



Shenzhen Golden Security Technology Co., Ltd

A: 6th Floor, Unit 1, Building 1, Kailifang Plaza, Lianrun Road, Taoyuan Community, Dalang Street, Longhua District, Shenzhen

Attns: Lilian Huang | T: +86 189 4879 4227 | E: lilian@cameralarms.com | W: <https://alarm-camera.en.alibaba.com>


Smart Home Control Panels






No.	Picture	Model	Features	Price (EXW)	Compatible devices
1		GS-4CDH (Control panel accessories)	<p>EU standard Desk Stand for central control screen</p> <p>Suitable for model GS-TPP06, T1E-TPP01-2, GS-T6E, GS-T2E-TPA10-M2E and T8E Control Panels.</p> <p>Purpose: Allow your smart home control panel to become a desktop controller (Live wire and neutral wire are needed to connect).</p> <p>Specification: Material: PC V0 Color: Gray</p> <p>Dimension: 121*88.50*67.50mm</p>	1-99pcs: \$3.90 100-199pcs: \$3.80 200pcs+: \$3.70	
2		TPA08-M3A 8 Pro-EU (European standard)	<p>Integration with Spotify enables users to enjoy avast selection of songs anytime, perfect for relaxation or parties.</p> <p>Built-in High-Fidelity Speakers: Equipped with two 2W speakers, professionally tuned for rich sound quality.</p> <p>External Speaker Support: Allows for connection to dual-channel background music speakers for a theater-grade audio experience.</p> <p>Zigbee and BLE Mesh Gateways: Built-in Zigbee, Bluetooth gateway support one-click adding Zigbee and Bluetooth sub-device, support RS485 interface</p>		
3		TPA08-M3A 8 Pro-Asian (Asian standard)	<p>Input: 100-240V~ 50/60Hz Working temp : 0~40°C Working hum : 5%~90%RH (non-condensing) Storage : 2GB RAM/16GB ROM Screen: 3.5-inch 128x80px Audio: Speaker+Microphone*2 Wireless Protocol: Wi-Fi/Zigbee3.0/Bluetooth 4.2/BLEmesh System: Android 11 Operation Mode: Touch control/Physical button/Voicecontrol/APP control Product Size: 127.5*23.5*38mm (including base) Installation: Standard 86-sized wall boxes</p>		
4		TPA08-M3A 8 Pro-US (US standard)	<p>Golden Color TPA08 8 inch smart screen panel with built in Alexa voice</p> <p>Integration with Spotify enables users to enjoy avast selection of songs anytime, perfect for relaxation or parties.</p> <p>Built-in High-Fidelity Speakers: Equipped with two 2W speakers, professionally tuned for rich sound quality.</p> <p>External Speaker Support: Allows for connection to dual-channel background music speakers for a theater-grade audio experience.</p> <p>Zigbee and BLE Mesh Gateways: Built-in Zigbee, Bluetooth gateway support one-click adding Zigbee and Bluetooth sub-device, support RS485 interface</p> <p>The specification is same as below TPA08-M3A 8 Pro-Asian</p>		
5		TPA08-M3A 8 Pro-Asian (Asian standard) Golden Color	<p>Golden Color TPA08 8 inch smart screen panel with built in Alexa voice</p> <p>Integration with Spotify enables users to enjoy avast selection of songs anytime, perfect for relaxation or parties.</p> <p>Built-in High-Fidelity Speakers: Equipped with two 2W speakers, professionally tuned for rich sound quality.</p> <p>External Speaker Support: Allows for connection to dual-channel background music speakers for a theater-grade audio experience.</p> <p>Zigbee and BLE Mesh Gateways: Built-in Zigbee, Bluetooth gateway support one-click adding Zigbee and Bluetooth sub-device, support RS485 interface</p> <p>The specification is same as below TPA08-M3A 8 Pro-Asian</p>		
6		GS-TPP06 (Wi-Fi & Bluetooth mesh/SigMesh/IR) - WHITE COLOR	<p>Smart Control Panel Mini is a 2024 now released smart control panel mini version. It is a multifunctional interactive device that integrates a screen, three physical buttons, three relay channels, and infrared remote control.</p> <p>Specification: Input: 100-240V, 50/60Hz Wireless protocol: WiFi, IR Max load ratings: Tungsten/Incandescent 200W Dimmable CFL/LED 200W Ballast/Fluorescent 200VA Working temperature: 0 °C ~40 °C Working Humidity: 5% ~90% RH non-condensing Product size: 86*86*11.5mm (base excluded) 86*86*35.50mm (base included) Net weight: 152.40g</p>		
7		GS-TPP06 (Wi-Fi & Bluetooth mesh/SigMesh/IR) - Grey COLOR	<p>This Smart Rotate Panel R adopts RTOS platform, integrates 3-way relay, mainly provides switch in situ replacement, intelligent device control, scene panel functions, standard 86 base, install the user's home 86-box, the user can manage and control the home device through the interactive way of knob, screen, button and so on.</p> <p>Devices Control: Rich device control entry and diversified control forms, compatible with most TUYA devices. Scene Control: Screen interaction and button interaction can trigger scenes to meet different needs in life. Feature-rich</p>		
8		TPR01-B(EU) White color	<p>This Smart Rotate Panel R adopts RTOS platform, integrates 3-way relay, mainly provides switch in situ replacement, intelligent device control, scene panel functions, standard 86 base, install the user's home 86-box, the user can manage and control the home device through the interactive way of knob, screen, button and so on.</p> <p>Devices Control: Rich device control entry and diversified control forms, compatible with most TUYA devices. Scene Control: Screen interaction and button interaction can trigger scenes to meet different needs in life. Feature-rich</p>		

9		TPR01-B(EU) Gray color (Available on 2026/02/01)	The application offers a range of features including weather-themed. • Login mode/APP Bluetooth networking • Support fan control • Support smart screen saver, screen off and touch wake up • Clock wallpapers, weather dynamic wallpapers and custom wallpapers • The home page shows the weather, time, date and week • The device and scene list are displayed Control function: • Master list shortcut control/Tomato Alarm • Devices shortcut control/Device detail control • Scene One-click execution	1000-2999pcs: \$48.9 3000pcs or more: \$48.5	
10		GS-X20U-1L1FWIFI-PC (PC material)	This is smart Fan switch with a knob, can adjust the fan speed as you like through the knob, also can realize one tap to run 50% and 100% speed on the button. It also can be acting as a one-gang light switch for	1-19pcs: \$22.50 Wireless: \$23.00 100-999pcs: \$22.50 1000-2999pcs: \$22.00 3000pcs or more: \$21.00	
11		GS-X20U-1L1F-ZIGBEE-PC (PC material)	Specification: *Wireless:Zigbee3.0 *Rated Voltage:110~240V/50~60Hz *Rated Power:LED/150W(Max) *Wireless Frequency:2.4GHz *Wireless Standard:IEEE802.11b/g/n *Resistance:Load/500W,Fan/300W(max) *Material: Tempered glass material	1-19pcs: \$24.50 20-99pcs: \$24.00 100-999pcs: \$23.50 1000-2999pcs: \$23.00 3000pcs or more: \$22.00	
12		GS-X30U-1L1F-WIFI-Glass (Tempered glass material)	 Rotary Knob In Order To Adjust Speed of the fan. Fan adjustment 50% button Fan adjustment 100% button Blue LED Aperture Backlight Digital LCD Screen Lamp switch key (long press until blue light flashes until first connected) Fan main button Lamp switch and blue light (flashes when first connected)	1-19pcs: \$25.50 20-99pcs: \$25.00 100-999pcs: \$24.50 1000-2999pcs: \$24.00 3000pcs or more: \$23.00	
13		GS-X30U-1L1F-Zigbee-Glass (Tempered glass material)	 T1E is a Tuya smart central control panel integrated with Tuya smart home gateway + built-in Alexa voice control (English, Spanish, German & French) + super Zigbee device compatibility + group dimming system. Main Features: 1. A best alternative of tuya ZigBee gateway at home, 100+ Zigbee sub-devices can be added in. 2. 3 Control modes at different distance with 3 themes 3. Multimedia interconnection function. Add smart doorbell and smart camera, which will show the screen outside the door when someone rings the bell, contributing a higher level of security to the family. 4. Super group wireless dimming lighting. Works with zigbee dimming driver, can realize single light and group light dimming. Chinese;Chinese;English;Spanish;French;Arabic;German;Portuguese;Italian;Korean;Japanese;Hindi;Greek;Polish;Hungarian;Czech;Slovak;Hebrew; T1E Package size:36.5*25.5*21cm 12PC/box 3.38kg	1-19pcs: \$26.50 20-99pcs: \$26.00 100-999pcs: \$25.50 1000-2999pcs: \$25.00 3000pcs or more: \$24.00	
14		T1E-TPP01-Z (Built-in tuya gateway)	 T1E is a Tuya smart central control panel integrated with Tuya smart home gateway + built-in Alexa voice control (English, Spanish, German & French) + super Zigbee device compatibility + group dimming system. Main Features: 1. A best alternative of tuya ZigBee gateway at home, 100+ Zigbee sub-devices can be added in. 2. 3 Control modes at different distance with 3 themes 3. Multimedia interconnection function. Add smart doorbell and smart camera, which will show the screen outside the door when someone rings the bell, contributing a higher level of security to the family. 4. Super group wireless dimming lighting. Works with zigbee dimming driver, can realize single light and group light dimming. Chinese;Chinese;English;Spanish;French;Arabic;German;Portuguese;Italian;Korean;Japanese;Hindi;Greek;Polish;Hungarian;Czech;Slovak;Hebrew; T1E Package size:36.5*25.5*21cm 12PC/box 3.38kg	1-19pcs: \$65 20-99pcs: \$64.5 100-999pcs: \$64.3 1000-2999pcs: \$63.9 3000pcs or more: \$63.5	
16		GS-T6E (Built-in tuya gateway)	 T6E is a tuya smart home gateway with 4 inch touch screen. T6E comes with WiFi connection, ZigBee 3.0, added 99+ sub-devices 1. Local control and local smart scene 2. Customize your home scene, one tap to run. 3. Sports working with Zigbee alarm sensor, such as door sensor motion sensor to secure the house. 4. Can connect the tuya wifi video doorbell, and realize two-way communication. 5. Can be working with tuya smart camera, and view real-time monitoring on panel	Sample: \$7.8 5-99pcs: \$7.5 100-199 pcs: \$7.8 200-500 pcs: \$7.8 ≥501: Negotiable	
17		GS-F1 (Built-in tuya gateway and music amplifier)	 F1 is a touch control panel integrated Tuya gateway capability, devices and scenes control, timing music playback and etc. It has 4" touch LCD screen and smart home central control. Features: •Tuya /Smart Life APP wireless remote control, IOS & Android supported phone. •Touch to control smart devices in the whole house ,making it easy to accurately control the equipment •Create your smart own scene •2-way external speakers, and support one group audio input AUX. •Customizable linkage scenes , touch the panel to quickly switch scene modes •RS-485 Central Control Agreement •Commonly used in hotels, home, apartment, store, spa and etc. •Support local, TF card, U-disk and BLE, AUX play music.	Sample: \$89 10pcs: \$88 11-50pcs: \$87 51-100 pcs: \$86	
18		GS-T5E-TPP05 (Built-in tuya gateway)	 T5E is a Tuya smart central control panel integrated with Tuya smart home gateway + built-in Alexa voice control (English, Spanish, German & French) + super Zigbee device compatibility + group dimming system. Main features: - Built-in Zigbee Gateway - Built-in BLE Mesh - In-wall to replace a switch - Local control (off-network) - Edge computing	1-20sets : \$89 21-100sets:\$88 101-999 sets:\$87 1000~ 3000 sets:\$86	
19	5" Touch screen control panel for smart home	F5-1(EU)-White Built in 3 relay switch	 F5 is 6.2" inch smart screen music center panel with built in zigbee gateway& proximity sensor &5 physical buttons		
20		F5-1(EU)-Black Built in 3 relay switch	 Key features: 1.User can connect the mobile to the F5 central control screen via Bluetooth and then connecting the mobile phone songs to the F5 host via Bluetooth to play music; 2.User can customize the 5 physical buttons function via smart life APP or tuya smart APP. 3.F5 is built with IR controller for controlling TV, Split air conditioner,etc. 4.F5 has a built-in proximity sensor, which can automatically turn on the screen when it detects infrared body approaching, and turn off the screen when the person leaves. The proximity sensor can support distance adjustment and can also be used as a DP point to trigger linkage scenes. 5.F5 Support local storage and music playback, support TF card, U disk, Bluetooth, etc to play music.	1-20sets : \$112 21-100sets:\$111 101-999 sets:\$109.5 1000~ 3000 sets:\$108.8	
21		F5-1(EU)-Grey Built in 3 relay switch			
22		F5-4(UK)-White support 4pcs wired speakers	 Specification: • Color: black/white/grey for option • Operation system: Android 11 • CPU: 4-core • CPU Frequency: 1.5Ghz • Main screen size:6.2 inch • Resolution:960*360, IPS • Material: IPS Full viewing angle • Touch screen: Multi-touch capacitive screen • Music format: MP3, WAV,WMA,FLAC,APE,.ACC,.AC3,.OGG	• Output power: 2*10-25W wired speakers • 2 or switch controls: 200W/Gang • Output Impedance: 4-8Ω • LAN port: Yes • WiFi: Yes • Bluetooth: 4.0 • Audio Inputs:AUX,one group • Product dimension: 161*86*9MM • product weight: 0.7KG	
23		F5-4(UK)-Black support 4pcs wired speakers			
24		F5-4(UK)-Grey support 4pcs wired speakers			
25					

26	<p>TOP SELLING</p> <p>F6-1 (Built-in 2 gang relay switch)</p> <p>GS-F6-2 Support 2-way wired speakers version GS-F6-1 Built in 2 gang relay switch version</p>	<p>F6 is 6" touch screen music playback & smart home control panel with built-in gateway.</p> <p>Key features:</p> <ul style="list-style-type: none"> It comes with WiFi and Lan connection, ZigBee 3.0, added 100 sub-devices can be controlled. *Customize your home scene, one tap to run. *2-gang relay switch, support wire lights, fans, etc. (Model F6-2) *Supports working with zigbee sub-device, such as zigbee wall switch, zigbee bulb, zigbee curtain motor, zigbee rolling shutter motor, etc. *With a power amplifier, two wired speakers can be connected. *Support audio input/output *Bluetooth receiving function. You can connect the host to play the music on the mobile phone through the Bluetooth of the mobile phone. *With a physical button, short press to lock/off the screen; long press to shut down. *With a physical button, short press to lock/off the screen; long press to shut down. *With a physical button, short press to lock/off the screen; long press to shut down. *With a physical button, short press to lock/off the screen; long press to shut down. *With a knob. The knob can add equipment control equipment, such as air conditioners, curtains, light groups, and volume adjustment. <p>Specification:</p> <ul style="list-style-type: none"> • Color: black • Operation system: Android 8.1 • CPU: Quad-core Cortex-A53 • CPU frequency: 1.5GHz • Main screen size: 6 inch • Resolution: 1440*720, IPS • Touch screen: Multi-touch capacitive screen • Output power: 2*10-25W wired speakers • or 2 switch controls: 200W/Gang • Output impedance: 4-8Ω • Audio signal-to-noise ratio: 98db • LAN port: Yes • WiFi: Yes • Bluetooth: 4.0 • Audio Input/AUX/one group • Product dimension: 240*196*100MM • product weight: 0.7KG 	<p>cost down</p> <p>Sample: \$136.6 2~20pcs: \$136.3 21~50 pcs: \$136.2 51~100 :Negotiable</p>	<p>01.6.0119</p>
27	<p>NEW</p> <p>F6-2 (Support 2-way wired speakers) (not including speakers)</p>	<p>F6 is 6" touch screen control panel with music play</p> <p>Key features:</p> <ul style="list-style-type: none"> *With a knob. The knob can add equipment control equipment, such as air conditioners, curtains, light groups, and volume adjustment. *With a physical button, short press to lock/off the screen; long press to shut down. *With a physical button, short press to lock/off the screen; long press to shut down. *With a physical button, short press to lock/off the screen; long press to shut down. *Can play local music and online music. *With a knob. The knob can add equipment control equipment, such as air conditioners, curtains, light groups, and volume adjustment. *With a knob. The knob can add equipment control equipment, such as air conditioners, curtains, light groups, and volume adjustment. <p>Specification:</p> <ul style="list-style-type: none"> • Color: black • Operation system: Android 8.1 • CPU: Quad-core Cortex-A53 • CPU frequency: 1.5GHz • Main screen size: 6 inch • Resolution: 1440*720, IPS • Touch screen: Multi-touch capacitive screen • Output power: 2*10-25W wired speakers • or 2 switch controls: 200W/Gang • Output impedance: 4-8Ω • Audio signal-to-noise ratio: 98db • LAN port: Yes • WiFi: Yes • Bluetooth: 4.0 • Audio Input/AUX/one group • Product dimension: 240*196*100MM • product weight: 0.7KG 	<p>cost down</p> <p>Sample: \$135.6 2~20pcs: \$135.3 21~50 pcs: \$135.2 51~100 :Negotiable</p>	<p>01.6.0119</p>
28	<p>NEW</p> <p>GS-Q7 (8-way wired ceiling speakers) 2-Partition Background Music Main Unit</p>	<p>Q7 is a tuya smart home gateway with 7 inch touch screen, Android operation system, supports 2 zone music playback+support 8 pcs wired ceiling speakers.</p> <p>Key features:</p> <ul style="list-style-type: none"> *It comes with WiFi and wifi connection. ZigBee 3.0, added 100 sub-devices *Partition support to play different online/local music independently. *2 partitions support independent adjustment of sound DSP and volume. *4 partitions support volume adjustment. *Customize your home scene, one tap to run. *Can support wired and bluetooth audio speakers, play music on with one-touch screen *Supports working with zigbee sub-device, such as zigbee wall switch, zigbee bulb, zigbee curtain motor, zigbee rolling shutter motor, etc. 	<p>cost down</p> <p>Sample: \$178.50 2~20pcs: \$178.30 21~50 pcs: \$177.9 51~100 pcs:\$177.50</p>	<p>01.6.123</p>
29	<p>GS-F8-2CH (2-way wired ceiling speakers + 2-gang relay switch) -- Speakers not in the box</p>	<p>F8 is a tuya smart home gateway with 8 inch touch screen, Android operation system, supports music playback.</p> <p>Key features:</p> <ul style="list-style-type: none"> *It comes with WiFi and Lan connection, ZigBee 3.0, added 100 sub-devices *Local control and local smart scene *Customize your home scene, one tap to run. *Can support wired and bluetooth audio speakers, play music on with one-touch screen *2-gang relay switch, support wire lights, fans,etc. *Supports working with zigbee sub-device, such as zigbee wall switch, zigbee bulb, zigbee curtain motor, zigbee rolling shutter motor, etc. 	<p>cost down</p> <p>1-99pcs: \$178 100-499pcs: \$175 500-1000 pcs: \$173</p>	<p>01.6.0113</p>
30	<p>TOP SELLING</p> <p>GS-F8-2CH (2-way wired ceiling speakers + 2-gang relay switch) -- Speakers not in the box</p>	<p>GS-F8-2CH (2-way wired ceiling speakers + 2-gang relay switch) -- Speakers not in the box</p> <p>8-Inc full touch screen smart home gateway</p>	<p>GS-F8 is a tuya smart home gateway with 8 inch touch screen, Android operation system, supports music playback.</p> <p>Key features:</p> <ul style="list-style-type: none"> *It comes with WiFi and Lan connection, ZigBee 3.0, added 100 sub-devices *Local control and local smart scene *Customize your home scene, one tap to run. *Can support wired and bluetooth audio speakers, play music on with one-touch screen *2-gang relay switch, support wire lights, fans,etc. *Supports working with zigbee sub-device, such as zigbee wall switch, zigbee bulb, zigbee curtain motor, zigbee rolling shutter motor, etc. 	<p>cost down</p> <p>Sample price: \$219 2~20pcs: \$218 21~50 pcs: \$217 51~100 pcs:\$216 QTY≥500: negotiate</p>
31	<p>NEW</p> <p>GS-F8-4CH (4-way wired ceiling speakers) -Speakers not in the box</p>	<p>GS-F8-4CH (4-way wired ceiling speakers) -Speakers not in the box</p> <p>8-Inc full touch screen smart home gateway</p>	<p>GS-F10PRO is a tuya smart home gateway with 10 inch touch screen, Android operation system, supports 8 wired speakers music playback+2 zones different music songs playback function</p> <p>Key features:</p> <ul style="list-style-type: none"> *It comes with WiFi and wifi connection. ZigBee 3.0, added 100 sub-devices *Partition support to play different online/local music independently. *2 partitions support independent adjustment of sound DSP and volume. *4 partitions support volume adjustment. *Customize your home scene, one tap to run. *Can support wired and bluetooth audio speakers, play music on with one-touch screen *Supports working with zigbee sub-device, such as zigbee wall switch, zigbee bulb, zigbee curtain motor, zigbee rolling shutter motor, etc. 	<p>cost down</p> <p>Sample price: \$219 2~20pcs: \$218 21~50 pcs: \$217 51~100 pcs:\$216 QTY≥500: negotiate</p>
32	<p>NEW</p> <p>GS-Q10PRO (Built-in tuya gateway and music amplifier) Speakers not in the box</p>	<p>Q10 PRO-10.1" inch 2-zone background music touch screen control panel (WiFi+Zigbee+Lan +support 8 Wired ceiling speakers+2 zones music playback)</p>	<p>GS-Q10PRO is a tuya smart home gateway with 10 inch touch screen, Android operation system, supports 8 wired speakers music playback+2 zones different music songs playback function</p> <p>Key features:</p> <ul style="list-style-type: none"> *It comes with WiFi and wifi connection. ZigBee 3.0, added 100 sub-devices *Partition support to play different online/local music independently. *2 partitions support independent adjustment of sound DSP and volume. *4 partitions support volume adjustment. *Customize your home scene, one tap to run. *Can support wired and bluetooth audio speakers, play music on with one-touch screen *Supports working with zigbee sub-device, such as zigbee wall switch, zigbee bulb, zigbee curtain motor, zigbee rolling shutter motor, etc. 	<p>cost down</p> <p>Sample price: \$219 2~20pcs: \$218 21~50 pcs: \$217 51~100 pcs:\$216 QTY≥500: negotiate</p>
33	<p>NEW</p> <p>GS-T10PRO (Built-in tuya gateway and music amplifier) Speakers not in the box</p>	<p>T10 PRO-10.1" inch 2-zone background music touch screen control panel (WiFi+Zigbee+Lan +support 8 Wired ceiling speakers+2 zones music playback)</p>	<p>GS-T10PRO is a tuya smart home gateway with 10 inch touch screen, Android operation system, supports 8 wired speakers music playback+2 zones different music songs playback function</p> <p>Key features:</p> <ul style="list-style-type: none"> *It comes with WiFi and wifi connection. ZigBee 3.0, added 100 sub-devices *Partition support to play different online/local music independently. *2 partitions support independent adjustment of sound DSP and volume. *4 partitions support volume adjustment. *Customize your home scene, one tap to run. *Can support wired and bluetooth audio speakers, play music on with one-touch screen *Supports working with zigbee sub-device, such as zigbee wall switch, zigbee bulb, zigbee curtain motor, zigbee rolling shutter motor, etc. 	<p>cost down</p> <p>Sample price: \$249.00 2~20pcs: \$248.00 21~50 pcs: \$245.00 51~100 pcs:\$243.00 QTY≥500: negotiate</p>
34	<p>Can install 3rd party APK,</p> <p>E8K (can install 3rd party APK)</p>	<p>E8K (can install 3rd party APK)</p>	<p>Standard 180mm back box; for HD cable installation, please use a 180mm deeper back box.</p> <p>8-channel wired speaker output, power: 8 x 30W</p> <p>Independent dual-zone (simultaneous playback of different music tracks) / 3 independent audio sources</p> <p>100Mbps wired network port</p> <p>HDMI port (wired image projection) • Dual-band (2.4G/5G) WiFi6</p> <p>Two-way Bluetooth (supports mobile phones and Bluetooth speakers)</p> <p>1 audio input (external audio source)</p> <p>1 audio output</p> <p>1 subwoofer output</p> <p>4 RGB port</p> <p>Supports OTG (USB flash drive playback) and local SD card (up to 128GB) • Built-in Google Play Store, supports mobile app-controlled music and photo sharing over the LAN, and supports a microphone (optional).</p>	<p>Sample price: \$159 2~20pcs: \$157 21~50 pcs: \$156 51~100 pcs:\$155 QTY≥500: negotiate</p>

32	 10.1 inch smart screen can install 3rd part APK	GS-S9E-A (can install 3rd party APK)	1.Fit Asian 88mm*88mm wall boxes. 2.Simple inwall installation 10.1-inch HD LCD, IPS, multi touch screen, 3.quadrumel microphone with noise reduction. 4.built in 2 x 2W speakers/sensor; 5.radar sensor, temperature and humidity sensor 6.ZigBee gateway function, APP remote control,Control the lights, curtains, air conditioners, and all other Smart Home devices. 7.Configure smart home scenes in theAPP, turn on the scene mode with one touch on the screen.	Sample price: \$216.00 2-20pcs: \$213.00 21-50 pcs: \$211.00 51-100 pcs: \$205.00 QTY>500: negotiate	 Without tuya APK\$2.604
33	 10" Touch Control Panel with Built-in tuya gateway function	GS-S9E-TY (Built-in tuya gateway)	10" Touch screen control panel for smart home and music playback feature 1)OS:Android 11 2)CPU:RK35689 Quad Core Cortex-A35 3)RAM:2GB 4)Screen:10.1 inch(1920*1200) G+FF Grafted Multi Touch Anti-fingerprint Coating 5)ROM:16GB Bluetooth: 6)Bluetooth:BLE 5.0 Single point 7)Ethernet:10M/100M Adaptive Ethernet RJ45 8)Ports:USB Type-C port RJ 45	Sample price: \$232.00 2-20pcs: \$231.00 21-50 pcs: \$230.00 51-100 pcs: \$228.00 QTY>500: negotiate	
34 Multi-functional Smart home control panel Tuya Gateway + music center + intercom display 3 in 1					
35	 Model: GS-T2E-TPA10-M2A	Asian Standard		US standard	
36	 TOP SELLING	GS-T2E-TPA10-M2A (Asian standard wall box)	MAX is a Tuya smart central control panel, Zigbee & Bluetooth independent chips, integrate Zigbee and Bluetooth gateway functions, support Bluetooth BLE & BLE mesh Sub-device, and have edge capabilities for localized control. Device control: Fully compatible device access and diversified control forms are compatible with almost all Tuya ecological devices. Scene control: Customs physical buttons, screen interaction, and voice interaction can trigger scenes to meet different needs in life. I-share technology and T-control Technology	 1-19pcs: \$198 20-99pcs: \$197 100-999pcs: \$192.00 1000-2999pcs: \$181.00 300pcs or more: \$174.00	 02.4.0698
37	 Model: GS-T2E-TPA10-M2E (EU standard wall box)	GS-T2E-TPA10-M2E (EU standard wall box)	 Golden Security	 1-19pcs: \$198 20-99pcs: \$197 100-999pcs: \$192.00 1000-2999pcs: \$181.00 300pcs or more: \$174.00	 02.4.0436
38	 10.1" Touch Control Panel with tuya gateway+Music center+intercom display 3 in 1	GS-T2E-TPA10-M2U (US standard wall box)		 02.4.0697	Price don't include the ceiling speakers
39	 2-gang relay switch & 2-way speaker	GS-F12-2CH (Built-in tuya gateway and music amplifier function)	F12 is 12.0" touch screen music playback & smart home control panel with built-in gateway. Key features: It comes with WiFi and Lan connection, ZigBee 3.0, added 100 sub-devices can be control. • Built-in speakers, and also can connect external speakers/amplifier • Custom your own scenes to meet your needs • 2-gang relay switch, support wire lights, fans etc. • Supports working with zigbee sub-device, such as zigbee wall switch, zigbee bulb, zigbee curtain motor, zigbee rolling shutter motor, etc. Specifications: • Split 4.0+woofer drivers (Hello, Kazoo) • 12.0" touch IPS display screen, 1920*120 resolution • Support Tuya ZIGBEE gateway • System memory 2G, storage memory 8G • Standard 11 system, quad-core processor, CPU: 1.8Hz • Power supply method: AC 110-220V (other power supply methods can be customized with a minimum order of 1K) • Lighting control: Two-way local lighting control 2*200 W • Network: WiFi wired network • Built-in speakers: Yes (with speaker and interface) • 485 interface support (music part) • Speaker output power: 2*20W (Digital power amplifier/analog audio output (dual background music • 1000-2999pcs: \$192.00 • Installation method: double 80Single 86 can be combined • Product weight: 1.9KG	 Sample: \$259 2-20pcs: \$258 21-50 pcs: \$257 51-100 pcs: \$256	 02.6.002
41	 Wired in-ceiling speaker	GS-VX5-C	Main features: - Bass 5.25" polypropylene diaphragm, rubber surround, 12oz magnet, 25mm (1") voice coil. - Natural air dome diaphragm, 25mm (1") voice coil, ferrofluid cooling, NdFeB magnets. - Cross-over modified phenolic resin PCB board, -12dB/Oct low-pass filter, -12dB/Oct high-pass filter, treble PTC overload protection. - Resonant frequency 65Hz. - Frequency response 50Hz-20kHz - Sensitivity 86dB/W/M - Maximum amplifier power 10-80W (rated power 40W) - Impedance 8Ω - Hole size 185mm(7.29") - Accessories Aluminum mesh, aluminum mesh hook, perforated template, spray paint card and instruction manual.	Sample: \$30.50*2	
42	 Wired Ceiling speakers		The price is for one piece, and one box included 2 pieces, so the unit price should be multiplied by 2	100-500pcs: \$29.50*2	
43	 Wired in-ceiling speaker		Impedance: 8Ω Power: 10-30W Appearance diameter: 192mm Installation size: 195mm Sensitivity:95dB 1m/1W Frequency response: 85HZ-20KHZ Rated power: 10-15W	501-1K pcs: \$28.50*2	02.2.03
44	 Engineering special ceiling speakers	S65P	 Product parameters: Speaker type: In-ceiling speaker Speaker material: Polypropylene Speaker size: 6.5" (165mm) Speaker thickness: 38mm Speaker sensitivity: 86dB Speaker frequency response: 85HZ-20KHZ Speaker impedance: 8Ω Speaker power: 10-30W Speaker full frequency	Sample: \$8.85 10-50pcs: \$8.3 50-100 pcs: \$7.95	
45	 Wired in-ceiling speaker	S50P	Impedance: 8Ω Power: 10-30W Appearance diameter: 180mm Installation size: Φ150mm	Sample: \$12.8 10-50pcs: \$12.5 50-100 pcs: \$11.7	
46	 Wired in-ceiling speaker	S40C+	Impedance: 8Ω Power: 10-30W Appearance diameter: 180mm Installation size: Φ150mm	Sample: \$16.8 10-50pcs: \$16.5 50-100 pcs: \$15.8	
47	 Wired in-ceiling speaker	S40G	Impedance: 8Ω Power: 10-30W Appearance diameter: 180mm Installation size: Φ150mm	Sample: \$19.9 10-50pcs: \$19.8 50-100 pcs: \$19.5	

48	 Wired in-ceiling speaker	S52G	Impedance: 8Ω Power: 10-40W Appearance diameter: 205mm Installation size: Φ180mm	Sample: \$22.98 10~50pcs: \$22.86 50-100 pcs: \$22.5	
49	 Wired in-ceiling speaker	S65T	Impedance: 8Ω Power: 10-60W Appearance diameter: 232mm Installation size: Φ200mm	Sample: \$46.8 10~50pcs: \$46.3 50-100 pcs: \$45.8	
50	 Bluetooth Ceiling Speakers	GS-CH601	Suitable for: hotels, exhibition halls, home living room, supermarkets, canteens, stores, script killing stores and other large-scale applications. Ceiling speaker for hotel applications. Speaker power: 10W-20W; Speaker support: Bluetooth, U disk, TF card, AUX, TWS interconnection; Bluetooth version: Jerry program, Bluetooth 5.0; Transmission distance: straight line distance without blocking 12 meters; Battery capacity: no battery, can be connected to 12V power supply; Speaker size: 5 inch; Product dimension: 175mm*85mm; Opening size: Φ16-16.5cm; Single with packing weight: 0.8kg; Single box size: 21*21*9cm; Outer box size: 17*17*21cm; A box of 20 units, gross weight: 16.6kg, net weight: 16.0kg. Ceiling speakers are full-frequency hi-fi speakers, no need for amplifier, direct Bluetooth connection, 1 host with up to 3 sets of speakers, multi-scene application is recommended to shoot more than one set of hosts that this uses a single host, TWS function is not supported.	① GS-CH601-Z Master speaker:\$17.50/pcs ② GS-CH601-F sub-speaker:\$12.5/pcs ③ GS-YK03 Remote controller:\$3.60/pcs ④ 5M cable:\$1.80 ⑤ 10M cable:\$3.60 ⑥ Power Adapter:\$0.50/pcs	 Hole Size: Φ160-165mm ① GS-CHS01-Z Master speaker:\$24.0846 ② GS-H001-F sub-speaker:\$24.0847 ③ GS-YK03 Remote controller:\$24.4.0707 ④ 5M cable:\$24.0848 10M cable: (2, 4, 8) 0.4.0849
51	 HOT SALE High quality ceiling speaker Bluetooth 5.0	GS-S530-B (Master speaker)	Bluetooth Ceiling Speaker -Master speaker Product dimension: 200mm*85mm Installation dimension: 175mm*100mm FO: 63Hz Frequency response: 55Hz~20KHz Rated power: 20W Sensitivity: 90dB1W/1W Resistant: 5Ω	1-50pcs: \$34.50 51-100pcs:\$33.50	S530-B Packing quantity: 12PCS Packing size: 51.5X51.5X32CM Packing weight: 20KG 01.9.136
52	 High quality ceiling speaker -Secondary speaker	GS-S530 (Slave speaker)	Slave speaker Product dimension: 200mm*85mm Installation dimension: 175mm*100mm FO: 63Hz Frequency response: 55Hz~20KHz Rated power: 20W Sensitivity: 90dB1W/1W Resistant: 5Ω	1-50pcs: \$24.15 51-100pcs:\$23.15	S530 Packing quantity: 12PCS Packing size: 51.5X51.5X32CM Packing weight: 19KG 01.9.135
53	 ZIGBEE Gateway (wired RJ45 port)	ZIG01	ZIG-01 is a Lan connection Ethernet (wired) smart home gateway. It supports all kinds of tuya smart Zigbee sub-devices, such as Zigbee wall switch,zigbee PIR human movement sensor, Zigbee temperature and humidity sensor,Zigbee curtain motor,etc. Parameter: ①Standard: IEEE 802.15.4 ②Frequency:2.4~2.485GHz ③Transmission rate: 250kbps ④Receiving sensitivity:-102dBm, PER<10% ⑤Open air transmission distance: 100M to 200M - Power supply: 5VIA - Working temperature : -10~45°C - Wireless communication protocol: Lan connectip + Zigbee - Product dimension: 60*60*15mm	Sample: \$20.90 50~100pcs:\$20.50 101~200 pcs: \$20.30 200~1K pcs: \$20.00	 works with the Google Assistant works with amazon alexa
54	 Multi-mode Gateway Zigbee wireless gateway	GS-GW006	This is a Multi-mode WiFi+Zigbee+Bluetooth smart home gateway. It supports all kinds of tuya smart Zigbee sub-devices, such as Zigbee wall switch,zigbee PIR human movement sensor, Zigbee temperature and humidity sensor,Zigbee curtain motor,etc. Parameter: ①Standard: IEEE 802.15.4 ②Frequency:2.4~2.485GHz ③Transmission rate: 250kbps ④Receiving sensitivity:-102dBm, PER<10% ⑤Open area transmission distance: 100M to 200 M (Support devices: 99+) - Power supply: Micro-USB - Working temperature : -10~55°C - Wireless communication protocol: 2.4G wireless & Zigbee & BLE & Mesh - Product dimension: 60*60*15mm - Weight: 33g - Communication protocol: WiFi+Zigbee+bluetooth	Sample: \$12.50 50-100pcs:\$12.00 101-200 pcs: \$11.50	 works with the Google Assistant works with amazon alexa 02.4.0667
55	 Gateway LY-122 Bluetooth version		The bluetooth gateway is only used for the bluetooth robot, it is not a necessary part. You can only use it if you connect to a Google/Amazon device.	Bluetooth version Sample: \$8.6 50-200 pcs: \$7.9 200-1K pcs: \$7.6	
56	 Gateway LY-122 Zigbee version			Zigbee version Sample: \$12.8 50-200 pcs: \$12.3 200-1K pcs: \$11.9	
57	 Tuya Smart gateway (Zigbee/Bluetooth/Multi-mode version for option)	Gateway LY-122 Multimode version		Multi-mode version Sample: \$12.50 50-100pcs:\$12.00 101-200 pcs: \$11.50	
58	 Zigbee&BLE gateway hub	GS-BLE-G01	ZigBee+Bluetooth Multimode Gateway (with USB cable) One-key arm/disarm/sound and light alarm/voice prompt/doordoor/alarm clock/LED indicator adjustment/security SAAS - Support voice control - Support Google Home finger robot - Support Zigbee PIR movement sensor - Support Bluetooth humidity and temperature sensor - Zigbee blind curtain motor Parameter: - Power supply: 5V 1A - Working temperature : -10~45°C - Wireless communication protocol: 2.4G wireless & Zigbee & BLE & Mesh - Product dimension: 92*92*40mm	Single weight: 1.7kg Product size:9.7*3.8.6 FCL weight: 10kg Sample: \$25.50 50-100pcs: \$25.00 101-200 pcs: \$24.50 200-1K pcs: \$24.00	 works with the Google Assistant works with amazon alexa 02.4.0269
59	 Matter Zigbee Wired gateway	GS-MZHUB	This is a Multi-functional MATTER Wired Gateway. It supports both Tuya app and Apple Homekit - Can be acted as a Matter Gateway - Can be acted as a ZigBee Gateway - Works with Alexa, Google Home Assistant - Can support up to 128 smart devices - LAN network connection Internet of Everything: It can be seamlessly linked with smart home devices on various platforms. Whether it is lamps or sockets, Matter gateway can interconnect with them to provide agreed control and management. Specification - Type C power input: 5V1A - Working temperature : -10~55°C - Wireless communication protocol: 2.4G wireless & Zigbee - Product dimension: 80*60*15mm - Weight: 33g - Communication protocol: Zigbee, Thread	Sample: \$29.50 50-100pcs: \$28.58 101-200 pcs: \$28.00	 90mm 90mm 22mm 02.4.0733

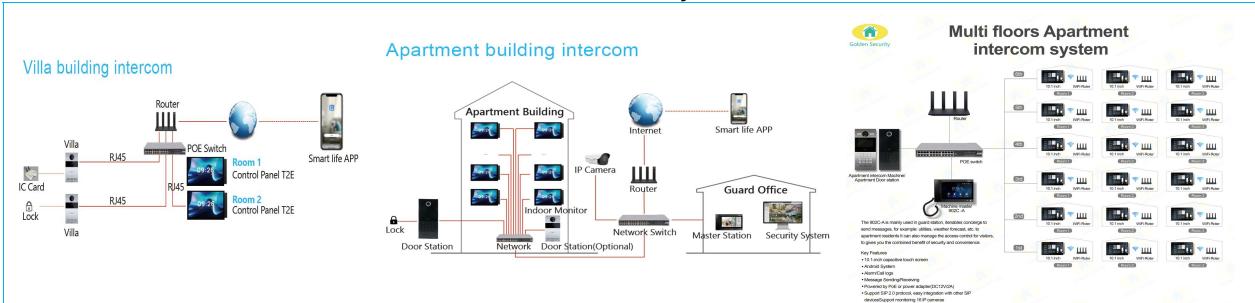
60	  2.4GHz WiFi 5 GHz WiFi Zigbee Sigmesh BLE BLE Long Range Dual-Band Wireless Multi-mode gateway	<p>Dual-Band Wireless Multi-mode gateway</p> <p>1.THP01-ZB-V5 gateway enables remote upgrades firmware of Zigbee, BLE, and SigMESH 2.it supports right-angle WiFi signal strength diagnosis for routers and gateways, including signal strength detection between Zigbee, BLE, and Sigmesh devices and the gateway. 3.Maximum number of localized scenarios and automation supported: 100. 4.Supports remote online/restart function.</p> <table border="1" data-bbox="811 287 1002 399"> <tr> <td>WIFI : 2.4G/5G</td><td>Maximum BLE Long Range sub devices:4pc</td></tr> <tr> <td>Main frequency: 330MHz</td><td>Product Size:56*66(20.4mm)</td></tr> <tr> <td>Antenna:IPEX antenna</td><td>Power supply:5V DC,1A</td></tr> <tr> <td>Flash:128Mbit</td><td></td></tr> <tr> <td>Memory:32G</td><td></td></tr> <tr> <td>Maximum No. of 220V smart devices:128pcs</td><td></td></tr> <tr> <td>Maximum low-power Zigbee sub-devices:32pcs</td><td></td></tr> <tr> <td>Maximum Sigmesh sub-devices:128pcs.</td><td></td></tr> </table>	WIFI : 2.4G/5G	Maximum BLE Long Range sub devices:4pc	Main frequency: 330MHz	Product Size:56*66(20.4mm)	Antenna:IPEX antenna	Power supply:5V DC,1A	Flash:128Mbit		Memory:32G		Maximum No. of 220V smart devices:128pcs		Maximum low-power Zigbee sub-devices:32pcs		Maximum Sigmesh sub-devices:128pcs.		<p>Sample: \$15.8 ≤50~100pcs: \$14.8 101~200 pcs: \$13.96</p>	 <small>逐步支持本地场景和自动化的部署</small>
WIFI : 2.4G/5G	Maximum BLE Long Range sub devices:4pc																			
Main frequency: 330MHz	Product Size:56*66(20.4mm)																			
Antenna:IPEX antenna	Power supply:5V DC,1A																			
Flash:128Mbit																				
Memory:32G																				
Maximum No. of 220V smart devices:128pcs																				
Maximum low-power Zigbee sub-devices:32pcs																				
Maximum Sigmesh sub-devices:128pcs.																				
61	  2.4 GHz Wi-Fi 5 GHZ Wi-Fi Dua Band Tuya Smart wirelessBluetooth Gateway(BLE / BLE Long Range / SigMesh / Beacon)	<p>Without Zigbee Only BLE SigMesh gateway</p> <p>Dual band wireless bluetooth gateway notonly supports 2.4 GHz Wi-Fi, but also 5 GHZWi-Fi. It supports BLE, BLE Long Range,SigMesh and Beacon Devices.</p> <ul style="list-style-type: none"> Max Connectivity: 4 BLE/BLE Long Range devices (Phase 2 upgrade tosupport8 BLE devices),or 64 Beacon devices(Phase2),or 128 SigMesh devices. BLE Long Range(Phase 2): Open area with a distance of 300 meters;Operates over 40m through 35cm reinforced concrete Sigmesh 2.1(Phase 2): Low latency, high control success rate, groupOTA Local Automation: The localautomation responses even when the external networkis disconnected OTA: Support BLE, BLE Long Range,SigMesh and Beacon devices OTA through gateway controller. Signal Strength Detection: Support Wi-Fi strength diagnosis between router and gateway, as well as Bluetooth strength between BLE devices and gateway. Faulty Replacement: Seamlessly migrate your original automation tothe new gateway without reconfiguration 	<p>≤10pcs:\$8.7 ≤50pcs:\$7.9 ≤500pcs:\$8.5</p>	<table border="1" data-bbox="1144 406 1335 556"> <tr> <td>Point-to-Point</td> <td>Broadcast</td> <td>Mesh</td> </tr> </table> <table border="1" data-bbox="1144 473 1335 563"> <tr> <td>Protocol</td> <td>Radio Frequency</td> </tr> <tr> <td>2.4G Wi-Fi</td> <td>2400.0-2483.5MHz</td> </tr> <tr> <td>5G Wi-Fi</td> <td>5150-5875MHz</td> </tr> <tr> <td>BLE 5.0</td> <td>2402-2480MHz</td> </tr> </table>	Point-to-Point	Broadcast	Mesh	Protocol	Radio Frequency	2.4G Wi-Fi	2400.0-2483.5MHz	5G Wi-Fi	5150-5875MHz	BLE 5.0	2402-2480MHz					
Point-to-Point	Broadcast	Mesh																		
Protocol	Radio Frequency																			
2.4G Wi-Fi	2400.0-2483.5MHz																			
5G Wi-Fi	5150-5875MHz																			
BLE 5.0	2402-2480MHz																			
62	  Tuya 2.4Gi+5G Wi-Fi Zigbee Gateway	<p>THP12-Z-V5</p> <p>Smart Home RTC Local Timing Project Deployment Fault Replacement ! High Reliability/localization/Continuous CapabilityUpgrade</p> <p>1)The core hub of the smarthome, controlling and managing smart devices It is a professional gateway for the whole smart house, supporting Wi-Fi or Ethernet access to the network. Through the access and flexiblecombination of diversified devices, it realizes the intelligence of homescenes, such as remote control, device linkage, various scene modes etc,allowing you to enjoy smart home life as you wish.</p> <p>2)Highly stable and reliable Zigbee gateway/Transmission It adopts low-power, stable and reliable Zigbee communication methoddeveloped based on Zigbee3.0 standard, connects the whole house.supports 200 sub-devices access and fast and stable control, and can easily play with rich scenarios of smart home.</p> <p>3)The local deployment capabilityof the gateway is efficient and stable Data is stored in the local gateway, and all working conditions are analized and controlled.Supports local linkage, scenes, and groups.Supports LAN linkage, and the Master level is the highest, providing highly reliable and stable local management.</p> <p>4)Can access the entirehouse SaaS and App Provide professional solutions integrating software and hardware Supports network-free construction deploymentSupports gateway fault replacement, sub-device fault replacementetc under abnormal conditions, simplifies the complexity and Smart M Gateway is a comprehensive Mattergateway.The uplink supports Wi-Fi andEthernet, and the downlink supports theecological interoperability of Matter, BLE andZigBee devices.</p> <p>Matter Capabilities Standard Matter gateway, with bridge, controller, and border router roles.Supports access tostandard thread devices and third-party standard matter over WiFidevices, and also supports subdevice bridges such as zigbee</p>	<p>≤10pcs:\$15.5 ≤50pcs:\$14.8 ≤500pcs:\$14.3</p>	<p>Input :5V-1A Operating Humidity: 10-90% RH(Non-condensing) Wireless Protocols: WiFi, Zigbee Size:86*18mm Weight:113g</p>																
64	  Ethernet + 2.4 GHz Wi-Fi+ 5 GHZ Wi-Fi Tuya smart ZigBee BLE Bluetooth Mesh and Thread Matter Gateway	<p>THP23-ZB-X (Matter Gateway)</p> <p>Max Connectivity: 128 Zigbee devices,or 200 Sigmesh devices,or 32 Matter over thread devices.</p> <p>Wireless distance: ZigBee range > 200 meters, Thread range > 140meters, Bluetooth range > 150 meters</p> <p>Optional power supply methods: Supports plugging in 4G assistant to expand 4G networking.</p> <p>Faulty Replacement: Seamlesslymigrate your original automation to thenew gateway without reconfiguration.</p> <p>Extended cloud connection method: Supports plugging in 4G assistant to expand 4G networking.</p>	<p>sample:\$45.5 ≤50pcs:\$44.5 ≤500pcs:\$43.5</p>																	
65	  Ethernet + 2.4 GHz Wi-Fi+ 5 GHZ Wi-Fi Tuya smart ZigBee BLE Bluetooth Mesh and Thread Matter Gateway	<p>THP23-ZB-X- 4G (Matter gateway + 4G communication assistant)</p> <p>Max Connectivity: 128 Zigbee devices,or 200 Sigmesh devices,or 32 Matter over thread devices.</p> <p>Wireless distance: ZigBee range > 200 meters, Thread range > 140meters, Bluetooth range > 150 meters</p> <p>Optional power supply methods: Supports plugging in 4G assistant to expand 4G networking.</p> <p>Faulty Replacement: Seamlesslymigrate your original automation to thenew gateway without reconfiguration.</p> <p>Extended cloud connection method: Supports plugging in 4G assistant to expand 4G networking.</p> <p>Operating Temperature 0-40°C Operating Humidity: 10-90% RH</p>	<p>sample:\$63.5 ≤50pcs:\$62.5 ≤500pcs:\$61.5</p>																	



A: 6th Floor, Unit 1, Building 1, Kailifang Plaza, Lianrun Road, Taoyuan Community, Dalang Street, Longhua District, Shenzhen



Attns: Lilian Huang | T: +86 189 4879 4227 | E: lilian@cameralarms.com | W: <https://alarm-camera.en.alibaba.com>

Intercom Solution & Systems



No.	Picture	Model	Features	Price (EXW)	Compatible devices
1		GS-T2E-TPA10-M2A CN/US standard	<p>MAX is a Tuya smart central control panel, Zigbee & Bluetooth independent chips, integrate Zigbee and Bluetooth gateway functions, support Bluetooth BLE & BLE mesh Sub-device, and have edge capabilities for localized control.</p> <p>Device control: Fully compatible device access and diversified control forms are compatible with almost all Tuya ecological devices.</p> <p>Scene control: Customs physical buttons, screen interaction, and voice interaction can trigger scenes to meet different needs in life.</p> <p>I-Share technology and T- Control Technology</p> <p>Rich interface: A variety of base forms are supported, the standard base uses zero-fire wire wire connection.</p> <ul style="list-style-type: none"> Color: grey Operate System: Android 8.1 OS: Quad-core Cortex-A35 CPU Frequency: 1.5GHz Main screen size: 8 inch Resolution: 1280*800 Material: IPS (full viewing angle) Storage: 2GB Expansion Memory: 8 GB USB: 2.0 interface, can read 32G LAN port: No WiFi: Yes Bluetooth: 4.0 <p>Packing information: Product weight: 0.4kg Product dimension: 255*133*10mm Giftbox weight: 1.3kg Giftbox dimension:342*213*73mm</p>	1-19pcs: \$198 20-99pcs: \$197 100-999pcs: \$192.00 1000-2999pcs: \$181.00 300pcs or more: \$174.00	
2		GS-H51TYF-CR	<ul style="list-style-type: none"> Linux System Video Intercom Access Control Face Recognition Maximum Rooms: 9999 Rooms Mode: Dial Mode or Room Listings PIN: Admin's PIN/User's PIN/Public's PIN Echo Cancellation Tuya Home: 1 (Up to 1000) Display: 5" IPS LCD 720*1280 Camera: 2M pixels Dual-lens Power: DC12V/1A Input: Capacitive Touch Ringtone: ≥70db Video Codec: H.264/H.265 Working Temperature: -20°C ~ +70°C Material: Aluminum + Tempered Glass Installation: Wall-mounted <ul style="list-style-type: none"> Storage: 2GB Expansion Memory: 8 GB USB: 2.0 interface, can read 32G LAN port: No WiFi: Yes Bluetooth: 4.0 <p>• Working Temperature: -20°C ~ +70°C</p> <p>• Material: Aluminum + Tempered Glass</p> <p>• Installation: Wall-mounted</p> <p>• IP Level: IP65</p> <p>• Relay Out: 1 (NO/COM)</p> <p>• RS485 Port: Support</p> <p>• RJ45 Network Port: Support</p> <p>• WiFi: Optional</p> <p>• Rain Cover: Optional</p> <p>• Product Size: 200*95*20mm</p> <p>• Package Size: 250*130*90mm</p> <p>• Gross Weight: 0.39KG</p>	1-19pcs: \$180 20-99pcs: \$179 100-999pcs: \$178	
3		GS-H8TYF-CR	<ul style="list-style-type: none"> Linux System Video Intercom Access Control Face Recognition Maximum Rooms: 9999 Rooms Mode: Dial Mode or Room Listings PIN: Admin's PIN/User's PIN/Public's PIN Echo Cancellation Tuya Home: 1 (Up to 1000) Display: 8" IPS LCD 800*1280 Camera: 2M pixels Dual-lens Power: DC12V/1A Input: Capacitive Touch Ringtone: ≥70db Video Codec: H.264/H.265 RF Card Reader:13.56MHz IC Card NFC: Support Working Temperature: -20°C ~ +70°C Material: Aluminum + Tempered Glass Installation: Wall-mounted <ul style="list-style-type: none"> RS485 Port: Support RJ45 Network Port: Support WiFi: Optional Rain Cover: Optional Product Size: 270*132*20mm Package Size: 320*170*75mm Gross Weight: 1.58KG 	1-19pcs: \$235 20-99pcs: \$234 100-999pcs: \$233.5	
4		GS-H10TYF-CR	<ul style="list-style-type: none"> Linux System Video Intercom Access Control Face Recognition Maximum Rooms: 9999 Rooms Mode: Dial Mode or Room Listings PIN: Admin's PIN/User's PIN/Public's PIN Echo Cancellation Tuya Home: 1 (Up to 1000) Display: 10.1" IPS LCD 800*1280 Camera: 2M pixels Dual-lens Power: DC12V/1A Input: Capacitive Touch Ringtone: ≥70db Video Codec: H.264/H.265 RF Card Reader:13.56MHz IC Card NFC: Support Working Temperature: -20°C ~ +70°C Material: Aluminum + Tempered Glass Installation: Wall-mounted IP Level: IP65 Relay Out: 1 (NO/COM) RS485 Port: Support <ul style="list-style-type: none"> Wi-Fi: Optional Rain Cover: Optional Product Size: 385*225*70mm Package Size: 385*225*70mm Gross Weight: 2.4KG 	1-19pcs: \$276 20-99pcs: \$275 100-999pcs: \$274	
5		GS-P7007PROTY-W	<ul style="list-style-type: none"> Linux System Video Intercom Audio Intercom Echo Cancellation Video Codec: H.264/H.265 Monitor IPC(24-hour, Quad-split Display) Monitor SOS, Gas Detection Alarm: SOS, Gas Detection Tuya Home: Optional Display: 7" IPS LCD 1024*600 Power: DC12V or POE (IEEE 802.3af) Input: Capacitive touch Ringtone: ≥70db <ul style="list-style-type: none"> RS485 Port: Optional RJ45 Network Port: Support Wi-Fi: Optional 4-Channel Input: Support Power Output: 12V200mA Size: 210x145x20 mm Package Size: 150*36*235mm Gross Weight: 22.2KG 	1-19pcs: \$72.5 20-99pcs: \$71.9 100-999pcs: \$71.2	

6		GS-P11PROTY-W	<p>Linux System</p> <ul style="list-style-type: none"> Video Intercom Audio Intercom Echo Cancellation Video Codec: H.264/H.265 Monitor: IPC(24-hour, Quad-split Display) Monitors: SOS, Gas Detection Tuya Home: Optional Display: 10.1" IPS LCD 1024*600 Power: DC12V or POE (IEEE 802.3af) Input: Capacitive touch Ringtones: ≥70db <p>* Up to 10 Extension Each Rooms</p> <ul style="list-style-type: none"> Energy Storage Capacitor ≤0.3Wh RS485 Port: Optional RJ45 Network Port: Support 4-Channel Input: Support Power Output: 12V200mA Size: 254x168x20mm Package Size: 305*205*45mm Gross Weight: 0.88KG 	<p>1-19pcs: \$90.5</p> <p>20-99pcs: \$90</p> <p>100-999pcs: \$89.5</p>
2		GS-TPD01	<p>S212 enables you to make the video call with villa entrance door, and open the door remotely from indoor monitor or mobile APP. It also makes an easy integration with SIP devices.</p> <p>Key Features:</p> <ol style="list-style-type: none"> Powered by PoE or power adapter (DC12V/2A) Support IC (13.56MHz) & ID (125kHz) card 3 Indicator Lights 2 relays supported Tamper alarm <p>Physical:</p> <ul style="list-style-type: none"> System: Linux RAM: 64 MB ROM: 128 MB Front Panel: Aluminum Power Supply: PoE (802.3af) or DC 12V/2A Standby Power: 1.5 W Rated Power: 3.5 W Camera: 2MP, CMOS Indicator Light: 3 Wiegand Port: Support Ethernet Port: 1 x RJ45, 10/100 Mbps adaptive Door Entry: IC (13.56MHz) & ID (125kHz) card Reset Button: 1 RS485 Port: 1 <p>Networking: Protocol: ONVIF, SIP, UDP, TCP, RTP, RTSP, NTP, DNS, HTTP, DHCP, IPV4, ARP, ICMP</p> <p>Video:</p> <ul style="list-style-type: none"> Video Codec: H.264 Video Resolution: 1380 x 720 Viewing Angle: 110° (H) / 60° (V) / 125° (D) Max. Image Transfer Rate: 720p - 25fps Light Compensation: LED white light <p>Networking: Protocol: ONVIF, SIP, UDP, TCP, RTP, RTSP, NTP, DNS, HTTP, DHCP, IPV4, ARP, ICMP</p> <p>Installation: Surface Mounting</p> <ul style="list-style-type: none"> Surface Mounting DIM: 168 x 88 x 34 mm Working Temperature: -40°C to +55°C Storage Temperature: -40°C to +70°C 	<p>1-100pcs: \$154.50</p> <p>101-300pcs: \$152.00</p> <p>>300pcs: \$149.00</p> <p>Package Features</p> <p>Package Content:</p> <ul style="list-style-type: none"> DNAKE S212 (Power adapter not included) Bracket Screwing Kit Quick Start Guide <p>Qty/CTN: 12 pcs N.W/PCS: 0.71 kg G.W/CTN: 11.08 kg Giftbox Size: 215 x 135 x 73 mm Carton Size: 470 x 235 x 295 mm</p> <p>02.4.0591 明装款</p>
3		280SD-C60/S	<p>The 280SD-C60 enables you to make the video call with villa entrance door, and open the door remotely from indoor monitor or mobile APP. It also makes an easy integration with SIP devices.</p> <p>Key Features:</p> <ol style="list-style-type: none"> Powered by PoE or power adapter (DC12V/2A) Support IC (13.56MHz) & ID (125kHz) card 3 Indicator Lights 2 relays supported <p>Physical:</p> <ul style="list-style-type: none"> System: Linux RAM: 64 MB ROM: 128 MB Front Panel: Aluminum Power Supply: PoE (802.3af) or DC 12V/2A Standby Power: 1.5 W Rated Power: 3.5 W Camera: 2MP, CMOS Indicator Light: 3 Wiegand Port: Support Ethernet Port: 1 x RJ45, 10/100 Mbps adaptive <p>Networking: Protocol: ONVIF, SIP, UDP, TCP, RTP, RTSP, NTP, DNS, HTTP, DHCP, IPV4, ARP, ICMP</p> <p>Door:</p> <ul style="list-style-type: none"> Door Entry: IC (13.56MHz) & ID (125kHz) card Reset Button: 1 RS485 Port: 1 Relay Out: 2 Input: 2 IP / IR Rating: IP65 / IK06 Installation: Surface Mounting Surface Mounting DIM: 168 x 88 x 34 mm Working Temperature: -40°C to +55°C Storage Temperature: -40°C to +70°C Working Humidity: 10% to 90% (non-condensing) 	<p>1-100pcs: \$129</p> <p>101-300pcs: \$128</p> <p>>300pcs: \$127</p> <p>Package Features</p> <p>Package Content:</p> <ul style="list-style-type: none"> DNAKE S280SD (Power adapter not included) Bracket Screwing Kit Quick Start Guide <p>Qty/CTN: 12 pcs N.W/PCS: 0.71 kg G.W/CTN: 11.08 kg Giftbox Size: 215 x 135 x 73 mm Carton Size: 470 x 235 x 295 mm</p> <p>02.4.0857</p>
4		GS-TPD06	<p>S215 enables you to make the video call with apartment entrance door, and open the door remotely from indoor monitor or mobile APP. It also makes an easy integration with SIP devices and lift control system.</p> <p>Key Features:</p> <ol style="list-style-type: none"> Induction loop for hearing impaired Braille dot for visually impaired 3 output relays for door locks Tamper alarm Support IC (13.56MHz) & ID (125kHz) card, PIN code <p>Physical:</p> <ul style="list-style-type: none"> System: Linux Front Panel: Aluminum Button: Mechanical Power Supply: PoE (802.3af) or DC 12V/2A Standby Power: 1.5 W Rated Power: 9 W Camera: 2MP, CMOS IR Sensor: Support Wiegand Port: Support Ethernet Port: 1 x RJ45, 10/100 Mbps adaptive Door Entry: IC (13.56MHz) & ID (125kHz) card, PIN code <p>Networking: Protocol: ONVIF, SIP, UDP, TCP, RTP, RTSP, NTP, DNS, HTTP, DHCP, IPV4, ARP, ICMP</p> <p>Display:</p> <ul style="list-style-type: none"> Display: 4.3-inch TFT LCD <p>Audio:</p> <ul style="list-style-type: none"> Audio Codec: G.711 Echo Cancellation DTMF: RFC2833 Microphone: Built-in microphone 	<p>1-100pcs: \$375.50</p> <p>101-300pcs: \$372.50</p> <p>>300pcs: \$356.00</p> <p>Package Features</p> <p>Package Content:</p> <ul style="list-style-type: none"> DNAKE S215 (Power adapter not included) Surface Mounting Box Screwing Kit Quick Start Guide <p>Qty/CTN: 10 pcs N.W/PCS: 1.53 kg G.W/CTN: 20.8 kg Giftbox Size: 362 x 170 x 100 mm Carton Size: 490 x 420 x 450 mm</p> <p>02.4.0664</p>
5		280D-B63F	<p>The 280D-B63 enables you to make the video call with apartment entrance door, and open the door remotely from indoor monitor or mobile APP. It also makes an easy integration with SIP devices and lift control system.</p> <p>Key Features:</p> <ol style="list-style-type: none"> Induction loop for hearing impaired Braille dot for visually impaired 3 output relays for door locks Tamper alarm Support IC (13.56MHz) & ID (125kHz) card, PIN code, Bluetooth (Optional) <p>Physical:</p> <ul style="list-style-type: none"> System: Linux Front Panel: Aluminum Button: Mechanical Power Supply: PoE (802.3af) or DC 12V/2A Standby Power: 1.5 W Rated Power: 9 W Camera: 2MP, CMOS IR Sensor: Support Wiegand Port: Support Ethernet Port: 1 x RJ45, 10/100 Mbps adaptive Door Entry: IC (13.56MHz) & ID (125kHz) card, PIN code, Bluetooth (Optional) 	<p>1-100pcs: \$312</p> <p>101-300pcs: \$309</p> <p>>300pcs: \$305</p> <p>Package Features</p> <p>Package Content:</p> <ul style="list-style-type: none"> DNAKE S215 (Power adapter not included) Surface Mounting Box Screwing Kit Quick Start Guide <p>Qty/CTN: 10 pcs N.W/PCS: 1.53 kg G.W/CTN: 20.8 kg Giftbox Size: 362 x 170 x 100 mm Carton Size: 490 x 420 x 450 mm</p> <p>预埋款 02.4.0858</p>
6		902C-A	<p>Property Center Management Machine</p> <p>The 902C-A is mainly used in guard station, it enables concierge to send messages, for example: utilities, weather forecast, etc. to apartment residents. It can also manage the access control for visitors, to gives you the combined benefit of security and convenience.</p> <p>Key Features:</p> <ul style="list-style-type: none"> 10.1-inch capacitive touch screen Android System Alarm/Call logs Message Sending/Receiving Powered by PoE or power adapter(DC12V/2A) Support SIP 2.0 protocol, easy integration with other SIP devices Support monitoring 16 IP cameras 	<p>1-100pcs: \$415</p> <p>101-300pcs: \$410</p> <p>>300pcs: \$398</p> <p>Physical</p> <p>System: Android</p> <p>RAM: 512 MB</p> <p>ROM: 4 GB</p> <p>Front Panel: Plastic</p> <p>Power Supply: PoE(802.3af) or DC 12V/2A</p> <p>Standby Power: 0.5 W</p> <p>Rated Power: 10 W</p> <p>Camera: 0.3MP CMOS</p> <p>SD Card Port: 1</p> <p>Ethernet Port: 1 x RJ45, 10/100 Mbps adaptive</p> <p>Installation: Desktop</p> <p>Dimension: 303x195 x35 mm</p> <p>Working Temperature: -10°C to +55°C</p> <p>Storage Temperature: -40°C to +70°C</p> <p>Working Humidity: 10% to 90% (non-condensing)</p> <p>02.4.0882</p>

7		KW02 Smart WiFi video doorbell can be powered by POE switch	<p>Network:2.4G WiFi 802.11 b/g/n or Wired network Power adapter:DC 12-36V AC 8-24V or 12-15V or 48V POE Function:Full duplex talk, Take photo, Take video, Unlock Unlock/Unlock by remote control, ID Card or APP External memory:MicroSD card up to 256GB Resolution:2Mega pixels View angle:140 Horizontal angle Night vision:IR CUT no color deviation, B/W night vision Alarm message:Push picture to APP when motion detection or call Playback:Video recording after the call or motion detection Third-Party Services:Amazon echo, Google Home, Cloud storage</p> <p>1-20pcs: \$42 21-100pcs: \$41 >101pcs: \$39</p>  <p>02.4.0830</p>	
8		GS-SB8-1 (WIFI VERSION) WiFi Video doorbell	<p>1. Main control: Ingenic T312L Sensor:SC233A 2. Mobile detection: PIR detection + Humanoid filtering + regional setting, effective distance of 8 meters 3. Night vision: 80m 4. Night vision distance, effective lighting distance is about 8 meters 5. Lens: HD lens 3MM F=2.0 FOV 160 degrees 6. Battery :18650*2 lithium battery, solar rechargeable battery 7. Charging time: 8 hours, interface full charging about 4 hours 8. Memory: supports up to 128GB TF card and cloud storage 9. Supports full-duplex intercom 10. Waterproof grade: IP66 11. Support access to Google Assistant and Amazon Alexa</p> <p>1-50sets: \$32.5 51-100sets: \$31.6 101-500sets: \$30.5</p> <p>02.2.121</p>	
9		KW02 -Doorbell	Indoor door bell work with Outdoor KW02 video doorbell	<p>1-20pcs: \$3.9 21-100pcs: \$3.8 >101pcs: \$3.7</p>
10		GS-ED1073 1073 type building access control electric lock	<p>Specifications: Double-head left positive; Double-head right positive; Double-head left reverse, Double-head right reverse size:130mm*106mm</p> <p>Installation diagram of various models of electric lock</p>  <p>02.4.0880</p>	<p>1-100pcs: \$39.5 101-300pcs: \$39 >300pcs: \$38.5</p> 
11		SY1250	<p>Input:AC110-240V Output:DC12V 3A 5A Time:0-15s</p>	<p>1-100pcs: \$5.9 101-300pcs: \$5.8 >300pcs: \$5.7</p> <p>02.4.0881</p>
12		GS-LXS-12V-005 Two-wire electric lock	<p>1. Working voltage: DC12V; 2. Unlocking method: lock with power on, unlock with power off; 3. Coil operation: continuous operation; 4. Locking delay: adjustable 0~9 seconds delay; 5. Weight: 0.9kg; 6. Current: start 0.8A, working current 0.09A; 7. Lock core: 15.5mm diameter stainless steel lock core, pop-up length 15mm; 8. Suitable door types: glass door, wooden door, metal door, fire door Note: Glass door has no frame and needs to be matched with electric bolt lock door clamp</p> <p>1-100pcs: \$11.9 101-300pcs: \$11.8 >300pcs: \$11.7</p> <p>03.6.71</p>	
13		GS-CLS-12V	<p>1. Name: 60/120/280kg magnetic lock 2. Voltage: DC12V 3. Current: 500ma 4. Suction: 60/120/280kg linear pull 5. Material: aluminum alloy 6. Unlocking time: <1s 7. Indicator light: LED light 8. Product weight: 2.1kg 9. Signal feedback: normally open and normally closed signal 10. Function: can be used with building intercom and access control system; 11. Suitable for door types: wooden door, iron door, framed glass door</p> <p>Note: Glass door has no frame and needs to be matched with electric bolt lock door clamp</p> <p>60KG: 1-100pcs: \$3.6 101-300pcs: \$3.5 >300pcs: \$3.4</p> <p>180KG 1-100pcs: \$5.9 101-300pcs: \$5.8 >300pcs: \$5.7</p> <p>02.4.0387</p>	






Shenzhen Golden Security Technology Co., Ltd

A: 6th Floor, Unit 1, Building 1, Kailifang Plaza, Lianrun Road, Taoyuan Community, Dalang Street, Longhua District, Shenzhen

Attns: Lilian Huang | T: +86 189 4879 4227 | E: lilian@cameralarms.com | W: <https://alarm-camera.en.alibaba.com>






No.	Picture	Model	Features	Compatible devices
5			Smart Screen switch (WiFi & ZigBee for option) Classic dimming knob switch + scene button 2 in 1 GS-X3 is a multi-functional knob switch with 2-gang relay switch and 2-way scene control. It works with tuya gateway, can be controlled through smart phone App. Main features: - Light dimming feature: cold and warm color dimming for lights - Acting as a 2-gang relay switch to control lights on/off - Can set 2-way scenes control on the button, self-defined intelligent linkage scenes, and quickly switch to scene mode and lighting mode. - Different colors for option - Asian wall box design, 86*86mm type Specification: Power supply: Live & Neutral Wire Voltage: AC220V 50Hz Statistics power consumption: 0.5W Communication frequency: 2.4g Communication protocol: ZigBee Key mode: Capacitive touch Material: PC material	 Sample: \$24.80 50~100pcs: \$23.80 101~200 pcs: \$22.80 Sample: \$27.80 50~100pcs: \$26.80 101~200 pcs: \$25.80 aluminum alloy material : 02.4.0998
6		GS-X3	 Classic dimming knob switch + scene button 2 in 1 Specification: Power supply: Live & Neutral Wire Voltage: AC220V 50Hz Statistics power consumption: 0.5W Communication frequency: 2.4g Communication protocol: ZigBee Key mode: Capacitive touch Material: PC material	 aluminum alloy material : 02.4.0998
7		GS-F3 PRO-Gray	4 Gang Zigbee wall switches with scene panel 2 in 1 1. 4-way composite switch, ordinary switch scene switch any switch. 2. App to modify the switch or scene name, automatically synchronised to the switch LCD display. 3. 3.5-inch LCD display, 320 * 480 resolution. 4. Time calendar, weather information screensaver function. 5. Millimeter wave human body sensing radar. 6. Support power on and off. 7. support zigbee wireless connection.	 Sample: \$31.5 50~100pcs: \$29.9 101~200 pcs: \$29.55 Sample: \$19.8 50~100pcs: \$18.7 101~200 pcs: \$18.3
8		GS-F3 PRO-Black		
9		GS-F3 PRO-White		
10		GS-M8Pro-Gray	1. 4-way composite switch, ordinary switch scene switch any switch. 2. App to modify the switch or scene name, automatically synchronised to the switch LCD display. 3. 2.06 inch IPS display, 80 * 160 resolution. 4. Time calendar, weather information screensaver function 5. Millimeter wave human body sensing radar. 6. support power-on, power-off memory 7. support zigbee wireless connection 8. 485: can support external input control, also can output control external intelligent devices. (Customisation required) Memory card function: external TF card, supporting 32GB TF card.	 Sample: \$19.8 50~100pcs: \$18.7 101~200 pcs: \$18.3
11		GS-M8Pro-Black		
12		GS-M8Pro-White		
13			WIFI and Zigbee EU standard LCD display wall switches	
14		GS-Y9-PC01-WiFi	(Ivory white/Moonlight white/Starry gray for option)	 (WIFI and zigbee is with same price) Sample: \$9.8 50~100pcs: \$9.7 101~200 pcs: \$9.65 (WIFI and zigbee is with same price) Sample: \$15.58 50~100pcs: \$14.48
15		GS-Y9-PC01-Zigbee		
16		GS-Y9-Glass01-WiFi		
17		GS-Y9-Glass01-Zigbee		
18		GS-Y9-PC02-WiFi		
19		GS-Y9-PC02-Zigbee		
20		GS-Y9-Glass02-WiFi		
21		GS-Y9-Glass02-Zigbee		
22		GS-Y9-EPLN-ZW-3(PC)	1. 1~3-way composite switch, ordinary switch scene switch any switch. 2. App to modify the switch or scene name, automatically synchronised to the switch LCD display. 3. 2.06 inch IPS display, 80 * 160 resolution. 4. Time calendar, weather information screensaver function 5. Millimeter wave human body sensing radar. 6. support power-on, power-off memory 7. support zigbee/WIFI wireless connection 8. 485: can support external input control, also can output control external intelligent devices. (Customisation required) Memory card function: external TF card, supporting 32GB TF card.	 Sample: \$10.5 50~100pcs: \$10.39 101~200 pcs: \$10.29 Sample: \$12.84 50~100pcs: \$12.74 101~200 pcs: \$12.64
23		GS-Y9-EPLN-ZW-3(W)		
24		GS-Y9-EPLN-ZW-3(G)		
25				
30		YX-ZJ-01-WIFI-NL (Neutral+Live version)	 1 gang Switch WiringDiagram (N+L & "Only L" 2 in switch)	 Sample: \$4.6 50~200pcs: \$4.5 201~500 pcs: \$4.3 QTY: 50PCS G.W: 11.1KG
31		YX-ZJ-01-Zigbee-NL (Neutral+Live version)		
32		YX-ZJ-01-WIFI-L (NL&Only L 2 in 1 version)		
33		YX-ZJ-01-Zigbee-L (NL&Only L 2 in 1 version)	 1 gang Switch WiringDiagram (N+L 2 in switch)	
39		YX-ZJ-02-WIFI-NL (Neutral+Live version)	 2 gang Switch WiringDiagram (N+L & "Only L" 2 in switch)	 Sample: \$5.3 50~200pcs: \$5.2 201~500 pcs: \$5.1 QTY: 50PCS G.W: 11.1KG
40		YX-ZJ-02-Zigbee-NL (Neutral+Live version)		
41		YX-ZJ-02-WIFI-L (NL&Only L 2 in 1 version)		
42		YX-ZJ-02-Zigbee-L (NL&Only L 2 in 1 version)	 2 gang Switch WiringDiagram (N+L 2 in switch)	
48		YX-ZJ-03-WIFI-NL (Neutral+Live version)	 3 gang Switch WiringDiagram (N+L & "Only L" 2 in switch)	 Sample: \$5.79 50~200pcs: \$5.69 201~500 pcs: \$5.59 QTY: 50PCS
49		YX-ZJ-03-Zigbee-NL (Neutral+Live version)		
50		YX-ZJ-03-WIFI-L (NL&Only L 2 in 1 version)	 3 gang Switch WiringDiagram (N+L & "Only L" 2 in switch)	

51		 Wiring without Neutral cable 3 gang Switch WiringDiagram (N+L & "Only L" 2 in 1 switch)		 works with the Google Assistant works with amazon alexa	G.W: 11.1KG
57		 			 works with the Google Assistant works with amazon alexa
58					 works with the Google Assistant works with amazon alexa
59					 works with the Google Assistant works with amazon alexa
60					 works with the Google Assistant works with amazon alexa
61					
66		 	 AC Power Water Heater Load L N Water Heater AC Power Load L N	 AC Power Water Heater Load L N	 works with the Google Assistant works with amazon alexa
67			 AC Power Water Heater Load L N	 AC Power Water Heater Load L N	 works with the Google Assistant works with amazon alexa
68		 	 AC Power Water Heater Load L N	 AC Power Water Heater Load L N	 works with the Google Assistant works with amazon alexa
69		 	 AC Power Water Heater Load L N	 AC Power Water Heater Load L N	 works with the Google Assistant works with amazon alexa
71					
75			 Power ground Curtain motor L N	 Power ground Curtain motor L N	 works with the Google Assistant works with amazon alexa
76			 Power ground Curtain motor L N	 Power ground Curtain motor L N	 works with the Google Assistant works with amazon alexa
77					
78					
84			 Power ground Dimmer switch L N	 Power ground Dimmer switch L N	 works with the Google Assistant works with amazon alexa
85			 Power ground Dimmer switch L N	 Power ground Dimmer switch L N	 works with the Google Assistant works with amazon alexa
86			 Power ground Dimmer switch L N	 Power ground Dimmer switch L N	 works with the Google Assistant works with amazon alexa
87					
93			 Power ground Fan switch L N	 Power ground Fan switch L N	 works with the Google Assistant works with amazon alexa
94			 Power ground Fan switch L N	 Power ground Fan switch L N	 works with the Google Assistant works with amazon alexa
95					
96					
104			 1)Input Voltage: 100-240VAC 50/60Hz 2)Connection Mode: WiFi 3)Peak Current: 13A 4)Available Colors: White/Black/Gold/Gray 5)Dimensions: 86 * 86 * 35mm (European) 6)Gross Weight: 170g	 1)Input Voltage: 100-240VAC 50/60Hz 2)Connection Mode: WiFi 3)Peak Current: 13A 4)Available Colors: White/Black/Gold/Gray 5)Dimensions: 86 * 86 * 35mm (European) 6)Gross Weight: 170g	 works with the Google Assistant works with amazon alexa
105			 1)Input Voltage: 100-240VAC 50/60Hz 2)Connection Mode: WiFi 3)Peak Current: 13A 4)Available Colors: White/Black/Gold/Gray 5)Dimensions: 86 * 86 * 35mm (European) 6)Gross Weight: 170g	 1)Input Voltage: 100-240VAC 50/60Hz 2)Connection Mode: WiFi 3)Peak Current: 13A 4)Available Colors: White/Black/Gold/Gray 5)Dimensions: 86 * 86 * 35mm (European) 6)Gross Weight: 170g	 works with the Google Assistant works with amazon alexa
106			 1)Input Voltage: 100-240VAC 50/60Hz 2)Connection Mode: WiFi 3)Peak Current: 13A 4)Available Colors: White/Black/Gold/Gray 5)Dimensions: 86 * 86 * 35mm (European) 6)Gross Weight: 170g	 1)Input Voltage: 100-240VAC 50/60Hz 2)Connection Mode: WiFi 3)Peak Current: 13A 4)Available Colors: White/Black/Gold/Gray 5)Dimensions: 86 * 86 * 35mm (European) 6)Gross Weight: 170g	 works with the Google Assistant works with amazon alexa
107					
108			 Pmax 20W/Type C PD3.0 /USB-A QC3.0 1)Input Voltage: 100-240VAC 50/60Hz 2)Connection Mode: WiFi 3)Peak Current: 13A 4)Available Colors: White/Black/Gold/Gray 5)Dimensions: 86 * 86 * 35mm (European) 6)Gross Weight: 170g	 Pmax 20W/Type C PD3.0 /USB-A QC3.0 1)Input Voltage: 100-240VAC 50/60Hz 2)Connection Mode: WiFi 3)Peak Current: 13A 4)Available Colors: White/Black/Gold/Gray 5)Dimensions: 86 * 86 * 35mm (European) 6)Gross Weight: 170g	 works with the Google Assistant works with amazon alexa
109			 Pmax 20W/Type C PD3.0 /USB-A QC3.0 1)Input Voltage: 100-240VAC 50/60Hz 2)Connection Mode: WiFi 3)Peak Current: 13A 4)Available Colors: White/Black/Gold/Gray 5)Dimensions: 86 * 86 * 35mm (European) 6)Gross Weight: 170g	 Pmax 20W/Type C PD3.0 /USB-A QC3.0 1)Input Voltage: 100-240VAC 50/60Hz 2)Connection Mode: WiFi 3)Peak Current: 13A 4)Available Colors: White/Black/Gold/Gray 5)Dimensions: 86 * 86 * 35mm (European) 6)Gross Weight: 170g	 works with the Google Assistant works with amazon alexa
110			 1)Input Voltage: 100-240VAC 50/60Hz 2)Connection Mode: WiFi 3)Peak Current: 13A 4)Available Colors: White/Black/Gold/Gray 5)Dimensions: 86 * 86 * 35mm (European) 6)Gross Weight: 170g	 1)Input Voltage: 100-240VAC 50/60Hz 2)Connection Mode: WiFi 3)Peak Current: 13A 4)Available Colors: White/Black/Gold/Gray 5)Dimensions: 86 * 86 * 35mm (European) 6)Gross Weight: 170g	 works with the Google Assistant works with amazon alexa
111			 1)Input Voltage: 100-240VAC 50/60Hz 2)Connection Mode: WiFi 3)Peak Current: 13A 4)Available Colors: White/Black/Gold/Gray 5)Dimensions: 86 * 86 * 35mm (European) 6)Gross Weight: 170g	 1)Input Voltage: 100-240VAC 50/60Hz 2)Connection Mode: WiFi 3)Peak Current: 13A 4)Available Colors: White/Black/Gold/Gray 5)Dimensions: 86 * 86 * 35mm (European) 6)Gross Weight: 170g	 works with the Google Assistant works with amazon alexa
112					
113					
114					
115					

116		LX-ZJ-UNI-WIFI-Socket-TYC (Neutral+Live version) (White/Black/Gray/Golden color)	Zigbee/WIFI Universal smart Wall socket with USB and Type C charger Pmax 20W/Type C PD3.0 /USB-A QC3.0 1)Input Voltage: 100-240VAC 50/60Hz 2)Connection Mode: WiFi 3)Peak Current: 13A 4)Available Colors: White/Black/Gold/Gray 5)Dimensions: 86 * 86 * 35mm (European) 6)Gross Weight: 170g		
117		LX-ZJ-UNI-Zigbee-Socket-TYC (Neutral+Live version) (White/Black/Gray/Golden color)		Carton box volume QTY: 50PCS G.W: 11.1KG	
118		Universal smart Wall socket with USB and Type C charger		Carton box volume QTY: 50PCS G.W: 11.1KG	
119		Universal smart Wall socket with USB and Type C charger			
120		GS-UKWBO2-Wifi	Wifi 147 British socket Tuya smart socket tempered glass panel with 1USB & 1 Type C Available Colors: White/Black/Gold/Gray		
121		UK standard Double socket with 1 USB+1 Type C charger	Zigbee147 British socket Tuya smart socket tempered glass panel with 1USB & 1 Type C Available Colors: White/Black/Gold/Gray		
122		GS-UKWBO2-Wifi-20W	Wifi 147 British socket Tuya smart socket tempered glass panel with 1USB & 1 Type C Available Colors: White/Black/Gold/Gray Pmax 20W		
123		GS-UKWBO2-Zigbee-20W	Zigbee147 British socket Tuya smart socket tempered glass panel with 1USB & 1 Type C Available Colors: White/Black/Gold/Gray Pmax 20W		
124		GS-70W-UK-WIFI	Wifi 147 British socket Tuya smart socket tempered glass panel with 1USB & 1 Type C Available Colors: White/Black/Gold/Gray Pmax 70W		
125		GS-70W-UK-ZIGBEE	Wifi 147 British socket Tuya smart socket tempered glass panel with 1USB & 1 Type C Available Colors: White/Black/Gold/Gray Pmax 70W		
126		GS-70W-UN-WIFI	Wifi 147 Universal socket Tuya smart socket tempered glass panel with 1USB & 1 Type C Available Colors: White/Black/Gold/Gray Pmax 70W		
127		GS-70W-UN-ZIGBEE	Wifi 147 Universal socket Tuya smart socket tempered glass panel with 1USB & 1 Type C Available Colors: White/Black/Gold/Gray Pmax 70W		
201	Silver Frame	Gold Frame	Rose Gold Frame	Black Frame	White color glass
202		GS-M601-White	Zigbee	M6 series Zigbee Smart N&L 1-Gang Physical button switch Composite switch(Load switch and scene button 2 in 1)	Neutral&Live Cable
203		GS-M601-Black	Zigbee		
204		GS-M601-Gray	Zigbee		
205		GS-M601-Yellow	Zigbee		
206	M6 series Zigbee Smart Non-neut 1-Gang switch	Non-neutral switch	Zigbee	Non-Neutral version M6 series Zigbee Smart N&L 1-Gang Physical button switch *Color: white/black/gold/Gray for options	
207		GS-M602-White	Zigbee	M6 series Zigbee Smart N&L 2-Gang Physical button switch	Neutral&Live Cable switch
208		GS-M602-Black	Zigbee		
209		GS-M602-Gray	Zigbee		
210		GS-M602-Yellow	Zigbee		
211	M6 series Zigbee Smart Non-neut 2-Gang switch	Non-neutral switch	Zigbee	Non-Neutral version M6 series Zigbee Smart N&L 2-Gang Physical button switch *Color: white/black/gold/Gray for options	
212		GS-M603-White	Zigbee	M6 series Zigbee Smart N&L 3-Gang Physical button switch	Neutral&Live Cable switch
213		GS-M603-Black	Zigbee		
214		GS-M603-Gray	Zigbee		

215	M6 series Zigbee Smart N&L 3-Gang switch	N&L switch GS-M603-Yellow 	*support power-on, power-off memory *support zigbee wireless connection *Color: white/black/gold/grey for options	PCB panel frame Intelligent control chip Fully isolated structure design		
216	M6 series Zigbee Smart Non-neutral 3-Gang switch	Non-neutral switch GS-M603-Non-Neutral 	Non-Neutral version M6 series Zigbee Smart N&L 3-Gang Physical button switch *Color: white/black/gold/Gray for options		Sample: \$12.2 50~100pcs: \$11.9	
217		N&L switch GS-M604-White 	M6 series Zigbee Smart N&L 4-Gang Physical button switch			
218		N&L switch GS-M604-Black 				
219		N&L switch GS-M604-Gray 				
220	M6 series Zigbee Smart N&L 4-Gang switch	N&L switch GS-M604-Yellow 	*Input Voltage:110V-220V,50-60Hz *The lamp load power< 200W *Size:86mm*86mm *Work temperature: -20°C-45°C *Working humidity: <85%RH (no condensation) *Casing material: PC flame retardant material *support power-on, power-off memory *support zigbee wireless connection *Color: white/black/grey for options			
221	M6 series Zigbee Smart Non-neutral 4-Gang switch	Non-neutral switch GS-M604-Non-Neutral 	Non-Neutral version M6 series Zigbee Smart N&L 3-Gang Physical button switch *Color: white/black/gold/Gray for options		Sample: \$13.5 50~100pcs: \$13.4	
222		N&L switch GS-M606-White 	M6 series Zigbee Smart N&L 4-Gang +2-scene button switch			
223		N&L switch GS-M606-Black 				
224		N&L switch GS-M606-Gray 				
225	M6 Zigbee Smart N&L 4-Gang+2 scene button switch	N&L switch GS-M606-Yellow 				
226		M6-2Gang Switch Frame 	PC plastic frame is used to install multiple switches on the wall for M6 series wall switches		Sample: \$0.74 50~100pcs: \$0.65	
227		M6-3Gang Switch Frame 			Sample: \$0.97 50~100pcs: \$0.95	
228		M6-4Gang Switch Frame 			Sample: \$1.32 50~100pcs: \$1.29	
229		M6-5Gang Switch Frame 			Sample: \$1.98 50~100pcs: \$1.89	
230	Non-Smart	GS-M6X1V-XC BC 	GS-M6X1V-XC BC non smart TV socket GS-M6X1T-XC BC non smart TEL socket GS-M6X1C-XC BC non smart internet socket socket GS-M6X2T-XC BC double TEL socket GS-M6X2C-XC BC double internet socket GS-M6XVT-XC BC TV + TEL socket GS-M6XVC-XC BC TV + INTERNET socket GS-M6XTC-XC BC TEL + INTERNET socket GS-M6X1C6-XC BC cat 6 socket		Sample : \$1.3 50~200 pcs: \$1.28 200~1K pcs: \$1.25	Black Gray Golden White
231	Non-Smart	GS-M6X2C6-XC BC 	1, bottom box: standard 86; 2, panel size: 86mm*86mm*9.4mm; 3, material: fireproof PC 4, function: information socket		Sample : \$2.92 200~1K pcs: \$2.87	
232		GS-M6XVC6-XC BC 	5, color: gray, black, gold		Sample : \$2.49 200~1K pcs: \$2.43	
233		GS-M6XTC6-XC BC 			Sample : \$2.6 200~1K pcs: \$2.55	Black Gray Golden White
234		GS-M6XTG-XC BC 	1, bottom box: standard 86; 2, panel size: 86mm*86mm*9.4mm; 3, material: fireproof PC 4, function: dimmer switch		Sample : \$2.6 200~1K pcs: \$2.55	
235		GS-M6XTS-XC BC 	5, color: gray, black, gold 6, parameters: Power 250W		Sample : \$2.6 200~1K pcs: \$2.55	
236						
237		JD5GDN1-Glass-white 	1-Gang Tuya Zigbee AG tempered Glass wall switch	N&L 	AG Glass tempered 1 Gang switch	MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM
238		JD5GDN1-Glass-gray 	1-Gang PC Zigbee Plastic tempered Glass wall switch		Sample : \$9.29 50~200 pcs: \$9.20 200~1K pcs: \$9.10	
239	JD5 Zigbee N&L 1 Gang AG tempered Glass Wall switch	JD5GDN1-Glass- brown 	1-Gang Aluminum alloy Zigbee wall switch wall switch Operating current: 16A Max (purely resistive load) Wiring method: Live & Neutral wire Product material: Fireproof PC shell Dimensions:86mm*86mm*38mm Usage environment: temperature 0°C~40°C, relative humidity less than 95% Wireless standard: Wi-Fi IEEE802.11 b/g/n 2.4GHz Security mechanism: WPA-PSK/WPA2-PSK	Matt black/Matt Grey, Skin- 	PC plastic version 1 Gang switch Sample : \$8.58 50~200 pcs: \$8.50 200~1K pcs: \$8.40	MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM
240		JD5GDN1-PC-White 				
241		JD5GDN1-PC- gray 				
242		JD5GDN1-PC-black 				
243		JD5GDN1-Aluminum-White 				
244		JD5GDN1-Aluminum-gray 				
245		JD5GDN1-Aluminum-Black 				
246		JD5GDN2-Glass-white 	2-Gang Tuya Zigbee AG tempered Glass wall switch	N&L 	AG Glass tempered 2 Gang switch	MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM
247		JD5GDN2-Glass-gray 	2-Gang PC Zigbee Plastic tempered Glass wall switch		Sample : \$10.00 50~200 pcs: \$9.90 200~1K pcs: \$9.80	
248		JD5GDN2-Glass- brown 	Working voltage: 100V-240V~,50Hz/60Hz Operating current: 16A Max (purely resistive load) Wiring method: Live & Neutral wire Product material: Fireproof PC shell Dimensions:86mm*86mm*38mm Usage environment: temperature 0°C~40°C, relative humidity less than 95% Wireless standard: Wi-Fi IEEE802.11 b/g/n 2.4GHz Security mechanism: WPA-PSK/WPA2-PSK	Matt black/Matt Grey, Skin- 	PC plastic 2 Gang switch Sample : \$9.11 50~200 pcs: \$8.93 200~1K pcs: \$8.84	MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM
249		JD5GDN2-PC- white 				
250		JD5GDN2-PC- gray 				
251		JD5GDN2-PC-black 				

252		JD5GDN2-Aluminum-White JD5GDN2-Aluminum-gray JD5GDN2-Aluminum-Black		Aluminum alloy 2 Gang switch Sample : \$12.68 50~200 pcs: \$12.56 200~1K pcs: \$12.43	MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
253		JD5GDN3-Glass-white JD5GDN3-Glass-gray JD5GDN3-Glass- brown	3-Gang Tuya Zigbee AG tempered Glass wall switch 3-Gang PC Zigbee Plastic tempered Glass wall switch 3-Gang Aluminum alloy Zigbee wall switch Working voltage: 100V~240V~,50Hz/60Hz Operating current: 16A Max (purely resistive load) Wiring method: Live & Neutral wire Product material: Fireproof PC shell Dimensions:86mm*86mm*38mm Usage environment: temperature 0°C~40°C, relative humidity less than 95% Wireless standard: Wi-Fi IEEE802.11 b/g/n 2.4GHz Security mechanism: WPA-PSK/WPA2-PSK APP platform: Tuya Smart Life	N&L switch Matt black/Matt Grey,Skin-	AG Glass tempered 3 Gang switch Sample : \$10.72 50~200 pcs: \$10.60 200~1K pcs: \$10.50	MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM
254		JD5GDN3-PC-White JD5GDN3-PC- gray JD5GDN3-PC-black		PC plastic 3 Gang switch Sample : \$9.65 50~200 pcs: \$9.46 200~1K pcs: \$9.36	MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
255		JD5GDN3-Aluminum-White JD5GDN3-Aluminum-gray JD5GDN3-Aluminum-Black		Aluminum alloy 3 Gang switch Sample : \$14.30 50~200 pcs: \$14.20 200~1K pcs: \$14.00	MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
256		JD5GDN4-Glass-white JD5GDN4-Glass-gray JD5GDN4-Glass- brown		AG Glass tempered 4 Gang switch Sample : \$11.65 50~200 pcs: \$11.42 200~1K pcs: \$11.30	MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
257		JD5GDN4-PC-White JD5GDN4-PC- gray JD5GDN4-PC-black		PC plastic 4 Gang switch Sample : \$10.36 50~200 pcs: \$10.26 200~1K pcs: \$10.16	MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
258		JD5GDN4-Aluminum-White JD5GDN4-Aluminum-gray JD5GDN4-Aluminum-Black		Aluminum alloy 4 Gang switch Sample : \$16.09 50~200 pcs: \$15.93 200~1K pcs: \$15.77	MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
259		JD5GDN8-Glass-white JD5GDN8-Glass-gray JD5GDN8-Glass- brown		AG Glass tempered 4 Gang switch+4 scene mode buttons Sample : \$13.66 50~200 pcs: \$13.40 200~1K pcs: \$13.30	MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
260		JD5GDN8-PC-White JD5GDN8-PC- gray JD5GDN8-PC-black		PC plastic 4 Gang switch+4 scene mode buttons Sample : \$12.59 50~200 pcs: \$12.49 200~1K pcs: \$12.39	MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
261		JD5GDN8-Aluminum-White JD5GDN8-Aluminum-gray JD5GDN8-Aluminum-Black		PC plastic 4 Gang switch+4 scene mode buttons Sample : \$20.05 50~200 pcs: \$19.85 200~1K pcs: \$19.65	MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
262		JD5GDN8-Aluminum-White JD5GDN8-Aluminum-gray JD5GDN8-Aluminum-Black		AG Glass 20A switch Sample : \$12.35 50~200 pcs: \$12.20 200~1K pcs: \$12.10	MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
263		GS-JD5AC-20A-Glass-white GS-JD5AC-20A-Glass-gray		PC 20A switch Sample : \$11.86 50~200 pcs: \$11.50 200~1K pcs: \$11.30	MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
264		GS-JD5AC-20A-Glass- brown		Aluminum alloy 20A switch Sample : \$13.9 50~200 pcs: \$13.80 200~1K pcs: \$13.60	MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
265		GS-JD5AC-20A-PC-White GS-JD5AC-20A-PC- gray			MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
266		GS-JD5AC-20A-PC-black			MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
267		GS-JD5AC-20A-Aluminum-White GS-JD5AC-20A-Aluminum-gray			MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
268		GS-JD5AC-20A-Aluminum-Black			MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
269		GS-JD5AC-20A-Aluminum-White GS-JD5AC-20A-Aluminum-gray			MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
270		GS-JD5AC-20A-Aluminum-Black			MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
271		GS-JD5AC-20A-Aluminum-White GS-JD5AC-20A-Aluminum-gray			MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
272		GS-JD5AC-20A-Aluminum-Black			MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
273		GS-JD5AC-20A-Aluminum-White GS-JD5AC-20A-Aluminum-gray			MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
274		GS-JD5AC-20A-Aluminum-Black			MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
275		GS-JD5AC-20A-Aluminum-White GS-JD5AC-20A-Aluminum-gray			MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
276		GS-JD5AC-20A-Aluminum-Black			MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
277		GS-JD5AC-20A-Aluminum-White GS-JD5AC-20A-Aluminum-gray			MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
278		GS-JD5AC-20A-Aluminum-Black			MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
279		GS-JD5AC-20A-Aluminum-White GS-JD5AC-20A-Aluminum-gray			MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
280		GS-JD5AC-20A-Aluminum-Black			MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
281		GS-JD5AC-20A-Aluminum-White GS-JD5AC-20A-Aluminum-gray			MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
282		GS-JD5AC-20A-Aluminum-Black			MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
283		GS-JD5AC-20A-Aluminum-White GS-JD5AC-20A-Aluminum-gray			MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
284		GS-JD5AC-20A-Aluminum-Black			MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
285		GS-JD5AC-20A-PC-White GS-JD5AC-20A-PC- gray			MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
286		GS-JD5AC-20A-PC-black			MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
287		GS-JD5AC-20A-Aluminum-White GS-JD5AC-20A-Aluminum-gray			MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
288		GS-JD5AC-20A-Aluminum-Black			MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
289		GS-JD5AC-20A-Aluminum-White GS-JD5AC-20A-Aluminum-gray			MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
290		GS-JD5AC-20A-Aluminum-Black			MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
291		GS-JD5AC-20A-Aluminum-White GS-JD5AC-20A-Aluminum-gray			MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
292		GS-JD5AC-20A-Aluminum-Black			MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
293		GS-JD5AC-20A-Aluminum-White GS-JD5AC-20A-Aluminum-gray			MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
294		GS-JD5AC-20A-Aluminum-Black			MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
295		GS-JD5WH-20A-Glass-white GS-JD5WH-20A-Glass-gray			MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
296		GS-JD5WH-20A-Glass- brown			MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
297		GS-JD5WH-20A-PC-White GS-JD5WH-20A-PC- gray			MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
298		GS-JD5WH-20A-PC-black			MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
299		GS-JD5WH-20A-Aluminum-White GS-JD5WH-20A-Aluminum- gray			MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
300		GS-JD5WH-20A-Aluminum- Black			MODEL NO: QTY: 50PCS G.W: 15.2KGS MEAS: 49x31x33CM	
301		JD5-FR-2 Frame-White		The integrated frame for 2 pcs JD05 smart wall switch JD05 Skin-friendly Switch Integrated Frame (consisting of two parts: a plastic integrated frame and a metal integrated fram`	PC 20A switch Sample : \$11.86 50~200 pcs: \$11.50 200~1K pcs: \$11.30	

302		JD5-FR-2 Frame-Gray		Sample : \$0.85 50~200 pcs: \$0.83 200~1K pcs: \$0.82	
303		JD5-FR-2 Frame-Black			
304		JD5-FR-3 Frame-White	The integrated frame for 3 pcs JD05 smart wall switch JD05 Skinny-friendly Switch Integrated Frame (consisting of two parts: a plastic integrated frame and a metal integrated)		
305		JD5-FR-3 Frame-Gray			
306		JD5-FR-3 Frame-Black			
307		JD5-FR-4 Frame-White	The integrated frame for 4 pcs JD05 smart wall switch JD05 Skinny-friendly Switch Integrated Frame (consisting of two parts: a plastic integrated frame and a metal integrated)		
308		JD5-FR-4 Frame-Gray			
309		JD5-FR-4 Frame-Black			
310					
311		N&L switch GS-206EU-1	Input voltage: AC100~240V50~60HZ Load: 200W/gang Wireless Protocol: Zigbee Panel Material: Tempered glass Color selection: white Wireless Standard: IEEE 802.15.4 b/g/n * Neutral Required. * The color and brightness can be changed through Tuya APP. * Custom names in multiple languages.	Sample: \$19.9 100~200 pcs: \$18.6 300~400 pcs: \$18.2	 
312		N&L switch GS-206EU-2		Sample: \$20.9 100~200 pcs: \$19.9 300~400 pcs: \$18.6	
313		N&L switch GS-206EU-3		Sample: \$22.8 100~200 pcs: \$22.7 300~400 pcs: \$21.7	
314					
315		PC01-ZIG-W (White color)	1 Gang N&L PC/aluminum alloy relay and scene 2 in 1 Composite switch with Zigbee version		
316		PC01-ZIG-B (Black color)		Sample: \$11.98 50~100 pcs: \$11.95 101~200 pcs: \$11.85	Each icon can be customized with MOQ 10 pcs
317		PC01-ZIG-G (Gray color)			
318		PC01-ZIG-Y (Golden color)	*Each Gang should be less than or equal to 500W *Power supply: Neutral & Live cable		
319		Metal01-ZIG-W (White color)	*Rated voltage: AC100V-240V 50-60Hz *Working temperature: -20°C-45°C *Working humidity: ≤85%RH (no condensation) *Casing material: PC flame retardant material		
320		Metal01-ZIG-S (Silver color)	*Panel material: aluminum alloy CNC anodized		
321		Metal01-ZIG-Y (Golden color)	*Wireless connection: zigbee 3.0		
322		Metal01-ZIG-G (Gray color)	*Wireless power consumption: ≤0.3		
323		Metal01-ZIG-B (Blue color)	*Size: 86*86*35mm		
324		Metal01-ZIG-R (Red color)			
325		Metal01-ZIG-O (Orange color)			
326		Metal01-ZIG-B (Black color)			
327		PC02-ZIG-W (White color)	2 Gang N&L PC/aluminum alloy relay and scene 2 in 1 Composite switch with Zigbee version		
328		PC02-ZIG-B (Black color)		Sample: \$12.98 50~100 pcs: \$12.95 101~200 pcs: \$12.85	Each icon can be customized with MOQ 10 pcs
329		PC02-ZIG-G (Gray color)			
330		PC02-ZIG-Y (Golden color)	*Each Gang should be less than or equal to 500W *Power supply: Neutral & Live cable		
331		Metal02-ZIG-W (White color)	*Rated voltage: AC100V-240V 50-60Hz *Working temperature: -20°C-45°C *Working humidity: ≤85%RH (no condensation) *Casing material: PC flame retardant material		
332		Metal02-ZIG-S (Silver color)	*Panel material: aluminum alloy CNC anodized		
333		Metal02-ZIG-Y (Golden color)	*Wireless connection: zigbee 3.0		
334		Metal02-ZIG-G (Gray color)	*Wireless power consumption: ≤0.3		
335		Metal02-ZIG-B (Blue color)	*Size: 86*86*35mm		
336		Metal02-ZIG-R (Red color)			
337		Metal02-ZIG-O (Orange color)			
338		Metal02-ZIG-B (Black color)			
339		PC03-ZIG-W (White color)	3 Gang N&L PC/aluminum alloy relay and scene 2 in 1 Composite switch with Zigbee version		
340		PC03-ZIG-B (Black color)		Sample: \$13.98 50~100 pcs: \$13.95 101~200 pcs: \$13.85	Each icon can be customized with MOQ 10 pcs
341		PC03-ZIG-G (Gray color)			

342		PC03-ZIG-Y (Golden color) *Each Gang should be less than or equal to 500W *Power supply: Neutral &Live cable *Rated voltage: AC100V-240V 50-60HZ *Working temperature: -20°C-45°C *Working humidity: ≤85%RH (no condensation) *Casing material: PC flame retardant material *Panel material: aluminum alloy CNC anodized *Wireless connection: zigbee 3.0 *Wireless power consumption: ≤0.3 *Size: 86*86*35mm			
343		Metal03-ZIG-W(White color)	Sample: \$21.54 50~100pcs: \$21.3 101~200 pcs: \$21		
344		Metal03-ZIG-S(Silver color)		Each Icon can be customized with MOQ 10 pcs	
345		Metal03-ZIG-Y(Golden color)			
346		Metal03-ZIG-G(Gray color)			
347		Metal03-ZIG-B(Blue color)			
348		Metal02-ZIG-R(Red color)			
349		Metal02-ZIG-O(orange color)			
350		Metal02-ZIG-B(Black color)			
351		PC04-ZIG-W (White color)			
352		PC04-ZIG-B (Black color)	Sample: \$14.98 50~100pcs: \$14.95 101~200 pcs: \$14.85	Each Icon can be customized with MOQ 10 pcs	
353		PC04-ZIG-G (Gray color)			
354		PC04-ZIG-Y (Golden color)			
355		Metal04-ZIG-W(White color)			
356		Metal04-ZIG-S(Silver color)			
357		Metal04-ZIG-Y(Golden color)			
358		Metal04-ZIG-G(Gray color)			
359		Metal04-ZIG-B(Blue color)			
360		Metal04-ZIG-R(Red color)			
361		Metal04-ZIG-O(orange color)			
362		Metal04-ZIG-B(Black color)			
363		PC-TYG5-SM-812-G			
364		PC-TYG5-SM-812-W	Working voltage: 100V-240V~,50Hz/60Hz Operating current: 10A Max (purely resistive load) Wiring method: zero live wire Load type: incandescent lamp 500W/channel, LED lamp 120W/channel, energy-saving lamp 200W/channel		
365		PC-TYG5-SM-812-Y	Product material: Fireproof PC shell Dimensions (height*width*thickness):86mm*86mm*38mm Usage environment: temperature 0°C~40°C, Relative humidity less than 95% Security mechanism: WPA-PSK/WPA2-PSK Wireless standard: Zigbee 2.4GHz		
366		PC-TYG5-SM-812-B			
367		Metal-TYG5-SM-812-G			
368		Metal-TYG5-SM-812-W			
369		Metal-TYG5-SM-812-Y			
370		Metal-TYG5-SM-812-B			
371		Metal-M9-W(White color)	*4-way relay output + 4-button scene, *Structural material		
372		Metal-M9-S(Silver color)	*zigbee3.0 enhanced		
373		Metal-M9-Y(Golden color)	*Dual 86 version bottom box installation *Optional horizontal and vertical installation *Including custom icon and words,		
374		Metal-M9-G(Gray color)	*Four-inch LCD central control screen, with gateway, voice, background music, group control		
375		Metal-M9-B(Blue color)	*System, with network interface		
376		Metal-M9-R(Red color)	*WiFi network		
377		Metal-M9-O(orange color)	*2-way audio interface and Bluetooth transmitter		
378		Metal-M9-B(Black color)			
379					
380		WIFI-J-XBJ-1-L (L wire version)	Product color: black, white, gold Material: Fire-retardant plastic Working voltage: 100V-250V Wireless type: WIFI2.4GHZ+RF 433MHZ Normal load: <300W per channel LED load: <100W per channel	Sample: \$4.3 50~100pcs: \$4.2 101~200 pcs: \$4.1	
381					
382		WIFI-J-XBJ-2-L (L wire)	Product color: black, white, gold Material: Fire-retardant plastic Working voltage: 100V-250V Wireless type: WIFI2.4GHZ+RF 433MHZ Normal load: <300W per channel LED load: <100W per channel	Sample: \$4.9 50~100pcs: \$4.8 101~200 pcs: \$4.7	
383					
384		WIFI-J-XBJ-3-L (L wire)	Product color: black, white, gold Material: Fire-retardant plastic Working voltage: 100V-250V Wireless type: WIFI2.4GHZ+RF 433MHZ Normal load: <300W per channel LED load: <100W per channel	Sample: \$5.2 50~100pcs: \$4.8 101~200 pcs: \$4.7	
385					
386		WIFI-J-XBJ-4-NL (L wire)	Product color: black, white, gold Material: Fire-retardant plastic Working voltage: 100V-250V Wireless type: WIFI2.4GHZ+RF 433MHZ Normal load: <300W per channel LED load: <100W per channel	Sample: \$5.8 50~100pcs: \$5.7 101~200 pcs: \$5.6	
387					
388		Zig-YQ-WK-01-W	Need Neutral cable Zigbee 1 Gang tempered glass N&L composite switch Working voltage: 100V-240V~, 50Hz/60Hz (Need Neutral&Live wire) *Working current: Built-in 16A Relay (pure resistive load) *Load type:incandescent lamp 500W/circuit, LED lamp 120W/circuit, energy-saving lamp 200W/circuit *Product Material: ABS+PC plastic material *Operating environment: temperature 0°C~40°C, relative humidity<95% *Wireless communication: Zigbee3.0/WiFi version (for option)	Sample: \$6.30 50~200 pcs:\$6.17 200~1K pcs: \$5.9	
389		Zig-YQ-WK-01-B	Need Neutral cable Zigbee 2 Gang tempered glass N&L composite switch Working voltage: 100V-240V~, 50Hz/60Hz (Need Neutral&Live wire) *Working current: Built-in 16A Relay (pure resistive load) *Load type:incandescent lamp 500W/circuit, LED lamp 120W/circuit, energy-saving lamp 200W/circuit *Product Material: ABS+PC plastic material *Operating environment: temperature 0°C~40°C, relative humidity<95% *Wireless communication: Zigbee3.0/WiFi version (for option)	Sample: \$6.83 50~200 pcs:\$6.73 200~1K pcs: \$6.5	
390		Zig-YQ-WK-01-G			
391		Zig-YQ-WK-01-Y			
392		Zig-YQ-WK-02-W	Need Neutral cable Zigbee 2 Gang tempered glass N&L composite switch Working voltage: 100V-240V~, 50Hz/60Hz (Need Neutral&Live wire) *Working current: Built-in 16A Relay (pure resistive load) *Load type:incandescent lamp 500W/circuit, LED lamp 120W/circuit, energy-saving lamp 200W/circuit *Product Material: ABS+PC plastic material *Operating environment: temperature 0°C~40°C, relative humidity<95% *Wireless communication: Zigbee3.0/WiFi version (for option)	Sample: \$7.36 50~200 pcs:\$7.25 200~1K pcs: \$7.2	
393		Zig-YQ-WK-02-B			
394		Zig-YQ-WK-02-G			
395		Zig-YQ-WK-02-Y			
396		Zig-YQ-WK-03-W	Need Neutral cable Zigbee 3 Gang tempered glass N&L composite switch Working voltage: 100V-240V~, 50Hz/60Hz (Need Neutral&Live wire) *Working current: Built-in 16A Relay (pure resistive load) *Load type:incandescent lamp 500W/circuit, LED lamp 120W/circuit, energy-saving lamp 200W/circuit *Product Material: ABS+PC plastic material *Operating environment: temperature 0°C~40°C, relative humidity<95% *Wireless communication: Zigbee3.0/WiFi version (for option)	Sample: \$8.83 50~200 pcs:\$8.73 200~1K pcs: \$8.5	
397		Zig-YQ-WK-03-B			
398		Zig-YQ-WK-03-G			
399					

400	Zigbee 3 Gang tempered glass N&L composite switch	Zig-YQ-WK-03-Y	*Operating environment: temperature 0 °C~40 °C, relative humidity<95% *Wireless communication: Zigbee3.0/WiFi version (for option)		
401	HOT SALE	Zig-YQ-WK-04-W	Zigbee 4 Gang tempered glass N&L composite switch Need Neutral cable		
402		Zig-YQ-WK-04-B	Working voltage: 100V-240V~, 50Hz/60Hz (Need Neutral&Live wire) *Working current: Built-in 16A Relay (pure resistive load) *Load type: incandescent lamp 500W/circuit, LED lamp 120W/circuit, energy-saving lamp 200W/circuit *Product Material: ABS+PC plastic material *Operating environment: temperature 0 °C~40 °C, relative humidity<95%	Sample: \$8.43 50~200 pcs:\$8.25 200~1K pcs: \$8.21	
403		Zig-YQ-WK-04-G			
404	Zigbee 4 Gang tempered glass N&L composite switch	Zig-YQ-WK-04-Y			
405	HOT SALE	Zig-YQ-WK-05-W	Relay switch & scene switch 2 in 1	Sample: \$8.43 50~200 pcs:\$8.25 200~1K pcs: \$8.21	
406		Zig-YQ-WK-05-B			
407		Zig-YQ-WK-05-G			
408	Zigbee 4 Gang+1scene button N&L composite switch	Zig-YQ-WK-05-Y			
409	HOT SALE	Zig-YQ-WK-06-W			
410		Zig-YQ-WK-06-B			
411		Zig-YQ-WK-06-G			
412	Zigbee 4 Gang+2 scene button N&L composite switch	Zig-YQ-WK-06-Y			
413	HOT SALE	Zig-CZ-TypeC-W	86-EU Zigbee/WiFi Universal smart Wall socket with Type C+USB		
414		WIFI-CZ-TypeC-W	1) Input voltage: 100-240VAC 50/60Hz 2) Connection mode: WiFi /Zigbee for option		
415		Zig-CZ-TypeC-B	3) Peak current: 13A 4) Regular Color: White/Black/gold/Gray 5) Product Size: 106*100*55mm 6) Package Size: 300gmm 7) Gross weight: 200g		
416		WIFI-CZ-TypeC-B			
417		Zig-CZ-TypeC-G			
418		WIFI-CZ-TypeC-G			
419		Zig-CZ-TypeC-Y			
420	86-EU Zigbee/WiFi Universal smart Wall socket with Type C+USB	WIFI-CZ-TypeC-Y			
421	HOT SALE	Zig-YQ-CL-W	86-EU Zigbee Digital Curtain Smart Switch 1.Wallswitch: 86*96*35mm 2.white& black&gray&golden 3.AC 100V-240V 60Hz/Z50Hz 4.600W/Gang 5.Relay switch more stable 6.Tuya&Smart Life APP Alexa Google Home		
422		Zig-YQ-CL-B			
423		Zig-YQ-CL-G			
424		Zig-YQ-CL-Y			
425	86*86-Wall switch BOX	86-BOX	SIZE:50*84*86mm	Sample: \$0.9 50~200 pcs:\$0.87 200~1K pcs: \$0.8	
426	108-Wall switch BOX	108-Box	SIZE:50*65*108mm	Sample: \$1.5 50~200 pcs:\$1.4 200~1K pcs: \$1.3	
427		124-BOX	SIZE:108*110*85*52mm	Sample: \$1.5 50~200 pcs:\$1.4 200~1K pcs: \$1.3	
428		GS-MIG-MIKDIP05W-WF	◆ App Control –Control switches via Smart Life or TUYA APP ◆ RF Remote control-Turn on/off by 433MHz RF Remote indoors ◆ Voice Control –Works perfectly with Amazon Alexa, Google Home ◆ Timing–Set scheduled/countdown timers to turn on/off at specified time ◆ Share Control– Control your smart home together with your family ◆ Smart Scene–Trigger on/off by temperature, humidity etc. ◆ High quality crystal tempered glass panel design.never fade. ◆ With red and blue LED indicator,very distinguished. ◆ Control the switch directly .No gateway required. ◆ Easy to install.Neutral wire required ◆ Status indication and Power statistics function.	Sample: \$45.5 50~200 pcs:\$45 200~1K pcs: \$44.5	
429		GS-MIG-MKDIP05B-Zig		Sample: \$48 50~200 pcs:\$47 200~1K pcs: \$46	
430		GS-MKDIP05Dimmer-W	◆ App Control –Control switches via Smart Life or TUYA APP ◆ RF Remote control-Turn on/off by 433MHz RF Remote indoors ◆ Voice Control –Works perfectly with Amazon Alexa, Google Home ◆ Timing–Set scheduled/countdown timers to turn on/off at specified time ◆ Share Control– Control your smart home together with your family ◆ Smart Scene–Trigger on/off by temperature, humidity etc. ◆ High quality crystal tempered glass panel design.never fade. ◆ With red and blue LED indicator,very distinguished. ◆ Control the switch directly .No gateway required. ◆ Easy to install.Neutral wire required ◆ Status indication and Power statistics function.	Sample: \$45.5 50~200 pcs:\$45 200~1K pcs: \$44.5	
431	Smart Switch&Socket&Fan switch&Light dimming+Air conditioner control	GS-MKDIP05Dimmer-B		Sample: \$48 50~200 pcs:\$47 200~1K pcs: \$46	
432					
433		GS-DME411-WIFI (L&N Wires)	Input voltage: 100-240VAC (50/60Hz) Networking mode: Zigbee Max Power: 2000W Max Current: 10A Product Size: 86 * 86 * 35mm Service Life: 100000 times Housing Color: white/black/gold Operating Temperature: -20°C ~ +40°C Plastic Material: ABS+Singel crystal tempered glass panel Fire protection rating: 94-V0 Packing detail: 100pcs/carton Carton Size: 47*39*21cm 100pcs for 1/2/3/4gang /carton weight is 17/18/19/20kg	Sample: \$10.5 50~200 pcs:\$10.4 200~1K pcs: \$10.3	
434		GS-DME211-Zigbee (L&N Wires)		Sample: \$10.78 50~200 pcs:\$10.67 200~1K pcs: \$10.5	
435	Aluminum alloy frame + flat glass 1 gang switch	GS-DME231-Zigbee (No neutral wire)		Sample: \$14.5 50~200 pcs:\$14.3 200~1K pcs: \$14.2	Only Live cable
436		GS-DME412-WIFI (L&N Wires)	Without neutral wire Neutral wire is required	Sample: \$10.9 50~200 pcs:\$10.8 200~1K pcs: \$10.7	

437		 GS-DME212-Zigbee (L&N Wires)			
438	Aluminum alloy frame + flat glass 2 gang switch	 GS-DME232-Zigbee (No neutral wire)			Only Live cable
439		 GS-DME413-WIFI (L&N Wires)			
440		 GS-DME213-Zigbee (L&N Wires)			
441	Aluminum alloy frame + flat glass 3 gang switch	 GS-DME233-Zigbee (No neutral wire)			
442		 GS-DME414-WIFI (L&N Wires)			
443	Aluminum alloy frame + flat glass 4 gang switch	 GS-DME214-Zigbee (L&N Wires)			
444		 GS-DME291-ZIGBEE (L&N Wires)			
445	Aluminum alloy frame + flat glass Curtain Switch	 GS-DME291-WIFI (L&N Wires)			
446		 GS-DME4B1-WIFI (L&N Wires)			
447		 GS-DME2AK-20A-Zigbee (L&N Wires)			
448	Aluminum alloy frame + flat glass water heater switch	 GS-DME2AK-20A-WIFI (L&N Wires)			
449	Concave switch				
450		 Concave-DME211-Zigbee (L&N Wires)			
451	Aluminum alloy frame +Concave glass 1 gang switch	 Concave-DME231-Zigbee (No neutral wire)			
452		 Concave-DME212-Zigbee (L&N Wires)			
453	Aluminum alloy frame +Concave glass 2 gang switch	 Concave-DME232-Zigbee (No neutral wire)			
454		 Concave-DME213-Zigbee (L&N Wires)			
455	Aluminum alloy frame +Concave glass 3 gang switch	 Concave-DME233-Zigbee (No neutral wire)			
456		 Concave-DME214-Zigbee (L&N Wires)			
457	Aluminum alloy frame +Concave glass 4 gang switch				
458		WS-EU-FL			
459	QJ series Smart Button Switch (86mm, Asian Wall Box)				
460		GS-M6X1V-XC BC	GS-M6X1V-XC BC non smart TV socket GS-M6X1T-XC BC non smart TEL socket GS-M6X1C-XC BC non smart internet socket GS-M6X2T-XC BC double TEL socket GS-M6X2C-XC BC double internet socket GS-M6XVT-XC BC TV + TEL socket GS-M6XVC-XC BC TV + INTERNET socket GS-M6XTC-XC BC TEL + INTERNET socket GS-M6X1C6-XC BC cat 6 socket		
461		GS-M8X2C6-XC BC	1, bottom box: standard 86; 2, panel size: 86mm*86mm*9.4mm; 3, material: fireproof PC		

462		GS-M6XVC6-XC BC	4. function: information socket 5. color: gray, black, gold			
463		GS-M6XTC6-XC BC			Black Gray Golden White	
464		GS-M6XTG-XC BC	1. bottom box: standard 86; 2. panel size: 86mm*86mm*9.4mm; 3. material: fireproof PC			
465	Non-Smart universal socket with type C charger	GS-M6XTS-XC BC	4. function: dimmer switch 5. color: gray, black, gold			
466						
467		65-TY03-SM-11Z-NL-Black 65-TY03-SM-11Z-NL-Grey 65-TY03-SM-11Z-NL-Golden 65-TY03-SM-11Z-NL-White	N&L N&L switch N&L switch N&L switch N&L switch N&L switch Non-Neutral Non-Neutral Non-Neutral Non-Neutral	Working voltage: 100V~240V~ 50Hz/60Hz Operating current: 10A Max (purely resistive load) Wiring method: zero live wire Low light: incandescent lamp 500W/channel, LED lamp 120W/channel, energy-saving lamp 200W/channel Product material: Fireproof PC shell Dimensions (height*width*thickness): 86mm*96mm*38mm Usage environment: temperature 0°C~40°C, relative humidity less than 95% Wireless standard: Wi-Fi IEEE802.11 b/g/n 2.4GHz Security mechanism: WPA-PSK/WPA2-PSK	N&L switch 1-10pcs: \$9.29 11-99pcs: \$9.11 100-999pcs: \$8.83	Black Gray Golden White
468		65-TY03-SM-11Z-Live-Black 65-TY03-SM-11Z-Live-Grey 65-TY03-SM-11Z-Live-Golden 65-TY03-SM-11Z-Live-White	N&L Non-Neutral Non-Neutral Non-Neutral			
469		65-TY03-SM-21Z-NL-Black 65-TY03-SM-21Z-NL-Grey 65-TY03-SM-21Z-NL-Golden 65-TY03-SM-21Z-NL-White	N&L N&L N&L N&L			
470		65-TY03-SM-21Z-Live-Black 65-TY03-SM-21Z-Live-Grey 65-TY03-SM-21Z-Live-Golden 65-TY03-SM-21Z-Live-White	N&L Non-Neutral Non-Neutral Non-Neutral			
471		65-TY03-SM-21Z-Live-Black 65-TY03-SM-21Z-Live-Grey 65-TY03-SM-21Z-Live-Golden 65-TY03-SM-21Z-Live-White	N&L Non-Neutral Non-Neutral Non-Neutral			
472		65-TY03-SM-21Z-Live-Black 65-TY03-SM-21Z-Live-Grey 65-TY03-SM-21Z-Live-Golden 65-TY03-SM-21Z-Live-White	N&L Non-Neutral Non-Neutral Non-Neutral			
473		65-TY03-SM-21Z-Live-Black 65-TY03-SM-21Z-Live-Grey 65-TY03-SM-21Z-Live-Golden 65-TY03-SM-21Z-Live-White	N&L Non-Neutral Non-Neutral Non-Neutral			
474		65-TY03-SM-21Z-Live-Black 65-TY03-SM-21Z-Live-Grey 65-TY03-SM-21Z-Live-Golden 65-TY03-SM-21Z-Live-White	N&L Non-Neutral Non-Neutral Non-Neutral			
475		65-TY03-SM-31Z-NL-Black 65-TY03-SM-31Z-NL-Grey 65-TY03-SM-31Z-NL-Golden 65-TY03-SM-31Z-NL-White	N&L N&L N&L N&L			
476		65-TY03-SM-31Z-Live-Black 65-TY03-SM-31Z-Live-Grey 65-TY03-SM-31Z-Live-Golden 65-TY03-SM-31Z-Live-White	N&L Non-Neutral Non-Neutral Non-Neutral			
477		65-TY03-SM-31Z-Live-Black 65-TY03-SM-31Z-Live-Grey 65-TY03-SM-31Z-Live-Golden 65-TY03-SM-31Z-Live-White	N&L Non-Neutral Non-Neutral Non-Neutral			
478		65-TY03-SM-31Z-Live-Black 65-TY03-SM-31Z-Live-Grey 65-TY03-SM-31Z-Live-Golden 65-TY03-SM-31Z-Live-White	N&L Non-Neutral Non-Neutral Non-Neutral			
479		65-TY03-SM-31Z-Live-Black 65-TY03-SM-31Z-Live-Grey 65-TY03-SM-31Z-Live-Golden 65-TY03-SM-31Z-Live-White	N&L Non-Neutral Non-Neutral Non-Neutral			
480		65-TY03-SM-31Z-Live-Black 65-TY03-SM-31Z-Live-Grey 65-TY03-SM-31Z-Live-Golden 65-TY03-SM-31Z-Live-White	N&L Non-Neutral Non-Neutral Non-Neutral			
481		65-TY03-SM-31Z-Live-Black 65-TY03-SM-31Z-Live-Grey 65-TY03-SM-31Z-Live-Golden 65-TY03-SM-31Z-Live-White	N&L Non-Neutral Non-Neutral Non-Neutral			
482		65-TY03-SM-41Z-NL-Black 65-TY03-SM-41Z-NL-Grey 65-TY03-SM-41Z-NL-Golden 65-TY03-SM-41Z-NL-White	N&L N&L N&L N&L			
483		65-TY03-SM-41Z-Live-Black 65-TY03-SM-41Z-Live-Grey 65-TY03-SM-41Z-Live-Golden 65-TY03-SM-41Z-Live-White	N&L Non-Neutral Non-Neutral Non-Neutral			
484		65-TY03-SM-41Z-Live-Black 65-TY03-SM-41Z-Live-Grey 65-TY03-SM-41Z-Live-Golden 65-TY03-SM-41Z-Live-White	N&L Non-Neutral Non-Neutral Non-Neutral			
485		65-TY03-SM-41Z-Live-Black 65-TY03-SM-41Z-Live-Grey 65-TY03-SM-41Z-Live-Golden 65-TY03-SM-41Z-Live-White	N&L Non-Neutral Non-Neutral Non-Neutral			
486		65-TY03-SM-41Z-Live-Black 65-TY03-SM-41Z-Live-Grey 65-TY03-SM-41Z-Live-Golden 65-TY03-SM-41Z-Live-White	N&L Non-Neutral Non-Neutral Non-Neutral			
487		65-TY03-SM-41Z-Live-Black 65-TY03-SM-41Z-Live-Grey 65-TY03-SM-41Z-Live-Golden 65-TY03-SM-41Z-Live-White	N&L Non-Neutral Non-Neutral Non-Neutral			
488		65-TY03-SM-41Z-Live-Black 65-TY03-SM-41Z-Live-Grey 65-TY03-SM-41Z-Live-Golden 65-TY03-SM-41Z-Live-White	N&L Non-Neutral Non-Neutral Non-Neutral			
489		65-TY03-SM-41Z-Live-Black 65-TY03-SM-41Z-Live-Grey 65-TY03-SM-41Z-Live-Golden 65-TY03-SM-41Z-Live-White	N&L Non-Neutral Non-Neutral Non-Neutral			
490		65-TY03-SM-41Z-Live-Black 65-TY03-SM-41Z-Live-Grey 65-TY03-SM-41Z-Live-Golden 65-TY03-SM-41Z-Live-White	N&L Non-Neutral Non-Neutral Non-Neutral			
491		65-TY03-SM-41Z-Live-Black 65-TY03-SM-41Z-Live-Grey 65-TY03-SM-41Z-Live-Golden 65-TY03-SM-41Z-Live-White	N&L Non-Neutral Non-Neutral Non-Neutral			
492		65-TY03-SM-41Z-Live-Black 65-TY03-SM-41Z-Live-Grey 65-TY03-SM-41Z-Live-Golden 65-TY03-SM-41Z-Live-White	N&L Non-Neutral Non-Neutral Non-Neutral			
493		65-TY03-SM-41Z-Live-Black 65-TY03-SM-41Z-Live-Grey 65-TY03-SM-41Z-Live-Golden 65-TY03-SM-41Z-Live-White	N&L Non-Neutral Non-Neutral Non-Neutral			
494		65-TY03-SM-41Z-Live-Black 65-TY03-SM-41Z-Live-Grey 65-TY03-SM-41Z-Live-Golden 65-TY03-SM-41Z-Live-White	N&L Non-Neutral Non-Neutral Non-Neutral			
495		65-TY03-SM-61Z-NL-White	N&L switch			
496		65-TY03-SM-61Z-NL-White				
497		65-TY03-SM-61Z-NL-White				
498		65-TY03-SM-61Z-NL-White				
499		GS-Q3-QP-ZIGBEE	1.Working voltage: 220V 2.Installation method: 86 bottom box installation 3.Overall size:140mm*246mm 4.Frame material: zinc alloy 5.Border color: silver 6.Panel material: tempered glass 7.Panel color: black		1-10pcs: \$11.95 11-99pcs: \$11.8 100-999pcs: \$11.7	Hotel-PC
500		GS-MP80-0246		The wiring diagram of electronic door plate & card power switch & Wall switches	1-10pcs: \$15.5 11-99pcs: \$15.2 100-999pcs: \$14.9	Hotel
501		GS-MP80-086-D				
502		GS-MP80-086-S				
503		GS-MP80-72	Working voltage: 220V Installation box: 86*86mm wall box Panel size: 100*380*15mm Panel material:Stainless steel brushed Color: Grey Room number backlight: LED white light No disturb backlight: LED red light Clean backlight: LED green light Check in/backlight: LED blue light 85.00 mm 100.00 mm		1-10pcs: \$27.00 11-99pcs: \$26.00 100-999pcs: \$25.00	Hotel
504		GS-ML			1-10pcs: \$3.5 11-99pcs: \$3.2 100-999pcs: \$2.8	02.4.0856
505	 4-way zigbee scene sticker	Zig-Q05	Create various smart scenes linkage to any tuia smart devices you like. 4-way zigbee scene stick switch as well 12 scene modes can be associated Battery CR2430 power supply black/grey Long press the scene switch to turn off all your lights before sleeping. 3 modes: Single click, double click, long press		Sample : \$12 50-200 pcs: \$11 200-1K pcs: \$10.5	

506		Zig-Q06	Create various smart scenes linkage to any toy smart devices you like. 4-way zigbee scene click switch as well 12 scene modes can be associated Battery CR2430 power supply black/gray Long press the scene switch to turn off all your lights before sleeping. 4 modes: Single click, double click, long press	Sample : \$7.9 50~200 pcs: \$7.8 200~1K pcs: \$7.6					
507	Zigbee 4-way zigbee scene sticker								
50		White color		Black color		Grey color		Gold color	
50									
510		GS-TYB2-SM-11Z-W	Working voltage: 100V-240V~, 50Hz/60Hz Working current: 10A Max (pure resistive load) Wiring method: neutral and live wire Load type: incandescent lamp 500W/channel, LED lamp 120W/channel, energy-saving lamp 200W/channel						
511		GS-TYB2-SM-11Z-g	Product material: fireproof PC shell Dimensions (height*width*thickness): 86mm*86mm*40mm Use environment: temperature 0°C~40°C, relative humidity less than 95%	1-10pcs: \$10.17 11~99pcs: \$10.00 100~999pcs: \$9.97	Black Gray Golden White				
512		GS-TYB2-SM-11Z-G	Wireless standard: Wi-Fi IEEE802.11 b/g/n 2.4GHz Security mechanism: WPA-PSK/WPA2-PSK APP platform: Tuya Smart Smart Life Wireless standard: Zigbee 2.4GHz						
513	Smart ZigBee Wall Switch 1 gang (L&N wires)	GS-TYB2-SM-11Z-B							
514		GS-TYB2-SM-21Z-W							
515		GS-TYB2-SM-21Z-g		1-10pcs: \$10.71 11~99pcs: \$10.50 100~999pcs: \$10.40	Black Gray Golden White				
516		GS-TYB2-SM-21Z-G							
517	Smart ZigBee Wall Switch - 2 gang (L&N wires)	GS-TYB2-SM-21Z-B							
518		GS-TYB2-SM-31Z-W							
519		GS-TYB2-SM-31Z-g		1-10pcs: \$10.89 11~99pcs: \$10.68 100~999pcs: \$10.57	Black Gray Golden White				
520		GS-TYB2-SM-31Z-G							
521	Smart ZigBee Wall Switch - 3 gang (L&N wires)	GS-TYB2-SM-31Z-B							
522		GS-TYB2-SM-1CTZ-W	Working voltage: 100V-240V~, 50Hz/60Hz Operating current: 2A Max (pure resistive load) Wiring method: N&L wire						
523		GS-TYB2-SM-1CTZ-g	Load type: Curtain motor within 400W Product material: Fireproof PC shell Dimensions (height*width*thickness): 86mm*86mm*40mm Usage environment: temperature 0°C~40°C, relative humidity less than 95%	1-10pcs: \$10.90 11~99pcs: \$10.80 100~999pcs: \$10.70	Black Gray Golden White				
524		GS-TYB2-SM-1CTZ-G	Wireless standard: Wi-Fi IEEE802.11 b/g/n 2.4GHz Security mechanism: WPA-PSK/WPA2-PSK APP platform: Tuya Smart Smart Life Wireless standard: Zigbee 2.4GHz						
525	Smart Zigbee One-way curtain Switch (L&N wires)	GS-TYB2-SM-1CTZ-B							
526		GS-TYB2-SM-1DMZ-W	Working voltage: 100V-240V~, 50Hz/60Hz Operating current: 2A Max Wiring method: zero live wire Load : Dimmable lamps within 400W						
527		GS-TYB2-SM-1DMZ-g	Product material: Fireproof PC shell Dimensions :86mm*86mm*40mm Usage environment: 0°C~40°C, relative humidity less than 95%	1-10pcs: \$10.90 11~99pcs: \$10.80 100~999pcs: \$10.70	Black Gray Golden White				
528		GS-TYB2-SM-1DMZ-G							
529	Smart Zigbee One-Channel dimming Switch (L&N wires)	GS-TYB2-SM-1DMZ-B							
530									
531		GS-TYB2-SFM-11Z-W							
532		GS-TYB2-SFM-11Z-g							
533		GS-TYB2-SFM-11Z-G							
534	Smart ZigBee Wall Switch - 1 gang (L wire)	GS-TYB2-SFM-11Z-B							
535		GS-TYB2-SFM-21Z-W	Working voltage: 100V-240V~, 50Hz/60Hz Working current: 10A Max (pure resistive load) Wiring method: Live wire or Live wire and Neutral wire						
536		GS-TYB2-SFM-21Z-g	Load type: incandescent lamp 500W/channel, LED lamp 120W/channel, energy-saving lamp 200W/channel Product material: fireproof PC shell Dimensions (height*width*thickness): 86mm*86mm*40mm Use environment: temperature 0°C~40°C, relative humidity less than 95%	1-10pcs: \$11.71 11~99pcs: \$11.50 100~999pcs: \$11.40	Black Gray Golden White				
537		GS-TYB2-SFM-21Z-G	Wireless standard: Wi-Fi IEEE802.11 b/g/n 2.4GHz Security mechanism: WPA-PSK/WPA2-PSK APP platform: Tuya Smart Smart Life Wireless standard: Zigbee 2.4GHz						
538	Smart ZigBee Wall Switch - 2 gang (L wire)	GS-TYB2-SFM-21Z-B							

Universal wall switches

539		G8-TYB2-SFM-31Z-W	UNIVERSAL WALL SWITCHES (Need neutral wire) —	1-10pcs: \$11.89 11-99pcs: \$11.68 100-999pcs: \$11.57	Black Gray Golden White
540		G8-TYB2-SFM-31Z-G			
541		G8-TYB2-SFM-31Z-B			
542		G8-TYB2-SFM-31Z-B			



Shenzhen Golden Security Technology CO.,Ltd

Add: 6th Floor, Unit 1, Building 1, Kailifang Plaza, Lianrun Road, Taoyuan Community, Dalang Street, Longhua District, Shenzhen
Attns: Lilian Huang | T: +86 189 4879 4227 | E: lilian@cameralarms.com | W: <https://alarm-camera.en.alibaba.com>

No.	Picture	Model	Features	Price (EXW)	Compatible devices
Smart Switch Module (WiFi & ZigBee for option)					
271	WiFi smart switch	GS-101	Input voltage: 90-250V AC 50/60Hz Maximum power: 2200W/10A Single weight: 51g Product size: 9.1*4.2*2.5cm FCL weight: 11.5kg FCL size: 38*22*30cm 200 packs	Sample: \$3.50 50-100pcs: \$3.40 101-200 pcs: \$3.30 200+1K pcs: \$3.20	Single weight: 54g Size: 9.5*5.2*2.8cm FCL weight: 17.2kg FCL size: 36.5*28*28.5cm 300 packs
272	6 gang Smart home switch module (Built-in Antenna)	GS-RCU-6-In-WIFI	6 gang Smart home networkswitch module(Built-in Antenna) 1. 485 switch supported 2. Support weak current switch 3. Supports traditional reset switches 4. Supports traditional warping switch	Sample: \$23.5 50-500pcs: \$22.8 501-1K pcs: \$22.5	Three-way motor control Professional door and window control, a variety of motor support
273	6 gang Smart home switch module (External Antenna)	GS-RCU-6-In-Zigbee	The Highlights of 6 Channel Power Controller 1. Smart Connectivity The 6 channel power controller support Wi-Fi or Zigbee network 2. Professional Motor Control (1)Supports 3-way motor control for doors, windows, and more. (2)6-Channel 16A Relays – Independently control lighting or high-power devices with stability. 3. Universal Switch Support The 6 channel power controller works with 485 communication, reset, toggle, and low-voltage switches. 4. Hotel RCU hosting features The 6 channel power controller supports to unplug and turn off the power and lock the external input keys of K1-16Card-Perform the welcome scenario to unlock the key panel	Sample: \$24.9 50-500pcs: \$24.6 501-1K pcs: \$24.3	tuoya Google Assistant amazon alexa
274	16 gang Smart home networkswitch module (Built-in Antenna)	GS-RCU-16-In-WIFI	16 gang Smart home networkswitch module(Built-in Antenna) 1. 4-Way 50A Relay 2. 12-Way 16A Relay 3. 3-Way Motor Control 4. Rail installation WiFi/ Zigbee	Sample: \$81.5 50-500pcs: \$79.5 501-1K pcs: \$78.9	16 Way Wiring Diagram Resists power exceeding regular power supply. Equipment resists power exceeding regular power supply
275	16 gang Smart home networkswitch module (External Antenna)	GS-RCU-16-In-Zigbee	The Highlights of 16 Channel Power Controller ①App control This 16-channel power controller supports Tuya smart/light app remote control. ②Supports multiple types of switches The 16-channel power controller is designed to control 485 switches, reset switches, and weak current switches. ③35MM Rail Installation The rail installation design of 16-channel power controller is designed for quick and easy installation, ensuring stability and firmness. Additionally, it allows for convenient disassembly. ④Smart Connectivity The 16 channel power support Zigbee network for flexible connectivity.	Sample: \$81.5 50-500pcs: \$79.5 501-1K pcs: \$78.9	tuoya Google Assistant amazon alexa
274	1CH Matter Switch Module	W-MTS01	1CH Matter Switch Module Voltage:AC100-240V 50/60Hz Max.load:LED 300W 16A	Sample: \$5.94 50-500pcs: \$5.84 501-1K pcs: \$5.64	Product size: 43*39.2*22.3mm Packing weight: 42g Packing size: 56*45*30mm Full box packaging size: 295: 245*270mm Weight: 10KG Packing quantity: 200 pieces
273	2CH Matter Switch Module	W-MTS02	2CH Matter Switch Module Voltage:AC100-240V 50/60Hz Max.load:LED2x150W 2x5A	Sample: \$6.87 50-500pcs: \$6.77 501-1K pcs: \$6.57	Product size: 43*39.2*22.3mm Packing weight: 42g Packing size: 56*45*30mm Full box packaging size: 295: 245*270mm Weight: 10KG Packing quantity: 200 pieces
274	3CH Matter Switch Module	W-MTS03	3CH Matter Switch Module Voltage:AC100-240V 50/60Hz Max.load:LED 3x150W 3x3.3A	Sample: \$8.36 50-500pcs: \$8.26 501-1K pcs: \$8.06	Product size: 43*39.2*22.3mm Packing weight: 42g Packing size: 56*45*30mm Full box packaging size: 295: 245*270mm Weight: 10KG Packing quantity: 200 pieces
275	1CH Matter Switch Module	V-MTS01	1CH Matter Switch Module Voltage:AC100-240V 50/60Hz Max.load:LED 300W 16A	Sample: \$6.31 50-500pcs: \$6.21 501-1K pcs: \$6.01	Product size: 43*39.2*22.3mm Packing weight: 42g Packing size: 56*45*30mm Full box packaging size: 295: 245*270mm Weight: 10KG Packing quantity: 200 pieces
276	2CH Matter Switch Module	V-MTS02	2CH Matter Switch Module Voltage:AC100-240V 50/60Hz Max.load:LED 2*150W 2*5A	Sample: \$7.24 50-500pcs: \$7.14 501-1K pcs: \$6.94	Product size: 43*39.2*22.3mm Packing weight: 42g Packing size: 56*45*30mm Full box packaging size: 295: 245*270mm Weight: 10KG Packing quantity: 200 pieces
277	3CH Matter Switch Module	V-MTS03	Voltage:AC100-240V 50/60Hz Max.load:LED 3*150W 3*3.3A	Sample: \$8.73 50-500pcs: \$8.63 501-1K pcs: \$8.43	Product size: 43*39.2*22.3mm Packing weight: 42g Packing size: 56*45*30mm Full box packaging size: 295: 245*270mm Weight: 10KG Packing quantity: 200 pieces
WiFi+BLE Mini Dry contact Switch Module					
278	WiFi+BLE mini dry contact N&L 1 Gang switch	GS-WMS01DC	WiFi+BLE mini dry contact N&L 1 Gang switch Voltage:AC100-240V 50/60Hz Max load: LED 150W 5A WiFi:2.4GHz IEEE802.11bg/n	Sample: \$4.6 50-500pcs: \$4.5 501-1K pcs: \$4.4	Product size: 43*39.2*22.3mm Packing weight: 42g Packing size: 56*45*30mm Full box packaging size: 295: 245*270mm Weight: 10KG Packing quantity: 200 pieces tuoya Google Assistant amazon alexa
279	WiFi+BLE mini 10A N&L 1/2/3/4 Gang switch	GS-WMS01		Sample: \$4.3 50-500pcs: \$4.2 501-1K pcs: \$4.1	Product size: 43*39.2*22.3mm Packing weight: 42g Packing size: 56*45*30mm Full box packaging size: 295: 245*270mm Weight: 10KG Packing quantity: 200 pieces
280	WiFi+BLE mini 10A N&L 1/2/3/4 Gang switch	GS-WMS02	WiFi+BLE mini 10A N&L 1/2/3/4 Gang switch Working voltage: AC100-240V 50/60Hz Maximum load: 1 channel: LED 250W 10A 2 channel: LED 2x150W 2x5A 3 channel: LED 3x150W 3x3.3A 4 channel: LED 4x150W 4x2.5A WiFi: 2.4GHz IEEE 802.11bg/n	Sample: \$5.6 50-500pcs: \$5.5 501-1K pcs: \$5.4	Product size: 43*39.2*22.3mm Packing weight: 42g Packing size: 56*45*30mm Full box packaging size: 295: 245*270mm Weight: 10KG Packing quantity: 200 pieces
281	WiFi+BLE mini 10A N&L 1/2/3/4 Gang switch	GS-WMS03		Sample: \$7.8 50-500pcs: \$7.7 501-1K pcs: \$7.6	Product size: 43*39.2*22.3mm Packing weight: 42g Packing size: 56*45*30mm Full box packaging size: 295: 245*270mm Weight: 10KG Packing quantity: 200 pieces
282	WiFi+BLE mini N&L 1/2/3/4 Gang switch	GS-WMS04		Sample: \$9.1 50-500pcs: \$9.0 501-1K pcs: \$8.9	Product size: 43*39.2*22.3mm Packing weight: 42g Packing size: 56*45*30mm Full box packaging size: 295: 245*270mm Weight: 10KG Packing quantity: 200 pieces
WiFi+BLE Mini 1CH/1CH+RF/2CH Curtain Switch Module					
287	WiFi+BLE mini version curtain switch 1CH	GS-WMC01	WiFi+BLE mini version curtain switch 1CH	Sample: \$6.5 50-500pcs: \$6.4 501-1K pcs: \$6.3	tuoya

288	WiFi+BLE mini version curtain switch	GS-WMC01RF WiFi+BLE mini version curtain switch 1CH +RF	Working voltage: AC100-240V 50/60Hz Maximum load: 1 channel: 3A 2 channels: 2x3A WiFi: 2.4GHz IEEE 802.11bg/n	Sample: \$7.92 50~500pcs: \$7.8 501~1K pcs: \$7.7	
289		GS-WMC02 WiFi+BLE mini version curtain switch 2CH	WiFi: 2.4GHz IEEE 802.11bg/n	Sample: \$9.8 50~500pcs: \$9.7 501~1K pcs: \$9.6	
WIFI+BLE Mini N&L 1/2/3/4 Gang switch with Power metering function					
290		GS-WMS016-16A	2.4GHz IEEE 802.11bg/n Working voltage: AC100-240V 50/60Hz Maximum load: 1 channel: LED 300W 16A without power metering function	Sample: \$5.28 50~500pcs: \$5.1 501~1K pcs: \$4.9	
291		GS-WMS016ES-16A	Working voltage: AC100-240V 50/60Hz Maximum load: 1 channel: LED 300W 16A with power metering function	Sample: \$6.5 50~500pcs: \$6.4 501~1K pcs: \$6.3	
292	WiFi+BLE Mini 16A N&L 2/3/4 Gang switch with Power metering function	GS-WMS02ES-10A MOQ:10pcs	Working voltage: AC100-240V 50/60Hz Maximum load: 2 channel: LED 2x150W 2x5A with power metering function	Sample: \$7.9 50~500pcs: \$7.8 501~1K pcs: \$7.6	
293		GS-WMS03ES-15A MOQ:500pcs	Working voltage: AC100-240V 50/60Hz Maximum load: 3 channel: LED 3x150W 3x5A with power metering function	Sample: \$9.8 50~500pcs: \$9.7 501~1K pcs: \$9.6	
WIFI+BLE mini dimmer switch 1gang/2gang N&Lwire					
294	WiFi+BLE mini dimmer switch 1/2 gang(L&N wire)	GS-WMDO1	Operating voltage :AC100-240V 50/60Hz Maximum load :1 channel:230V150W 120V80W 2 channel:230V2x100W 120V 2x60W	Sample: \$7.9 50~500pcs: \$7.8 501~1K pcs: \$7.6	
295		GS-WMDO2	WiFi:2.4GHz IEEE 802.11bg/n	Sample: \$10.02 50~500pcs: \$9.92 501~1K pcs: \$9.72	
WiFi+BLE mini Garage door controller					
296	WiFi+BLE mini garage door controller	GS-WMGDO1	Operating voltage :AC100-240V50/60Hz WiFi:2.4GHz IEEE 802.11bg/n	Sample: \$9.1 50~500pcs: \$9 501~1K pcs: \$8.8	
ZigBee Non-neutral 1/3/4 Gang switch module					
298	ZigBee 3.0 mini switch Non neutral wire 1/2/3/4 Gang	GS-ZMS01L (Non-Neutral 1 Gang)	Operating voltage :AC200-240V 50/60Hz	Sample: \$6.5 50~500pcs: \$6.4 501~1K pcs: \$6.2	Can be fixed in mounting clips Also suitable for DIN rail mounting
299		GS-ZMS02L (Non-Neutral 2 Gang)	Maximum load :1 way:LED 10-100W 2 way:LED2x(10-100W) 3 way:LED3x(10-100W) 4 way:LED4x(10-100W)	Sample: \$8.17 50~500pcs: 8.07 501~1K pcs: \$7.87	
300		GS-ZMS03L (Non-Neutral 3 Gang)	Wireless protocol :Zigbee3.0 IEEE 802.15.4	Sample: \$10.02 50~500pcs: \$9.92 501~1K pcs: \$9.72	
301		GS-ZMS04L (Non-Neutral 4 Gang)		Sample: \$15.23 50~500pcs: \$15.13 501~1K pcs: \$14.93	
ZigBee N&L 1/2/3/4 Gang switch module					
302	ZigBee 3.0 mini switch N&L wire 1/2/3/4 Gang	GS-ZMS01 (N&L 1 Gang)	Working voltage :AC100-240V 50/60Hz	Sample: \$6.5 50~500pcs: \$6.4 501~1K pcs: \$6.2	Can be fixed in mounting clips Also suitable for DIN rail mounting
303		GS-ZMS02 (N&L 2 Gang)	Maximum load :1 :LED250W/10A 2 :LED2x150W 2x5A 3 :LED 3x150W 3x3.3A 4 :LED 4x150W 4x2.5A	Sample: \$8.17 50~500pcs: 8.07 501~1K pcs: \$7.87	
304		GS-ZMS03 (N&L 3 Gang)	Wireless protocol :Zigbee3.0 IEEE 802.15.4	Sample: \$10.02 50~500pcs: \$9.92 501~1K pcs: \$9.72	
305		GS-ZMS04 (N&L 4 Gang)		Sample: \$12.26 50~500pcs: \$12.16 501~1K pcs: \$11.96	
ZigBee N&L 1/2/3/4 GANG 16A/15A/10A switch module with Power statistics function					
306	ZigBee N&L 1/2/3/4 GANG 16A/15A/10A switch module with Power statistics function	GS-ZMS016-16A ((N&L 1 Gang 16A))	Power statistics function	Sample: \$7.05 50~500pcs: \$6.95 501~1K pcs: \$6.75	
307		GS-ZMS016ES-16A ((N&L 1 Gang 16A+Power statistics function))	Working voltage :AC100-240V 50/60Hz Maximum load :1 :LED 300W 16A	Sample: \$8.17 50~500pcs: 8.07 501~1K pcs: \$7.87	
308		GS-ZMS02ES-10A ((N&L 2 Gang 10A+Power statistics function)) MOQ:10PCS	2 :LED 2x150W 2x5A 3 :LED 3x150W 3x5A	Sample: \$10.02 50~500pcs: \$9.92 501~1K pcs: \$9.72	
309		GS-ZMS03ES-15A ((N&L 3 Gang 15A+Power statistics function)) MOQ:500pcs	Wireless protocol :Zigbee3.0 IEEE 802.15.4	Sample: \$12.26 50~500pcs: \$12.16 501~1K pcs: \$11.96	
Zigbee 1CH/2CH Curtain Switch Module					
310	Zigbee 1CH/2CH Curtain Switch Module	GS-ZMC01 (N&L 1CH Curtain Switch)	Operating voltage :AC100-240V 50/60Hz Maximum load :1 channel :3A 2 channel :2x3A	Sample: \$8.35 50~500pcs: 8.25 501~1K pcs: \$8.05	
312		GS-ZMC02 (N&L 2CH Curtain Switch)	Wireless protocol :Zigbee3.0 IEEE 802.15.4	Sample: \$12.26 50~500pcs: \$12.16 501~1K pcs: \$11.96	
Zigbee Mini Dimming Switch Module with reset button					
313	ZigBee mini dimmer switch N&L wire 1/2 CH	GS-ZMD01 (N&L 1CH dimming Switch)	Operating voltage :AC100-240V 50/60Hz Maximum load :1 channel :230V150W 120V80W 2 channel :230V2x100W 120V 2x60W	Sample: \$10.02 50~500pcs: \$9.92 501~1K pcs: \$9.72	
314		GS-ZMD02 (N&L 2CH dimming Switch)	Wireless protocol :Zigbee3.0 IEEE 802.15.4	Sample: \$12.26 50~500pcs: \$12.16 501~1K pcs: \$11.96	
Zigbee mini Garage door controller					
315	ZigBee mini garage door controller	ZMGD01	Operating voltage :AC100-240V50/60Hz Wireless protocol :Zigbee3.0 IEEE 802.15.4	Sample: \$11.14 50~500pcs: \$11.04 501~1K pcs: \$10.94	
Zigbee hidden Switches with bigger size					



316		GS-MS-104Z	<p>Hidden breaker 1 GANG 1. Small size, hidden in the switch box 2. The traditional switch and the smart switch operate independently. Do not interfere with each other 3. Can be used for dual control switch. Two switches control the same light 4. Can control 1-way dual-control switch Input voltage: 90-250V AC 50/60Hz Maximum current: 10A</p>	Sample: \$8.20 50-100pcs: \$8.10 101-200 pcs: \$8.0 200-5K pcs: \$7.90 1K-5K pcs: \$7.80	Single weight: 5.4g Size: 5.9*5.3*2.8cm FCL weight: 17.2kg FCL size: 36.5*28*28.5cm 300 packs
317		GS-MS-104BZ	<p>Hidden breaker 2 GANG 1. Small size, hidden in the switch box 2. The traditional switch and the smart switch operate independently. Do not interfere with each other 3. Can be used for dual control switch. Two switches control the same light 4. Can control two-way dual-control switch Input voltage: 90-240V AC 50/60Hz Maximum current: 10A total</p>	Sample: \$9.90 50-100pcs: \$9.80 101-200 pcs: \$9.60 200-1K pcs: \$9.40 1K-5K pcs: \$9.30	Single weight: 5.4g Size: 5.9*5.3*2.8cm FCL weight: 17.2kg FCL size: 36.5*28*28.5cm 300 packs
318		GS-MS-104CZ	<p>Hidden zigbee switch 3 GANG 1. Small size, hidden in the switch box 2. The traditional switch and the smart switch operate independently. Do not interfere with each other 3. Can be used for dual control switch. Two switches control the same light 4. Can control 3-way dual control switch Input voltage: 90-240V AC 50/60Hz Maximum current: 10A total</p>	Sample: \$11.5 50-100pcs: \$11.3 101-200 pcs: \$11 200-1K pcs: \$10.6 1K-5K pcs: \$10.36	Single weight: 5.4g Size: 5.9*5.3*2.8cm FCL weight: 17.2kg FCL size: 36.5*28*28.5cm 300 packs
319		GS-MS-105Z	<p>Hidden Dimming ZIGBEE Switch 1. Small size, hidden in the switch box 2. The traditional switch and the smart switch operate independently. Do not interfere with each other 3. Can be used for dual control switch. Two switches control the same light 4. Can control all the way double control switch Input voltage: 90-250V AC 50/60Hz Maximum power: 150W</p>	Sample: \$10.8 50-100pcs: \$10.3 101-200 pcs: \$9.9 200-1K pcs: \$9.8 1K-5K pcs: \$9.7	Single weight: 5.4g Size: 5.9*5.3*2.8cm FCL weight: 17.2kg FCL size: 36.5*28*28.5cm 300 packs
320		GS-MS-105BZ	<p>Hidden dimming ZIGBEE switch 2 way 1. Small size, hidden in the switch box 2. The traditional switch and the smart switch operate independently. Do not interfere with each other 3. Can be used for dual control switch. Two switches control the same light 4. Can control two-way dual-control switch Input voltage: 90-250V AC 50/60Hz Maximum power: 2*100W</p>	Sample: \$11.9 50-100pcs: \$11.8 101-200 pcs: \$11.5 200-1K pcs: \$11.2 1K-5K pcs: \$10.9	Single weight: 5.4g Size: 5.9*5.3*2.8cm FCL weight: 17.2kg FCL size: 36.5*28*28.5cm 300 packs
321		GS-MS-108ZR	<p>Hidden Zigbee+RF Smart Curtain Switch 1. Small size, hidden in the switch box 2. The traditional switch and the smart switch operate independently. Do not interfere with each other 3. With RF433 function, it can be controlled with remote control Input voltage: 90-250V AC 50/60Hz Maximum power: 500W</p>	Sample: \$10.9 50-100pcs: \$10.8 101-200 pcs: \$10.7 200-1K pcs: \$10.6 1K-5K pcs: \$10.5	Single weight: 5.4g Size: 5.9*5.3*2.8cm FCL weight: 17.2kg FCL size: 36.5*28*28.5cm 300 packs
322		GS-zigbee-SB01-SW	<p>Voltage: AC110-240V 50/60Hz Max. Load: LED 250W 10A Operation frequency: 2.4GHz-4.48GHz Operation temp: -10°C~+40°C Protocol: WiFi IEEE 802.11 b/g/h Operation range: less than 100m Dims(WxHxD): 39.2*39.2*18mm IP rating: IP20 Warranty: 2 years Networking: Zigbee 3.0</p>	1-199pcs: \$6.20 200pcs: \$5.90 201-1000PC:\$5.70 1001-3000PC:\$5.50	Single weight: 5.4g Size: 5.9*5.3*2.8cm FCL weight: 17.2kg FCL size: 36.5*28*28.5cm 300 packs
323		GS-WIFI-SB01-SW	<p>WiFi Voltage: AC110-240V 50/60Hz Max. Load: LED 250W 10A Operation frequency: 2.4GHz-4.48GHz Operation temp: -10°C~+40°C Protocol: WiFi IEEE 802.11 b/g/h Operation range: less than 100m Dims(WxHxD): 39.2*39.2*18mm IP rating: IP20 Warranty: 2 years Networking: Zigbee 3.0</p>	1-199pcs: \$4.6 200pcs:\$4.3 201-1000PC:\$4.15 1001-3000PC:\$4.05	Single weight: 5.4g Size: 5.9*5.3*2.8cm FCL weight: 17.2kg FCL size: 36.5*28*28.5cm 300 packs
324		GS-zigbee-SB02-SW	<p>Voltage: AC110-240V 50/60Hz Max. Load: LED 250W 10A Operation frequency: 2.4GHz-4.48GHz Operation temp: -10°C~+40°C Protocol: WiFi IEEE 802.11 b/g/h Operation range: less than 100m Dims(WxHxD): 39.2*39.2*18mm IP rating: IP20 Warranty: 2 years Networking: Zigbee 3.0</p>	1-199pcs: \$7.2 200pcs: \$7.00 201-1000PC:\$6.80 1001-3000PC:\$6.60	Single weight: 5.4g Size: 5.9*5.3*2.8cm FCL weight: 17.2kg FCL size: 36.5*28*28.5cm 300 packs
325		GS-WIFI-SB02-SW	<p>WiFi Voltage: AC110-240V 50/60Hz Max. Load: LED 250W 10A Operation frequency: 2.4GHz-4.48GHz Operation temp: -10°C~+40°C Protocol: WiFi IEEE 802.11 b/g/h Operation range: less than 100m Dims(WxHxD): 39.2*39.2*18mm IP rating: IP20 Warranty: 2 years Networking: Zigbee 3.0</p>	1-199pcs: \$5.6 200pcs:\$5.4 201-1000PC:\$5.2 1001-3000PC:\$5.00	Single weight: 5.4g Size: 5.9*5.3*2.8cm FCL weight: 17.2kg FCL size: 36.5*28*28.5cm 300 packs
326		GS-zigbee-SB03-SW	<p>Voltage: AC110-240V 50/60Hz Max. Load: LED 250W 10A Operation frequency: 2.4GHz-4.48GHz Operation temp: -10°C~+40°C Protocol: WiFi IEEE 802.11 b/g/h Operation range: less than 100m Dims(WxHxD): 39.2*39.2*18mm IP rating: IP20 Warranty: 2 years Networking: Zigbee 3.0</p>	1-199pcs: \$8.20 200pcs: \$7.90 201-1000PC:\$7.60 1001-3000PC:\$7.40	Single weight: 5.4g Size: 5.9*5.3*2.8cm FCL weight: 17.2kg FCL size: 36.5*28*28.5cm 300 packs
327		GS-WIFI-SB03-SW	<p>WiFi Voltage: AC110-240V 50/60Hz Max. Load: LED 250W 10A Operation frequency: 2.4GHz-4.48GHz Operation temp: -10°C~+40°C Protocol: WiFi IEEE 802.11 b/g/h Operation range: less than 100m Dims(WxHxD): 39.2*39.2*18mm IP rating: IP20 Warranty: 2 years Networking: Zigbee 3.0</p>	1-199pcs: \$7.40 200pcs: \$7.20 201-1000PC:\$7.00 1001-3000PC:\$6.80	Single weight: 5.4g Size: 5.9*5.3*2.8cm FCL weight: 17.2kg FCL size: 36.5*28*28.5cm 300 packs
328		GS-zigbee-SB04-SW	<p>Voltage: AC110-240V 50/60Hz Max. Load: LED 250W 10A Operation frequency: 2.4GHz-4.48GHz Operation temp: -10°C~+40°C Protocol: WiFi IEEE 802.11 b/g/h Operation range: less than 100m Dims(WxHxD): 39.2*39.2*18mm IP rating: IP20 Warranty: 2 years Networking: Zigbee 3.0</p>	1-199pcs: \$8.80 200pcs: \$8.50 201-1000PC:\$8.20 1001-3000PC:\$7.90	Single weight: 5.4g Size: 5.9*5.3*2.8cm FCL weight: 17.2kg FCL size: 36.5*28*28.5cm 300 packs
329		GS-WIFI-SB04-SW	<p>WiFi Voltage: AC110-240V 50/60Hz Max. Load: LED 250W 10A Operation frequency: 2.4GHz-4.48GHz Operation temp: -10°C~+40°C Protocol: WiFi IEEE 802.11 b/g/h Operation range: less than 100m Dims(WxHxD): 39.2*39.2*18mm IP rating: IP20 Warranty: 2 years Networking: Zigbee 3.0</p>	1-199pcs: \$8.40 200pcs: \$8.20 201-1000PC:\$8.10 1001-3000PC:\$8.00	Single weight: 5.4g Size: 5.9*5.3*2.8cm FCL weight: 17.2kg FCL size: 36.5*28*28.5cm 300 packs

330		Zigbee GS-zigbee-CU01- Curtain	Voltage: AC110-240V 50/60Hz Max. Load: LED 250W 3A Operation frequency: 2.412GHz-4.484GHz Operation temp.: -10 ℃~+40℃ Protocol: WiFi IEEE 802.11 b/g/h Operation range: less than 100m Dims(VxWxH) 39.2*39.2*18mm IP rating: IP20 Warranty: 2 years Networking: Zigbee 3.0	1-199pcs: \$8.80 200pcs: \$8.50 201-1000PCS: \$8.20 1001-3000PCS: \$7.90	Single weight: 54g Size: 5.9*5.3*2.8cm FCL weight: 17.2kg FCL size: 36.5*28*28.5cm 300 packs
331	1-channel Smart curtain module		WiFi GS-wifi-CU01- Curtain	1-199pcs: \$7.20 200pcs: \$7.40 201-1000PCS: \$7.20 1001-3000PCS: \$7.00	
332		Zigbee GS-zigbee-CU02- Curtain	Voltage: AC110-240V 50/60Hz Max. Load: LED 250W 2x3A Operation frequency: 2.412GHz-4.484GHz Operation temp.: -10 ℃~+40℃ Protocol: WiFi IEEE 802.11 b/g/h Operation range: less than 100m Dims(VxWxH) 39.2*39.2*18mm IP rating: IP20 Warranty: 2 years Networking: Zigbee 3.0	1-199pcs: \$9.90 200pcs: \$9.60 201-1000PCS: \$9.30 1001-3000PCS: \$9.10	Single weight: 54g Size: 5.9*5.3*2.8cm FCL weight: 17.2kg FCL size: 36.5*28*28.5cm 300 packs
333	2-channel Smart curtain module		WiFi GS-wifi-CU02- Curtain	1-199pcs: \$9.40 200pcs: \$9.20 201-1000PCS: \$8.95 1001-3000PCS: \$8.80	
334		GS-MINI-FAN	1. Support reset switch, touch switch, mechanical switch, speed control switch. 2.WIFI+ Bluetooth dual mode, more rapid and stable distribution network 3. Doodle solution, support Amazon speaker, Google speaker, Tmall genie, can adjust the speed of voice 4. Mini body, can be put into the bottom box, more convenient installation 5. Once WIFI is activated again after disconnection, devices connected to the module will automatically connect to your WIFI network Parameters: Voltage: 85-250V,50-60HZ Power: 5-150W WIFI standard: 2.4GHz IEEE 802.11b/g/n Material: PC flame retardant VO Size: 59x42x20mm	Price: 7.7\$	Single weight: 54g Size: 5.9*5.3*2.8cm FCL weight: 17.2kg FCL size: 36.5*28*28.5cm 300 packs





Smart Wall Switch US standard					
206US series small LED smart Zigbee Switch (US standard)					
47	Tuya Zigbee US standard 1 gang N&L LED Switch	GS-206US-1	<p>Input voltage:AC100~240V50~60HZ Load:≤200w/gang Wireless Protocol:Zigbee Panel Material:Tempered glass Color selection:white Wireless Standard:IEEE 802.15.4 b/g/n</p> <p>* Neutral Required. *The color and brightness can be changed through Tuya APP. *Custom names in multiple languages.</p>	Sample: \$19.9 100~200pcs: \$18.6 300~400 pcs: \$18.2	
41	Tuya Zigbee US standard 2 gang N&L LED Switch	GS-206US-2		Sample: \$21.7 100~200pcs: \$20.8 300~400 pcs: \$19.9	
42	Tuya Zigbee US standard 3 gang N&L LED Switch	GS-206US-3		Sample: \$23.5 100~200pcs: \$22.7 300~400 pcs: \$21.7	
43	Tuya Zigbee US standard 4 gang N&L LED Switch	GS-206US-4		Sample: \$25.3 100~200pcs: \$24.2 300~400 pcs: \$23.5	
337	1-Gang Zigbee Wall Switch (Silver frame optional)	Aluminum alloy frame + flat glass panel (L&N wire) GS-Z3NL-US-01F	<p>Input voltage: 100-240VAC (50/60Hz) Networking mode: Zigbee Max Power: 2000W Max Current: 10A Product Size: 120* 72 * 35mm Service Life: 100000 times Housing Color: white/black/gold Operating Temperature: -20°C ~ +50°C Plastic Material: ABS+Single crystal tempered glass panel Fire protection rating: IP44 Packing detail: 100pcs/carton Carton Size: 47*39*21cm 100pcs for 1/2/3/4gang /carton weight is 17/18/19/20kg</p>	Sample: \$10.26 50~100pcs: \$10.06 101~500 pcs: \$9.85	
338		Aluminum alloy frame + concave panel (L&N wire) GS-Z3NL-US-01C		Sample: \$12.69 50~100pcs: \$12.43 101~500 pcs: \$12.18	
339	2-Gang Zigbee Wall Switch (Silver frame optional)	Aluminum alloy frame + flat glass panel (L&N wire) GS-Z3NL-US-02F	<p>Input voltage: 100-240VAC (50/60Hz) Networking mode: Zigbee Max Power: 2000W Max Current: 10A Product Size: 120* 72 * 35mm Service Life: 100000 times Housing Color: white/black/gold Operating Temperature: -20°C ~ +50°C Plastic Material: ABS+Single crystal tempered glass panel Fire protection rating: IP44 Packing detail: 100pcs/carton Carton Size: 47*39*21cm 100pcs for 1/2/3/4gang /carton weight is 17/18/19/20kg</p>	Sample: \$11.00 50~100pcs: \$10.79 101~500 pcs: \$10.57	
340		Aluminum alloy frame + concave panel (L&N wire) GS-Z3NL-US-02C		Sample: \$13.43 50~100pcs: \$13.13 101~500 pcs: \$12.9	
341	3-Gang Zigbee Wall Switch (Silver frame optional)	Aluminum alloy frame + flat glass panel (L&N wire) GS-Z3NL-US-03F	<p>Feature : 1. Remote control by mobile APP 2. Support Amazon Alexa, Google Assistant, IFTTT and other intelligent voice control 3. Timing switches/Share control 4. WiFi touch switch (Bluetooth + WiFi dual mode, can be quickly configured by Bluetooth of the player, or can be configured by WiFi in conventional mode)</p>	Sample: \$11.94 50~100pcs: \$11.70 101~500 pcs: \$11.46	
342		Aluminum alloy frame + concave panel (L&N wire) GS-Z3NL-US-03C		Sample: \$14.55 50~100pcs: \$14.26 101~500 pcs: \$13.97	
343	4-Gang Zigbee Wall Switch (Silver frame optional)	Aluminum alloy frame + flat glass panel (L&N wire) GS-Z3NL-US-04F	<p>Feature : 1. Remote control by mobile APP 2. Support Amazon Alexa, Google Assistant, IFTTT and other intelligent voice control 3. Timing switches/Share control 4. WiFi touch switch (Bluetooth + WiFi dual mode, can be quickly configured by Bluetooth of the player, or can be configured by WiFi in conventional mode)</p>	Sample: \$12.69 50~100pcs: \$12.43 101~500 pcs: \$12.18	
344		Aluminum alloy frame + concave panel (L&N wire) GS-Z3NL-US-04C		Sample: \$15.49 50~100pcs: \$15.18 101~500 pcs: \$14.87	

345	 Roller shutter door Touch Switch (neutral wire+Live wire) Aluminum frame	GS-DMS4R1V	Wifi roller shutter door Specification: US standard Color: Black glass gold aluminum alloy, white glass gold aluminum alloy Size: 118*72*33mm	Price:\$14.85	
346	US type Smart Switch with Metal Frame				
347		GS-AF-US-Zigbee-01 (L&N wires)		Sample: \$9.82 50-100pcs: \$9.63 101-500 pcs: \$9.33	
348	US/AU Type Smart Wall Switch 1- Gang (Zigbee/WiFi)	GS-AF-US-WiFi-01 (L&N wires)		Sample: \$8.57 50-100pcs: \$8.40 101-500 pcs: \$8.15	
349		GS-AF-US-Zigbee-02 (L&N wires)		Sample: \$10.36 50-100pcs: \$10.16 101-500 pcs: \$9.85	 works with the Google Assistant
350	Gold & White	GS-AF-US-WiFi-02 (L&N wires)		Sample: \$9.11 50-100pcs: \$8.93 101-500 pcs: \$8.66	 WORKS WITH amazon alexa
351		GS-AF-US-Zigbee-03 (L&N wires)	120-American standard Australian standard aluminum alloy frame Zigbee smart switch (Live & Neutral Wire Type) 1. Input voltage: 100-240VAC 50/60Hz 2. Network: Zigbee (requires gateway) 3. Product items: 1.2.3.4gang smart switch 4. Switch rated power: 1000W/Gang Maximum current: 10A 5. Size: 118*72*33mm 6. Color: black/gold 7. Panel material: 2.5D luxury tempered glass 8. Shell material: aluminum alloy frame+ABS+PC, fire protection grade: 94-V0 9. Packing size: 130*90*40mm Gross weight: 200g 10. Carton size: 44*21*27mm Weight: 9.5KG. Quantity: 50 pieces 11. Using Tuya certified modules, it can directly pass FCC and ANATEL certification. 12. Support dual control. After setting through APP, two smart switches can control the same light at the same time.		
352	Gold & White	GS-AF-US-WiFi-03 (L&N wires)		Sample: \$9.64 50-100pcs: \$9.45 101-500 pcs: \$9.16	
353		GS-AF-US-Zigbee-04 (L&N wires)		Sample: \$12.14 50-100pcs: \$11.90 101-500 pcs: \$11.54	
354	Gold & White	GS-AF-US-WiFi-04 (L&N wires)		Sample: \$10.71 50-100pcs: \$10.50 101-500 pcs: \$10.18	
US/AU Type Smart Wall Switch 1- Gang (Zigbee/WiFi)					

355		GS-AF-US-Zigbee-01L (Non-neutral wire)	<p>Sample: \$10.40 50-100pcs: \$10.20 101-500 pcs: \$9.88</p>	
356	 Gold & White	GS-AF-US-WIFI-01L (Non-neutral wire)	<p>Sample: \$9.30 50-100pcs: \$9.12 101-500 pcs: \$8.84</p>	
357		GS-AF-US-Zigbee-02L (Non-neutral wire)	<p>Sample: \$10.90 50-100pcs: \$10.70 101-500 pcs: \$10.40</p>	
358	 Gold & White	GS-AF-US-WIFI-02L (Non-neutral wire)	<p>Sample: \$9.82 50-100pcs: \$9.63 101-500 pcs: \$9.33</p>	 works with the Google Assistant
359		GS-AF-US-Zigbee-03L (Non-neutral wire)	<p>Sample: \$11.43 50-100pcs: \$11.21 101-500 pcs: \$10.86</p>	 WORKS WITH amazon alexa
360	 Gold & White	GS-AF-US-WIFI-03L (Non-neutral wire)	<p>Sample: \$10.36 50-100pcs: \$10.20 101-500 pcs: \$9.85</p>	
361		GS-AF-US-Zigbee-04L (Non-neutral wire)	<p>Sample: \$12.50 50-100pcs: \$12.25 101-500 pcs: \$11.88</p>	
362	 Gold & White	GS-AF-US-WIFI-04L (Non-neutral wire)	<p>Sample: \$11.61 50-100pcs: \$11.40 101-500 pcs: \$11.03</p>	
363		GS-US-CUR01-AF-Zigbee	<p>American standard Zigbee aluminum alloy frame digital curtain smart switch 1. Wall switch; 120*72mm 2.White&Black&Grey&Gold 3.AC 100V-240V 60hz/50hz 4.3-600W/Gang 600W/total 5. Relay switching is more stable 6. Wiring method: Live & Neutral wire (neutral wire required)</p>	<p>Sample: \$12.14 50-100pcs: \$11.90 101-500 pcs: \$11.54</p>
364	 120Type US Digital Smart Curtain Touch Switch (neutral wire+fire wire) Aluminum frame	GS-US-CUR01-AF-WIFI	<p>Colors for option: Gold and White Gold and black Silver White silver black</p>	<p>Sample: \$10.71 50-100pcs: \$10.50 101-500 pcs: \$10.18</p>
365		GS-US-Dimming-AF-Zigbee	<p>American standard Zigbee aluminum alloy frame digital dimming smart switch 1. Wall switch; 120*72mm 2.White&Black&Grey&Gold 3.AC 100V-240V 60hz/50hz 4.3-800W/Gang 800W/total 5. Relay switching is more stable 6. Wiring method: Live & Neutral wire (neutral wire required)</p>	<p>Sample: \$12.14 50-100pcs: \$11.90 101-500 pcs: \$11.54</p>
366	 120Type US Digital Dimming Touch Switch (neutral wire+fire wire) Aluminum frame	GS-US-Dimming-AF-WIFI	<p>Colors for option: Gold and White Gold and black Silver White silver black</p>	<p>Sample: \$10.71 50-100pcs: \$10.50 101-500 pcs: \$10.18</p>
367		GS-Zigbee-FAN-US-AF	<p>American standard Zigbee aluminum alloy frame digital fan light smart switch 1. Wall switch; 120*72mm 2.White&Black&Grey&Gold 3.AC 100V-240V 60hz/50hz 4.3-800W/Gang 800W/total 5. Relay switching is more stable 6. Wiring method: Live & Neutral wire (neutral wire required)</p>	<p>Sample: \$12.86 50-100pcs: \$12.61 101-500 pcs: \$12.22</p>
368	 120Type US Digital Smart Fan Touch switch (neutral wire+fire wire) Aluminum frame	GS-WIFI-FAN-US-AF	<p>American standard Zigbee aluminum alloy frame digital fan light smart switch 1. Wall switch; 120*72mm 2.White&Black&Grey&Gold 3.AC 100V-240V 60hz/50hz 4.3-800W/Gang 800W/total 5. Relay switching is more stable 6. Wiring method: Live & Neutral wire (neutral wire required)</p>	<p>Sample: \$11.61 50-100pcs: \$11.38 101-500 pcs: \$11.03</p>
369		40A GS-US-Zigbee-40A-AF	<p>American standard Zigbee aluminum alloy frame water heater smart switch 1. Wall switch; 120*72mm 2.White&Black&Grey&Gold 3.AC 100V-240V 60hz/50hz 4.8,800W/total 5. Relay switching is more stable 6. Wiring method: Live & Neutral wire (neutral wire required)</p>	<p>Sample: \$13.40 50-100pcs: \$13.14 101-500 pcs: \$12.73</p>
370	 40A high-power switch of 120 American standard water heater + Aluminum frame	40A GS-US-WIFI-40A-AF	<p>American standard Zigbee aluminum alloy frame water heater smart switch 1. Wall switch; 120*72mm 2.White&Black&Grey&Gold 3.AC 100V-240V 60hz/50hz 4.8,800W/total 5. Relay switching is more stable 6. Wiring method: Live & Neutral wire (neutral wire required)</p>	<p>Sample: \$11.61 50-100pcs: \$11.38 101-500 pcs: \$11.03</p>

371		20A GS-US-Zigbee-20A AF	American standard Zigbee aluminum alloy frame water heater smart switch 1. Wall switch; 120*72mm 2.White&Black&Grey&Gold 3.AC 100V~240V 60hz/50hz 4.44.00W/total 5. Relay switching is more stable 6. Wiring method: Live & Neutral wire (neutral wire required)	Sample: \$12.50 50~100pcs: \$12.25 101~500 pcs: \$11.88	
372	20A high-power switch of 120 American standard water heater + Aluminum frame	20A GS-US-WIFI-20A-AF		Sample: \$10.71 50~100pcs: \$10.50 101~500 pcs: \$10.20	
373	147Type 4/5/6/8/10/Gang Smart Switch				
374		147-Zigbee-04		Sample: \$12.50 50~100pcs: \$12.25 101~500 pcs: \$11.80	
375	Type146-4gang WiFi tuyu Smart Switch (With neutral line)	147-WIFI-04		Sample: \$10.71 50~100pcs: \$10.50 101~500 pcs: \$10.20	
376		147-Zigbee-05		Sample: \$13.40 50~100pcs: \$13.14 101~500 pcs: \$12.73	
377	Type146-5 gang tuyu Smart Switch (With neutral line)	147-WIFI-05	147 large board Zigbee smart switch 1. Input voltage: 100-240VAC 50/60Hz 2.Network: wifi 2.4G 3. Product items: 6, 8, 10 Gang smart switches 4. Switch rated power: 1000W/Gang Maximum current: 10A 5. Power factor: 0.95W 6. Size: 147*85*36mm 7. Lifespan: 100,000 times 8. Color: white/black (customizable color, customized panel LOGO). 9. Operating temperature: -20°C ~+50°C. 10. Panel material: tempered glass 11. Shell material: ABS+PC 12. Fire performance: V4-V0 13. Packing size: 16*9*40mm Gross weight: 350g 14. Using Tuya certified CBS3 module, it can directly pass FCC and ANATEL certification 15. Supports dual control. After setting through the APP, two smart switches can control the same light at the same time. The power-off memory function can turn off the indicator light.	Sample: \$11.61 50~100pcs: \$11.38 101~500 pcs: \$11.03	
378		147-Zigbee-06		Sample: \$16.07 50~100pcs: \$15.75 101~500 pcs: \$15.30	
379	Type146-6 gang tuyu Smart Switch (With neutral line)	147-WIFI-06		Sample: \$13.39 50~100pcs: \$13.13 101~500 pcs: \$12.72	
380		147-Zigbee-08		Sample: \$17.86 50~100pcs: \$17.51 101~500 pcs: \$16.97	
381	Type146-8-gang WiFi tuyu Smart Switch (With neutral line)	147-WIFI-08		Sample: \$14.01 50~100pcs: \$13.73 101~500 pcs: \$13.31	
382		147-Zigbee-10		Sample: \$21.43 50~100pcs: \$21.01 101~500 pcs: \$20.36	
383	Type146-8 gang WiFi tuyu Smart Switch (With neutral line)	147-WIFI-10		Sample: \$17.86 50~100pcs: \$17.51 101~500 pcs: \$16.95	
384		GS-UKCM01-WIFI	◆ App Control –Control switches via Smart Life or TUYA APP ◆ RF Remote control-Turn on/off by 433MHz RF Remote Indoors ◆ Voice Control –Works perfectly with Amazon Alexa, Google Home ◆ Timing –Set scheduled/countdown timers to turn on/off at specified time ◆ Share Control –Control your smart home together with your family ◆ Smart Scene–Trigger on/off by temperature, humidity or other environmental conditions ◆ High quality crystal tempered glass panel design,never fade. ◆ With red and blue LED indicator,very distinguished. ◆ Control the switch directly .No gateway required. ◆ Easy to install,Neutral wire required ◆ Status indication and Power statistics function.	Sample: \$19.6 50~200 pcs\$19.5 200~1K pos: \$19.4	Dimension:147*86*40MM Operating Voltage:110~240V/50~60Hz ; Wall Socket Output:15AMP; Wall Switch load:625W/Gang Frequency: Wifi 2.4G,Support 802.11b/g/n
385		GS-UKCM01-Zig		Sample: \$21.5 50~200 pcs\$21.3 200~1K pos: \$21.1	ZigBee Google Assistant amazon alexa
386		GS-UKFG01W-Wifi	◆ App Control –Control switches via Smart Life or TUYA APP ◆ RF Remote control-Turn on/off by 433MHz RF Remote Indoors ◆ Voice Control –Works perfectly with Amazon Alexa, Google Home ◆ Timing –Set scheduled/countdown timers to turn on/off at specified time ◆ Share Control –Control your smart home together with your family ◆ Smart Scene–Trigger on/off by temperature, humidity or other environmental conditions ◆ High quality crystal tempered glass panel design,never fade. ◆ With red and blue LED indicator,very distinguished. ◆ Control the switch directly .No gateway required. ◆ Easy to install,Neutral wire required ◆ Status indication and Power statistics function.	Sample: \$18.8 50~200 pcs\$18.7 200~1K pos: \$18.6	Wi-Fi Dimension:147*86*40MM Operating Voltage:110~240V/50~60Hz ; Wall Socket Output:15AMP; Wall Switch load:625W/Gang Frequency: Wifi 2.4G,Support 802.11b/g/n
387		GS-UKFG01B-Zig		Sample: \$20.5 50~200 pcs\$20.3 200~1K pos: \$20	ZigBee Google Assistant amazon alexa
388	4Gang&Fan Smart Switch		Zigbee Touch Wall Switch- US Standard	Metal frame costs \$2.2 extra	

389	 <p>(Magnetic Latching Relay) 1-gang ZigBee touch switch (ZigBee single fire and zero fire universal, no need to connect capacitors)</p>	GS-1211ZC-1	<p>US standard, Australian standard, Italy, Canada, Brazil, Vietnam, Thailand</p> <p>Input voltage: 100-240VAC 50/60Hz Networking mode: ZigBee Rated power: 3-600W Regular Color: White/Black/Gold/Grey Product size: 118 * 72 * 35mm (USA) Package size: 138*69*55mm Product gross weight: 255g</p>	<p>Sample: \$9.10 50-200 pcs: \$8.91 200-1K pcs: \$8.83</p>	<p>MODEL NO: QTY: 50PCS G.W: 13.2KG MEAS: 47x29.2x30.5CM</p>
390	 <p>(Magnetic Latching Relay) 2-gang ZigBee touch switch (ZigBee single fire and zero fire universal, no need to connect capacitors)</p>	GS-1211ZC-2	<p>US standard, Australian standard, Italy, Canada, Brazil, Vietnam, Thailand</p> <p>Input voltage: 100-240VAC 50/60Hz Networking mode: ZigBee Rated power: 3-600W Regular Color: White/Black/Gold/Grey Product size: 118 * 72 * 35mm (USA) Package size: 138*69*55mm Product gross weight: 255g</p>	<p>Sample: \$10.14 50-200 pcs: \$9.94 200-1K pcs: \$9.35</p>	<p>MODEL NO: QTY: 50PCS G.W: 13.2KG MEAS: 47x29.2x30.5CM</p>

391		GS-1211ZC-3	<p>US standard, Australian standard, Italy, Canada, Brazil, Vietnam, Thailand</p> <p>Input voltage: 100-240VAC 50/60Hz Networking mode: ZigBee Rated power: 3-600W Regular Color: White/Black/Gold/Grey Product size: 118 * 72 * 35mm (USA) Package size: 138*69*55mm Product gross weight: 255g</p>	Sample : \$11.00 50~200 pcs:\$10.78 200~1K pcs: \$10.67	MODEL NO: QTY: 50PCS G.W: 13.2KG MEAS: 47x29.2x30.5CM
392		GS-124-1	 <p>Input voltage: 100-240VAC 50/60Hz Networking mode: ZigBee Rated power: 600W Regular Color: White/Black/Gold/Grey Product size: 118 * 72 * 35mm (USA) Package size: 138*69*55mm Product gross weight: 255g</p>	Sample : \$8.5 50~200 pcs: \$8.4 200~1K pcs: \$8.3	MODEL NO: QTY: 50PCS G.W: 15.2KG MEAS: 49x31x33CM
393		GS-121BW-1	 <p>WIFI touch switch (WiFi+ Bluetooth dual mode) with Neutral wire Suitable for USA, Australia, Italy, Canada, Brazil, Vietnam, Thailand.</p> <p>1) Input voltage: 100-240VAC 50/60Hz 2) Connection mode: WiFi 3) Rated power: 600W 4) Regular Color: White/Black/Gold/Grey 5) Product Size: 118 * 72 * 35mm (US) 6) Package Size: 158*99*65mm 7) Gross weight: 280g</p>	Sample : \$7.5 50~200 pcs: \$7.4 200~1K pcs: \$7.3	MODEL NO: QTY: 50PCS G.W: 15.2KG MEAS: 49x31x33CM
394		GS-124-2	 <p>Input voltage: 100-240VAC 50/60Hz Networking mode: ZigBee Rated power: 600W Regular Color: White/Black/Gold/Grey Product size: 118 * 72 * 35mm (USA) Package size: 138*69*55mm Product gross weight: 255g</p>	Sample : \$9.1 50~200 pcs: \$9.0 200~1K pcs: \$8.9	MODEL NO: QTY: 50PCS G.W: 15.2KG MEAS: 49x31x33CM
395		GS-121BW-2	 <p>WIFI touch switch (WiFi+ Bluetooth dual mode) with Neutral wire Suitable for USA, Australia, Italy, Canada, Brazil, Vietnam, Thailand.</p> <p>1) Input voltage: 100-240VAC 50/60Hz 2) Connection mode: WiFi 3) Rated power: 600W *2 4) Regular Color: White/Black/Gold/Grey 5) Product Size: 118 * 72 * 35mm (US) 6) Package Size: 158*99*65mm 7) Gross weight: 280g</p>	Sample : \$7.9 50~200 pcs: \$7.8 200~1K pcs: \$7.7	MODEL NO: QTY: 50PCS G.W: 15.2KG MEAS: 49x31x33CM
396		GS-124-3	 <p>Input voltage: 100-240VAC 50/60Hz Networking mode: ZigBee Rated power: 600W Regular Color: White/Black/Gold/Grey Product size: 118 * 72 * 35mm (USA) Package size: 138*69*55mm Product gross weight: 255g</p>	Sample : \$9.7 50~200 pcs: \$9.6 200~1K pcs: \$9.5	MODEL NO: QTY: 50PCS G.W: 15.2KG MEAS: 49x31x33CM
397		GS-121BW-3	 <p>WIFI touch switch (WiFi+ Bluetooth dual mode) with Neutral wire Suitable for USA, Australia, Italy, Canada, Brazil, Vietnam, Thailand.</p> <p>1) Input voltage: 100-240VAC 50/60Hz 2) Connection mode: WiFi 3) Rated power: 600W *3 4) Regular Color: White/Black/Gold/Grey 5) Product Size: 118 * 72 * 35mm (US) 6) Package Size: 158*99*65mm 7) Gross weight: 280g</p>	Sample : \$8.3 50~200 pcs: \$8.2 200~1K pcs: \$8.1	MODEL NO: QTY: 50PCS G.W: 15.2KG MEAS: 49x31x33CM
399		GS-124-4	 <p>Input voltage: 100-240VAC 50/60Hz Networking mode: ZigBee Rated power: 600W Regular Color: White/Black/Gold/Grey Product size: 118 * 72 * 35mm (USA) Package size: 138*69*55mm Product gross weight: 255g</p>	Sample : \$10.2 50~200 pcs: \$10.1 200~1K pcs: \$10	MODEL NO: QTY: 50PCS G.W: 15.2KG MEAS: 49x31x33CM
400		GS-162Z	 <p>20A Input voltage: 100-240VAC 50/60Hz Networking mode: ZigBee Rated power: 600W Regular Color: White/Black/Gold/Grey Product size: 118 * 72 * 35mm (USA) Package size: 138*69*55mm Product gross weight: 255g</p>	Sample : \$12.7 50~200 pcs: \$12.6 200~1K pcs: \$12.5	MODEL NO: QTY: 50PCS G.W: 15.2KG MEAS: 49x31x33CM
401		GS-162	 <p>Input voltage: 100-240VAC 50/60Hz Networking mode: WiFi Rated power: 4000W Regular Color: White/Black/Gold/Grey Product size: 118 * 72 * 35mm (USA) Package size: 138*69*55mm Product gross weight: 255g</p>	Sample : \$9.58 50~200 pcs: \$9.5 200~1K pcs: \$9.4	MODEL NO: QTY: 50PCS G.W: 15.2KG MEAS: 49x31x33CM
402		GS-121DZN	 <p>40A Input voltage: 100-240VAC 50/60Hz Networking mode: ZigBee Rated power: 8000W Regular Color: White/Black/Gold/Grey Product size: 118 * 72 * 35mm (USA) Package size: 138*69*55mm Product gross weight: 255g</p>	Sample : \$13.6 50~200 pcs: \$13.5 200~1K pcs: \$13.4	MODEL NO: QTY: 50PCS G.W: 15.2KG MEAS: 49x31x33CM
403		GS-121DWN	 <p>40A WIFI Touch Switch High Power Water Heater (20A) Suitable for USA, Australia, Italy, Canada, Brazil, Vietnam, Thailand.</p> <p>1) Input voltage: 100-240VAC 50/60Hz 2) Connection mode: WiFi 3) Rated power: 8000W 4) Regular Color: White/Black/Gold/Grey 5) Product Size: 118 * 72 * 35mm (US) 6) Package Size: 158*99*65mm 7) Gross weight: 280g</p>	Sample : \$10.58 50~200 pcs: \$10.5 200~1K pcs: \$10.4	MODEL NO: QTY: 50PCS G.W: 15.2KG MEAS: 49x31x33CM



404		GS-WF152	<p>US regulations, Australian regulations, Italy, Canada, Brazil, Vietnam, Thailand</p> <p>Input voltage: 100-240VAC 50/60Hz Networking mode: WiFi Rated power: 1000W Regular Color: White/Black/Gold/Grey Product size: 118 * 72 * 35mm (USA) Package size: 138*89*55mm Product gross weight: 255g</p>	<p>1-50pcs: \$7.80 51-200pcs: \$7.54 201-1000pcs: \$7.30</p> <p> </p>	
405		GS-172	<p>US regulations, Australian regulations, Italy, Canada, Brazil, Vietnam, Thailand</p> <p>Input voltage: 100-240VAC 50/60Hz Networking mode: WiFi Rated power: 600W Regular Color: White/Black/Gold/Grey Product size: 118 * 72 * 35mm (USA) Package size: 138*89*55mm Product gross weight: 255g</p>	<p>1-50pcs: \$9.51 51-200pcs: \$9.26 201-1000pcs: \$9.01</p>	
406		GS-US-F	<p>WiFi tuya smart fan wall switch (Neutral and Live wire)</p> <ul style="list-style-type: none"> - Works with tuya smart/app, alexa voice control - WiFi network: 2.4G b/g/n - Max. Load: 10A (lighting/7A (fan)) - Rated power: 1500W~800W - Operating voltage: 100-250VAC - Touch button function: turn on/off fan, high/low speed - Timing on/off setting - Supports multi-people/mobile app) control or single people control the switch - Support multi-control association function - Dimension: 72*118*50.6mm - Product weight: 0.25kg 	<p>Sample: \$10.15 50-200 pcs:\$10.10 200-1K pcs: \$10.00</p> <p> </p>	
407		GS-WIFI-DL-USB	<p>* Power: AC110-220V 20A * Power consumption function * Timer switch: countdown, timer, set daily repeat timer * Overcharge protection: When the power is less than 3W for 40 minutes, it will be automatically turned off <need to be turned on manually> * WiFi connection: plug-in ABS-PC association * Crystal tempered glass panel will never fade: The switch will always look like new. * Fireproof ABS plastic box, prevents excessive heat result in fire, reducing the security risk. * With LED indicator, very distinguished in the darkness.</p>	<p>Sample: \$12.90 500pcs: \$12.50 1K pcs: \$11.90 5K pcs: \$11.60 10K pcs: \$10.80</p> <p></p>	
408		GS-ZIGBEE-DL-USB	<p>* Single line wire control, easy to install, replace the old switch * Operating Voltage: AC110V-240V/50Hz~60Hz * Switch Dimension: 4.7 x 2.9 x 1.5 in * Rated load: each gang less than 300W * Self consuming power: Less than 1mA * Operating environment: -20~50°C, Less than 95%RH * Life long: more than 100,000 times * App: iOS/Android * Works with Alexa, Google Assistant*</p>	<p>Sample: \$13.9 600pcs: \$13.5 1K pcs: \$12.9 5K pcs: \$12.6 10K pcs: \$11.8</p> <p></p>	
409		GS-1KNL/US-TZB-W	<p>Wireless protocol: ZigBee 3.0 (Wi-Fi2.4GHz) Working voltage: AC 90-250V, 50Hz/60Hz (with neutral wire) 110V~60Hz (without neutral wire) 220V~50Hz (without neutral wire) Environment: Working temperature: 0 to 40 degrees Relative humidity: less than 95% Rated current (without neutral wire): Max 10A (resistive load) Rated current (with neutral wire): Max 2.5A/5A (resistive load) Size:118mm*72mm*38mm,86mm*86mm*34mm * for option Materials: Tempered glass panel and fireproof PC APP support:IOS/Android Load type: Incandescent lamp: 500W/gang , LED lamp:120W/gang, Energy saving lamp:200W/gang RF operating frequency:433.92MHz</p>	<p>Sample: \$9.66 50-200 pcs:\$9.60 200-1K pcs: \$9.50</p>	
410		GS-2KNL/US-TZB-W	<p>ZigBee US/AU ZigBee 2 gang wall switch (with neutral wire)</p>	<p>Sample: \$10.55 50-200 pcs:\$10.34 200-1K pcs: \$10.25</p> <p> </p>	
411		GS-3KNL/US-TZB-W	<p>ZigBee US/AU ZigBee 3 gang wall switch (with neutral wire)</p> <p>Product Size Parameters</p>	<p>Sample: \$10.85 50-200 pcs:\$10.65 200-1K pcs: \$10.55</p>	
412		GS-4KNL/US-TZB-W	<p>ZigBee US/AU ZigBee 4 gang wall switch (with neutral wire)</p>	<p>Sample: \$11.55 50-200 pcs:\$11.50 200-1K pcs: \$11.40</p>	
413		GS-1KNL/US-DIM-W	<p>ZigBee US/AU ZigBee Dimmer Switch</p> <p>working voltage: 100V-240V~ 50 Hz/60 Hz working current: 2A (max (pure resistive load)) wiring: with neutral load type: dimmable load, less than 400W product material: toughened glass panel + fireproof PC shell size:length*width*height:118mm*72mm*38mm use environment: temperature 0 ~40 °C, relative humidity < 95% wireless standard: Wi-Fi IEEE802.11 b/gn 2.4GHz. security mechanism: WPA-PSK/WPA2-PSK APP: "Smart Life"APP, "Tuya Smart"APP voice speakers: Amazon Alexa, Google Assistant, etc.</p>	<p>Sample: \$12.61 50-200 pcs:\$12.20 200-1K pcs: \$12.20</p> <p>QTY: 50PCS G.W.:10.85KG MEAS: 425*275*260mm</p>	
414		GS-1KNL/US-FAN-W	<p>ZigBee US/AU ZigBeeFan Speed Regulating Switch</p> <p>working voltage: 100V-240V ~, 50 Hz / 60 Hz working current: 2A max (pure resistive load) wiring: with neutral load type: within 400W (motor load) product material: toughened glass panel + fireproof PC shell size:length*width*height:118mm*72mm*38mm use environment: temperature 0 ~40 °C, relative humidity < 95% wireless standard: Wi-Fi IEEE802.11 b/gn 2.4GHz. security mechanism: WPA-PSK/WPA2-PSK APP: "Smart Life"APP, "Tuya Smart"APP voice speakers: Amazon Alexa, Google Assistant, etc.</p>	<p>Sample: \$12.61 50-200 pcs:\$12.20 200-1K pcs: \$12.20</p> <p>QTY: 50PCS G.W.:10.85KG MEAS: 425*275*260mm</p>	
415		GS-1KNL/US-CU-W	<p>ZigBee US/AU ZigBee Curtain Switch</p> <p>working voltage: 100V-240V ~, 50 Hz / 60 Hz working current: 2A max (pure resistive load) wiring: with neutral load type: motor load, less than 400W product material: toughened glass panel + fireproof PC shell size:length*width*height:118mm*72mm*38mm use environment: temperature 0 ~40 °C, relative humidity < 95% wireless standard: Wi-Fi IEEE802.11 b/gn 2.4GHz. security mechanism: WPA-PSK/WPA2-PSK APP: "Smart Life"APP, "Tuya Smart"APP voice speakers: Amazon Alexa, Google Assistant, etc.</p>	<p>Sample: \$12.61 50-200 pcs:\$12.24 200-1K pcs: \$12.20</p> <p>QTY: 50PCS G.W.:10.85KG MEAS: 425*275*260mm</p>	



Smart Outlets/Sockets

No.	Picture	Model	Features	Price (EXW)	Compatible devices
1		UK032IG-TYPC-C+USB UK03WF1-TYPC-C+USB	5-hole universal plug smart socket with one USB ports one type C 1) Input voltage: 100-240VAC 50/60Hz 2) Connection mode: WiFi 3) Peak current: 13A 4) Regular Color: White/Black/gold/Gray 5) Product Size: 106*100*55mm 6) Package Size: 300gmm 7) Gross weight: 200g	Sample: \$12 50-100pcs: \$11.8 101-500 pcs: \$11.6	 works with the Google Assistant amazon alexa
2				Sample: \$11.5 50-100pcs: \$11.3 101-500 pcs: \$10.9	 works with the Google Assistant amazon alexa
3		GS-UK032-1g-USB-TYPC-C	Zigbee 5-hole universal plug smart 1) Input voltage: 100-240VAC 50/60Hz 2) Connection mode: Zigbee 3) Peak current: 13A 4) Regular Color: White/Black/gold/Gray 5) Product Size: 106*100*55mm 6) Package Size: 300gmm 7) Gross weight: 200g	 works with the Google Assistant amazon alexa	 works with the Google Assistant amazon alexa
4		GS-1539WN	EU, UK, CN standard WiFi 5 hole 1) Input voltage: 100-240VAC 50/60Hz 2) Connection mode: WiFi 3) Peak current: 13A 4) Regular Color: White/Black/gold/Gray 5) Product Size: 106*100*55mm 6) Package Size: 300gmm 7) Gross weight: 190g	Sample : \$10.80 50-200 pcs: \$10.63 200-1K pcs: \$10.46	 works with the Google Assistant amazon alexa
5		GS-1530WN-2USB	WIFI 5-hole universal plug smart socket with two USB ports 1) Input voltage: 100-240VAC 50/60Hz 2) Connection mode: WiFi 3) Peak current: 13A 4) Regular Color: White/Black/gold/Gray 5) Product Size: 106*100*55mm 6) Package Size: 300gmm 7) Gross weight: 200g	Sample : \$11.49 50-200 pcs: \$11.31 200-1K pcs: \$11.14	 works with the Google Assistant amazon alexa
6		GS-1539ZN	EU, UK, CN standard Zigbee 5 hole universal plug intelligent socket 1) Input voltage: 100-240VAC 50/60Hz 2) Connection mode: Zigbee 3) Peak current: 13A 4) Regular Color: White/Black/gold/Gray 5) Product Size: 106*100*55mm 6) Package Size: 300gmm 7) Gross weight: 190g	Sample : \$13.71 50-200 pcs: \$13.54 200-1K pcs: \$13.37	 works with the Google Assistant amazon alexa
7		GS-1530ZN-2USB	WIFI 5-hole universal plug smart socket with two USB ports 1) Input voltage: 100-240VAC 50/60Hz 2) Connection mode: Zigbee 3) Peak current: 13A 4) Regular Color: White/Black/gold/Gray 5) Product Size: 106*100*55mm 6) Package Size: 300gmm 7) Gross weight: 200g	Sample : \$15.43 50-200 pcs: \$15.26 200-1K pcs: \$15.09	 works with the Google Assistant amazon alexa
8		Zigbee-UK16A	Zigbee smart wall socket (UK-type) * Network: zigbee 3.0 * Max power: 3000W * Working current: 16A * Rated frequency: 60Hz * Working voltage: AC110V/250 * Material: ABS flame retarding polymer * Plug Standard: UK * Power consuming: <0.3W * Working temperature: -20 ~ 45°C (-4 ~ 113°F) * Working Humidity: ≤80% * Radio signal power: 1mW * Radio rate: 30 meter indoor * Product weight: 201g * Product dimension: 11*10*5	Sample: \$11.57 10-50pcs: \$11.50 51-100 pcs: \$11.00 101-500 pcs: \$10.57	 works with the Google Assistant amazon alexa
9		GS-UKW01-wifi		Sample: \$19.64 10-50pcs: \$19.25 51-100 pcs: \$18.85 101-500 pcs: \$18.46	 works with the Google Assistant amazon alexa
10		GS-UKW01-zigbee		Sample: \$21.4 10-50pcs: \$20.9 51-100 pcs: \$20.5 101-500 pcs: \$20.1	 works with the Google Assistant amazon alexa
11		GS-UNWB01-WIFI		Sample: \$17.8 10-50pcs: \$17.5 51-100 pcs: \$17.2	 works with the Google Assistant amazon alexa
12		GS-UNWB01-Zigbee	Zigbee 147 Universal double socket Tuya smart socket tempered glass panel with 1USB & 1 Type C	Sample: \$19.3 10-50pcs: \$19.1 51-100 pcs: \$18.9	 works with the Google Assistant amazon alexa
13		GS-UKWB02-Zigbee		Sample: \$24.00 10-50pcs: \$23.52 51-100 pcs: \$22.80	 works with the Google Assistant amazon alexa
14		GS-UKWB02-Wifi	Zigbee 147 British socket Tuya smart socket tempered glass panel with 1USB & 1 Type C	Sample: \$25.89 10-50pcs: \$25.38 51-100 pcs: \$24.60	 works with the Google Assistant amazon alexa
15		GS-UKWG01W	◆ App Control - Control switches via Smart Life or TUYA APP ◆ RF Remote control - Turn on/off by 433MHz RF Remote indoors ◆ Voice Control - Works perfectly with Amazon Alexa, Google Home ◆ Timing-Set scheduled/countdown timers to turn on/off at specified time ◆ Share Control - Control your smart home together with your family ◆ Smart Scene - Trigger on/off by temperature, humidity or other environmental conditions ◆ High quality crystal tempered glass panel design,never fade. ◆ With red and blue LED indicator,very distinguished. ◆ Easy to install,Neutral wire required ◆ Status indication and Power statistics function.	Sample: \$16.9 50-200 pcs:\$16.8 200-1K pcs: \$16.7	 Dimension:147*82*48MM Operating Voltage:110-240VAC/50-60Hz; Wall Socket Output:15AMP; Wall Switch load:625W/Gang Frequency: WiFi 2.4G,Support 802.11b/g/n
16		GS-UKWG01B		Sample: \$18.9 50-200 pcs:\$18.8 200-1K pcs: \$18.7	 works with the Google Assistant amazon alexa
17		Zigbee-EU16A	Smart wall socket (EU-type) * Network: Zigbee/WIFI for your option * Max power: 3000W * Working current: 16A * Rated frequency: 60Hz * Working voltage: AC110V/250 * Material: ABS flame retarding polymer * Plug Standard: EU	Sample: \$11.57 10-50pcs: \$11.50 51-100 pcs: \$11.00 101-500 pcs: \$10.57	

18		WIFI-EU16A	<ul style="list-style-type: none"> * Power consuming: <0.3W * Working temperature: -20 ~ 45°C (-4 ~ 113°F) * Working Humidity: ≤80% * Radio signal power: 1mW * Radio rate: 30 meter indoor * Product weight: 201g * Product dimension: 11*10*5 	<p>Sample: \$10.80 10-50pcs: \$10.70 51-100 pcs: \$10.60 101-500 pcs: \$10.50</p>	
19		GS-WIFI-Y-EU-1U1C	<p>WiFi Type-C USB wall socket with 20W (EU-type)</p> <ul style="list-style-type: none"> * Network: zigbee 3.0 * Color: White * Input power: AC100-240V * Working temperature: -20~45°C * Rated frequency: 50/60Hz * Material: ABS flame retarding polymer * Plug Standard: EU standard * USB-A: DCSV/3A, 9V/2A, 12V/1.5A; * USB-B: DCSV/3A, 9V/2.2A, 12V/1.5A * USB-A: USB-C: 5V/3.4A (MAX) * Working temperature: -20 ~ 45°C (-4 ~ 113°F) * Working Humidity: ≤80% * Radio signal power: 1mW * Radio rate: 30 meter indoor * Product weight: 161g * Product dimension: 11*10*5 	<p>Sample: \$15.82 10-50pcs: \$15.50 51-100 pcs: \$15.35 101-500 pcs: \$15.20</p>	
20		GS-WIFI-PW732-E	<p>Maximum voltage: 230V~50HZ,10A/16A Maximum power: consumption 3680W Standby power 0.1W Working temperature -20~50°C Protection device overload protection/surge protection Wireless network standard 802.11 b/g/n Wireless frequency 2.4GHz Color white (color customization quantity 3000/piece)</p>	<p>Sample: \$4.9 10-50pcs: \$4.8 51-100 pcs: \$4.7 101-500 pcs: \$4.6</p>	Product size 52*52*85.5mm Color box size 55*55*90mm Outer box size 57.5*29*28.5cm
21		GS-WIFI-732-UK	<p>Maximum voltage: 230V~50HZ,10A/16A Maximum power: consumption 3680W Standby power 0.1W Working temperature -20~50°C Protection device overload protection/surge protection Wireless network standard 802.11 b/g/n Wireless frequency 2.4GHz Color white (color customization quantity 3000/piece)</p>	<p>Sample: \$4.9 10-50pcs: \$4.8 51-100 pcs: \$4.7 101-500 pcs: \$4.6</p>	Product size 52*52*85.5mm Color box size 55*55*90mm Outer box size 57.5*29*28.5cm
22		GS-WIFI-734-US	<p>Maximum voltage: 110V~50HZ,10A/16A Maximum power: consumption 3680W Standby power 0.1W Working temperature -20~50°C Protection device overload protection/surge protection Wireless network standard 802.11 b/g/n Wireless frequency 2.4GHz Color white (color customization quantity 3000/piece)</p>	<p>Sample: \$3.6 10-50pcs: \$3.5 51-100 pcs: \$3.4 101-500 pcs: \$3.3</p>	Product size 52*52*85.5mm Color box size 55*55*90mm Outer box size 57.5*29*28.5cm
23		WK-US2U-WH-EN	<p>Number of holes 2 digits Number of jacks: 3 holes Number of USB ports: 1 full length: wireless switch mode: sub-control Rated current: 15A 3C rated voltage range: Above 50V 440V and below Product Series: American standard 2 plug + USB Rated voltage: AC220V Rated frequency: 60Hz rated power: Single 1500W Total 2500W Inductive load less than 2000W</p>	<p>USB output parameters: 5V 1A Support system: Android 4.4 or iOS9.0 or above wireless connection: wifi IEEE 802.11 b/g/n 2.4GHz Support third-party applications: Alexa special function: Voice control function Color: White shell material: ABS Conductor material: Tin Phosphor Bronze</p> <p>Sample: \$11.50 10-50pcs: \$11.30 51-100 pcs: \$11.00 101-500 pcs: \$10.90</p>	Product Size: 125*60*42.3mm Color box size: 138*104*60mm QTY: 50PCS/CSTN MEANS: 53*29*31.5cm Gross Weight: 14KG
24		Zigbee-US15A	<p>Number of holes 2 digits Number of jacks: 3 holes Number of USB ports: 1 full length: wireless switch mode: sub-control Rated current: 15A 3C rated voltage range: Above 50V 440V and below Product Series: American standard 2 plug + USB Rated voltage: AC220V Rated frequency: 60Hz rated power: Single 1500W Total 2500W Inductive load less than 2000W</p>	<p>MOQ: 500pcs to start</p>	
25		WIFI-301-AP	<p>* Material: anti-fire ABS Material materials * Rated power: 30W Type-C Input: 110~240V ~ 60Hz 15A 1875W; USB-C Output: 5V ~ 3A/9V ~ 3A/15V ~ 2A/20V ~ 1.5A; USB-A Output: 5V ~ 2.4A Max (2.4A Max Per Port); * Working current: 10A AC220~240V 50Hz 2000W * Versatile protection on all outlets * Compact design, lightweight and portable * Neatly arranged plug and ports * Includes built-in 5ft. power cord * 12 months Warranty and lifetime technical support</p>	<p>Sample: \$19.8 10-50pcs: \$19.7 51-100 pcs: \$19.6 101-500 pcs: \$19.3</p>	
26		Zigbee-301-AP			

 <p style="text-align: center;">Shenzhen Golden Security Technology CO.,Ltd Add: 6th Floor, Unit 1, Building 1, Kailifang Plaza, Lianrun Road, Taoyuan Community, Dalang Street, Longhua District, Shenzhen Attns: Lillian Huang T: +86 189 4879 4227 E: lillian@cameralarms.com W: https://alarm-camera.en.alibaba.com</p> <p style="text-align: center;">GM46 series Smart Curtain Motor/Motor track</p>					
No.	Picture	Model	Features	Price (EXW)	Compatible devices
1		GS-CM-2-TWIFI-1.2N	1)Tuya 1.2 N.M WIFI/Zigbee smart curtain motor 2)Rate Torque:1.2N.m 3)Rated Speed:50rpm 5)Working frequency 50/60hz Max load:40KG 6)Rated speed: 50 rpm 8)Rated power: 24 W 10)Running time: 2 min 12)Operating noise<45DB 13)Recommended load bearing < 30KG 14)The length of power supply :70CM	1-199pcs: \$13.8 200pcs: \$13.6 201-1000PCS: \$13.5 1001-3000PCS: \$13.2	Weight: 0.85kg Motor Dimensions: 290*90*70 (mm) Packaging Dimensions: 385*135*95 (mm)   
2		GS-CM-2-Tzigbee-1.2N	1)Tuya 1.2 N.M WIFI smart curtain motor 2)Rate Torque:1.2N.m 3)Rated Speed:50rpm 5)Working frequency 50/60hz Max load:40KG 6)Rated speed: 50 rpm 8)Rated power: 24 W 10)Running time: 2 min 12)Operating noise<45DB 13)Recommended load bearing < 30KG 14)The length of power supply :70CM	1-199pcs: \$13.8 200pcs: \$13.6 201-1000PCS: \$13.5 1001-3000PCS: \$13.2	Weight: 0.85kg Motor Dimensions: 290*90*70 (mm) Packaging Dimensions: 385*135*95 (mm)   
3		GS-XGM-2-1.2N-Twifi	1)Tuya 1.2 N.M WIFI smart curtain motor 2)Rate Torque:1.2N.m 3)Rated Speed:50rpm 4)Input:100-240VAC 5)Working frequency 50/60hz Max load:40KG 6)Rated speed: 50 rpm 7)Operating current: 0.25 A 8)Rated power: 24 W 9)Operating speed: 14 cm/s 10)Running time: 2 min 11)Dimensions: 31*7*5 cm 12)Operating noise<43DB 13)Protection level: IP20 14)The length of power supply 1M	1-199pcs: \$16.8 200pcs: \$16.5 201-1000PCS: \$15.9 1001-3000PCS: \$15.8	Weight: 0.85kg Motor Dimensions: 290*90*70 (mm) Packaging Dimensions: 385*135*95 (mm)   
4		GS-XGM-2-1.2N-TZigbee	1)Tuya 1.2 N.M WIFI smart curtain motor 2)Rate Torque:1.2N.m 3)Rated Speed:50rpm 4)Input:100-240VAC 5)Working frequency 50/60hz Max load:40KG 6)Rated speed: 50 rpm 7)Operating current: 0.25 A 8)Rated power: 24 W 9)Operating speed: 14 cm/s 10)Running time: 2 min 11)Dimensions: 31*7*5 cm 12)Operating noise<43DB 13)Protection level: IP20 14)The length of power supply 1M	1-199pcs: \$17.5 200pcs: \$17.3 201-1000PCS: \$16.9 1001-3000PCS: \$16.8	Weight: 0.85kg Motor Dimensions: 290*90*70 (mm) Packaging Dimensions: 385*135*95 (mm)   
5		CP-2700-01-GF	Single channel remote control	1-199pcs: \$1.85 200pcs: \$1.83 201-1000PCS: \$1.79	Working with XG series Smart curtain motor
6		CP-2700-02-GF	Dual channel remote control	1-199pcs: \$1.85 200pcs: \$1.83 201-1000PCS: \$1.79	Working with XG series Smart curtain motor
7		vangre-YK001	Single channel remote control	1-199pcs: \$3.66 200pcs: \$3.58 201-1000PCS: \$3.53	Working with XG series Smart curtain motor
8		vangre-YK002	Double channel remote control	1-199pcs: \$3.66 200pcs: \$3.58 201-1000PCS: \$3.53	Working with XG series Smart curtain motor
9		Zigbee curtain motor GS-GM46-ZIG	Draging Start/Stop, Stop in case of obstruction, Electronic Limit, Speed Regulation, Stop Setting At Any Point, Intelligent Route Amending, Dry Contact contral, AC contact Control, Match Code&Reset Without Setting Button, Fabric Traction Identify, Fabric Rbounding Identify, Overload Protection, Runing Overtime Protection 1)AC90V to 240V 50/60Hz 2)Working environment: -5°C~45°C 3)Rated power: 20W 4)Rated torque: 2.0N.m 5)Wireless transmission: Zigbee 6)App application name: Tuya/Smart life APP	1-99pcs: \$19.8 100-499pcs: \$19.2 500-1000pcs: \$18.5	Single package Weight:0.8kg Dimension:35*12*7cm Standard box Packing qty: 25PCS Packing size: 38*38*64CM Packing weight: 21KG
10		wifi curtain motor GS-GM46-WIFI	Draging Start/Stop, Stop in case of obstruction, Electronic Limit, Speed Regulation, Stop Setting At Any Point, Intelligent Route Amending, Dry Contact contral, AC contact Control, Match Code&Reset Without Setting Button, Fabric Traction Identify, Fabric Rbounding Identify, Overload Protection, Runing Overtime Protection 1)AC90V to 240V 50/60Hz 2)Working environment: -5°C~45°C 3)Rated power: 20W 4)Rated torque: 2.0N.m 5)Wireless transmission: Zigbee 6)App application name: Tuya/Smart life APP	1-99pcs: \$19.8 100-499pcs: \$19.2 500-1000pcs: \$18.5	
11		Curtain motor drive head for GM46 motor GM46-82	Curtain motor drive head for GM46 Curtain motor. Wholesale distributors can buy the motor track locally with collocation	Sample : \$1.90 50-200 pcs: \$1.80 200-1K pcs: \$1.70	
12		GS-DJYK01	curtain remote controller for controlling 1 pcs motor version (Compatible with RF433 devices)	(Control 1 pcs motor version) Sample: \$6.5 50-100pcs: \$6.3 101-200 pcs: \$6.1	
13		curtain remote controller for GM46 motor	curtain remote controlling 2 pcs motor version (Compatible with RF433 devices)	(Control 2 pcs motor version) Sample: \$7.5 50-100pcs: \$7.3 101-200 pcs: \$7.1	

14		curtain motor track GS-C	<ul style="list-style-type: none"> Material: aluminum alloy Weight: 14KG or more (depend on its length) Belt: 7pcs of 3X2 molybdenum wire Boom: 304 stainless steel Hanging wheel: 304 stainless steel Weight: 14KG or more (depend on its length) Belt: 7pcs of 3X2 molybdenum wire Boom: 304 stainless steel 	\$7.6/meter	
15		curtain motor track GS-JLS Garris track	<ul style="list-style-type: none"> Material: aluminum alloy Weight: 14KG or more (depend on its length) Belt: 7pcs of 3X2 molybdenum wire Boom: 304 stainless steel Hanging wheel: 304 stainless steel Material: aluminum alloy Weight: 14KG or more (depend on its length) Belt: 7pcs of 3X2 molybdenum wire Boom: 304 stainless steel 	\$7/meter	
16		L track for C-Shape rail	L track for C-Shape rail	Sample: \$8.2 50~100pcs: \$8.1 101~200 pcs: \$7.9	
17		L track for Garris rail	L track for C-Shape rail	Sample: \$8.2 50~100pcs: \$8.1 101~200 pcs: \$7.9	
18		belt for rail	belt for both Garris shape rail and C-shape rail	\$0.36/meter	

GM46 series curtain motor full set with track(C track)

20		GM46-114-Smart curtain kit with 1x Zigbee/WIFI motor+1x 1.14 Meter track+ 1x one-way remote control Zigbee/WIFI-c-shape C-shape Track dimension: 1x50CM, 2x20CM, 1x10CM, rotating box 14CM, extension piece 3CM	\$32.40		
21		GM46-114-Smart curtain kit with 1x Zigbee/WIFI motor+1x 1.14 Meter track+ 1x one-way remote control Zigbee/WIFI-Garris Garris Track dimension: 1x50CM, 2x20CM, 1x10CM, rotating box 14CM, extension piece 3CM	\$27.98		
22		GM46-214-Smart curtain kit with 1x Zigbee/WIFI motor+1x 2.14 Meter track+ 1x one-way remote control Zigbee/WIFI-c-shape C-shape Track dimension: 1x50CM, 2x20CM, 1x10CM, rotating box 14CM, extension piece 3CM	\$35.81		
23		GM46-214-Smart curtain kit with 1x Zigbee/WIFI motor+1x 2.14 Meter track+ 1x one-way remote control Zigbee/WIFI-Garris Garris Track dimension: 1x50CM, 2x20CM, 1x10CM, rotating box 14CM, extension piece 3CM	\$31.59		
24		GM46-314-Smart curtain kit with 1x Zigbee/WIFI motor+1x 3.14 Meter track+ 1x one-way remote control Zigbee/WIFI-c-shape C-shape Track dimension: 1x50CM, 2x20CM, 1x10CM, rotating box 14CM, extension piece 3CM	\$39.26		
25		GM46-314-Smart curtain kit with 1x Zigbee/WIFI motor+1x 3.14 Meter track+ 1x one-way remote control Zigbee/WIFI-Garris Garris Track dimension: 1x50CM, 2x20CM, 1x10CM, rotating box 14CM, extension piece 3CM	\$35.20		
26		GM46-414-Smart curtain kit with 1x Zigbee/WIFI motor+1x 4.14 Meter track+ 1x one-way remote control Zigbee/WIFI-c-shape C-shape Track dimension: 1x50CM, 2x20CM, 1x10CM, rotating box 14CM, extension piece 3CM	\$42.66		
27		GM46-414-Smart curtain kit with 1x Zigbee/WIFI motor+1x 4.14 Meter track+ 1x one-way remote control Zigbee/WIFI-Garris Garris Track dimension: 1x50CM, 2x20CM, 1x10CM, rotating box 14CM, extension piece 3CM	\$38.80		
28		GM46-514-Smart curtain kit with 1x Zigbee/WIFI motor+1x 5.14 Meter track+ 1x one-way remote control Zigbee/WIFI-c-shape C-shape Track dimension: 1x50CM, 2x20CM, 1x10CM, rotating box 14CM, extension piece 3CM	\$46.29		
29		GM46-514-Smart curtain kit with 1x Zigbee/WIFI motor+1x 5.14 Meter track+ 1x one-way remote control Zigbee/WIFI-Garris Garris Track dimension: 1x50CM, 2x20CM, 1x10CM, rotating box 14CM, extension piece 3CM	\$42.43		
30		GM46-614-Smart curtain kit with 1x Zigbee/WIFI motor+1x 6.14 Meter track+ 1x one-way remote control Zigbee/WIFI-c-shape C-shape Track dimension: 1x50CM, 2x20CM, 1x10CM, rotating box 14CM, extension piece 3CM	\$49.61		
31		GM46-614-Smart curtain kit with 1x Zigbee/WIFI motor+1x 6.14 Meter track+ 1x one-way remote control Zigbee/WIFI-Garris Garris Track dimension: 1x50CM, 2x20CM, 1x10CM, rotating box 14CM, extension piece 3CM	\$46.04		
32		GM46-714-Smart curtain kit with 1x Zigbee/WIFI motor+1x 7.14 Meter track+ 1x one-way remote control Zigbee/WIFI-c-shape C-shape Track dimension: 1x50CM, 2x20CM, 1x10CM, rotating box 14CM, extension piece 3CM	\$54.72		
33		GM46-714-Smart curtain kit with 1x Zigbee/WIFI motor+1x 7.14 Meter track+ 1x one-way remote control Zigbee/WIFI-Garris Garris Track dimension: 1x50CM, 2x20CM, 1x10CM, rotating box 14CM, extension piece 3CM	\$49.65		
34		GM46-814-Smart curtain kit with 1x Zigbee/WIFI motor+1x 8.14 Meter track+ 1x one-way remote control Zigbee/WIFI-c-shape C-shape Track dimension: 1x50CM, 2x20CM, 1x10CM, rotating box 14CM, extension piece 3CM	\$58.34		
35		GM46-814-Smart curtain kit with 1x Zigbee/WIFI motor+1x 8.14 Meter track+ 1x one-way remote control Zigbee/WIFI-Garris Garris Track dimension: 1x50CM, 2x20CM, 1x10CM, rotating box 14CM, extension piece 3CM	\$53.26		
36		zigbee curtain motor ZIGBEE-DJ01	1.Easy to control Curtain via mobile APP/ scene switch panel and echo 2.Support manual sensing function 3.High quality motor configuration 4.Electronic Memory Limit Function 5.Resistance and Stop Function 6.Rated torque: 1.5Nm 7.Rated speed: 120rpm 8.Curtain line retracting speed: 12cm/s	Sample : \$28 50~200 pcs: \$27 200~1K pcs: \$26	MOQ:1 unit 01.7.110
37		wifi curtain motor WIFI-DJ01		Sample : \$28 50~200 pcs: \$27 200~1K pcs: \$26	MOQ:1 unit 01.7.40
38		Zigbee-DJ02	The Smart curtain kit include: ①zigbee Smart curtain motor ②retractable rail (2.45-4.5M) ③Remote controller*1pcs Features: 1. New ultra-quiet architecture design, truly silent operation 2. Ultra-small size, large torque 3. High-grade thickened piano paint process	sample : \$53 50~200 pcs:\$52 200~1K pcs:\$50	Tips: This set has a long track, and it is recommended to ship by sea. Because international express and air freight will charge an extra fee of USD140 for lengthening.

39 Smart Curtain Kit (retractable track)

length adjustable

WIFI-DJ02

4. The second gear speed is adjustable
5. Fabric curtain automatic repair
6. Over voltage, over current protection
7. Support hotel plug-in card power/dry contact/485 control mode
①Torque: 1.2Nm ②Voltage: 100~240V ③Weight: 50KG
④Rated speed: 80-120 (rpm) ⑤Opening/closing speed (cm/s)

sample : \$52
50~200 pcs:\$51
200~1K pcs:\$50

40 GM46 5-cable Electric curtain motor(work with curtain switch/Curtain switch module to be smart)

Five-core wire connection: AC90~220V electrical control can be achieved, regardless of whether the AC90~220V electrical control wire is electrified or not, it can be achieved by remote control, dry contact control and hand-pull start function.
Note: Electrical control wire voltage AC90~240V, 50/60HZ
When the red wire is connected, the black wire is disconnected, the motor is rotating; when the black wire is connected, the red wire is disconnected, the motor is reversing.
1)Working environment: -5°C~45°C
2)Rated power: 20W
3)Rated torque: 2.0N.m
4)Support connecting with smart curtain switch/smart curtain module to be smart

1-99 pcs: \$15.4
100-499 pcs:\$14.85
500-1000pcs: \$14.52

41 GS-GM46-5X

Single package
Weight:0.8kg
Dimension:35*12*7cm
Standard box
Packing qty: 25PCS
Packing size: 38*38*64CM
Packing weight: 21KG

42 5-cable Electric curtain motor

Wiring Diagram

43 (EU standard)smart curtain switch GS-WS-EU-C (EU standard)

European/UK/GB Wifi touch curtain switch
1. Mobile phone APP control
2. Smart speaker voice control
3. Automation scene linkage WIFI + RF433

44 US standard Wifi touch curtain switch GS-WS-US-C (USA standard)

USA standard Wifi touch curtain switch
1. Mobile phone APP control
2. Smart speaker voice control
3. Automation scene linkage WIFI + RF433

45 5-cable Electric motor wall switches

Hidden Zigbee+RF Smart Curtain Switch

1. Small size, hidden in the switch box
2. The traditional switch and the smart switch operate independently
3. Do not interfere with each other
4. With RF433 function, it can be controlled with remote control
Input voltage: 90-250V AC 50/60HZ Maximum power: 500W

Voltage: AC110-240V 50/60Hz
Max. Load: LED 250W 3A
Operation frequency: 2.412GHZ-4.484GHz
Operation temp.: -10 °C~+40°C
Operation range: less then 100m
Dims(WxDxH): 39.2*39.2*18mm
IP rating: IP20
Networking: Zigbee 3.0

1-49 pcs: \$10.1
50-100pcs: \$10
101-200 pcs: \$9.9
200-1K pcs: \$9.8
1K-5K pcs: \$9.7

46 5-cable Electric motor Switch modules

GS-zigbee-CU01-Curtain

Voltage: AC110-240V 50/60Hz
Max. Load: LED 250W 2x3A
Operation frequency: 2.412GHZ-4.484GHz
Operation temp.: -10 °C~+40°C
Operation range: less then 100m
Dims(WxDxH): 39.2*39.2*18mm
IP rating: IP20
Networking: Zigbee 3.0

1-199pcs: \$8.80
200pcs: \$8.50
201-1000PCS: \$8.20
1001-3000PCS: \$7.90

47 GS-zigbee-CU02-Curtain

Single weight: 54g
Size: 5.9*5.3*2.8cm
FCL weight: 17.2kg
FCL size: 36.5*28*28.5cm
300 packs

1-199pcs: \$9.90
200pcs: \$9.60
201-1000PCS: \$9.30
1001-3000PCS: \$9.10

48 XG series Smart curtain motor

Standard version

49 GS- CM-2-TWIFI-1.2N

1)Tuya 1.2 N.M WIFI/Zigbee smart curtain motor
2)Rate Torque:1.2N.m
3)Rated Speed:50rpm
4)Input:100-240VAC
5)Working frequency 50/60hz Max load:40KG
6)Rated speed: 50 rpm
7)Operating current: 0.25 A
8)Rated power: 24 W
9)Operating speed: 14 cm/s
10)Running time: 2 min
11)Dimensions: 31*7*5 cm
12)Operating noise<45DB
13)Protection level: IP20
14)The length of power supply :70CM

1-199pcs: \$13.8
200pcs: \$13.6
201-1000PCS: \$13.5
1001-3000PCS: \$13.2

50 GS- CM-2-Tzigbee-1.2N

1)Tuya 1.2 N.M WIFI smart curtain motor 2)Rate Torque:1.2N.m
3)Rated Speed:50rpm 4)Input:100-240VAC
5)Working frequency 50/60hz Max load:40KG
6)Rated speed: 50 rpm 7)Operating current: 0.25 A
8)Rated power: 24 W 9)Operating speed: 14 cm/s
10)Running time: 2 min 11)Dimensions: 31*7*5 cm
12)Operating noise<43DB 13)Protection level: IP20
13)Recommended load bearing < 30KG
14)The length of power supply 1M

1-199pcs: \$16.8
200pcs: \$16.5
201-1000PCS: \$15.9
1001-3000PCS: \$15.8

51 GS-XGM-2-1.2N-Twif

1)Tuya 1.2 N.M WIFI smart curtain motor 2)Rate Torque:1.2N.m
3)Rated Speed:50rpm 4)Input:100-240VAC
5)Working frequency 50/60hz Max load:40KG
6)Rated speed: 50 rpm 7)Operating current: 0.25 A
8)Rated power: 24 W 9)Operating speed: 14 cm/s
10)Running time: 2 min 11)Dimensions: 31*7*5 cm
12)Operating noise<43DB 13)Protection level: IP20
13)Recommended load bearing < 30KG
14)The length of power supply 1M

1-199pcs: \$17.5
200pcs: \$17.3
201-1000PCS: \$16.9
1001-3000PCS: \$16.8

52 GS-XGM-2-1.2N-TZigbee

1)Tuya 1.2 N.M WIFI smart curtain motor 2)Rate Torque:1.2N.m
3)Rated Speed:50rpm 4)Input:100-240VAC
5)Working frequency 50/60hz Max load:40KG
6)Rated speed: 50 rpm 7)Operating current: 0.25 A
8)Rated power: 24 W 9)Operating speed: 14 cm/s
10)Running time: 2 min 11)Dimensions: 31*7*5 cm
12)Operating noise<43DB 13)Protection level: IP20
13)Recommended load bearing < 30KG
14)The length of power supply 1M


1-199pcs: \$17.5
200pcs: \$17.3
201-1000PCS: \$16.9
1001-3000PCS: \$16.8



53 CP-2700-01-GF Single channel remote control

1-199pcs: \$1.85
200pcs: \$1.83
201-1000PCS: \$1.79

tuya
works with the Google Assistant
works with Amazon Alexa

Working with XG series Smart curtain motor

54		CP-2700-02-GF Dual channel remote control	1-199pcs: \$1.85 200pcs: \$1.83 201-1000PCS: \$1.79	Working with XG series Smart curtain motor
55		vangre-YK001 Single channel remote control	1-199pcs: \$3.66 200pcs: \$3.58 201-1000PCS: \$3.53	Working with XG series Smart curtain motor
56		vangre-YK002 Double channel remote control	1-199pcs: \$3.66 200pcs: \$3.58 201-1000PCS: \$3.53	Working with XG series Smart curtain motor
Smart Tubular motors for use with rolling /shutters				
58		AM25-1.2/30-Zigbee 25 ZIGBEE tubular motor Dc motor, built-in lithium battery Diameter: 25 mm Torque: 1.2 N RPM: 30	Sample: \$49 50-200 pcs: \$48 200-1K pcs: \$47	Tips: Powered by a built-in 7.4V rechargeable battery.
59		AM25-1.2/25-MEL-PW-WiFi 25 built-in switching power supply tubular motor (direct power supply) Tuya WiFi version	Sample: \$38.5 50-200 pcs: \$35.8 200-1K pcs: \$32.5	Tips: Powered by a built-in 7.4V rechargeable battery.
60		AM25A-1/25-ES-EZ-Zigbee 25 tubular smart motor (built-in module) Tuya ZIGBEE module (lithium battery) Tuya Zigbee version	Sample: \$42.5 50-200 pcs: \$41.5 200-1K pcs: \$39.5	Fits well to 38mm tube, and the tube is not included in the package. 
61		AM25A-1/25-ES-E-MT-Matter 25 tubular smart motor (built-in module) Tuya MATTER module (lithium battery)	Sample: \$44.5 50-200 pcs: \$43.5 200-1K pcs: \$41.5	
Smart Shutter motor				
62		AC123-01	Hand-held 01-Channel Emitter 1)Battery type: 3V CR2032 2)Transmitting Current:<18mA 3)Transmitting Power:<10mW 4)Frequency:433mhz/868mhz 5)RF modulation Mode:ASK/FSK 6)Working tem:-20°C~55°C	Sample: \$4.6 50-200 pcs: \$4.55 200-1K pcs: \$4.45
63		AC123-02	Hand-held 02-Channel Emitter 1)Battery type: 3V CR2032 2)Transmitting Current:<18mA 3)Transmitting Power:<10mW 4)Frequency:433mhz/868mhz 5)RF modulation Mode:ASK/FSK 6)Working tem:-20°C~55°C	Sample: \$4.95 50-200 pcs: \$4.92 200-1K pcs: \$4.88
64		AC123-06	Hand-held 06-Channel Emitter 1)Battery type: 3V CR2032 2)Transmitting Current:<18mA 3)Transmitting Power:<10mW 4)Frequency:433mhz/868mhz 5)RF modulation Mode:ASK/FSK 6)Working tem:-20°C~55°C	Sample: \$5.78 50-200 pcs: \$5.77 200-1K pcs: \$5.76
65		AC123-16	Hand-held 66-Channel Emitter 1)Battery type: 3V CR2032 2)Transmitting Current:<18mA 3)Transmitting Power:<10mW 4)Frequency:433mhz/868mhz 5)RF modulation Mode:ASK/FSK 6)Working tem:-20°C~55°C	Sample: \$7.39 50-200 pcs: \$7.28 200-1K pcs: \$7.2
66		35S-10N/17-Zigbee ①Torque: 10Nm ②Voltage: 230V 50Hz ③Rated speed:17/r/min ④0.5UF/450V ⑤146W ⑥0.64A ⑦S2:4min ⑧IP44 waterproof ⑨Diameter:35mm Wireless protocol :Zigbee3.0 IEEE 802.15.4	Sample: \$42.5 50-200 pcs: \$40 200-1K pcs: \$38 Negotiable price	
67		25S-1.1N/17-Zigbee ①Torque: 1.1Nm ②Voltage: 230V 50Hz ③Rated speed:17/r/min ④0.5UF/450V ⑤146W ⑥0.64A ⑦S2:4min ⑧IP44 waterproof ⑨Diameter:25mm Wireless protocol :Zigbee3.0 IEEE 802.15.4	Sample: \$42.5 50-200 pcs: \$40 200-1K pcs: \$38 Negotiable price	
68		35S-10N/17-Wi-Fi ①Torque: 10Nm ②Voltage: 230V 50Hz ③Rated speed:17/r/min ④0.5UF/450V ⑤146W ⑥0.64A ⑦S2:4min ⑧IP44 waterproof ⑨Diameter:35mm WiFi: 2.4GHz IEEE 802.11bg/n	Sample: \$39.5 50-200 pcs: \$39 200-1K pcs: \$35.5 Negotiable price	
69		25S-1.1N/17-Wi-Fi ①Torque: 1.1Nm ②Voltage: 230V 50Hz ③Rated speed:17/r/min ④0.5UF/450V ⑤146W ⑥0.64A ⑦S2:4min ⑧IP44 waterproof ⑨Diameter:25mm WiFi: 2.4GHz IEEE 802.11bg/n	Sample: \$39.5 50-200 pcs: \$39 200-1K pcs: \$38.5 Negotiable price	
70		LC291	Remote controller with display for shutter motor-15channel	Sample: \$6.6 50-200 pcs: \$6.5 200-1K pcs: \$6.4
71		LC271	Remote controller for shutter motor-1channel	Sample: \$4.7 50-200 pcs: \$4.6 200-1K pcs: \$4.5
Robot curtain motor				
73		GS-Zigbee -RBO1-A 1.Remote Control: Control your curtains anytime, anywhere via smartphone. 2.Voice Control: Operate your curtains with simple voice commands. 3.Light Sensor: Automatically adjust curtains based on light intensity. 4.Long Battery Life: Operate for up to four months. 5.Smart Linkage: Seamlessly integrate with other smart home devices.	Technical Specifications: ①Torque: 10Nm ②Voltage: 230V 50Hz ③Rated speed:17/r/min ④0.5UF/450V ⑤146W ⑥0.64A ⑦S2:4min ⑧IP44 waterproof ⑨Diameter:35mm Wireless protocol :Zigbee3.0 IEEE 802.15.4	Sample: \$29.5 50-200 pcs: \$29 200-1K pcs: \$28

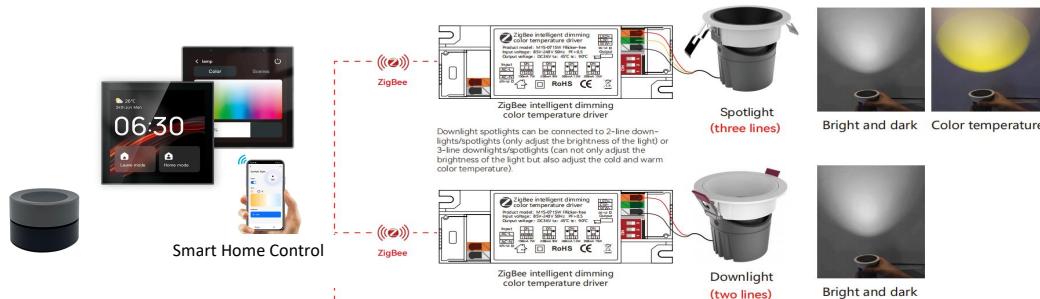
74		GS-RB01-BEL Smart curtain robot	TECHNICAL SPECIFICATIONS: Dimension: 160x40 mm Wireless protocol: Zigbee 3.0 Battery type: 3FAA batteries 1.5V Rated current: 1.5A Rated power: 0.75W Output speed: 120°/min Moving speed: 17cm/s Working temperature: 0°C~40°C Working humidity: 0~95%RH without condensation Maximum weight of curtains that can be pushed: 8kg		Sample: \$27.8 50~200 pcs: \$27 200~1K pcs: \$26.8
75		GS-RB01-L Roman pole accessories	TECHNICAL SPECIFICATIONS: Product size: 152*81*75mm Voltage: 10V Power: 4W Charging current: 5V/1A Charging port: Type C Standby power consumption: 180UA Communication method: Bluetooth/wifi Battery: built-in 4000mA lithium battery Speed: 10 seconds/meter Usage time: >6 months Control distance: 20 meters Application track: Roman rod track Material: ABS+PC Packaging: 1 piece/box, size: 210*168*72mm, 0.7kg/box 20 pieces/carton, size: 43.5*35*38.5cm Carton gross weight: 15kg		Sample: \$4.9 50~200 pcs: \$4.85 200~1K pcs: \$4.8
76		Roman rod single opening GS-1668-1 Bluetooth	WiFi/Zigbee/Bluetooth Tuya App remote control Curtain Robot Product size: 152*81*75mm Voltage: 10V Power: 4W Charging current: 5V/1A Charging port: Type C Standby power consumption: 180UA Communication method: Bluetooth/wifi Battery: built-in 4000mA lithium battery Speed: 10 seconds/meter Usage time: >6 months Control distance: 20 meters Application track: Roman rod track Material: ABS+PC Packaging: 1 piece/box, size: 210*168*72mm, 0.7kg/box 20 pieces/carton, size: 43.5*35*38.5cm Carton gross weight: 15kg		Roman rod, Bluetooth version Sample: \$29.8 50~200 pcs: \$29.5 200~1K pcs: \$29.3
77		Roman rod double opening GS-1668-1 Zigbee	WiFi/Zigbee/Bluetooth Tuya App remote control Curtain Robot Product size: 152*81*75mm Voltage: 10V Power: 4W Charging current: 5V/1A Charging port: Type C Standby power consumption: 180UA Communication method: Bluetooth/wifi Battery: built-in 4000mA lithium battery Speed: 10 seconds/meter Usage time: >6 months Control distance: 20 meters Application track: Roman rod track Material: ABS+PC Packaging: 1 piece/box, size: 210*168*72mm, 0.7kg/box 20 pieces/carton, size: 43.5*35*38.5cm Carton gross weight: 15kg		Roman rod, Zigbee version Sample: \$33.9 50~200 pcs: \$32.6 200~1K pcs: \$32.2
78		Roman lever double opening GS-1668-1 WiFi	Double control Tuya App/remote control Curtain Robot: 152*81*75mm*2PCS Voltage: 10V Power: 4W*2PCS Charging current: 5V/1A Charging port: Type C Standby power consumption: 180UA Communication method: Bluetooth/wifi Battery: built-in 4000mA lithium battery Speed: 10 seconds/meter Operation time: >6 months Control distance: 20 meters Application Track: Roman rod track Material: ABS+PC Packaging: 2 pieces/box, size: 282*86*178, 1.2kg/set 20 sets/carton, size: 58*37.5*46cm, carton gross weight: 25kg		Roman rod, WiFi version Sample: \$33.8 50~200 pcs: \$32.6 200~1K pcs: \$32.2
79		Single T/U LY-1668-3 Bluetooth	Control method: Tuya App/remote control Product size: 118*87*62mm Voltage: 10V Power: 4W Charging current: 5V/1A Charging port: Type C Standby power consumption: 180UA Communication method: Bluetooth/wifi Battery: built-in 4000mA lithium battery Speed: 10 seconds/meter Operation time: >6 months Control distance: 20 meters		Bluetooth version Sample: \$29.8 50~200 pcs: \$29.5 200~1K pcs: \$29.3
80		Single T/U LY-1668-2 Zigbee	Control method: Tuya App/remote control Product size: 118*87*62mm Voltage: 10V Power: 4W*2PCS Charging current: 5V/1A Charging port: Type C Standby power consumption: 180UA Communication method: Bluetooth/wifi Battery: built-in 4000mA lithium battery Speed: 10 seconds/meter Operation time: >6 months Control distance: 20 meters		Zigbee version Sample: \$33.9 50~200 pcs: \$32.6 200~1K pcs: \$32.2
81		Single T/U LY-1668-3 WiFi	Control method: Tuya App/remote control Product size: 118*87*62mm Voltage: 10V Power: 4W*2PCS Charging current: 5V/1A Charging port: Type C Standby power consumption: 180UA Communication method: Bluetooth/wifi Battery: built-in 4000mA lithium battery Speed: 10 seconds/meter Operation time: >6 months Control distance: 20 meters		WiFi version Sample: \$33.9 50~200 pcs: \$32.6 200~1K pcs: \$32.2
82		Double opening T/U LY-1668-4 Bluetooth	Control method: Tuya App/remote control Size: 118*87*62mm*2PCS Voltage: 10V Power: 4W*2PCS Charging current: 5V/1A Charging port: Type C Power consumption: 180UA Communication method: Bluetooth/wifi Battery: built-in 4000mA lithium battery Speed: 10 seconds/meter Operation time: >6 months Control distance: 20 meters		Bluetooth version Sample: \$55 50~200 pcs: \$54.5 200~1K pcs: \$54
83		Double opening T/U LY-1668-4 Zigbee	Control method: Tuya App/remote control Size: 118*87*62mm*2PCS Voltage: 10V Power: 4W*2PCS Charging current: 5V/1A Charging port: Type C Power consumption: 180UA Communication method: Bluetooth/wifi Battery: built-in 4000mA lithium battery Speed: 10 seconds/meter Operation time: >6 months Control distance: 20 meters		Zigbee version Sample: \$59.5 50~200 pcs: \$58.5 200~1K pcs: \$58
84		Double opening T/U LY-1668-4 WiFi	Control method: Tuya App/remote control Size: 118*87*62mm*2PCS Voltage: 10V Power: 4W*2PCS Charging current: 5V/1A Charging port: Type C Power consumption: 180UA Communication method: Bluetooth/wifi Battery: built-in 4000mA lithium battery Speed: 10 seconds/meter Operation time: >6 months Control distance: 20 meters		WiFi version Sample: \$33.9 50~200 pcs: \$32.6 200~1K pcs: \$32.2
85		Double opening T/U LY-1668-4 Bluetooth	Control method: Tuya App/remote control Size: 118*87*62mm*2PCS Voltage: 10V Power: 4W*2PCS Charging current: 5V/1A Charging port: Type C Power consumption: 180UA Communication method: Bluetooth/wifi Battery: built-in 4000mA lithium battery Speed: 10 seconds/meter Operation time: >6 months Control distance: 20 meters		Bluetooth version Sample: \$55 50~200 pcs: \$54.5 200~1K pcs: \$54
86		Double opening T/U LY-1668-4 Zigbee	Control method: Tuya App/remote control Size: 118*87*62mm*2PCS Voltage: 10V Power: 4W*2PCS Charging current: 5V/1A Charging port: Type C Power consumption: 180UA Communication method: Bluetooth/wifi Battery: built-in 4000mA lithium battery Speed: 10 seconds/meter Operation time: >6 months Control distance: 20 meters		Zigbee version Sample: \$59.5 50~200 pcs: \$58.5 200~1K pcs: \$58
87		Single-opening 3-in-1 universal model (Roman rod/T/U) 1668-5 Bluetooth	Control method: Tuya App/remote control Size: 112.6*80.4*53MM*2PCS Voltage: 10V Power: 4W*2PCS Charging current: 5V/1A Charging port: Type C Power consumption: 180UA Communication method: Bluetooth/wifi Battery: built-in 4000mA lithium battery Speed: 10 seconds/meter Operation time: >6 months Control distance: 20 meters		Bluetooth version Sample: \$30.5 50~200 pcs: \$30 200~1K pcs: \$29.7
88		Single-opening 3-in-1 universal model (Roman rod/T/U) 1668-5 WiFi	Control method: Tuya App/remote control Size: 112.6*80.4*53MM*2PCS Voltage: 10V Power: 4W*2PCS Charging current: 5V/1A Charging port: Type C Power consumption: 180UA Communication method: Bluetooth/wifi Battery: built-in 4000mA lithium battery Speed: 10 seconds/meter Operation time: >6 months Control distance: 20 meters		WiFi version Sample: \$34.9 50~200 pcs: \$33.6 200~1K pcs: \$33.2
89		Single-opening 3-in-1 universal model (Roman rod/T/U) 1668-5 Zigbee	Control method: Tuya App/remote control Size: 112.6*80.4*53MM*2PCS Voltage: 10V Power: 4W*2PCS Charging current: 5V/1A Charging port: Type C Power consumption: 180UA Communication method: Bluetooth/wifi Battery: built-in 4000mA lithium battery Speed: 10 seconds/meter Operation time: >6 months Control distance: 20 meters		Zigbee version Sample: \$34.9 50~200 pcs: \$33.6 200~1K pcs: \$33.2
90		Double-opening 3-in-1 universal model (Roman rod/T/U) 1668-5 WiFi	Control method: Tuya App/remote control Size: 112.6*80.4*53MM*2PCS Voltage: 10V Power: 4W*2PCS Charging current: 5V/1A Charging port: Type C Power consumption: 180UA Communication method: Bluetooth/wifi Battery: built-in 4000mA lithium battery Speed: 10 seconds/meter Operation time: >6 months Control distance: 20 meters		WiFi version Sample: \$34.9 50~200 pcs: \$33.6 200~1K pcs: \$33.2
91		Double-opening 3-in-1 universal model (Roman rod/T/U) 1668-6 Bluetooth	Control method: Tuya App/remote control Size: 112.6*80.4*53MM*2PCS Voltage: 10V Power: 4W*2PCS Charging current: 5V/1A Charging port: Type C Power consumption: 180UA Communication method: Bluetooth/wifi Battery: built-in 4000mA lithium battery Speed: 10 seconds/meter Operation time: >6 months Control distance: 20 meters		Bluetooth version Sample: \$57 50~200 pcs: \$56.5 200~1K pcs: \$56
92		Double-opening 3-in-1 universal model (Roman rod/T/U) 1668-6 Zigbee	Control method: Tuya App/remote control Size: 112.6*80.4*53MM*2PCS Voltage: 10V Power: 4W*2PCS Charging current: 5V/1A Charging port: Type C Power consumption: 180UA Communication method: Bluetooth/wifi Battery: built-in 4000mA lithium battery Speed: 10 seconds/meter Operation time: >6 months Control distance: 20 meters		Zigbee version Sample: \$61.5 50~200 pcs: \$61 200~1K pcs: \$60.5
93		Single-opening 3-in-1 universal model (Roman rod/T/U) 1668-6 WiFi	Control method: Tuya App/remote control Size: 112.6*80.4*53MM*2PCS Voltage: 10V Power: 4W*2PCS Charging current: 5V/1A Charging port: Type C Power consumption: 180UA Communication method: Bluetooth/wifi Battery: built-in 4000mA lithium battery Speed: 10 seconds/meter Operation time: >6 months Control distance: 20 meters		WiFi version Sample: \$61.5 50~200 pcs: \$61 200~1K pcs: \$60.5
94		Blind motor LY-1690-2 WiFi	Control method: Tuya App/remote control size: 167*43*37.5 MM Power: 4W Voltage/current: 5V/2A Port: Type C Standby power consumption: 25mA Communication method: WiFi Power supply: 5V/2A Speed: 3.6CM/S Application track: blinds and roller blinds		WiFi version Sample: \$31.9 50~200 pcs: \$30.5 200~1K pcs: \$29.6
95		Blind motor LY-1690-3 Zigbee	Control method: Tuya App/remote control Size: 210*168*72mm, 0.62kg/box 20 pieces/carton, size: 43.2*41*40.5cm Carton gross weight: 13.4kg		Zigbee version Sample: \$31.9 50~200 pcs: \$30.5 200~1K pcs: \$29.6
96		Gateway LY-122 Bluetooth version	Control method: Tuya App/remote control Size: 167*43*37.5 MM Power: 4W Voltage/current: 5V/2A Port: Type C Standby power consumption: 25mA Communication method: WiFi Power supply: 5V/2A Speed: 3.6CM/S Application track: blinds and roller blinds		Bluetooth version Sample: \$8.6 50~200 pcs: \$7.9 200~1K pcs: \$7.6


97		The bluetooth gateway is only used for the bluetooth robot, it is not a necessary part. You can only use it if you connect to a Google/Amazon device.	Zigbee version Sample: \$12.8 50~200 pcs: \$12.3 200~1K pcs: \$11.9	 
98		Gateway LY-122 Multimode version	WiFi version Sample: \$14.8 50~200 pcs: \$14.5 200~1K pcs: \$13.9	
Smart Rope pull Blinds motor				
100		GS-LS-WIFI (WiFi version)	1.Timer your schedule via APP to set open or close time for roller shutters 2.Compatible with a variety of shades,blinds,curtains. 3.AC adapter is a must for normal use of the wifi blinds motor with no battery powered 4.Support one mobile phone to control multiple devices or multiple mobile phone to control one device. 5.RF remote control supported as another single control method	Sample : \$38 50~200 pcs: \$37.5 200~1K pcs: \$37
101		GS-LS-ZIG (ZIGBee version)	 VERTICAL BLINDS ROLLER BLINDS ROMAN BLIND ZEBRA BLINDS CURTAIN SHADES VENTILATION BL.	Sample : \$39 50~200 pcs: \$38.5 200~1K pcs: \$38




Shenzhen Golden Security Technology CO.,Ltd
 Add: 6th Floor, Unit 1, Building 1, Kailifang Plaza, Lianrun Road, Taoyuan Community, Dalang Street, Longhua District, Shenzhen
 Attns: Lillian Huang | T: +86 189 4879 4227 | E: lillian@cameralarms.com | W: <https://alarm-camera.en.alibaba.com>








Schematic Diagram of Downlight and Light Strip Dimming




No.	Picture	Model	Features	Price (EXW)	Compatible devices
1		GS-TWD-10W	Embedded downlights work with zigbee drives POTENCIA (W):10W 3000K	Sample: \$3.9 50~200pcs: \$3.8 201~1K pcs: \$3.7	
2		WJ-7W-BWBB Bright white/bright black lamp cup	Power: 7W Lamp Dimensions: Ø85 x H80mm Opening Size: Ø75mm Lamp Color: White Lighting Angle: 24° - 36° Adjustable: Yes Color Temperature: 3000K/4000K/6000K(for option) ONLY CAN CHOOSE THE FIXED TEMPERATURE	OSRAM lamp beads Brightness adjustment	Sample: \$2.39 50~200pcs: \$2.3
3		WJ-7W-BWBB Bright white/bright black lamp cup	Power: 7W Lamp Dimensions: Ø85 x H80mm Opening Size: Ø75mm Lamp Color: White Lighting Angle: 24° - 36° Adjustable: Yes Color Temperature: 3000K/4000K/6000K(for option) ONLY CAN CHOOSE THE FIXED TEMPERATURE	OSRAM lamp beads Brightness adjustment	Sample: \$2.48 50~200pcs: \$2.4
4		WJ-10W-BWBB Matt white/matt black Lamp cup	Power: 10W Lamp Dimensions: Ø85 x H85mm Opening Size: Ø75mm Lamp Color: White Lighting Angle: 24° - 36° Adjustable: Yes Color Temperature: 3000K/4000K/6000K(for option) ONLY CAN CHOOSE THE FIXED TEMPERATURE	OSRAM lamp beads Brightness adjustment	Sample: \$2.58 50~200pcs: \$2.5
5		WJ-10W-BWBB Bright white/bright black lamp cup	Power: 10W Lamp Dimensions: Ø85 x H85mm Opening Size: Ø75mm Lamp Color: White Lighting Angle: 24° - 36° Adjustable: Yes Color Temperature: 3000K/4000K/6000K(for option) ONLY CAN CHOOSE THE FIXED TEMPERATURE	OSRAM lamp beads Brightness adjustment	Sample: \$2.48 50~200pcs: \$2.4
6		TD-7W-W	Power: 7W Lamp Dimensions: Ø85 x H47mm Opening Size: Ø75mm Lamp Color: Available in White or Black Lighting Angle: 120° Adjustable: Not adjustable Fixed Color Temperature: 3000K/4000K/6000K (optional) Color Rendering Index: 95 Lumens: 110 lm/W	OSRAM lamp beads Brightness adjustment	Sample: \$2.12 50~200pcs: \$1.99
7		TD-7W-B	Power: 7W Lamp Dimensions: Ø85 x H47mm Opening Size: Ø75mm Lamp Color: Available in White or Black Lighting Angle: 120° Adjustable: Not adjustable Fixed Color Temperature: 3000K/4000K/6000K (optional) Color Rendering Index: 95 Lumens: 110 lm/W	OSRAM lamp beads Brightness adjustment	Only can adjust the light brightness 
8		TD-10W-W	Power: 10W Lamp Dimensions: Ø90 x H50mm Opening Size: Ø75mm Lamp Color: White Lighting Angle: 120° Adjustable: Not adjustable Fixed Color Temperature: 3000K/4000K/6000K (optional) Color Rendering Index: 95 Lumens: 110 lm/W	OSRAM lamp beads Brightness adjustment	Only can adjust the light brightness 
9		TD-10W-B	Power: 10W Lamp Dimensions: Ø90 x H50mm Opening Size: Ø75mm Lamp Color: White Lighting Angle: 120° Adjustable: Not adjustable Fixed Color Temperature: 3000K/4000K/6000K (optional) Color Rendering Index: 95 Lumens: 110 lm/W	OSRAM lamp beads Brightness adjustment	Only can adjust the light brightness
10		TD-10W-W	Power: 10W Lamp Dimensions: Ø90 x H50mm Opening Size: Ø75mm Lamp Color: White Lighting Angle: 120° Adjustable: Not adjustable Fixed Color Temperature: 3000K/4000K/6000K (optional) Color Rendering Index: 95 Lumens: 110 lm/W	OSRAM lamp beads Brightness adjustment	Only can adjust the light brightness
11		3TD-5W/7W	① Lamp surface size: Φ68*H80mm ② hole size: 55mm ③ Light Angle: 15°24°36° ④ Angle adjustable: adjustable ⑤ Color temperature: 2700K-6500K ⑥ Color rendering index: 95	Sample: \$5.6 50~200pcs: \$5.5 201~1K pcs: \$5.4	01.8.117
12		3TD-10W	① Lamp surface size: Φ90*H105mm ② hole size: 75mm ③ Light Angle: 15°24°36° ④ Angle adjustable: adjustable ⑤ Color temperature: 2700K-6500K ⑥ Color rendering index: 95	Sample: \$5.9 50~200pcs: \$5.8 201~1K pcs: \$5.7	
13		3TD-12W	① Lamp surface size: Φ90*H105mm ② hole size: 75mm ③ Light Angle: 15°24°36° ④ Angle adjustable: adjustable ⑤ Color temperature: 2700K-6500K ⑥ Color rendering index: 95	Sample: \$6.1 50~200pcs: \$5.9 201~1K pcs: \$5.8	
14		3TD-15W	① Lamp surface size: Φ110*H125mm ② hole size: 95mm (diameter) ③ Light Angle: 90°120° ④ brightness: 3000/4000/6000K for option ⑤ product color: white/Black; ⑥ Color rendering index: 95	Sample: \$8.7 50~200pcs: \$8.6 201~1K pcs: \$8.5	
15		3TD-20W	① Lamp surface size: Φ110*H125mm ② hole size: 95mm (diameter) ③ Light Angle: 90°120° ④ brightness: 3000/4000/6000K for option ⑤ product color: white/Black; ⑥ Color rendering index: 95	Sample: \$9.6 50~200pcs: \$9.5 201~1K pcs: \$9.4	
16		Three-wire Spot light (warm and cold color)			

17		XF-5W	① Lamp surface size: Φ63*H68mm ② hole size: 55mm (diameter) ③ Light Angle: 15°~24°~36° ④ Angle adjustable: adjustable ⑤ Color temperature: 2700K-6500K ; ⑥Color rendering index: 95	Sample: \$4.68 50~200pcs: \$4.65 201~1K pcs: \$4.59	
18		XF-7W	① Lamp surface size: Φ85*H71mm ② hole size: 75mm (diameter) ③ Light Angle: 15°~24°~36° ④ Angle adjustable: adjustable ⑤ Color temperature: 2700K-6500K ; ⑥Color rendering index: 95	Sample: \$4.68 50~200pcs: \$4.65 201~1K pcs: \$4.59	
19		XF-10W	① Lamp surface size: Φ85*H76mm ② Hole size: 75mm (diameter) ③ Light Angle: 15°~24°~36° ④ Angle adjustable: adjustable ⑤ Color temperature: 2700K-6500K ; ⑥Color rendering index: 95	Sample: \$4.88 50~200pcs: \$4.85 201~1K pcs: \$4.79	
20		XF-12W	① Lamp surface size: Φ85*H76mm ② Hole size: 75mm (diameter) ③ Light Angle: 15°~24°~36° ④ Angle adjustable: adjustable ⑤ Color temperature: 2700K-6500K ; ⑥Color rendering index: 95	Sample: \$5.58 50~200pcs: \$5.49 201~1K pcs: \$5.38	
21		XF-15W	① Lamp surface size: Φ85*H93mm ② Hole size: 75mm (diameter) ③ Light Angle: 15°~24°~36° ④ Angle adjustable: adjustable ⑤ Color temperature: 2700K-6500K ; ⑥Color rendering index: 95	Sample: \$7.8 50~200pcs: \$7.6 201~1K pcs: \$7.5	
22		XF-20W	① Lamp surface size: Φ85*H99mm ② Hole size: 95mm (diameter) ③ Light Angle: 15°~24°~36° ④ Angle adjustable: adjustable ⑤ Color temperature: 2700K-6500K ; ⑥Color rendering index: 95	Sample: \$10.8 50~200pcs: \$10.6 201~1K pcs: \$10.5	
23		XF-30W	① Lamp surface size: Φ105*H115mm ② Hole size: 95mm (diameter) ③ Light Angle: 15°~24°~36° ④ Angle adjustable: adjustable ⑤ Color temperature: 2700K-6500K ; ⑥Color rendering index: 95	Sample: \$13.8 50~200pcs: \$13.6 201~1K pcs: \$13.5	
24		TD1-10W12W	① Lamp surface size: 102*H52mm ② hole size: 95mm (diameter)③ Light Angle: 90°~120° ④brightness: 3000/4000/6000K for option ⑤product color: white/Black	Sample: \$5.52 50~200pcs: \$5.40 201~1K pcs: \$5.35	
25		TD1-15W	① Lamp surface size: 126*H66mm ② hole size: 120mm (diameter)③ Light Angle: 90°~120° ④Color temperature: 2700K-6500K ⑤product color: white/Black	Sample: \$7.31 50~200pcs: \$7.16 201~1K pcs: \$7.09	
26	Economy - Deep anti-glare downlights (brightness dimming only)	TD1-20W	① Lamp surface size: 126*H66mm ② hole size: 120mm (diameter)③ Light Angle: 90°~120° ④Brightness: 3000/4000/6000K for option ⑤product color: white/Black	Sample: \$8.36 50~200pcs: \$8.20 201~1K pcs: \$8.10	
27		XF-Double-14W (7W*2pcs)	① Lamp surface size: L172*W92*H71mm ② Hole size: L155*W75mm ③ Light Angle: 15°~24°~36° ④ Angle adjustable: adjustable ⑤ Color temperature: 2700K-6500K ; ⑥Color rendering index: 95 ;⑦Color:White;⑧Lumen output: 120 LM/W Note: Electroplated gun black cup plus \$0.9	Sample: \$13.65 50~200pcs: \$13.55 201~1K pcs: \$13.25	
28		XF-Double-20W (10W*2pcs)	① Lamp surface size: L172*W92*H77mm ② Hole size: L155*W75mm ③ Light Angle: 15°~24°~36° ④ Angle adjustable: adjustable ⑤ Color temperature: 2700K-6500K ; ⑥Color rendering index: 95 ;⑦Color:White;⑧Lumen output: 120 LM/W Note: Electroplated gun black cup plus \$0.9	Sample: \$14.56 50~200pcs: \$14.35 201~1K pcs: \$14.25	
29		XF-Double-24W (12W*2pcs)	① Lamp surface size: L172*W92*H77mm ② Hole size: L155*W75mm ③ Light Angle: 15°~24°~36° ④ Angle adjustable: adjustable ⑤ Color temperature: 2700K-6500K ; ⑥Color rendering index: 95 ;⑦Color:White;⑧Lumen output: 120 LM/W Note: Electroplated gun black cup plus \$0.9	Sample: \$15.56 50~200pcs: \$15.35 201~1K pcs: \$15.25	
30		XF-Double-30W (15W*2pcs)	① Lamp surface size: L172*W92*H93mm ② Hole size: L155*W75mm ③ Light Angle: 15°~24°~36° ④ Angle adjustable: adjustable ⑤ Color temperature: 2700K-6500K ; ⑥Color rendering index: 95 ;⑦Color:White;⑧Lumen output: 120 LM/W Note: Electroplated gun black cup plus \$0.9	Sample: \$18.95 50~200pcs: \$18.85 201~1K pcs: \$18.65	
31		XF-Double-40W (20W*2pcs)	① Lamp surface size: L172*W120*H99mm ② Hole size: L205*W100mm ③ Light Angle: 15°~24°~36° ④ Angle adjustable: adjustable ⑤ Color temperature: 2700K-6500K ; ⑥Color rendering index: 95 ;⑦Color:White;⑧Lumen output: 120 LM/W Note: Electroplated gun black cup plus \$0.9	Sample: \$25.66 50~200pcs: \$24.6 201~1K pcs: \$23.85	
32		XF-Double-60W (30W*2pcs)	① Lamp surface size: L270*W140*H123mm ② Hole size: L205*W100mm ③ Light Angle: 15°~24°~36° ④ Angle adjustable: adjustable ⑤ Color temperature: 2700K-6500K ; ⑥Color rendering index: 95 ;⑦Color:White;⑧Lumen output: 120 LM/W Note: Electroplated gun black cup plus \$0.9	Sample: \$39.6 50~200pcs: \$38.6 201~1K pcs: \$37.6	
33	Non-isolated DIP external Zigbee LED downlight/spot light driver	MYS-157	Input Voltage: 35-240V 50Hz PF >0.5 Output: DC36V Ta:45 °C Te:75 °C Product Size: 95*35*25mm Two-color dial switch 7-12W Wireless transmission:Tuya Zigbee	Zigbee intelligent dimming color temperature driver Spotlight Sample: \$3.98 50~200pcs: \$3.96 201~1K pcs: \$3.95	

34	 ZigBee	MYS-218W	<p>It can control the down lamp and spot lamp cold light and warm light constant voltage dimming driver Power: Color Temperature adjustment 7W 9W 12W Input voltage :AC85-245V Output voltage: DC12V-42V Output current: -7W 150mA -9W 200mA 12W 260mA Size MM: 100*36*23</p> 	<p>Sample: \$5.80 50~200pcs: \$5.70 201~1K pcs: \$5.60</p> <p>02.1.012518</p>	
35		MYS-DDQ157	<p>Intelligent Dimming and color temperature adjustment dimming driver Rating:60W Wireless transmission: Zigbee Input: AC85-245V Output: DC36V 2.5A(Max) 50/60HZ, Ta:45°C Te:75°C</p> <p>1pcs DDQ157 60W dimming driver can connect with 6pcs 10W downlights/spotlights</p>	<p>Sample: \$7.9 50~200pcs: \$7.8 201~1K pcs: \$7.7</p>	
36		MYS-2180	<p>Intelligent Dimming and color temperature adjustment dimming driver (Two-color dial switch 15-36W) Maximum connected with 3 pcs 12W downlights/spot lights Input: AC85-245V 50/60HZ, SEC: DC15V-42V PF≥0.9 Ta:45°C Te:75°C Wireless transmission: Zigbee</p>	<p>Sample: \$6.9 50~200pcs: \$6.8 201~1K pcs: \$6.7</p>	
37		GS-XH-EZ03B-Zigbee RGBCW	<p>3-inch Smart 10W RGBCW 5 Cable Light *LED types: 2835 pure white (4 LEDs); 2835 warm white (4 LEDs); 5050 RGB (3 LEDs) Beam angle: 120 degrees LED light source: 10W LED color: RGB + CW (3000K-6500K) Power supply type: IC constant current output</p>	<p>Sample: \$7.50 50~200pcs: \$7.20 201~1K pcs: \$6.9</p>	
38		GS-XH-EZ03B-WiFi RGBCW	<p>Material: Thermally conductive plastic, acrylic diffuser plate Product size: Diameter 8.8CM * Height 4.3CM Opening size: 6.5-7.5CM Packaging box size: 11.5*11.5*6CM Wireless transmission:Tuya Zigbee or Tuya WiFi</p> 	<p>Sample: \$7.50 50~200pcs: \$7.20 201~1K pcs: \$6.9</p>	
39		GS-XH-EZ03.5B-Zigbee RGBCW	<p>3.5-inch Smart 10W RGBCW 5 Cable Light *LED types: 2835 pure white (8 LEDs); 2835 warm white (8 LEDs); 3030 RGB (6 LEDs) Beam angle: 120 degrees LED light source: 15W LED color: RGB + CW (3000K-6500K) Power supply type: IC constant current output</p>	<p>Sample: \$8.00 50~200pcs: \$7.50 201~1K pcs: \$7.00</p>	
40		GS-XH-EZ03.5B-WiFi RGBCW	<p>Material: Thermally conductive plastic, acrylic diffuser plate Product size: Diameter 11.4CM * Height 5.5CM Opening size: 8.5-9.5CM Packaging box size: 11.5*11.5*6CM Wireless transmission:Tuya Zigbee or Tuya WiFi</p>	<p>Sample: \$7.50 50~200pcs: \$7.00 201~1K pcs: \$6.80</p>	
41		RGBCW downlight remote controller	RGBCW downlight remote controller	<p>Sample: \$1.37 50~200pcs: \$1.32 201~1K pcs: \$1.28</p>	
42		MYS-0715W	<p>It can control the down lamp and spot lamp cold light and warm light constant voltage dimming driver Power: Color Temperature adjustment 7W 9W 12W Input voltage :AC85-265V Output voltage: DC21V-36V Output current: 7W 150mA 9W 200mA 12W 260mA Size MM: 100*36*23</p>	<p>Sample: \$5.80 50~200pcs: \$5.70 201~1K pcs: \$5.60</p> <p>02.1.012518</p>	
43		FGD-10W	<p>①Applicable track: Suitable for 20MM width track ②Product Name: Floodlight (Magnetic suction style) ③Size(L300*W22*H25 mm) ④Irradiation angle: 120° ⑤Input voltage: DC48V</p>	<p>Sample: \$10.9 50~200pcs: \$10.6 201~1K pcs: \$10.5</p>	
44		FGD-20W	<p>①Applicable track: Suitable for 20MM width track ②Product Name: Floodlight (Magnetic suction style) ③Size(L600*W22*H25 mm) ④Irradiation angle: 120° ⑤Input voltage: DC48V</p>	<p>Sample: \$13.2 50~200pcs: \$12.9 201~1K pcs: \$12.6</p>	
45		FGD-40W-1.2M	<p>①Applicable track: Suitable for 20MM width track ②Product Name: Floodlight (Magnetic suction style) ③Size(L900*W22*H25 mm) ④Irradiation angle: 120° ⑤Input voltage: DC48V</p>	<p>Sample: \$26.9 50~200pcs: \$26.5 201~1K pcs: \$26.3</p> <p>The track's length is 1.2M, 40W</p>	
46		CXSD-10W	<p>①Applicable track: Suitable for 20mm width track ②Product Name: Spotlight(Magnetic suction style) ③Size:(dia)45*100mm ④Color temperature : 2700-6000K ⑤Irradiation angle: 15°24°36° ⑥Input voltage: DC48V</p>	<p>Sample: \$13.4 50~200pcs: \$13.2 201~1K pcs: \$12.98</p>	
47		CXSD-15W	<p>①Applicable track: Suitable for 20mm width track ②Product Name: Spotlight(Magnetic suction style) ③Size:(dia)45*100mm ④Color temperature : 2700-6000K ⑤Irradiation angle: 15°24°36° ⑥Input voltage: DC48V</p>	<p>Sample: \$15.5 50~200pcs: \$15.3 201~1K pcs: \$14.9</p>	

48	Zigbee Spotlight (Magnetic suction style)	CXSD-20W	<p>①Applicable track: Suitable for 20mm width track ②Product Name: Spotlight(Magnetic suction style) ③Size.(dia)45*1.00mm ④Color temperature : 2700-6000K ⑤Irritation angle : 15°~24°~36° ⑥Input voltage: DC48V</p>	<p>Sample: \$17.7 50~200pcs: \$17.5 201~1K pcs: \$17.3</p>	  
49		GSD-12W	<p>①Applicable track: Suitable for 20MM width track ②Product Name: Grille light (Magnetic suction style) ③Size:L220*W22*H25 ④Color temperature : 2700-6000K ⑤Irritation angle: 24°~36° ⑥Input voltage: DC48V</p>	<p>Sample: \$11.98 50~200pcs: \$11.86 201~1K pcs: \$11.7</p>	  
50		GSD-18W	<p>①Applicable track: Suitable for 20MM width track ②Product Name: Grille light (Magnetic suction style) ③Size:L328*W22*H25 ④Color temperature : 2700-6000K ⑤Irritation angle: 24°~36° ⑥Input voltage: DC48V</p>	<p>Sample: \$12.8 50~200pcs: \$12.5 201~1K pcs: \$12.2</p>	  
51		GSD-24W		<p>Sample: \$14.8 50~200pcs: \$14.5 201~1K pcs: \$14.3</p>	  
52		ZDGSD-12W	<p>①Applicable track: Suitable for 20MM width track ②Product Name: Grille light (Magnetic suction style) ③Size:L230*W22*H100 ④Color temperature : 2700-6000K ⑤Irritation angle: 24°~36° ⑥Input voltage: DC48V</p>	<p>Sample: \$15.5 50~200pcs: \$15.3 201~1K pcs: \$15.1</p>	  
53		ZDGSD-18W	<p>①Applicable track: Suitable for 20MM width track ②Product Name: Grille light (Magnetic suction style) ③Size:L370*W22*H100 ④Color temperature : 2700-6000K ⑤Irritation angle: 24°~36° ⑥Input voltage: DC48V</p>	<p>Sample: \$17.5 50~200pcs: \$17.3 201~1K pcs: \$17.1</p>	  
54		AZGD-20MM-1.8 (thickness 1.8mm)	<p>Installation mode: Slot 35mm Input voltage :DC48V Free splicing type, thickness 1.5mr Four copper wire, The whole meter multiple sales, If choose white color plus \$0.5 The default is one meter, Maximu 2 meters/piece Over 2 meters, we will suggest order multi-pieces.</p>	<p>Hidden type</p>  <p>Sample: \$4.8/meter 50~200pcs: \$4.7/meter 201~1K pcs: \$4.5/meter</p>	 <p>Four installation methods Available to choose from</p>
55		AZGD-20MM-2.0 (thickness 2.0mm)	<p>Installation mode: Slot 35mm Input voltage :DC48V Free splicing type, thickness 2.0mm, Four copper wire, The whole meter multiple sales, If choose white color plus \$0.5 The default is one meter, Maximu 2 meters/piece. Over 2 meters, we will suggest order multi-pieces.</p>	<p>Hidden type</p>  <p>Sample: \$6.5/meter 50~200pcs: \$6.4/meter 201~1K pcs: \$6.3/meter</p>	
56		MZGD-20MM-1.8 (thickness 1.8mm) Exposed style	<p>1.8mm thick, four-wire, 2 large copper + 2 small copper. Sold in 2-meter/3-meter lengths, white color+\$0.5/meter.</p>	<p>Exposed style</p>  <p>Sample: \$5.6/meter 50~200pcs: \$5.4/meter 201~1K pcs: \$5.3/meter</p>	
57		MZGD-20MM-2.0 (thickness 2.0mm) Exposed style	<p>2.0mm thick, four-wire, 4 large copper wires. Sold in 2-meter/3-meter lengths, white color +\$0.5/meter.</p>	<p>Exposed style</p>  <p>Sample: \$6.6/meter 50~200pcs: \$6.4/meter 201~1K pcs: \$6.3/meter</p>	
58		MZ-DZ-LJP	<p>Connection and fixing installation of surface-mounted/hanging magnetic rails Notes:Only surface-mounted/ceiling-mounted magnetic tracks require connecting plates; other magnetic tracks do not.</p>	<p>Sample: \$0.38 50~200pcs: \$0.36 201~1K pcs: \$0.35</p>	
59		DX-1.5M	<p>Suitable for Hoisting type, magnetic track installation Includes 2 suspension wires, screws, fixing connectors, and other accessories.</p>	<p>Sample: \$1.79 50~200pcs: \$1.69 201~1K pcs: \$1.59</p>	
60		DZG-50-100 50-100cm telescopic pole	<p>Ceiling mount with magnetic track installation, includes 1 rod, ceiling plate, screws, fixing connectors, and other accessories.</p>	<p>Sample: \$2.33 50~200pcs: \$2.23 201~1K pcs: \$2.1</p>	
61		DZG-75-150 75-150cm telescopic pole	<p>Ceiling mount with magnetic track installation, includes 1 rod, ceiling plate, screws, fixing connectors, and other accessories.</p>	<p>Sample: \$2.78 50~200pcs: \$2.68 201~1K pcs: \$2.65</p>	

62		CXDY-100W	Input Power: AC180-265V Power: 100W Output voltage: DC48V L200*W22*H45mm	Economy Version	Sample: \$4.78 50~200pcs: \$4.68 201~1K pcs: \$4.55	
63	Magnetic suction lamp power supply	CXDY-200W	Input Power: AC180-265V Power: 200W Output voltage: DC48V L260*W22*H45mm	Economy Version Can carry 80% power	Sample: \$6.97 50~200pcs: \$6.87 201~1K pcs: \$6.77	
64		LUCXD-100W	Input Power: AC180-265V Power: 100W Output voltage: DC48V L235*W22*H45mm	Luxurious Version Can carry 90% power	Sample: \$6.9 50~200pcs: \$6.7 201~1K pcs: \$6.5	
65		LUCXD-200W	Input Power: AC180-265V Power: 200W Output voltage: DC48V L305*W22*H45mm	Luxurious Version Can carry 90% power	Sample: 9.8 50~200pcs: \$9.7 201~1K pcs: \$9.6	
66		KYCXD-100W	Wide voltage range : AC85-265V Power: 100W Output voltage: DC48V L200*W22*H45mm	used with 110V voltage ,US standard Can carry 90% power	Sample: 7.6 50~200pcs: \$7.5 201~1K pcs: \$7.4	
67		KYCXD-200W	Wide voltage range : AC85-265V Power: 200W Output voltage: DC48V	used with 110V voltage ,US standard Can carry 90% power	Sample: 9.9 50~200pcs: \$9.8 201~1K pcs: \$9.7	
68	 R20-1 negative Angle	R20-1-NA		 Ceiling corner connection	Sample: \$3.5 50~200pcs: \$3.4 201~1K pcs: \$3.1	 Google Assistant amazon alexa
69	 R20-1 plane L Angle	R20-1-PA	Magnetic suction lamp track adapter	 Lower wall corner connector	Sample: \$3.5 50~200pcs: \$3.4 201~1K pcs: \$3.1	 Google Assistant amazon alexa
70	 T-shaped corner	R21	T-shaped corner for Magnetic suction lamp track		Sample: \$6.5 50~200pcs: \$6.4 201~1K pcs: \$6.3	 Google Assistant amazon alexa
71	 + shaped corner	R23	+ -shaped corner for Magnetic suction lamp track		Sample: \$7.8 50~200pcs: \$7.7 201~1K pcs: \$7.6	 Google Assistant amazon alexa
72	 Connecting piece for corner	LJP	Connecting piece for Magnetic suction lamp track corner		Sample: \$0.5 50~200pcs: \$0.45 201~1K pcs: \$0.4	 Google Assistant amazon alexa
73	 load module	SRMK	load module for Magnetic suction lamp track		Sample: \$2 50~200pcs: \$1.5 201~1K pcs: \$1.25	
74	 Pass through module	ZTMK	Pass through module for Magnetic suction lamp track		Sample: \$2 50~200pcs: \$1.5 201~1K pcs: \$1.25	
75	 Angle module	ZJMK	Angle module for Magnetic suction lamp track		Sample: \$3.00 50~200pcs: \$2.5 201~1K pcs: \$2.0	
76	Smart Light Strip Dimming					
77	 Smart Home Control		ZigBee intelligent dimming color temperature driver Power Supply Light strip (three lines)	 ZigBee Power Supply	 Bright and dark  Color temperature	

78	 4" touch smart voice control panel with built-in Alexa (WiFi+Zigbee +BLE)	T1E-TPP01-Z	<p>T1E is a Tuya smart central control panel integrated with Tuya smart home gateway + built-in Alexa voice control (English, Spanish, Arabic, German & French) + super Zigbee device compatibility + group dimming system.</p> <p>Main Features:</p> <ul style="list-style-type: none"> 1. A best alternative of tuya ZigBee gateway at home, 100+ Zigbee sub-devices can be added in. 2. 3 Control modes at different distance with 3 themes 3. Multimedia interconnection function. Add smart dobell and smart camera, which will show the screen outside the door when someone rings the bell, contributing a higher level of security to the family. 4. Support group wireless dimming lighting. Works with zigbee dimming driver, can realize single light and group lights dimming. 	<p>1-19pcs: \$69.50 20-99pcs: \$67.50 100-999pcs: \$67.00 1000-2999pcs: \$66.90 3000pcs or more: \$66.50</p>	
79	 two-color low voltage 24v high color rendering light strip (10 meters per roll)	24V-2835-192	<p>Power: 20W, Color Temperature: 3000K-6000K Voltage: DC24V</p> <p>Re:16W per meter</p>	<p>Sample: \$15.9 50-200pcs: \$15.5 201-1K pcs: \$15</p>	
80	 RGB COB low voltage light strip (5 meters per roll)	GS-COB-RGB-5M		<p>Sample: \$16.5 50-200pcs: \$16 201-1K pcs: \$15.5</p>	
81	 COB 2colors low voltage light strip (10 meters per roll)	GS-COB-24V-684D-10mm	<p>Product name:COB smart light strip Specifications: DC 24V-684D-10mm Color temperature: dual color temperature 2700K+6500K Power: 9+9W/meter Waterproof level: IP20 Packing quantity: 10 meters/roll CRI:95 240220</p>	<p>Sample: \$22.80 50-200pcs: \$22.50 201-1K pcs: \$22.30</p>	
82	 Constant Voltage light strip driver (2 colors)	GS-DDQD	<p>Input voltage :DC 5-24V Output current/Channel:6A max Total Output Current:15A max Operating Temperature :-20 to +60 °C Constant Voltage</p>	<p>Sample: \$5.90 50-200pcs: \$5.80 201-1K pcs: \$5.70</p>	
83	 Intelligent Dimmable LED Light Strip Driver & Power Supply 2 in 1	MYS-DDQ157-3way	<p>Intelligent Dimmable LED Light Strip Driver & Power Supply 2 in 1 Function: LED light strip Dimming & color temperature adjustment (Cold & Warm color temperature) Rated Power: 60W Model: MYS-DDQ157 Working voltage: AC85-245V 50/60Hz PF≥0.5 Output current: 2.5A Output voltage: DC24V 2.5A (Max) -- DC36V for downlight can be made also. Ta: 45°C Te: 75°C Driver mode: Constant voltage and current Product size: 150*40*30mm Wireless protocol: ZigBee If it needs an additional power supply? - No need, this driver has integrated power supply in it.</p>	<p>Sample: \$7.98 50-500pcs: \$7.42 501-1K pcs: \$7.05</p>	
84	 Intelligent Dimmable LED Light Strip Driver & Power Supply 2 in 1	MYS-DDQ157-2way		<p>Sample: \$8.90 50-500pcs: \$8.35 501-1K pcs: \$8.00</p>	
85		DDDY-100W	<p>Power:100W, Color Temperature: 3000K-6000K, Voltage: DC24V Power supply: 110V-240V</p>	<p>Sample: \$6.90 50-200pcs: \$6.80</p>	08.1.165
86		DDDY-150W	<p>Power: 150W, Color Temperature: 3000K-6000K, Voltage: DC24V</p>	<p>Sample: \$7.80 50-200pcs: \$7.20</p>	
87		DDDY-200W/300W	<p>Power: 200W/300W, Color Temperature: 3000K-6000K, Voltage: DC24V</p>	<p>Sample: \$8.0 50-200pcs: \$7.4</p>	
88		SMD-RGBW-5M 103-0505 MMM994 (5 meter /Roll)	<p>SMD RGBW 5050RGBCW -60L-24V-12MM-21W/M-Ra80,RGB+3000K+6000K five-in-one, 24W/m, DC24V, three-year warranty. 5 meters per roll.</p>	<p>QTY≤100: \$7.8 100≤QTY≤500: \$7.7</p>	
89		SMD-RGBW-10m 103-0505 MMM994 (10 meter /Roll)	<p>SMD RGBW 5050RGBCW -60L-24V-12MM-21W/M-Ra80,RGB+3000K+6000K five-in-one, 24W/m, DC24V, three-year warranty. 10 meters per roll.</p>	<p>QTY≤100: \$15.49 100≤QTY≤500: \$15.29</p>	
90		SMD-RGBCW-5M 103-0505 MMM994 (5 meter /Roll)	<p>SMD RGBCW trip light 5 meters per roll. Color: RGB-C6500K-W3000K, 60 LEDs, 24V, 12mm wide circuit board, 21W per meter, CRI: 80</p>	<p>5 meters</p> <p>QTY≤100: \$11.98 100≤QTY≤500: \$11.95</p>	
91		SMD-RGBCW-5M 103-0505 MMM994 (10 meters /Roll)	<p>SMD RGBCW trip light 10 meters per roll. Color: RGB-C6500K-W3000K, 60 LEDs, 24V, 12mm wide circuit board, 21W per meter, CRI: 80</p>	<p>10 meters</p> <p>QTY≤100: \$24.16 100≤QTY≤500: \$23.87</p>	

92		5050RGBCW -60L-24V-12MM-21W/M-Ra80 (5 meter /Roll)	COB strip light(5 meters) RGBCW RGB-C6500K-W3000K, 60 LEDs, 24V, 12mm wide circuit board, 21W per meter, CRI 80	Need to work with zigbee light strip driver RGB+C+W	5 meters QTY≤100: \$19.25 100≤QTY≤500: \$19.1	
93		5050RGBCW -60L-24V-12MM-21W/M-Ra80 (10 meter /Roll)	COB strip light(10 meters) RGBCW RGB-C6500K-W3000K, 60 LEDs, 24V, 12mm wide circuit board, 21W per meter, CRI 80	Need to work with zigbee light strip driver RGB+C+W	10 meters QTY≤100: \$38.5 100≤QTY≤500: \$37.5	
94		JAASSC-23504	Zigbee RGBCW LED controller Model : JAASSC-23504 Input Voltage:DC12V-24V Out Current:10A Max Operating Temperature: -20℃- 40℃	Working with RGBCW strip lights	Sample: \$6.9 50~200pcs: \$6.8 201~1K pcs: \$6.7	 Google Assistant amazon alexa
95		GS-TGOZRGBCW	Rated power: 12V-120W/24V-240W Input volae: DC12-24V Output current: 10ADC Support RGBCW light strip		Sample: \$7.16 50~200pcs: \$7.02 201~1K pcs: \$6.95	 Google Assistant amazon alexa 01.8.126
96		GS-TGOZRGB	Rated power: 12V-120W/24V-240W Input volae: DC12-24V Output current: 10ADC Support RGBCW light strip		Sample: \$7.16 50~200pcs: \$7.02 201~1K pcs: \$6.95	 Google Assistant amazon alexa 02.4.0564
97		DP01-9W	* Support status tracking, home appliances status timely feedback to your device. * Support 16,000,000 colors adjust with your smart phone * Support Lum adjust with smart phone * Easy installation, easy handling and can be activated immediately and stably.		Sample: \$6.70 500pcs: \$6.50 1K pcs: \$6.20 5K pcs: \$5.90 10K pcs: \$5.80	 Google Assistant amazon alexa 01.7.024
98		GS-ZGA19	Tuya Zigbee 3.0 Power: 9W 850LM Size: 60*114mm Voltage: 85-265V Working temp.: -25°C to 45°C Connector: E27, E26, B22		Sample: \$5.60 500pcs: \$5.32 1K pcs: \$5.26	MOQ: 100pcs to order 01.7.129  Google Assistant amazon alexa
99		GS-ZGGU10	Tuya Zigbee 3.0 Power: 5W 450LM Size:45*57mm Voltage: 85-265V Working temp.: -25°C to 45°C Connector: GU10	Certificate: CE/FCC ID/Rohs	Sample: \$6.21 500pcs: \$5.55 1K pcs: \$5.35	Single Size: 5*5*6cm Single weight: 44g Carton box: 100pcs/CTN Carton box Size: 27*27*28cm 02.4.0509  Google Assistant amazon alexa
100		GS-SY-RD	GS-SY-RD is a multi-functional scene button, which can trigger full on or full off mode with one button, and turn the knob to adjust the brightness of the light. Double click to away mode to turn off all your lights,air conditioners,fans and other electronic devices. working voltage:DC3V Receive sensitivity:-98dBm Standby Consumption:0.8uA Life of battery:1 year(general use)		Sample: \$11.5 50~100pcs: \$11.3 101~200 pcs: \$11	 Google Assistant amazon alexa 02.4.0255
101		GS-SY-SR	zigbee wireless button scene stickers Support dimming		sample: \$9.2 50~100pcs: \$8.8 101~200 pcs: \$8.6	 Google Assistant amazon alexa 02.2.112
102		GS-TGKG	Knob Dimmer Switch (<u>for SCR dimming LED light</u>) 1.when the light is on,the user can touch the control panel adjust the brightness of the light,and the status indicator on the panel will change at the same time. 2.Touch Dimming: Move your finger up and down to adjust the light level 3.Set the mood with APP from anywhere 4.Exquisite craft and extraordinary protection Mechanism		Sample: \$17.6 50~100pcs: \$16.5 101~200 pcs: \$16 200~1K pcs: \$15.5 1K~5K pcs: \$15	
103		WIFI-1WAA	European/UK/GB Knob Dimmer Switch (<u>for SCR dimming LED light</u>) 1.Rotary Dimming Control: Rotate your finger left and right adjust the brightness 2.Compatible Bulbs:		Sample: \$15 50~100pcs: \$14.8 101~200 pcs: \$14.3	Single weight: 204g Product size: 10*10*6.3 FCL weight: 13.6kg FCL size: 42.5*34*33.5 An nake  Google Assistant amazon alexa

104		Zigbee-1WAA	<p>INC 300W / LED Dimmable 220W / CFL Dimmable 220W 3. 2.4G WIFI / Dimmer light / Mult-platform Support / Mechanical Push On/Off button 4.Exquisite craft and extraordinary protection Mechanism</p>	02.4.0359 Sample: \$16.5 50~100pcs: \$16.3 101~200 pcs: \$16.2	 02. (Black color, MOQ100pcs)
-----	---	-------------	---	--	---




Shenzhen Golden Security Technology CO.,Ltd

Add: 6th Floor, Unit 1, Building 1, Kalifang Plaza, Lianrun Road, Taoyuan Community, Dalang Street, Longhua District, Shenzhen
Attns: Lillian Huang | T: +86 189 4879 4227 | E: lillian@cameralarms.com.cn W: https://alarm-camera.en.alibaba.com

Smart sensor

No.	Picture	Model	Features	Price (EXW)	Compatible devices
3	 	GS-HP-AC-WIFI	AC110V-250V powered WiFi/Zigbee human presence Mirowave PIR sensor 1.Wireless technology:Zigbee/WIFI 2.Work voltage:AC110V~250V 3.Work temperature:-20°C~+70°C 4.Work current: <70mA 5.Sensitivity:0~9(Default) 6.Detect distance:0.3~9m(Default distance 6m) 7.Delay time:(target detection confirmation time)0~10s 8.Target disappearance delay time:0.5s~25min.Its recommended not to be less than 15 seconds. If too small,easy to miss 9.Installation mode:ceiling 10.Light sense:0~2000lux	Sample: \$14.50 50~200pcs: \$14.15 201~1K pcs: \$13.97 <i>cost down</i>	 Google Assistant amazon alexa
4	 	GS-HP-AC-ZIGBEE	DC 12V powered WiFi/Zigbee human presence Mirowave PIR sensor 1.Wireless technology:Zigbee/WIFI 2.Work voltage:DC12V 3.Work Current: <70mA 4.Work temperature:-20°C~+70°C 5.Sensitivity:0~9(Default) 6.Detect distance:0.3~9m(Default distance 6m) 7.Delay time:(target detection confirmation time)0~10s 8.Target disappearance delay time:0.5s~25min.Its recommended not to be less than 15 seconds. If too small,easy to miss 9.Installation mode:ceiling 10.Light sense:0~2000lux	Sample: \$14.50 50~200pcs: \$14.15 201~1K pcs: \$13.97	
5	 	GS-HP-DC12V-WIFI	DC 12V powered WiFi/Zigbee human presence Mirowave PIR sensor 1.Wireless technology:Zigbee/WIFI 2.Work voltage:DC12V 3.Work Current: <70mA 4.Work temperature:-20°C~+70°C 5.Sensitivity:0~9(Default) 6.Detect distance:0.3~9m(Default distance 6m) 7.Delay time:(target detection confirmation time)0~10s 8.Target disappearance delay time:0.5s~25min.Its recommended not to be less than 15 seconds. If too small,easy to miss 9.Installation mode:ceiling 10.Product Size:93*30	Sample: \$17.50 50~200pcs: \$17.15 201~1K pcs: \$16.63	 Google Assistant amazon alexa
6	 	GS-HP-DC12V-ZIGBEE	DC 12V powered WiFi/Zigbee human presence Mirowave PIR sensor 1.Wireless technology:Zigbee/WIFI 2.Work voltage:DC12V 3.Work Current: <70mA 4.Work temperature:-20°C~+70°C 5.Sensitivity:0~9(Default) 6.Detect distance:0.3~9m(Default distance 6m) 7.Delay time:(target detection confirmation time)0~10s 8.Target disappearance delay time:0.5s~25min.Its recommended not to be less than 15 seconds. If too small,easy to miss 9.Installation mode:ceiling 10.Product Size:93*30	Sample: \$17.50 50~200pcs: \$17.15 201~1K pcs: \$16.63	 Google Assistant amazon alexa
7	 	GS-PIR	zigbee series infrared human body sensor	Sample: \$6.80 50~100pcs: \$6.50 101~200 pcs: \$6.43	 Google Assistant amazon alexa
10	 	GS-HW04-WIFI	Detection distance: 5 m max detection: 15m Power supply: 12V Working temperature: -30~50°C Working humidity: 10%~90%RH (no condensation) Product dimension: 50*48*8 mm	Sample: \$7.70 (MOQ:3pcs) 50~100pcs: \$7.50 101~200 pcs: \$7.32	Each product weight and dimensions: Size: 61*61*27mm Gross weight: 80g Net weight: 79g Weight and size of one box of products: (200PCS) Size: 644*226mm Gross weight: 18kg Net weight: 17.4 02.4.0789
11	 	GS-HW04-Zigbee	WiFi Smart PIR + light 2 in 1 detector	Sample: \$7.15 (MOQ:3pcs) 50~100pcs: \$7.10 101~200 pcs: \$7.00	Each product weight and dimensions: Size: 61*61*27mm Gross weight: 80g Net weight: 79g Weight and size of one box of products: (200PCS) Size: 644*226mm Gross weight: 18kg Net weight: 17.4 02.4.0789
12	 	UFO-R6	Wi-Fi remote controller with 5V 1A USB power charger Working Humidity: ≤85%RH Power input: 5V DC 1A(Micro USB) IR Distance:3m Working Temperature: 0~50°C Size:2.6in*2.6in*1.06in55mm*55mm*27mm	Sample: \$6.8 50~200pcs: \$6.7 201~1K pcs: \$6.6	 Google Assistant amazon alexa
13	 	UFO-R2-RF	WIFI IR+RF remote controller Working Humidity: ≤85%RH Power Input: 5V DC 1A(Micro USB) IR Distance:3m Working Temperature: 0~50°C RF: 433mhz/315mhz	1-50set: \$9.30 51-100set: \$9.12 101-200set: \$8.95	 Google Assistant amazon alexa
14	 	UFO-R11	Zigbee infrared remote control (gateway is needed) Input power: 3A battery x2 Standby power: 50 mW Control distance: 30m (finally affected by the environment) Infrared frequency: 38KHz Working temperature: 0°C~50°C Working humidity: ≤85% RH (no condensation) Wireless protocol: Zigbee Executive standard: GB/T9254--2008 Product Size: 68x68x27mm	1-50set: \$9.65 51-100set: \$9.46 101-200set: \$9.17	 support Alexa
15	 	GS-ZS06-WIFI	WiFi/Zigbee IR remote controller for TV/AC Unit weight: 28g LED indicator: blue Infrared range: less than 10m Size: 50*50*19mm	Sample: \$6.29 (MOQ:3pcs) 50~100pcs: \$5.71 101~200 pcs: \$5.50	Product size:50*50*19mm Color box size:100*64*25mm Qty: 100/pcs per box Outer box size:385*285*330mm Product net weight: 70g Product gross weight: 75g Outer box gross weight: 8kg
16	 	GS-ZS06-Zigbee	Type C input: DC5V/1A Infrared frequency: 38KHz WiFi frequency: IEEE802.15.4, 2.4GHz	Sample: \$8.93 (MOQ:3pcs) 50~100pcs: \$8.21 101~200 pcs: \$8.2	Product size:50*50*19mm Color box size:100*64*25mm Qty: 100/pcs per box Outer box size:385*285*330mm Product net weight: 70g Product gross weight: 75g Outer box gross weight: 8kg
17	 	GS-S09-B-CH125	* Input: DC 5V/1A (Micro USB without adapter) * Infrared frequency: 38KHz * Coverage: 360° * Infrared remote control distance: 10m * Connection: Wi-Fi 2.4GHz * Application: Doodle Smart or Smart Life * Temperature measurement range: 0°C~60°C [Three-in-one] Infrared remote control + temperature + humidity three functions are integrated together. One click control of these devices can be done with a single tap on your phone's household appliances, such as set-top boxes, TV boxes, televisions, air conditioners, fans, DVDs, etc. It is compatible with most brands on the market. See the list of supported brands in the app for details. In addition, it also has a learning function, which can copy the key function of the original remote control into App. [Built-in temperature and humidity sensor and built-in display] With the built-in sensor, you can always know the current temperature and humidity in the room. And do subsequent automation according to their values. For example, turn on the air conditioner when the temperature is above 20°C, and turn on the humidifier when the humidity is below 50%. (Note: Cannot view history) [Massive infrared code library] Support 4000+ brand, 50000+ cloud infrared code, the cloud continues to update the supported device list. [Voice control] By connecting to Amazon Alexa and Google Home, you can control your home appliances by voice, for example - Alexa, turn on the TV - OK Google, set the air conditioning temperature to 25 degrees. [Family sharing function] Share and control with family members [360° range] Smart devices can be controlled remotely within a 360 degree range of 10 meters in diameter. It is recommended to place one piece of this product in each room, which is more convenient [WIFI+Bluetooth dual mode] Connect to the network faster. Connecting to the Internet is twice as fast as using WiFi alone	Price:9.75\$	 Google Assistant amazon alexa
18	 	GS-JM-EN	ZigBee Repeater for Extend signal Zigbee 3.0 - Works with tuya gateway - Forwarding Zigbee signal Specification: - Power input: 5V 1A - Operating voltage: 1.8V~3.8V - Transmitter: 10db - Operating temperature: -10°C~50°C - Frequency: 2.402~2.483GHz - Wireless Protocol: Zigbee	Sample: \$7.50 50~100pcs: \$7.35 101~200 pcs: \$7.30	 Google Assistant amazon alexa
19	 	GS-TH-LY-C	Product Name: Zigbee Temperature Humidity Sensor Wireless protocol: Zigbee Temperature measurement range: -10°C~50°C Humidity measurement range: 0%-99%RH Working voltage: DC2.4V/3V Battery specification: CR2032button cell Product size: 45*45*10mm/45*45*6mm(SQUARE) Screen size: 45*45mm(ROUND)/45*45.6mm(SQUARE) Product net weight: 4.2g(ROUND)/49.5g(SQUARE)	Sample: \$9.9 50~100pcs: \$9.7 101~200 pcs: \$9.5	Package List: Temperature Humidity Sensor*1 Product manual*1 Wall sticker*1 02.4.0289
20	 	GS-2222	Product name: Type: Water Level Alarm Power Supply: 3V 1*CR2032 Standby Time: 2 years Protocol: Zigbee APP: Tuya smartmartlife Support system: Android and iOS Waterproof: IP66 Material: ABS Operating Temperature: -10°C~+55°C Item Size: 50*18mm	Sample: \$5.7 50~100pcs: \$5.6 101~200 pcs: \$5.5	 Google Assistant amazon alexa

21		GS-QY-WL-C	<p>Product name: Type: Water Level Alarm Power Supply: 3V 1*CR2032 Standby Time: 2 years Protocol: ZigBee APP: Tuya smartlife Support system: Android and iOS Waterproof: IP68 Material: ABS Operating Temperature: -10°C~+55°C Item Size: 50*18mm</p>	<p>Sample: \$7.2 50-100pcs: \$7 101-200 pcs: \$6.8</p>	 Google Assistant amazon alexa				
22		GS-Z-SOS	<p>Specifications: Battery: CR2032 Working temperature: -20°C~60°C Working humidity: ≤95%RH (non-condensing) Emission frequency: 10dBm Emission current: ≤45mA, average 1~2mA Quiescent current: 2~3mA Emission distance: 100m* (OpenSpace) Wireless frequency: Zigbee2.4GHz</p>	<p>Sample: \$11.5 50-100pcs: \$11 101-200 pcs: \$10.6</p>	 Google Assistant amazon alexa				
23		GS-S-SOS2	<p>Battery: Not included CR2032 3V DC Communication: Zigbee 3.0 Working Range: 30m Indoor Area Working Temperature: -10°C~45°C Working Humidity: <90%RH2 Life Cycle: Years 30k times Dimension: 45x45x14mm Smart Button</p> 	<p>Sample: \$5.8 50-100pcs: \$5.7 101-200 pcs: \$5.5</p>	 Google Assistant amazon alexa				
24		ZSS-JM-GWM	<p>Specifications: Wireless Technology: ZigBee Working Voltage: 2.4V-3.3V(CR2032 battery) Transmission Frequency: 2.4GHz Working Temperature: -20°C ~+60°C Dimensions: 40*25*12mm Size Main Body: 40*25*12mm Size Small Body: 25*10*9mm Package list: Sensor User Manual¹</p> <p>User Manual¹:</p> <p>Characteristic:</p> <ol style="list-style-type: none"> Realize remote control on Smart Life APP through mobile phone network or WiFi. Realize monitoring of device changes, push notifications when sensing device movement, drop, impact, vibration and other state changes, and use it with other Tuya Zigbee or WiFi devices to realize automatic scene application. Use with Zigbee gateway <p>Parameters:</p> <ul style="list-style-type: none"> Working voltage: DC 3V Quiescent current: <10mA Alarm current: >20mA Communication method: Zigbee Transmission distance: 10-30m (indoor without shelter) LED indicator: YES Installation method: 3M plus or screw fixing Battery: AAA alkaline battery 1.5V*2 Working temperature: -10°C~+60°C Working humidity: ≤95% (no condensation) 	<p>Sample: \$6.3 50-100pcs: \$6.2 101-200 pcs: \$6.1</p>	 Google Assistant amazon alexa				
25		ZSS-Z-VBR-C	<p>Dual mode WiFi+ Bluetooth is more stable and faster [Sound and light alarm] 80DB sound alarm and red light warning to scare away intruders [Door open alarm] can be manually set within 5 seconds to 180 seconds. [APP remote control] Remote setup and disarming through mobile APP at any time [One-key defense] You can set one-key defense, which is more convenient to use. [Voice control] When used with Amazon Alexa and Google Home, you can check whether the doors and Windows are open or closed [Sharing function] Share with family, common control [Offline function] When the device is offline, the APP will remind the device to be offline after 30 minutes [Low battery reminder function] The product uses 2 AAA batteries (not included), when the battery is low, the phone will remind you to replace the battery [History] You can check the time the doors and Windows were opened to see if anyone else entered the house</p>	<p>Sample: \$10.29 50-100pcs: \$10.09 101-200 pcs: \$10.00</p>	 Google Assistant amazon alexa				
26		GS-DW/SW	<p>1. support tuya smart APP 2. Support google home & amazon alexa 3. door open alert, app notification 4. real time monitoring for in & out at the quarantine places. 5. App remote monitoring, multi-level prevention and control 6. Installation distance≤2cm 7. trigger range: 2-3cm 8. Operating temperature:-0°C ~+50°C</p> <table border="1" data-bbox="762 987 952 1066"> <tr> <td>1. Working voltage: 3V (AAA battery)</td> </tr> <tr> <td>2. Working current: ≤15-59mA</td> </tr> <tr> <td>3. standby current: ≤35uA</td> </tr> <tr> <td>4. connect method: wifi (802.11b/g/n)</td> </tr> </table>	1. Working voltage: 3V (AAA battery)	2. Working current: ≤15-59mA	3. standby current: ≤35uA	4. connect method: wifi (802.11b/g/n)	<p>sample1-30pcs: 3.65 50-100pcs:\$35 101-500pcs:\$2.6</p>	<p>1. battery: 2*AAA (excluding) 2. maximum volume: 80dB 3. working temperature: -10°C~50°C 4. wireless network type:</p>
1. Working voltage: 3V (AAA battery)									
2. Working current: ≤15-59mA									
3. standby current: ≤35uA									
4. connect method: wifi (802.11b/g/n)									
27		GS-D41	<p>1. support tuya smart APP 2. Support google home & amazon alexa 3. door open alert, app notification 4. real time monitoring for in & out at the quarantine places. 5. App remote monitoring, multi-level prevention and control 6. Installation distance≤2cm 7. trigger range: 2-3cm 8. Operating temperature:-0°C ~+50°C</p>	<p>1-50pcs:\$5.3 51-100pcs:\$5.2 101-500pcs:\$5.1</p>	 Google Assistant amazon alexa				
28		WIFI-SLA-U	<p>Sound and light flash siren (USB type), Zigbee version and WiFi version for option</p>	<p>Sample: \$11.8 50-100pcs: \$11.5 101-200 pcs: \$11.2</p>	<p>Single weight: 110g Product size: 8.5*9.5 FCL weight: 4.8kg FCL size: 45*27*21 50 packs</p>				
29		ZIGBEE-SLA-U		<p>Sample: \$13.5 50-100pcs: \$13.2 101-200 pcs: \$13</p>					
30		GS21	<p>1.7" TFT color display. Tuya APP remote push. Sound and light alarm, real voice prompt, mobile phone alarm push. Perpetual calendar, real-time ambient temperature and combustible gas display. Combustible gas alarm. High temperature alarm (alarm threshold can be set). Green power indicator Light, red alarm indicator, yellow sensor fault indicator, yellow life indicator. Test/silence button. Support Chinese and English. Alarm linkage solenoid valve/manipulator/external air cut-off device. Detecting gas type: (natural gas and LPG)</p>	<p>1-100pcs: USD13.15 101-500pcs: USD12.69 1000pcs: USD11.94</p>	 Google Assistant amazon alexa				
31		G8-225Z	<p>Zigbee standard: Zigbee 3.0 Gas type: Liquefied gas, natural gas Alarm concentration: 8%LEL methane (natural gas) Concentration error: ±3%LEL Alarm method: sound and light alarm, mobile phone notification Battery: single 9V Power output: DC 3V/1A Working temperature: -10~55°C Wireless distance: ≥50 meters (open distance) Installation: 3M glue/screw fixation Product net weight: 68g Product size: Ø68*23mm</p>	<p>1-100pcs: USD10.5 101-500pcs: USD10.3 1000pcs: US9.9</p>	 Google Assistant amazon alexa				
32		GS443W	<p>Tuya cloud platform APP alarm information push. High sensitivity, low power consumption, strong stability. Ultra long life battery power supply. Install to use, no wiring plug trouble. Ceiling installation. Live alarm with ultra loud buzzer. 360°all-round alarm. ABS flame retardant shell material. Using high-performance microprocessor.</p>	<p>Specification: Power supply: DC9Valkaline battery (6LR61/9V) Quiescent current: <100uA(wifi) <20uA(independent) Alarm current: <100mA(wifi) <10mA(independent) Sensitivity: 0.05~2.0dB(m/independent) Working temperature: 0~50° C Relative humidity: ≤95%RH, no condensation Alarm sound:>80dB Battery low voltage alarm:<7.0V±0.2V</p> <p>1-50pcs: \$13.00 51-100pcs: \$12.90 101-500pcs: \$12.50</p>	 Google Assistant amazon alexa				
33		GS-S11-Zigbee	<p>1. Rated voltage: DC3V 2. Static current: <15uA 3. Alarm current: <50mA 4. Low voltage threshold: 2.5V±0.1V 5. Sound pressure level: >80dB(A) (3 meters in front) 6. Smoke indicator: light, normal, alarm, undervoltage, etc. 7. Indicator light: red indicator light 8. Installation: wall-mounted 9. Working temperature: -10°C~+50°C 10. Relative humidity: ≤95%RH, no condensation 11. Output form: sound and light alarm Color box size: 109*46*96MM weight: 0.1KG 100 pieces/box Outer box size: 565*250*410MM Weight of a single box without battery: 9.8KG Weight of a single box with battery: 14.5KG</p>	<p>Sample: \$6.65 50-200 pcs:\$6.55 200-1K pcs: \$6.45</p>	<p>tuya Google Assistant amazon alexa</p>				
34		GS-S11-WIFI		<p>Sample: \$5.65 50-200 pcs:\$5.55 200-1K pcs: \$5.45</p>					
35		GS-210W	<p>Product features</p> <ul style="list-style-type: none"> - Real-time reporting of alarm concentration. - With voice prompt alarm function. - Support push gas alarm to the cloud. - Support remote self-inspection of device. - Anti-electromagnetic interference, anti-radio frequency interference. <p>Technical parameters</p> <ul style="list-style-type: none"> Quiescent current:<150mA Alarm current:<300mA Alarm sound:>80dB Operating temperature:-10°~55°C Relative humidity:≤93%RH Size:99.5x99.5x34mm(LWxT) 	<p>1-50pcs: \$12.00 51-100pcs: \$11.50 101-500pcs: \$10.50</p>	 Google Assistant amazon alexa				




Shenzhen Golden Security Technology CO.,Ltd
Add:6th Floor, Unit 1, Building 1, Kailifang Plaza, Lianrun Road, Taoyuan Community, Dalang Street, Longhua District, Shenzhen
Attns: Lilian Huang | T: +86 189 4879 4227 | E: lilian@cameralarms.com | W: <https://alarm-camera.en.alibaba.com>

No.	Picture	Model	Features	Price (EXW)	Package List	
323		C3	Material: ABS+glass cover Working voltage: 14.8V Battery capacity: 2600mAh Dust box capacity: 600ML Electric control water tank capacity: 350ML A cleaning time: 60-100min	Product net weight: 3KG Product size: 330x330x79mm Package gross weight: 3.5KG Packing size: 585 *385*126mm	\$107.46	Body*1, side brush*4 (two with two), filter*2 (one with one), mop*2 (one with one), recharger*1, adapter*1, water tank assembly* 1 (optional) manual*1 01.7.135
324		C2	Material: ABS Working voltage: 14.8V Battery capacity: 2600mAh Dust box capacity: 600ML Electric control water tank capacity: 350mL A cleaning time: 150min	Product net weight: 3KG Product size: 330x330x79mm Package gross weight: 3.5KG	\$107.46	Body*1, side brush*4 (two with two), remote control*1, AA battery*2, filter*2 (one with one), mop*2 (one with one), recharging stand* 1, Adapter*1, Manual*1 01.7.138
325		C1	Material: ABS Working voltage: 14.8V Battery capacity: 2000mAh Dust box capacity: 400ML A cleaning time: 60-90min	Product net weight: 2.5KG Product size: 305x305x75mm Gross packaging weight: 3KG	\$71.64	Body*1, remote control*1, AAA battery*2, side brush*4 (two with two), adapter*1, recharge stand*1, filter*1, brush*1 (optional) , manual*1
326		C01	Material: ABS Working voltage: 7.4V Battery capacity: 2000mAh Dust box capacity: 200ML A cleaning time: 60-90min	Product net weight: 2.5KG Product size: 305x305x75mm Gross packaging weight: 3KG	\$44.78	Body*1, Side Brush*2, Hair Brush*1, Hypa*1, Manual*1, USB Cable



Smart Thermostats

Item	Model	Product Image	Description	Remark	EXW USD Price	Packing Info.
1	WiFi 009ALW-WIFI-AC Two Pipe	1.95-240VAC, 50/60Hz 2.Cooling/heating, 2-pipe, 3-speed 3.WIFI version 4.Colors:White/Black	<p>Power Supply: 95~240 VAC, 50~60Hz or 24V DC/AC,50~60Hz Please ask the saler ask the user manual and check the information laser printed on the back of the thermostat for the actual voltage.</p> <p>1. Fan Relay Amps Resistance: 5A; Inductive: 3A 2. Valve Relay Amps Resistance: 3A; Inductive: 1A 3. Sensor: NTC3950, 10K 4. Set Temp. Range: 5~35 °C 5. Accuracy: ±1 °C 6. Dispaly Temp. Range: 5 ~ 70 °C 7. Ambient Temp.: 0~45 °C 8. Ambient Humidity: 5 ~ 95 % RH (Non Condensing) 9. Storage Temp.: -5 ~ 45 °C Timing Error: < 1 % 10. Power Consumption: <1.5W 11. Shell Material: PC +ABS (Fireproof)</p> <p>12. Installation Box: 86*86mm Square or European 60mm Round Box 13. Wire Terminals: Wire 2 X 1.5 mm² or 1 x 2.5 mm² 14. Protection Class: IP20 15. Buttons: Capacitive Touch Buttons</p>	WiFi AC 2 Pipe version	Sample: \$19.8 50~200pcs: \$19.5 201~1K pcs: \$19.2	Product size :11cm * 9.5cm *6cm 0.25KG Carton box size:51cm*25cm*35cm 13KG 50 pcs /carton box
2	WiFi 009ELW-WIFI-AC Four Pipe	1.95-240VAC, 50/60Hz 2.Cooling/heating, 4-pipe, 3-speed 3.WIFI version 4.Colors:White/Black	<p>1.95-240VAC, 50/60Hz 2.Cooling/heating, 4-pipe, 3-speed 3.WIFI version 4.Colors:White/Black</p>	WiFi-AC 4 Pipe version	Sample: \$21.5 50~200pcs: \$21.2 201~1K pcs: \$20.5	Product size :11cm * 9.5cm *6cm 0.25KG Carton box size:51cm*25cm*35cm 13KG 50 pcs /carton box
3	WiFi 009ALZB-Zigbee-AC Two Pipe	1.95-240VAC, 50/60Hz 2.Cooling/heating, 2-pipe, 3-speed 3.Zigbee version 4.Colors:White/Black	<p>1.95-240VAC, 50/60Hz 2.Cooling/heating, 2-pipe, 3-speed 3.Zigbee version 4.Colors:White/Black</p>	Zigbee-AC 2 Pipe version	Sample: \$21.5 50~200pcs: \$21.2 201~1K pcs: \$20.5	Product size :11cm * 9.5cm *6cm 0.25KG Carton box size:51cm*25cm*35cm 13KG 50 pcs /carton box
3	Zigbee 009ALZB-Zigbee-24V Two Pipe	1.24V, 50/60Hz 2.Cooling/heating, 2-pipe, 3-speed 3.Zigbee version 4.Colors:White/Black	<p>1.24V, 50/60Hz 2.Cooling/heating, 2-pipe, 3-speed 3.Zigbee version 4.Colors:White/Black</p>	Zigbee-24V 2 Pipe version	Sample: \$23.5 50~200pcs: \$23.2 201~1K pcs: \$22.5	Product size :11cm * 9.5cm *6cm 0.25KG Carton box size:51cm*25cm*35cm 13KG 50 pcs /carton box
4	Zigbee 009EZB-Zigbee-AC Four Pipe	1.95-240VAC, 50/60Hz 2.Cooling/heating, 4-pipe, 3-speed 3.Zigbee version 4.Colors:White/Black	<p>1.95-240VAC, 50/60Hz 2.Cooling/heating, 4-pipe, 3-speed 3.Zigbee version 4.Colors:White/Black</p>	Zigbee-AC 4 Pipe version	Sample: \$22.5 50~200pcs: \$21.8 201~1K pcs: \$21.5	Product size :11cm * 9.5cm *6cm 0.25KG Carton box size:51cm*25cm*35cm 13KG 50 pcs /carton box
4	Zigbee 009EZB-Zigbee-24V Four Pipe	1.24V, 50/60Hz 2.Cooling/heating, 4-pipe, 3-speed 3.Zigbee version 4.Colors:White/Black	<p>1.24V, 50/60Hz 2.Cooling/heating, 4-pipe, 3-speed 3.Zigbee version 4.Colors:White/Black</p>	Zigbee-24V 4 Pipe version	Sample: \$25.5 50~200pcs: \$25.2 201~1K pcs: \$24.5	Product size :11cm * 9.5cm *6cm 0.25KG Carton box size:51cm*25cm*35cm 13KG 50 pcs /carton box
1	GS-ME82FWH-0-WIFI	<p>Integrated air conditioning and floor heating 2 in 1</p>	<p>1. Power supply: 85-250VAC 50/60Hz 2. Maximum load current: 3A/250VAC 3. Temperature display accuracy: ±0.5°C 4. Room temperature control range: 5~70°C 5. Standby backlight brightness selection 6. Fan coil operation selection 7. Power-off memory selection 8. Valve anti-lock selection</p>	Bluetooth WiFi model (Mobile APP remote control, voice assistant Amazon, Google, Xiaodu, Yandex)	\$21.36	
2	GS-ME82FWH-0-WIFI			Without WiFi	\$17.76	024.0497
327	GS-ME102-WIFI	<p>Electric Floor Heating/Water Floor Heating/Gas Furnace</p>	<p>1. Temperature sensor: NTC 2. Temperature accuracy: ±1°C 3. Self-consumption power: < 2W 4. Power supply voltage: AC 220V, 50/60Hz 5. Load current: 16A/3A 6. Temperature setting: 5~95°C 7. Multi-screen display on color screen, nine language settings, Celsius/Fahrenheit setting, black&white mirror border, 5+2, 6+1, 7+0 programming mode, power-off memory, child lock</p>	Bluetooth WiFi model (Mobile APP remote control, voice assistant Amazon, Google, Xiaodu, Yandex)	\$39.25	ME102 Inner Box Package Size: 95*100*65mm 16A Gross weight: 0.4KG 3A Gross weight: 0.3KG 64Pcs/CTN Carton size: 423*403*290mm
328	GS-ME80-WIFI	<p>Electric Floor Heating/Water Floor Heating</p>	<p>1. Temperature sensor: NTC 2. Temperature accuracy: ±1°C 3. Self-consumption power: < 2W 4. Power supply voltage: AC 85~275V 50/60Hz 5. Load current: 16A/3A 6. Temperature setting: 5~95°C 7. Multi-screen display on color screen, six-language setting, Celsius/Fahrenheit setting, black&white screen, horizontal screen/vertical screen, 5+2, 6+1, 7+0 programming mode, power-off memory, PM2.5, humidity, outdoor temperature, weather forecast display, child lock</p>	Bluetooth WiFi model (Mobile APP remote control, voice assistant Amazon, Google, Xiaodu, Yandex)	\$52.24	ME80 Package Size: 142*95*65MM 16A Gross weight: 0.43KG 3A Gross weight: 0.35KG Carton size: 423*403*290mm 48Pcs/CTN 024.0510
329	GS-ME160-WIFI	<p>Electric Floor Heating/Water Floor Heating/Gas Stove</p>	<p>1. Temperature sensor: NTC 2. Temperature accuracy: ±1°C 3. Self-consumption power: < 2W 4. Power supply voltage: AC 85~275V 50/60Hz 5. Load current: 16A/3A 6. Temperature setting: 5~95°C 7. Multi-screen display on color screen, six language settings, Celsius/Fahrenheit setting, black&white screen, horizontal screen/vertical screen, 5+2, 6+1, 7+0 programming mode, power-off memory, PM2.5, humidity, outdoor temperature, weather forecast display, child lock</p>	Bluetooth WiFi model (Mobile APP remote control, voice assistant Amazon, Google, Xiaodu, Yandex)	\$44.78	ME160 Inner Box Package Size: 95*100*65mm 16A Gross weight: 0.4KG 3A Gross weight: 0.3KG 64Pcs/CTN Carton size: 423*403*290mm 024.0467
330	GS-ME80C-WIFI		<p>1. Temperature sensor: NTC 2. Temperature accuracy: ±1°C 3. Self-consumption power: < 1W 4. Power supply voltage: AC220V, 50/60Hz 5. Load current: 16A/3A 6. Temperature setting: 5~95°C 7. Touch button, 5+2 week programming, power-off memory, child lock</p>	Bluetooth WiFi model (Mobile APP remote control, voice assistant Amazon, Google, Xiaodu, Yandex)	\$27.16	ME80C Package Size: 142*95*65MM 16A Gross weight: 0.43KG 3A Gross weight: 0.35KG Carton size: 423*403*290mm 48Pcs/CTN 024.0498
331	GS-ME80C-WIFI			Without WiFi	\$23.43	
332	GS-ME81-WIFI	<p>Electric Floor Heating/Water Floor Heating/Gas Stove</p>	<p>1. Temperature sensor: NTC 2. Temperature accuracy: ±1°C 3. Self-consumption power: < 1W 4. Power supply voltage: AC220V, 50/60Hz 5. Load current: 16A/3A 6. Temperature setting: 5~90°C 7. Touch button, 5+2 week programming, power-off memory, with mirror, two backlight display specifications: white orange key, white white key, child lock</p>	Bluetooth WiFi model (Mobile APP remote control, voice assistant Amazon, Google, Xiaodu, Yandex)	\$17.50	ME81 Inner Box Package Size: 95*100*65mm 16A Gross weight: 0.3KG 3A Gross weight: 0.2KG 64Pcs/CTN Carton size: 423*403*290mm 024.0764
333	GS-ME81-WIFI			Without WiFi	\$12.90	
334	GS-ME82A-WIFI	<p>Electric Floor Heating/Water Floor Heating/Gas Stove</p>	<p>1. Temperature sensor: NTC 2. Temperature accuracy: ±1°C 3. Self-consumption power: < 1W 4. Power supply voltage: AC220V, 50/60Hz 5. Load current: 16A/3A 6. Temperature setting: 5~95°C 7. Touch button, 5+2 week programming, power-off memory, with mirror, Celsuis/Fahrenheit setting, child lock</p>	Bluetooth WiFi model (Mobile APP remote control, voice assistant Amazon, Google, Xiaodu, Yandex)	\$18.53	ME82A Inner Box Package Size: 95*100*65mm 16A Gross weight: 0.319g 3A Gross weight: 0.250g 64Pcs/CTN Carton size: 423*403*290mm
335	GS-ME82A-WIFI			Without WiFi	\$13.73	
336	GS-ME82B-WIFI	<p>Electric Floor Heating/Water Floor Heating/Gas Stove</p>	<p>1. Temperature sensor: NTC 2. Temperature accuracy: ±1°C 3. Self-consumption power: < 1W 4. Power supply voltage: AC220V, 50/60Hz 5. Load current: 16A/3A</p>	Bluetooth WiFi model (Mobile APP remote control, voice assistant Amazon, Google, Xiaodu, Yandex)	\$19.70	ME82B Inner Box Package Size: 95*100*65mm 16A Gross weight: 0.319g 3A Gross weight: 0.250g 64Pcs/CTN Carton size: 423*403*290mm

337			6. Temperature setting: 5~95°C 7. Touch button, 5+2 weeks of programming, power-off memory, Celsius/Fahrenheit setting, one-key energy saving, backlight adjustment, child lock	Without WiFi	\$14.03	64Pcs/CTN Carton size: 423*403*290mm 02.4.0538
338	GS-ME82C-WIFI		1. Temperature sensor: NTC 2. Temperature accuracy: ±0.5°C 3. Self-consumption power: <1W 4. Power supply voltage: AC230V, 50/60Hz 5. Load current: 16A/3A 6. Temperature setting: 5~95°C 7. Touch button, 5+2 weeks of programming, power-off memory, backlight adjustment setting (mobile APP can adjust the backlight); with mirror; one-key energy-saving function; child lock	Bluetooth WiFi model (Mobile APP remote control, voice assistant Amazon, Google, Xiaodu, Yandex)	\$19.70	ME82C Inner Box Package Size: 95*100*65mm 16A Gross weight: 319g 3A Gross weight: 250g 64Pcs/CTN Carton size: 423*403*290mm 02.4.0555
339			1. Temperature sensor: NTC 2. Temperature accuracy: ±1°C 3. Self-consumption power: <1W 4. Power supply voltage: AC220V, 50/60Hz 5. Load current: 16A/3A 6. Temperature setting: 5~95°C 7. Touch button, 5+2 weeks of programming, power-off memory, backlight adjustment setting (mobile APP can adjust the backlight); with mirror; one-key energy-saving function; child lock	Without WiFi	\$14.03	
340	GS-ME83-WIFI		1. Temperature sensor: NTC 2. Temperature accuracy: ±1°C 3. Self-consumption power: <1W 4. Power supply voltage: AC220V, 50/60Hz 5. Load current: 16A/3A 6. Temperature setting: 5~95°C 7. Touch button, 5+2 weeks of programming, power off memory, white display, child lock	Bluetooth WiFi model (Mobile APP remote control, voice assistant Amazon, Google, Xiaodu, Yandex)	\$16.87	ME83 Inner Box Package Size: 95*100*65mm 16A Gross weight: 0.3KG 3A Gross weight: 0.2KG 64Pcs/CTN Carton size: 423*403*290mm 02.4.0544
341			1. Power supply mode: two AA batteries 2. Temperature sensor: NTC 3. Temperature accuracy: ±1°C 4. Temperature range: 5~95°C 5. Communication protocol: G2B 6. Power on/off function/window opening function/anti-scale function/child lock function/antifreeze function/alarm prompt/low battery reminder function/proportional/integral function 7. Mobile APP control, compatible with Alexa, Amazon Echo, Google Home, Yandex and Xiaodu	Without WiFi	\$12.24	
342	GS-ME167		1. Temperature accuracy: ±1°C 2. Self-consumption power: <1W 3. Power supply mode of the launch panel: two AAA batteries, USB (Type-c&6P DC5V) 4. Receiving power supply voltage: AC220V 50/60Hz 5. Load current: 3A 6. Temperature setting: 5~95°C 7. Touch the button, 5+2 weeks of programming, wireless frequency 433MHZ (two-way FSK), child lock	Bluetooth WiFi model (Mobile APP remote control, voice assistant Amazon, Google, Xiaodu, Yandex)	\$19.70	Gross weight: 217g Inner Box Size: 100*88*61mm Carton size: 423*403*290mm 64Pcs/CTN 02.4.0496
343	GS-ME901		1. Temperature accuracy: ±1°C 2. Self-consumption power: <1W 3. Power supply mode of the launch panel: two AAA batteries, USB (Type-c&6P DC5V) 4. Receiving power supply voltage: AC220V 50/60Hz 5. Load current: 3A 6. Temperature setting: 5~95°C 7. Touch the button, 5+2 weeks of programming, wireless frequency 433MHZ (two-way FSK), child lock	Bluetooth WiFi model (Mobile APP remote control, voice assistant Amazon, Google, Xiaodu, Yandex)	\$29.85	ME901 Inner Box Package Size: 142*95*65mm 3A Gross weight: 0.4KG Carton size: 423*403*290mm 48Pcs/CTN 02.4.556
344			1. Temperature accuracy: ±0.5°C 2. Self-consumption power: <1W 3. Transmitter panel power supply method: two AA batteries (WIFI function cannot be used), USB (Type-c&6P DC5V) 4. Receiving power supply voltage: AC230V 50/60Hz 5. Load current: 3A 6. Temperature setting: 5~95°C 7. Touch button, 5+2 week programming, wireless frequency 433MHZ (two-way FSK), energy-saving mode, child lock. 节能模式. 儿童锁	Without WiFi	\$26.12	
345	GS-ME98		1. Temperature accuracy: ±0.5°C 2. Self-consumption power: <1W 3. Transmitter panel power supply method: two AA batteries (WIFI function cannot be used), USB (Type-c&6P DC5V) 4. Receiving power supply voltage: AC230V 50/60Hz 5. Load current: 3A 6. Temperature setting: 5~95°C 7. Touch button, 5+2 week programming, wireless frequency 433MHZ (two-way FSK), energy-saving mode, child lock. 节能模式. 儿童锁	Bluetooth WiFi model (Mobile APP remote control, voice assistant Amazon, Google, Xiaodu, Yandex)	\$34.63	ME98Package Size: 136*96*79MM Gross weight: 0.4KG Carton size: 423*403*290mm 40Pcs/CTN 02.4.0616
346			1. Power supply: 85-250VAC 50/60Hz 2. Maximum load current: 3A/250VAC 3. Temperature display accuracy: ±0.5°C 4. Room temperature control range: 5~70°C 5. Standby backlight brightness selection 6. Fan coil operation selection 7. Power-off memory selection 8. Valve anti-lock selection	Without WiFi	\$30.90	
347	GS-ME82FWH0-WIFI		1. Power supply: 85-250VAC 50/60Hz 2. Maximum load current: 3A/250VAC 3. Temperature display accuracy: ±0.5°C 4. Room temperature control range: 5~70°C 5. Standby backlight brightness selection 6. Fan coil operation selection 7. Power-off memory selection 8. Valve anti-lock selection	Bluetooth WiFi model (Mobile APP remote control, voice assistant Amazon, Google, Xiaodu, Yandex)	\$21.36	02.4.0497
348				Without WiFi	\$17.76	




Shenzhen Golden Security Technology CO.,Ltd
Add:6th Floor, Unit 1, Building 1, Kailifang Plaza, Lianrun Road, Tao yuan Community, Dalang Street, Longhua District, Shenzhen
Attns: Lilian Huang | T: +86 189 4879 4227 | E: lilian@cameralarms.com | W: https://alarm-camera.en.alibaba.com

Smart doorlock

No.	Model	Name	Picture	Wireless Version	Adaptable Mortise types	With Camera or not	Price	Functions
1	F15-TT-Bluetooth	Password door lock (without fingerprint function)		Bluetooth	24*240mm Mortise(Not included in the price)	NO	QTY: ≤10pcs:\$15.8 ≤50pcs:\$15.7 ≤500pcs:\$15.6	1.Power performance: Available for about 12 months 2.Power consumption: ≤500uA 3.Emergency power supply: Type-C USB 4.Battery:1.5V (AA alkaline battery)×4 5.Working current:250mA 6.Voltage range:4.5~9V 7.Operating temperature range:-20°C~70°C 8.Key type:Touch Button
2	F15-TT-WIFI	WiFi door lock (without fingerprint function)		WIFI	24*240mm Mortise(Not included in the price)	NO	QTY: ≤10pcs:\$19.99 ≤50pcs:\$19.65 ≤500pcs:\$19.35	
3	F15-TT-WIFI	WiFi door lock (with fingerprint function)		WIFI	24*240mm Mortise(Not included in the price)	NO	QTY: ≤10pcs:\$23.5 ≤50pcs:\$22.5 ≤500pcs:\$21.5	
4	F7-TT-WIFI	smart Wood door lock working with TT lock APP		WIFI	Doesn't come with lock body and batteries	NO	QTY: ≤10pcs:\$21.5 ≤50pcs:\$21.3 ≤500pcs:\$20.8	1.This smart door lock support five convenient unlock methods:fingerprint recognition, password unlock, mobile app control, physical key, card. 2.Supports Tuya app remotely unlock the door, you just need to use your mobile phone to unlock the door to experience a smart life. 3.The fast unlock speed of this smart door lock allows you to unlock your door in just 1.5 seconds per use. 4.This smart door lock comes with Type-C port to temporarily power the lock and unlock the door, ensuring you're never locked out due to a dead battery. 5.This smart door lock features real-time door opening records, anti-hijacking alarm, remote push,power reminder,etc.
5	F7-Tuya-WIFI	smart Wood door lock working with Smart life APP		WIFI	Doesn't come with lock body and batteries	NO	QTY: ≤10pcs:\$24.5 ≤50pcs:\$24.2 ≤500pcs:\$23.8	 Suitable for 6085 mortise
6	F8-TY-WIFI	Tuya WiFi fingerprint door lock		WiFi	24*240mm Mortise(Not included in the price)	NO	1-18pcs: \$25.8 19-4999pcs:\$24.8 5000pcs:\$19.9	1. Smart door lock with aluminum alloy material 2. 1 group of master code, 100 groups of fingerprint users 3. Fingerprint scanning time : ≤0.1s 4. Smart fingerprint recognition function: 360° fingerprint detection; from young to elder, a person only need to record his fingerprint one time, then he can unlock the door through his whole life. 5. Adopt phantom password technology, you can add some numbers before/after you input the real password, which can avoid other people peek your password. 6. Unlock ways: fingerprint, anti-peeping password, fingerprint+password, mechanical key, IC card,
7	F8-TY-ZIGBEE	Tuya Zigbee fingerprint door lock		Zigbee	24*240mm Mortise(Not included in the price)	NO	1-18pcs: \$27.80 19-4999pcs:\$26.80 5000pcs:\$21.90	
8	GS-k7-Semi 304 Stainless Steel	24*240 lock Mortise (6068 version)		/	This Mortise can be matched with the F8-TY-WIFI & F8-TY-ZIGBEE	NO	1-18pcs: \$3.55 19-4999pcs:\$3.35 5000pcs:\$3.1	Mortise size: 24*240mm Special national standard lock body. Stainless steel material
9	GSGS-k7-Full 304 Stainless Steel	24*240 lock Mortise (6068 version)		/	This Mortise can be matched with the F8-TY-WIFI & F8-TY-ZIGBEE	NO	1-18pcs: \$6.55 19-4999pcs:\$6.5 5000pcs:\$6.3	Mortise size: 24*240mm Special national standard lock body. Stainless steel material
10	RFID card	RFID card		/	Working with smart door lock	NO	1-18pcs: \$0.35 19-4999pcs:0.32 5000pcs:\$0.31	Product Name: Universal IC Card Data Storage: Offline Power Supply Type: DC Dimensions: 48*30*2mm Operating Temperature: -25~60 degrees Celsius Sensing Distance: 0-3cm
11	GS-P20	3D face+video doorbell Smart Automatic lock		WIFI	Doesn't come with Mortise in the kit	YES	1-6pcs:\$35.8 6-120pcs:\$35.2 121-360pcs:\$34.8	7 ways to unlock ① 3D face recognition unlock, ② Fingerprint unlock the door, ③ Password unlock, ④ RFID card unlock; ⑤ Mechanical key unlock ⑥ Mobile APP ,⑦ Video doorbell unlock *Power supply: 7.4V ; *Static current: <70μA ; *Quick unlocking time: <2s *Operating temperature range: -10°C~60°C *Relative humidity: 20%~90% ; *Face recognition distance: 0.3~1m *Image Sensor: 1/4"CMOS, 1280*800 pixels *Total number of door opening users: <=300 groups *Total number of door opening records: <=500 *Administrators: <=9 groups; *Number of faces: <=50 groups *Number of fingerprints: <=99 groups; *Number of microcontrollers: <=299 groups; *Lens: 84.2° field of view, focusing distance 50cm (35.5-84.7cm), <1.5% skewness
12	GS-X6-Grey	3D face+video doorbell Smart Automatic lock		WiFi	Doesn't come with Mortise in the kit	YES	1-6pcs:\$67.5 6-120pcs:\$66.5 121-360pcs:\$65.5	*7 ways to unlock the door: ① 3D face recognition unlock, ② Fingerprint unlock the door, ③ Password unlock, ④ RFID card unlock; ⑤ Mechanical key unlock ⑥ Mobile APP and central control screen panel unlock; ⑦ Video doorbell
13	GS-X6-Silver	3D face+video doorbell Smart Automatic lock		WiFi	Sliver color back lock is with emergency knob	YES	1-6pcs:\$67.5 6-120pcs:\$66.5 121-360pcs:\$65.5	*Color: Mocha gray *Screen: 3.5 inches Material: high-grade zinc alloy, IML panel *Rejection rate <0.01%, false recognition rate <0.0001% *Face/palm vein/fingerprint storage: 100 groups each *Password storage: 5 groups, smart card storage: 20 cards *Working power supply: 5000mAh *Working environment: humidity <80%,

14	GS-D11-3D face	3D face+video doorbell Smart Automatic lock  Only Grey color	NEW	WIFI	Doesn't come with Mortise in the kit	Yes	cost down 1-6pcs:\$56.8 6-120pcs:\$55.8 121-360pcs:\$54.3	*7 ways to unlock ① 3D face recognition unlock, ②fingerprint unlock the door, ③Password unlock, ④RFID card unlock, ⑤Mechanical key unlock ⑥Mobile APP, ⑦Video doorbell unlock * Material: Aluminum alloy; * Touch password screen, virtual password function, display screen, fingerprint password double protection; * Lock core: C-level blade anti-theft lock core 
15	GS-7F-palm vein	3D face recognition smart lock (Face recognition + palm vein recognition + Video intercom+Security camera)	NEW	WIFI	24/30*240mm Mortise 30/40*388mm Mortise (Not included in the price)	yes	cost down QTY: ≤10pcs:\$76.8 ≤50pcs:\$75.6 ≤500pcs:\$73.5	*Features: Face and body induction start *Screen: 4.5 inches Material: high-grade zinc alloy, IML panel *Rejection rate <0.01%, misrecognition rate <0.0001% *Face/palm vein/fingerprint/c card storage capacity: 50/50/100/100 *Working power supply: 4200mAh *Working environment: humidity 20%-90%, temperature - 20°C~60°C *Unlocking method: face recognition,fingerprint recognition, temporary password, password, smart card, mechanical key *Applicable door thickness: 40-120mm 
16	GS-7F-AI	3D face recognition smart lock (Face recognition + palm vein recognition + Video intercom+Security camera)	NEW	WIFI	24/30*240mm Mortise 30/40*388mm Mortise (Not included in the price)	yes	QTY: ≤10pcs:\$79.6 ≤50pcs:\$78.5 ≤500pcs:\$73.5	7F-AI facial Recognition Palm Vein Smart lock Material: Aluminum Alloy Unlocking Method: Face Fingerprint Capacity: 100 Groups Password Capacity: 100 Groups Password Length: 6- Digital and 20-digit dummy passwords Face capacity: 50 groups Applicable door thickness: 40-120mm The number of keys: 2 Emergency charging interface :Type-C Battery Capacity:4200MAH Unlocking method:Face recognition/Palm 
17	GS-X14	3D face recognition smart lock (Face recognition + Intercom + Security camera)		WIFI	24/30*240mm Mortise 30/40*388mm Mortise (Not included in the price)	yes	QTY: ≤10pcs:\$61.1 ≤50pcs:\$60.1 ≤500pcs:\$59.1	*Features: Face and body induction start *Screen: 4.5 inches Material: high-grade zinc alloy, IML panel *Rejection rate <0.01%, misrecognition rate <0.0001% *Face/palm vein/fingerprint/c card storage capacity: 50/50/100/100 *Working power supply: 4200mAh *Working environment: humidity 20%-90%, temperature - 20°C~60°C *Unlocking method: face recognition, fingerprint recognition, temporary password, password, smart card, mechanical key *Applicable door thickness: 40-120mm
18	GS-NDZW01 Singal fingerprint	WIFI Fingerprint integrated lock (bull head lock)	NEW  Only Black color	WIFI	No need Mortise	No	1-6pcs:\$32.5 6-120pcs:\$32 121-360pcs:\$31	 *Power supply: 4.5V-6.5V (i.e. 4 dry batteries) optional external 12V power supply *Typical static current: <55 microamperes (battery life can exceed one year) *Working current: <250 mA (strong driving ability) *Number of fingerprints for door opening: <=100 *Number of cards for door opening: <=100 *Number of passwords for door opening: <=100 *Number of remote controls for door opening: <=10 *Resolution: 500DPI *Rejection rate: ≤0.15% *False recognition rate: ≤0.00004% *Working temperature: -10°C ~ 60°C *Relative humidity: 20% ~ 93%
19	GS-NSZW02 Double fingerprint	WIFI Double-sided fingerprint integrated lock (bull head lock)	NEW  Only Black color	WIFI	No need Mortise	No	1-6pcs:\$39.6 6-120pcs:\$38.7 121-360pcs:\$37.8	*Material: aluminum alloy+tempered glass *Applicable lock body: double tongue/single door lock body *Color: black/gold *Configuration: fingerprint, password, card, key, temporary password, optional tuya remote door opening/remote door opening, standard 10 languages *Suitable door thickness: 35mm-120mm *Single handle weight: 1.66kg *Color box size: 340x190x123mm *Outer box size: 63.5x35.5x40cm *Packing quantity: 10 sets/box *Capacity: 100 fingerprints, 199 passwords, 199 cards, 2 mechanical keys 
20	GS-S30-Black	Smart door lock for wooden door (Black color)	NEW 	wifi	Including the wooden lock mortise in package	no	1-6pcs:\$46.8 6-120pcs:\$55.8 121-360pcs:\$54.3	*Material: aluminum alloy+tempered glass *Applicable lock body: double tongue/single door lock body *Color: black/gold *Configuration: fingerprint, password, card, key, temporary password, optional tuya remote door opening/remote door opening, standard 10 languages *Suitable door thickness: 35mm-120mm *Single handle weight: 1.66kg *Color box size: 340x190x123mm *Outer box size: 63.5x35.5x40cm *Packing quantity: 10 sets/box *Capacity: 100 fingerprints, 199 passwords, 199 cards, 2 mechanical keys 
21	GS-S30-Silver	Smart door lock for wooden door (Silver color)	NEW 	wifi	Including the wooden lock mortise in package	no	1-6pcs:\$56.8 6-120pcs:\$55.8 121-360pcs:\$54.3	
22	Mortise-Mumen	6874 wooden mortise		/	6874 wooden mortise	No	QTY: ≤10pcs:\$0.98 ≤50pcs:\$0.95 ≤500pcs:\$0.89	
23	GS-JLX6-TY	WiFi Smart Indoor Lock for wooden door	NEW 		Comes with 160*22mm lock body	No	1-6pcs:\$45.5 6-120pcs:\$44.5 121-360pcs:\$43.5	1. Brushed black craft material 2.24-digit dummy password, including 6-11 digits of correct secret to prevent peeping 3. Unlock method: By password, fingerprint, IC card, key and App remote unlock. 4. 4pcs AAA battery power supply, emergency power supply by micro USB 5. Suitable for wooden door, suitable for the door thickness: 38-55mm 6. Product dimension: 240x60x21mm 7. Be compatible with tuya smart/smart life app 8. Standard kit comes with 5050 Mortise160 long 
24	GS-JLX7-TY	WiFi Smart Indoor Lock for wooden door		WiFi	Comes with 160*22mm lock body	No	QTY: ≤10pcs:\$49.5 ≤50pcs:\$49 ≤500pcs:\$48.3	1. Brushed black craft material 2.24-digit dummy password, including 6-11 digits of correct secret to prevent peeping 3. Unlock method: By password, fingerprint, IC card, key and App remote unlock. 4. 4pcs AAA battery power supply, emergency power supply by micro USB 5. Suitable for wooden door, suitable for the door thickness: 38-55mm 6. Product dimension: 240x60x21mm 7. Be compatible with tuya smart/smart life app 8. Standard kit comes with 5050 Mortise160 long 
25								
26								
27	GS-G7	Tuya WiFi Handheld Smart door lock		WIFI	Comes with lock body	Yes	QTY: ≤10pcs:\$27 ≤50pcs:\$26 ≤500pcs:\$25	 1.Low Battery Powered by 4 pcs AAA batteries 2.USB charging port available for running-out batteries 3.Emergency mechanical key available for unlocking without interface 4.Create one-time,periodic and temporary password with effective and expiration time in smart life APP or tuya APP

28	GS-FF03	Tuya Bluetooth Smart door lock		Bluetooth	Comes with lock body	No	QTY: ≤10pcs:\$21.6 ≤50pcs:\$21.5 ≤500pcs:\$21.2	tuya 1.Low Battery Powered by 4 pcs AAA batteries 2.USB charging port available for running -out batteries 3.Emergency mechanical key available for unlocking without interface 4.Create one-time,periodic and temporary password with effective and expiration time in smart life APP or tuya APP
29	F7-TT-BLE	Smart door lock with bluetooth function (APP: TT lock)		Bluetooth	24*240mm lock body	No	QTY: ≤10pcs:\$25.8 ≤50pcs:\$24.8 ≤500pcs:\$19.9	Unlocking method: fingerprint/password/IC card/mechanical key/TT lock APP Functions:Low power voice prompt, anti-picking alarm, password contact error 5 times alarm, virtual password alarm, check the unlock history record function Extended function: TT lock APP, TT lock hotel, hotel PMS Battery: 1.5V (AA alkaline battery) *4pcs Fingerprint module: semiconductor living fingerprint head Fingerprint identification speed: ≤1s Rejection rate ≤0.01% power consumptions:50UA Emergency power supply: Micro-USB
30	GS-E3	Card Reader/Encoder (works with TT lock)		/		No	QTY: ≤10pcs:\$41 ≤50pcs:\$40 ≤500pcs:\$39.5	Support reading card Hotel style hair clips should be used with hotel locks. Support master card, floor card, building card, room card production. Dimensions :70x70x26mm RF frequency :13.56MHz Case material: Plastic
31	GS-TDF1	WiFi cat eye version semi-automatic lock		WiFi		Yes	QTY: ≤10pcs:\$62.5 ≤50pcs:\$61.2 ≤500pcs:\$59.5	1. When the guest rings the doorbell, the smart door lock will capture the photo of the guest and send it to the APP of the host's mobile phone, and the host's mobile phone will also receive A video popover to view the real-time situation of the door. If it is someone you know, you can directly unlock the door remotely on the phone. 2. Every time the lock is opened, the mobile APP will receive push information 3.work with tuya mobile APP or smart life APP. 4. Unlock ways: fingerprint, anti-peeping password, fingerprint+password, mechanical key, IC card, mobile APP
32							QTY: ≤10pcs:\$77 ≤50pcs:\$75.5 ≤500pcs:\$73.2	1. When the guest rings the doorbell, the smart door lock will capture the photo of the guest and send it to the APP of the host's mobile phone, and the host's mobile phone will also receive A video popover to view the real-time situation of the door. If it is someone you know, you can directly unlock the door remotely on the phone. 2. Every time the lock is opened, the mobile APP will receive push information 3.work with tuya mobile APP or smart life APP. 4. Unlock ways: fingerprint, anti-peeping password, fingerprint+password, mechanical key, IC card, mobile APP
33							QTY: ≤10pcs:\$77 ≤50pcs:\$75.5 ≤500pcs:\$73.2	1. When the guest rings the doorbell, the smart door lock will capture the photo of the guest and send it to the APP of the host's mobile phone, and the host's mobile phone will also receive A video popover to view the real-time situation of the door. If it is someone you know, you can directly unlock the door remotely on the phone. 2. Every time the lock is opened, the mobile APP will receive push information 3.work with tuya mobile APP or smart life APP. 4. Unlock ways: fingerprint, anti-peeping password, fingerprint+password, mechanical key, IC card, mobile APP
34							QTY: ≤10pcs:\$43.8 ≤50pcs:\$42.6 ≤500pcs:\$41.8	1. When the guest rings the doorbell, the smart door lock will capture the photo of the guest and send it to the APP of the host's mobile phone, and the host's mobile phone will also receive A video popover to view the real-time situation of the door. If it is someone you know, you can directly unlock the door remotely on the phone. 2. Every time the lock is opened, the mobile APP will receive push information 3.work with tuya mobile APP or smart life APP. 4. Unlock ways: fingerprint, anti-peeping password, fingerprint+password, mechanical key, IC card, mobile APP
35							QTY: ≤10pcs:\$43.8 ≤50pcs:\$42.6 ≤500pcs:\$41.8	1. When the guest rings the doorbell, the smart door lock will capture the photo of the guest and send it to the APP of the host's mobile phone, and the host's mobile phone will also receive A video popover to view the real-time situation of the door. If it is someone you know, you can directly unlock the door remotely on the phone. 2. Every time the lock is opened, the mobile APP will receive push information 3.work with tuya mobile APP or smart life APP. 4. Unlock ways: fingerprint, anti-peeping password, fingerprint+password, mechanical key, IC card, mobile APP
36	GS-M1	WiFi smart door lock with camera		WiFi		Yes	QTY: ≤10pcs:\$77 ≤50pcs:\$75.5 ≤500pcs:\$73.2	1. When the guest rings the doorbell, the smart door lock will capture the photo of the guest and send it to the APP of the host's mobile phone, and the host's mobile phone will also receive A video popover to view the real-time situation of the door. If it is someone you know, you can directly unlock the door remotely on the phone. 2. Every time the lock is opened, the mobile APP will receive push information 3.work with tuya mobile APP or smart life APP. 4. Unlock ways: fingerprint, anti-peeping password, fingerprint+password, mechanical key, IC card, mobile APP
37							QTY: ≤10pcs:\$77 ≤50pcs:\$75.5 ≤500pcs:\$73.2	1. When the guest rings the doorbell, the smart door lock will capture the photo of the guest and send it to the APP of the host's mobile phone, and the host's mobile phone will also receive A video popover to view the real-time situation of the door. If it is someone you know, you can directly unlock the door remotely on the phone. 2. Every time the lock is opened, the mobile APP will receive push information 3.work with tuya mobile APP or smart life APP. 4. Unlock ways: fingerprint, anti-peeping password, fingerprint+password, mechanical key, IC card, mobile APP
38							QTY: ≤10pcs:\$43.8 ≤50pcs:\$42.6 ≤500pcs:\$41.8	1. When the guest rings the doorbell, the smart door lock will capture the photo of the guest and send it to the APP of the host's mobile phone, and the host's mobile phone will also receive A video popover to view the real-time situation of the door. If it is someone you know, you can directly unlock the door remotely on the phone. 2. Every time the lock is opened, the mobile APP will receive push information 3.work with tuya mobile APP or smart life APP. 4. Unlock ways: fingerprint, anti-peeping password, fingerprint+password, mechanical key, IC card, mobile APP
39	A200-TY	WiFi Broken bridge aluminum lock for outdoor use		WiFi	Comes with 3585 lock body	No	QTY: ≤10pcs:\$43.8 ≤50pcs:\$42.6 ≤500pcs:\$41.8	1. When the guest rings the doorbell, the smart door lock will capture the photo of the guest and send it to the APP of the host's mobile phone, and the host's mobile phone will also receive A video popover to view the real-time situation of the door. If it is someone you know, you can directly unlock the door remotely on the phone. 2. Every time the lock is opened, the mobile APP will receive push information 3.work with tuya mobile APP or smart life APP. 4. Unlock ways: fingerprint, anti-peeping password, fingerprint+password, mechanical key, IC card, mobile APP
40	A210-TY	WiFi Broken bridge aluminum lock for outdoor use		WiFi		No	QTY: ≤10pcs:\$74.3 ≤50pcs:\$73.5 ≤500pcs:\$72.5	tuya 1. When the guest rings the doorbell, the smart door lock will capture the photo of the guest and send it to the APP of the host's mobile phone, and the host's mobile phone will also receive A video popover to view the real-time situation of the door. If it is someone you know, you can directly unlock the door remotely on the phone. 2. Every time the lock is opened, the mobile APP will receive push information 3.work with tuya mobile APP or smart life APP. 4. Unlock ways: fingerprint, anti-peeping password, fingerprint+password, mechanical key, IC card, mobile APP
41							QTY: ≤10pcs:\$74.3 ≤50pcs:\$73.5 ≤500pcs:\$72.5	tuya 1. When the guest rings the doorbell, the smart door lock will capture the photo of the guest and send it to the APP of the host's mobile phone, and the host's mobile phone will also receive A video popover to view the real-time situation of the door. If it is someone you know, you can directly unlock the door remotely on the phone. 2. Every time the lock is opened, the mobile APP will receive push information 3.work with tuya mobile APP or smart life APP. 4. Unlock ways: fingerprint, anti-peeping password, fingerprint+password, mechanical key, IC card, mobile APP
42							QTY: ≤10pcs:\$74.3 ≤50pcs:\$73.5 ≤500pcs:\$72.5	tuya 1. When the guest rings the doorbell, the smart door lock will capture the photo of the guest and send it to the APP of the host's mobile phone, and the host's mobile phone will also receive A video popover to view the real-time situation of the door. If it is someone you know, you can directly unlock the door remotely on the phone. 2. Every time the lock is opened, the mobile APP will receive push information 3.work with tuya mobile APP or smart life APP. 4. Unlock ways: fingerprint, anti-peeping password, fingerprint+password, mechanical key, IC card, mobile APP
43	GS-X14	3D face recognition smart lock (Face recognition + intercom + Security camera)		WiFi	24*30*240mm Mortise 30*40*388mm Mortise (Not included in the price)	yes	QTY: ≤10pcs:\$61.1 ≤50pcs:\$60.1 ≤500pcs:\$59.1	*Features: Face and body induction start *Screen: 4.5 inches Material: high-grade zinc alloy, IML panel *Rejection rate <0.01%, misrecognition rate <0.001% *Face/palm vein/fingerprint/IC card storage capacity: 50/50/100/100 *Working power supply: 4200mAh *Working environment: humidity 20%-90%, temperature - 20°C~60°C *Unlocking method: face recognition, fingerprint recognition, temporary password, password, smart card, mechanical key *Applicable door thickness: 40-120mm
44	YZ-30-240	Cylindrical 30*240 Mortise (Full 304 Stainless Steel)		Mortise	30*240 mortise Hole spacing 6068 Cylindrical deadbolt	No	QTY: ≤10pcs:\$3.85 ≤50pcs:\$3.75 ≤500pcs:\$3.65	30*240 mortise Hole spacing 6068 Cylindrical deadbolt
45	YZ-40-388	Cylindrical 40*388 Mortise (Full 304 Stainless Steel)		Mortise	40*388 mortise Hole spacing 6068 Cylindrical deadbolt	No	QTY: ≤10pcs:\$5.88 ≤50pcs:\$5.78 ≤500pcs:\$5.68	40*388 mortise Hole spacing 6068 Cylindrical deadbolt
46	DSS-5050	Square 5050 mortise (304 Stainless Steel)		Mortise	Square 5050 mortise (304 Stainless Steel)	No	QTY: ≤10pcs:\$5.88 ≤50pcs:\$5.78 ≤500pcs:\$5.68	Square 5050 mortise (304 Stainless Steel)
47	DSS-24240-3583	Single deadbolt 24*240mm size (Full 304 Stainless Steel)		Mortise	Single deadbolt 24*240mm size (Full 304 Stainless Steel) Hole spacing 3585	No	QTY: ≤10pcs:\$5.88 ≤50pcs:\$5.78 ≤500pcs:\$5.68	Single deadbolt 24*240mm size (Full 304 Stainless Steel) Hole spacing 3585
48	K9	Mortise (K9)		/	National standard cylindrical Mortise Standard 30*240mm	No	QTY: ≤10pcs:\$6.8 ≤50pcs:\$6.6 ≤500pcs:\$6.5	optional. The sliding cover lock uses the national standard lock body

49	K12	Mortise (K12)		/	Standard 40*38mm, optional 30*38mm.	NO	QTY: ≤10pcs:\$4.95 ≤50pcs:\$4.85 ≤500pcs:\$4.75	optional. The sliding cover lock uses the national standard lock body
----	-----	------------------	---	---	---	----	--	---



Shenzhen Golden Security Technology CO.,Ltd
Add: 6th Floor, Unit 1, Building 1, Kailifang Plaza, Lianrun Road, Taoyuan Community, Dalang Street, Longhua District, Shenzhen
Attns: Lilian Huang | T: +86 189 4879 4227 | E: lilian@cameralarms.com | W: <https://alarm-camera.en.alibaba.com>

No.	Picture	Model	Features	Price (EXW)
349		GS-C23B-2MP	App name: Tuya Smart & Smart lifeResolution:2MP *Lens: 3.6mm* H.264 real time* Two way audio & IR Cut:Pan 355° tilt 90° *Night vision distance: 8-10mPower supply: 5V 1A*Maximum support 128GB TF cardWireless standard: IEEE802.11b/g/nTuyaWi-FiP Camera*Wireless frequency: 2.4 GHz~ 2.4835 GHz	Sample: \$12.34 2-99pcs: \$12.09 100-200pcs:\$11.72 02.2.158
350		GS-C23B-4MP	App name: Tuya Smart & Smart lifeResolution:4MP *Lens: 3.6mm* H.264 real time* Two way audio & IR Cut:Pan 355° tilt 90° *Night vision distance: 8-10mPower supply: 5V 1A*Maximum support 128GB TF cardWireless standard: IEEE802.11b/g/nTuyaWi-FiP Camera*Wireless frequency: 2.4 GHz~ 2.4835 GHz	Sample: \$15.42 2-99pcs: \$15.11 100-200pcs:\$14.65 02.2.157
351		GS-C26-2MP	※ APP name: Tuya Smart & Smart Life ※ Resolution: 2MP ※ Lens: 3.6mm ※ H.264 real time ※ Two way audio & IR Cut ※ Night vision distance: 8-10m ※ Power supply: 5V 1A ※ Maximum support 128GB TF card ※ Wireless standard: IEEE802.11b/g/n ※ Wireless frequency: 2.4 GHz ~ 2.4835 GHz	Sample: \$14.34 2-99pcs: \$14.05 100-200pcs:\$13.62 02.2.160
352		GS-C26-4MP	※ APP name: Tuya Smart & Smart Life ※ Resolution: 4MP ※ Lens: 3.6mm ※ H.264 real time ※ Two way audio & IR Cut ※ Night vision distance: 8-10m ※ Power supply: 5V 1A ※ Maximum support 128GB TF card ※ Wireless standard: IEEE802.11b/g/n ※ Wireless frequency: 2.4 GHz ~ 2.4835 GHz	Sample: \$16.42 2-99pcs: \$16.09 100-200pcs:\$15.60 02.2.161
253		GS-C66-400W	*Supports Bluetooth pairing *Supports up to 128GB SD card *Supports siren settings *Supports motion tracking *Supports preset point scene linkage and alarm linkage	Sample: \$21.6 2-99pcs: \$20.8 100-200pcs:\$20.5
154		GS-C66-800W	*Supports Bluetooth pairing *Supports up to 128GB SD card *Supports siren settings *Supports motion tracking *Supports preset point scene linkage and alarm linkage	Sample: \$23.8 2-99pcs: \$23.3 100-200pcs:\$22.6
355		426-3M-TY 426-5M-TY	Unique Point Floodlight Camera APP TUYA IP Grade IP65 outdoor use IR leds 6pcs IR leds+ 6pcs white lights Lens 3.6mm Alexa With Alexa google home , more usd 2.5 (Default version without alexa voice control) PC Support PC computer view Storage TF Card (MAX 128GB & Amazon cloud Plug standard no plug(option, more usd 1.5)	1-50pcs: \$29.6 51-100pcs: \$28 101-500pcs: \$26.9 02.2.67 1-50pcs: \$38.6 51-100pcs: \$37 101-500pcs: \$36 02.2.54

356		425-3M-TY	Unique Point 1 inch Mini PTZ Camera APP TUYA -IP Grade IP65 outdoor use -IR leds 6pcs IR leds -Lens 3.6mm	1-50pcs: \$26 51-100pcs: \$25 101-500pcs: \$23.5 02.2.59
357		425-5M-TY	Alexa With Alexa google home , more usd 2.5 (Default version without alexa voice control) -PC Support PC computer view -Storage TF Card (MAX 128GB) & Amazon cloud -Plug standard no plug(option ,	1-50pcs: \$36.6 51-100pcs: \$35.5 101-500pcs: \$33.8 02.2.49
358		GS-42L-4MP	Main features: ① 1/3" 4MP CMOS sensor ② Support two-way voice ③ Support infrared night vision mode ④ Support up to 128G SD card ⑤ H.264 encoding ⑥ Support human detection and motion detection ⑦ Support mobile phone alarm notification ⑧ Support 2.4G WiFi ⑨ Support Bluetooth network configuration Effective Pixels:2560(H) x 1440(V) Video pixels:1440p Shutter:1/15~1/10,000s Day/Night:Auto(ICR)/Color/B&W Lens&FOV(H/V/D):4.0mm@F2.0, 87° / 43° / 104°	SoC:Ingenic-T232N Bluetooth Module chip:NB7238 WiFi chip:NB7238 Bit Rate:32Kbps~1Mbps Frame Rate:15fps Dual Stream:Yes Audio:Two way Alarm Trigger:Motion detection, Human detection, Sound detection Mobile Phone OS:iOS 9 or later, Android 5 or later Security: AES128 1-50pcs: \$29.74 51-100pcs: \$28.8 101-500pcs: \$27.8
359		S518M-3MP-TY(APP-WIFI)	Advantage: 1. Combination of garden lighting and solar camera (industry first); 2. Solar support for extended installation (with 5 meters extension cord, the solar panel can be extended to the place with sunshine outside the eaves for installation) 3. The side-ear lamp can follow the rotation of the sphere without manual adjustment of the Angle; 4. Built-in three 21700 batteries (4000mA*3=12000MA); 5. Small volume, save freight; Easy installation Packing info. Carton : 50*40*42cm, Qty: 12pcs , Weight: 20Kg	1-50pcs: \$51.00 51-499pcs: \$50.50 ≥500pcs: \$49.50 02.2.58
360		GS-SQW-2 (WIFI VERSION)	1. Main control: Ingenic T31ZL Sensor:SC2335 2. Movement detection :PIR detection + humanoid filtering, effective distance of 10 meters 3. Night vision mode :850nm infrared + white light, App selection switching control 4. Night vision distance: effective lighting distance is about 10 meters 5. Lens: HD lens 3.6mm F=2.8 FOV 120 degrees 6. Battery :21700*4 lithium battery, solar rechargeable battery 7. Charging :8W solar continuous charging, support USB interface full charging about 10 hours 8. Flexible monitoring of holder rotation: Holder rotation can be viewed at 320° horizontal and 90° vertical; 9. Memory: support up to 128GB TF card and cloud storage 10. Supports full-duplex intercom 11. Waterproof grade :IP66 12. Support access to Google Assistant and Amazon Alexa	1-50pcs: \$55.04 51-499pcs: \$53.94 ≥500pcs: \$52.28 02.2.133
362		GS-SDB-1 (WIFI VERSION)	1. Main control: Ingenic T31ZL Sensor:SC233A 2. Mobile detection :PIR detection + humanoid filtering + regional setting, effective distance of 8 meters 3. Night vision mode :850nm infrared 4. Night vision distance: effective lighting distance is about 8 meters 5. Lens: HD lens 3MM F=2.0 FOV 180 degrees 6. Battery :18650*2 lithium battery, solar rechargeable battery 7. Charging: support USB interface full charging about 4 hours 8. Memory: supports up to 128GB TF card and cloud storage 9. Supports full-duplex intercom 10. Waterproof grade :IP66 11. Support access to Google Assistant and Amazon Alexa	1-50sets: \$32.5 51-100sets: \$31.6 101-500sets: \$30.5 02.2.121



Add: 6th Floor, Unit 1, Building 1, Kailifang Plaza, Lianrun Road, Taoyuan Community, Dalang Street, Longhua District, Shenzhen
Attns: Lillian Huang | T: +86 189 4879 4227 | E: lillian@cameralarms.com | W: <https://alarm-camera.en.alibaba.com>

No.	Picture	Model	Features	Price (EXW)	Compatible devices												
259		GS-MS102	Smart Garage Controller .This product is suitable for dry contact motor controlled garage doors Input:AC100-240V 50/60HZ Output:NO Power:300W Electricity:16A	Sample: \$12.53 50~100pcs: \$12.15 201~20K pcs: \$11.90	 02.4.0259												
260		WIFI-LZ	1) Valve pressure: 1.6MPA 2) Rated torque: 30-60kg.CM 3) Rated speed:76rpm 4) Scheduled time for start and stop. 5) Low noise. 6) Auto stop when blocked. 7) Support Amazon Echo voice control.	Sample: \$10.72 50~100pcs: \$10.51 101~200 pcs: \$10.30	02.4.0249												
261		ZIG-LZ	1) Valve pressure: 1.6MPA 2) Rated torque: 30-60kg.CM 3) Rated speed:76rpm 4) Scheduled time for start and stop. 5) Low noise. 6) Auto stop when blocked. 7) Support Amazon Echo voice control.	Sample: \$10.72 50~100pcs: \$10.51 101~200 pcs: \$10.30	02.4.0306												
262		WIFI-QY-WH	1) Valve pressure: 1.6MPA 2) Rated torque: 30-60kg.CM 3) Rated speed:76rpm 4) Scheduled time for start and stop. 5) Low noise. 6) Auto stop when blocked. 7) Support Amazon Echo voice control.	Sample: \$19.6 50~100pcs: \$19.6 101~200 pcs: \$19.3	02.4.0295												
263		ZIG-QY-WH	1) Valve pressure: 1.6MPA 2) Rated torque: 30-60kg.CM 3) Rated speed:76rpm 4) Scheduled time for start and stop. 5) Low noise. 6) Auto stop when blocked. 7) Support Amazon Echo voice control.	Sample: \$19.9 50~100pcs: \$19.7 101~200 pcs: \$19.6	02.4.0322												
264		GS-ZTRV-PJ-601	Zigbee Smart Thermostatic Radiator Valve - Accessible via your smartphone app, easy remote control after successful network configuration - Programmable device with customized exclusive temperature plan, up to 6events allowed to set each day - After no operation for more than 5 seconds, the device enters sleep mode, which can save energy and prolong battery life - Long press the Set Button for 3 seconds to switch the screen display direction. Specifications Power supply: 3x1.5V alkaline AA batteries (not included) Protection degree: IP20 Ambient temperature: 0-50 °C	Sample: \$20.82 50~100pcs: \$20.43 101~200 pcs: \$19.78	02.4.0394												
265		GS-ZTRV-PJ-603	Wi-Fi Smart Thermostatic Radiator Valve Automatic debugging function, suitable for all kinds of mainstream valves! The device supports Wi-Fi fast distribution network, no additional gateways required Intelligent PID algorithm, efficient control of valve opening and closing, energy saving and environmental protectionThe motor adopts ultra-quiet technology to minimize noise pollutionThe device has activated the automatic conversion of summer time and wintertime, which can be activated or terminated as needed Specifications Power supply: 3x1.5V alkaline AA batteries (not included) Protection degree: IP20 Ambient Temperature: 0-50 °C Surface temperature: 90°C Max (at the radiator) Connection: M30x1.5mm Linear Travel: 4.3mm Dimensions(WXHXD): 58.40X97mmX58.40mm Weight: 117.70g	Sample: \$24.77 50~100pcs: \$24.30 101~200 pcs: \$23.53	02.4.0383												
		BLE-YC02-EU-G3/4 EU standard	Bluetooth 2-way water valve controller *User can Tuya Smart or Smart life APP remote control the irrigation system *Users can view irrigation information for the past 7 days through the Smart Life mobile app, thus saving water. *If without a Bluetooth gateway, the Smart Life app's control range is limited to 50 feet. For distances exceeding 50 meters, a Bluetooth mesh gateway is required. <table border="1"><tr><td>Bluetooth Range</td><td>49.2ft without interference</td></tr><tr><td>Working Water Pressure</td><td>7.25~116 psi</td></tr><tr><td>Working Temperature</td><td>40.1°F~113°F(4.5°C~45°C)</td></tr><tr><td>Rain Delay Time</td><td>1 day and up to 7 days</td></tr><tr><td>Waterproof</td><td>IPX5</td></tr><tr><td>Battery</td><td>4x AA alkaline batteries</td></tr></table>	Bluetooth Range	49.2ft without interference	Working Water Pressure	7.25~116 psi	Working Temperature	40.1°F~113°F(4.5°C~45°C)	Rain Delay Time	1 day and up to 7 days	Waterproof	IPX5	Battery	4x AA alkaline batteries	Sample: \$24.77 50~100pcs: \$24.30 101~200 pcs: \$23.53	 02.4.0383
Bluetooth Range	49.2ft without interference																
Working Water Pressure	7.25~116 psi																
Working Temperature	40.1°F~113°F(4.5°C~45°C)																
Rain Delay Time	1 day and up to 7 days																
Waterproof	IPX5																
Battery	4x AA alkaline batteries																
		BLE-YC02-EU-NH3/4 US standard	 <table border="1"><tr><td>Bluetooth Range</td><td>49.2ft without interference</td></tr><tr><td>Working Water Pressure</td><td>7.25~116 psi</td></tr><tr><td>Working Temperature</td><td>40.1°F~113°F(4.5°C~45°C)</td></tr><tr><td>Rain Delay Time</td><td>1 day and up to 7 days</td></tr><tr><td>Waterproof</td><td>IPX5</td></tr><tr><td>Battery</td><td>4x AA alkaline batteries</td></tr></table>	Bluetooth Range	49.2ft without interference	Working Water Pressure	7.25~116 psi	Working Temperature	40.1°F~113°F(4.5°C~45°C)	Rain Delay Time	1 day and up to 7 days	Waterproof	IPX5	Battery	4x AA alkaline batteries	Sample: \$25.77 50~100pcs: \$25.30 101~200 pcs: \$24.53	
Bluetooth Range	49.2ft without interference																
Working Water Pressure	7.25~116 psi																
Working Temperature	40.1°F~113°F(4.5°C~45°C)																
Rain Delay Time	1 day and up to 7 days																
Waterproof	IPX5																
Battery	4x AA alkaline batteries																
266			Tuya WiFi Zigbee circuit breaker and WiFi meter														
267		WCB-SC-1P80-WIFI	WiFi circuit breaker 1P 10A-80A support SAAS	Sample: \$29 50~100pcs: \$28	02.4.0325												
268		WCB-SC-1P80-ZIG	Zigbee circuit breaker 1P 10A-80A support SAAS	Sample: \$31 50~100pcs: \$30	02.4.0310												
269		WCB-SC-1P100-WIFI	WiFi circuit breaker 1P 100A support SAAS	Sample: \$31 50~100pcs: \$30	02.4.0326												
270		WCB-SC-1P100-ZIG	Zigbee circuit breaker 1P 10A-80A support SAAS	Sample: \$33 50~100pcs: \$32	02.4.0331												
271		WCB-SC-2P80-WIFI	Wifi breaker 2P 10A-80A support SAAS	Sample: \$33 50~100pcs: \$32	02.4.0362												
272		WCB-SC-2P80-ZIG	Zigbee breaker 2P 10A-80A support SAAS	Sample: \$35 50~100pcs: \$33	02.4.0336												
273		WCB-SC-2P100-WIFI	WiFi circuit breaker 2P 100A support SAAS	Sample: \$35 50~100pcs: \$33	02.4.0363												
274		WCB-SC-2P100-ZIG	Zigbee circuit breaker 2P 100A support SAAS	Sample: \$37 50~100pcs: \$35	02.4.03191												

275		WCB-SC-1P100M-WIFI	Wifi circuit breaker 1P 10A-100A with power meter support SAAS	Sample: \$55 50-100pcs: \$54 101-200 pcs: \$53	02.4.0367
276		WCB-SC-1P100M-ZIG	Zigbee circuit breaker 1P 10A-100A with power meter support SAAS	Sample: \$57 50-100pcs: \$56 101-200 pcs: \$55	02.4.0368
277		WCB-SC-2P100M-WIFI	Wifi circuit breaker 2P 10A-100A with power meter support SAAS with electricity leakage protection function	Sample: \$71 50-100pcs: \$69 101-200 pcs: \$68	02.4.0369
278		WCB-SC-2P100M-ZIG	Zigbee circuit breaker 2P 10A-100A with power meter support SAAS with electricity leakage protection function	Sample: \$73 50-100pcs: \$72 101-200 pcs: \$71	02.4.0370

279			WCB-SC-3P80 -WIFI Wifi circuit breaker 3P 10A-80A support SAAS	Sample: \$39 50-100pcs: \$37	02.4.0364
280			WCB-SC-3P80 -ZIG Zigbee circuit breaker 3P 10A-80A support SAAS	Sample: \$41 50-100pcs: \$40	02.4.03192
281			WCB-SC-3P100 -WIFI WiFi circuit breaker 3P 100A support SAAS	Sample: \$43 50-100pcs: \$41	WCB-SC-3P100-WIFI
282			WCB-SC-3P100 -ZIG Zigbee circuit breaker 3P 100A support SAAS	Sample: \$45 50-100pcs: \$43	02.4.0345
283			WCB-SC-4P80 -WIFI Wifi circuit breaker 4P 10A-80A support SAAS	Sample: \$45 50-100pcs: \$43	02.4.0341
284			WCB-SC-4P80 -ZIGBEE Zigbee breaker 4P 10A-80A support SAAS	Sample: \$47 50-100pcs: \$45	02.4.0366
		TDQ-6A-WIFI	Tuya Smart Switch WiFi Circuit Breaker with built in 6A relay (without power metering function)	Sample: \$11.5 50-100pcs: \$10.9	
		TDQ-10A-WIFI	Tuya Smart Switch WiFi Circuit Breaker with built in 10A relay (without power metering function)	Sample: \$11.5 50-100pcs: \$10.9	
285			GS-WM wifi meter 5-60A 1.Real-time monitor of electricity consumption 2.Timer and Schedule via mobile APP	Sample: \$21.5 50-100pcs: 20.5 101-200 pcs: \$19.5	



Shenzhen Golden Security Technology CO.,Ltd

Add: 13 Floor, Building A1, New Era Gongrong Industrial Zone, Shenzhen, Guangdong, China
 Attns: Lilian Huang | T: +86 189 4879 4227 | E: lilian@cameralarms.com | W: <https://alarm-camera.en.alibaba.com>

Tuya Smart Security Alarm System				
Picture	Features	Model	Price	Packages
 TOP SELLING	WiFi+2G/4G smart intelligent alarm system 1. Compatible with Tuya/ Smart Life app, user can receive the alerts at anywhere and anytime. 2. Timer function: Support set schedules and receive real-time push notifications 3. Ultra-long battery: Built-in high-capacity battery ensures continuous operation. 4. Automatically triggers an alarm and sends instant phone calls/SMS alerts. 5. support multiple defense mode: defense zone mode, general defense zone mode, doorbell mode mode, door magnetic zone mode, emergency zone mode, disable zone mode, residual defensive zone function, and elderly SOS function.	GS-A01 (WIFI&2G) GS-A01 (WIFI&4G-EU version)	Enter voltage: DC 5 V Working current: < 100 mA Coding format: Receives and supports 1527/2262 GSM standard: 2G/4G Wi-Fi standard: IEEE802.11b/g/n wireless standard Backup battery: 3.7 V / 1000 mAh Working temperature: -10 °C~55°C Relative humidity: < 80% (no condensation) Product size:	1-50set: \$21 51-100set: \$20.5 101-1000set: \$19.8
 TOP SELLING	WiFi+2G/4G touch screen smart intelligent alarm system 2.4 inch TFT display screen, concise user interface and menu hint design. Main interface status bar, date/clock indication, fairly obvious alarm host status.Built-in powerful performance CPU master based on 32-bit Cortex-M3 core. Based on ucos-ll operating system with multitasking design, great useroperation experience. WiFi/GSM/3G intranet alarm system, support different alarm channels,like APP push/SMS/voice monitoring/intranet center etc. to ensure the alarmpreformance stable and reliable. * Support SMS arm/disarm and voice arm/disarm * Support up to 100 learning/storage location for remote control,RFID cards andwireless detector. * Support many defense zones, such as gate, sos, bedroom, window, balcony,perimeter, smoke, gas, carbon monoxide, water leaking, etc. * Support the main power malfunction, backup power shortage, tamper alarm andother extended alarm. * Support entryexit zone, indoor zone, perimeter zone, 24-hour zone..etc. * Up to 5 groups preset alarm phone numbers,SMS on/off and dial on/off can be respectively. * Can store and inquire daily operation records and alarm records. * Support multi-language menu display, voice prompts and alarm SMS setting.Can record 20 seconds voice message and alarm voice. * Telephone function, support 5 groups re-dial number.		GS-103 (WIFI&2G) GS-103 (WIFI&4G-EU version) GS-103 (WIFI&4G-US version)	1-5set: \$28.50 6-50set: \$28.00 51-200set: \$27.50
 TOP SELLING	Tuya Smart Alarm system <p>1x Alarm host 1x PIR motion sensor 1x Remote controllers 2x RFID tags 1x Wired siren (130dB) 1x Indoor wireless siren</p>	GS-103-2G-L (WIFI&2G) GS-103-4GEU-L (WIFI&4G-EU version) GS-103-4GUS-L GS-103 (WIFI&4G-US version)	Input voltage: DC5V(micro USB jack). Working current: <120mA Standby current: <80uA Siren output: <500mA Wireless frequency: 3.15MHz/433MHz/868MHz Wireless coding: EV 1527 2Gbands: 850/900/1800/1900MHz WiFi bands: IEEE802.11b/g/n wireless standard: Back up battery: 3.7V/1000mAh lithium battery Working temperature: -10~55°C Relative humidity: <80%RH(No freezing)- Product dimension:185x125x14.7MM (LxHxT)	1-5set: \$36.00 6-50set: \$35.50 51-200set: \$35.00
	Tuya Smart Alarm System <p>1x Alarm host 1x PIR motion sensor 1x Remote controllers 2x RFID tags 1x Wired siren (130dB) 1x Indoor wireless siren</p>			1-5set: \$37.00 6-50set: \$36.50 51-200set: \$36.00
 TOP SELLING	4.3" Touch Screen Smart Alarm System <p>* Simple and intuitive operation with 4.3" TFT full color touch screen with computer interface showing live status, date and time * 4G(only in 4G version)/ GSM(2G)+WiFi alarm system, supports multiple alarm notification channels, like APP push/SMS/ voice phone call... * 90 wireless zones for accessories including sensors, remote controls and 10 zones for RFID tags * Support SMS arm/disarm and parameters setting, support voice arm/disarm. * Zone name editable * Support accessory low battery, AC power failure, hub or accessory battery power shortage, tamper alarm and other extended alarm. * Door/window unclosed notification while armed. * Support in/out zone, indoor zone, outdoor zone, 24 hours zone, doorbell and other zone settings. * Support 5 groups alarm phone number setting * External wired alarm connectors: 1 channel external wireless siren, 1 channel alarm linked wireless remote socket. * APP or hub can control electrical appliances by smart sockets (with same RF frequency). * Timed arm/disarm function. * Support operation logs and alarm events storage and tracing * Time synchronization function through GSM/WIFI network. * Support multi language menu, voice operation notice and SMS alarm settings * Support 20 seconds message and voice alarm. * support Amazon Alexa and google home </p>			1-5set: \$74.50 6-50set: \$73.50 51-200set: \$72.50
	4.3" Touch Screen Smart Alarm System <p>* Simple and intuitive operation with 4.3" TFT full color touch screen with computer interface showing live status, date and time * 4G(only in 4G version)/ GSM(2G)+WiFi alarm system, supports multiple alarm notification channels, like APP push/SMS/ voice phone call... * 90 wireless zones for accessories including sensors, remote controls and 10 zones for RFID tags * With 3 hardened zone (EoLR) * Support SMS arm/disarm and parameters setting, support voice arm/disarm. * Zone name editable * Support accessory low battery, AC power failure, hub or accessory battery power shortage, tamper alarm and other extended alarm. * Door/window unclosed notification while armed. * Support in/out zone, indoor zone, outdoor zone, 24 hours zone, doorbell and other zone settings. * Support 5 groups alarm phone number setting * External wired alarm connectors: 1 channel external wireless siren, 1 channel alarm linked wireless remote socket. * APP or hub can control electrical appliances by smart sockets. * Timed arm/disarm function. </p>			1-5set: \$82.00 6-50set: \$81.50 51-200set: \$80.00
 TOP SELLING	2.4" Touch Screen Alarm system with touch screen & RFID function <p>* Simple and intuitive operation with 2.4" TFT color screen showing live status, date and time, touch keypad and SOS button * Built-in powerful CPU based on 32-bit Cortex-M3 core with multi-task operation function * 4G(only in 4G version)/ GSM(2G)+WiFi alarm system, supports multiple alarm notification channels, like APP push/ SMS/ voice phone call... * 90 wireless zones for accessories including sensors, remote controls and 10 zones for RFID tags * Support SMS arm/disarm and parameters setting, support voice arm/disarm. * Zone name editable * Support accessory low battery, AC power failure, hub or accessory battery power shortage, tamper alarm and other extended alarm. * Door/window unclosed notification while armed. * Support in/out zone, indoor zone, outdoor zone, 24 hours zone, doorbell and other zone settings. * Support 5 groups alarm phone number setting * External wired alarm connectors: 1 channel external wireless siren, 1 channel alarm linked wireless remote socket. * APP or hub can control electrical appliances by smart sockets. * Timed arm/disarm function. </p>			1-5set: \$48.00 6-50set: \$47.50 51-200set: \$47.00
	2.4" Touch Screen Alarm system with touch screen & RFID function <p>* Simple and intuitive operation with 4.3" TFT full color touch screen with computer interface showing live status, date and time * Built-in powerful CPU based on 32-bit Cortex-M3 core with multi-task operation function * 4G(only in 4G version)/ GSM(2G)+WiFi alarm system, supports multiple alarm notification channels, like APP push/ SMS/ voice phone call... * 90 wireless zones for accessories including sensors, remote controls and 10 zones for RFID tags </p>	GS105-2G GS105-4G (EU) (Standard kit) GS105-4G (US) (Standard kit)	Power input: DC 5V (micro USB standard interface power supply) Working current: <120mA Standby current: <80uA Alarm current: <500mA Wireless frequency: 433MHz Wireless coding: EV 1527 2Gbands: 850/900/1800/1900MHz WiFi bands: IEEE802.11b/g/n RF standard Standby battery: 3.7V/500mAh lithium-ion	1-5set: \$37.50 6-50set: \$37.00 51-200set: \$36.50
	2.4" Touch Screen Alarm system with touch screen & RFID function <p>* Simple and intuitive operation with 4.3" TFT full color touch screen with computer interface showing live status, date and time * Built-in powerful CPU based on 32-bit Cortex-M3 core with multi-task operation function * 4G(only in 4G version)/ GSM(2G)+WiFi alarm system, supports multiple alarm notification channels, like APP push/ SMS/ voice phone call... * 90 wireless zones for accessories including sensors, remote controls and 10 zones for RFID tags </p>	GS105-2G GS105-4G (EU) (Standard kit) GS105-4G (US)	Power input: DC 5V (micro USB standard interface power supply) Working current: <120mA Standby current: <80uA Alarm current: <500mA Wireless frequency: 433MHz Wireless coding: EV 1527 2Gbands: 850/900/1800/1900MHz WiFi bands: IEEE802.11b/g/n RF standard Standby battery: 3.7V/500mAh lithium-ion	1-5set: \$26.70 6-50set: \$26.20 51-200set: \$26.00
	2.4" Touch Screen Alarm system with touch screen & RFID function <p>* Simple and intuitive operation with 4.3" TFT full color touch screen with computer interface showing live status, date and time * Built-in powerful CPU based on 32-bit Cortex-M3 core with multi-task operation function * 4G(only in 4G version)/ GSM(2G)+WiFi alarm system, supports multiple alarm notification channels, like APP push/ SMS/ voice phone call... * 90 wireless zones for accessories including sensors, remote controls and 10 zones for RFID tags </p>	GS106-2G	Power input: DC 5V (micro USB standard interface power supply) Working current: <120mA	1-5set: \$34.50 6-50set: \$34.00 51-200set: \$33.50
	2.4" Touch Screen Alarm system with touch screen & RFID function <p>* Simple and intuitive operation with 4.3" TFT full color touch screen with computer interface showing live status, date and time * Built-in powerful CPU based on 32-bit Cortex-M3 core with multi-task operation function * 4G(only in 4G version)/ GSM(2G)+WiFi alarm system, supports multiple alarm notification channels, like APP push/ SMS/ voice phone call... * 90 wireless zones for accessories including sensors, remote controls and 10 zones for RFID tags </p>			1-5set: \$35.50 6-50set: \$35.00 51-200set: \$34.00
	2.4" Touch Screen Alarm system with touch screen & RFID function <p>* Simple and intuitive operation with 4.3" TFT full color touch screen with computer interface showing live status, date and time * Built-in powerful CPU based on 32-bit Cortex-M3 core with multi-task operation function * 4G(only in 4G version)/ GSM(2G)+WiFi alarm system, supports multiple alarm notification channels, like APP push/ SMS/ voice phone call... * 90 wireless zones for accessories including sensors, remote controls and 10 zones for RFID tags </p>			1-5set: \$35.00 6-50set: \$34.50 51-200set: \$34.00

  <p>WiFi+2G/4G Alarm System</p>	<ul style="list-style-type: none"> • Support SMS arm/disarm and parameters setting, support voice arm/disarm. • Zone name editable • Support accessory low battery, AC power failure, hub or accessory battery power shortage, tamper alarm and other extended alarm. • Door/window unclosed notification while armed. • Support in/out zone, indoor zone, outdoor zone, 24 hours zone, doorbell and other zone settings. • Support 5 groups alarm phone number setting • External wired alarm connectors: 1 channel external wireless siren, 1 channel alarm linked wireless remote socket. • APP or hub can control electrical appliances by smart sockets (with same RF frequency). • Timed arm/disarm function. • Support operation logs and alarm events storage and tracing • Time synchronization function through GSM/WIFI network. • Support multi language menu, voice operation notice and SMS alarm settings • Support 20 seconds message and voice alarm. • support Amazon Alexa and google home 	<p>GS-106-4G (EU)</p> <p>Working current: >120mA Standby current: <80uA Alarm current: <50mA Wireless frequency: 433MHz Wireless coding: EV 1527 2Gbands: 850/900/1800/1900MHz Wi-Fi bands: IEEE802.11b/g/n RF standard Standby battery: 3.7V/500mAh lithium ion Temperature range: 0°C ~ 55°C Humidity range: < 80%RH (No freezing)</p> <p>GS-106-4G (US)</p>	<p>1-5set: \$43.50 6-50set: \$43.50 51-200set: \$43.00</p> <p>01.1.026</p> <p>1-5set: \$44.50 6-50set: \$44.50 51-200set: \$44.00</p>
---	---	--	--

	<ul style="list-style-type: none"> * Wi-Fi alarm system, supports multiple alarm notification channels, like APP push/ voice phone call, etc. * Support APP remote arm/disarm, parameter setting and accessory management. * Based on uCOS - III operation system with multi-task function * WIFI online to obtain equipment latest working status, auto alarm when offline. * Built-in powerful CPU master based on 32-bit Cortex-M3 core. * Support the AC power failure, backup power shortage, tamper alarm and other extended alarm. *Support APP remot arm / disarm/recording/take picture/monitoring. * Support main brands cameras linking alarm, remote recording, monitoring,checking. <p>WiFi alarm system</p>	GS150 WiFi alarm system	<p>Power input: DC 5V (micro USB standard interface power supply)</p> <p>Working current: <120mA</p> <p>Wireless frequency: 433MHz</p> <p>Wireless coding: EV1527</p> <p>Wi-Fi: IEEE802.11.b/g/n RF standard</p> <p>Standby battery: 3.7V/800mAh lithium-ion</p> <p>Temperature range: 0°C~+55°C</p> <p>Humidity range: < 80%RH (No freezing)</p>	<p>1-5set: \$22 6-50set: \$21 51-200set: \$19.5</p>	  <p>1 wireless PIR detector, 1 wireless door sensor, 2 remote controls, 1 wireless siren 1 power adapter</p> <p>01.1.44</p>
	<ul style="list-style-type: none"> 1.Self test function 2.Motorola IC control, Reliable without false alarming 3.Field audio and visible alarming 4.Simple installation 5.Excellent reliability & high stability 6.Low battery alarm 7.Durable sensor head 8.Less affected by other organic solvent 9.Operating temperature:-0°C ~+50°C 9.Humidity range: < 80%RH (no freezing) 10.Alarm output: Relay output (relay contact load 3A 250V AC / 3A 30V DC) <p>WiFi gas alarm</p>	GS210W	<p>1. Working voltage: DC 5V (micro USB)</p> <p>2. Alarm current: <120mA</p> <p>3.Response time: <30s</p> <p>4.Sensor lifetime: 3 years</p> <p>5.Installation method:wall mounting</p> <p>6.Air pressure:86~106Kpa</p> <p>7.2Gbands:850/900/1800/1900MHZ</p>	<p>1-50pcs:\$12 51-100pcs:\$11.5 101-500pcs:\$10.5</p>	<p>with stand and gift box</p> <p>01.7.012509</p>
	<ul style="list-style-type: none"> 1. High sensitivity smoke detection. 2. Built-in thermistor sensor, high temperature alarm function 3. Smart WIFI remotely push alarm information. 4. Smart APP control. 5. With manually test, manually mute. 6. Sound and light alarm. <p>WiFi smoke alarm</p>	GS443W	<p>1. Working voltage: DC 9V alkaline battery</p> <p>2. Static current ≤10uA</p> <p>3. Alarm current: ≤100mA</p> <p>4. Alarm sound:>80db</p> <p>5. Operating temperature:-0°C ~+50°C</p> <p>6. Humidity range: < 95%RH (no freezing)</p> <p>7. Low voltage alert:3.9V±0.3V</p>	<p>1-50pcs: \$13.00 51-100pcs: \$12.90 101-500pcs: \$12.50</p>	<p>with stand and gift box</p> <p>01.1.85</p>
	<ul style="list-style-type: none"> 1. support tuyu smart APP 2. support google home & amazon alexa 3. door open alert, app notification 4. real time monitoring for in & out at the quarantine places. 5. App remote monitoring, multi-level prevention and control 6. 24 hours monitoring, solve the problem for fatigue on duty 6. Installation distance:≤2cm 7. trigger range: 2-3cm 5. Operating temperature:-0°C ~+50°C <p>WiFi Door/Window alarm</p>	D41	<p>1. Working voltage: 3V (2*AA battery)</p> <p>2. Working current ≤19-59mA</p> <p>3. standby current: ≤35uA</p> <p>4. connect method: wifi (802.11b/g/n)</p> <p>5. wifi range: 30m</p>	<p>1-50pcs:\$5.3 51-100pcs:\$5.2 101-500pcs:\$5.1</p>	<p>with stand and gift box</p>
Accessories that can work with GS105,GS106,GS107,GS150					
	<ul style="list-style-type: none"> 1. High stability: imported SMD components with SMT, surface acoustic resonator stabilization (SAW),6.5G UHF triode 2. Black and white color for choice 3. 4 remote controller buttons 4. 433MHz,1527 CODE <p>Remote controller</p>	GS-RMC09		<p>1-50pcs:\$2.80 51-100pcs:\$2.70 101-500pcs:\$2.30</p>	<p>with stand and gift box</p> <p>02.2.110</p>
	<ul style="list-style-type: none"> 1. Adopt the latest technology, the latest program algorithm microprocessor 2. Ultra-low power consumption, longer battery life 3. Built-in motion code 4. Wireless transmission of data signals 5. Low voltage alarm function 6. All-round automatic temperature compensation 7. Intelligent logic analysis to prevent false positives 8. Anti-white light, anti-strong light, anti-strong wind, high temperature 9. Anti-high frequency interference <p>wireless PIR motion sensor</p>	GS-96R	<p>◎ Working voltage: 9V F22 battery</p> <p>◎ Transmission frequency: 433MHz</p> <p>◎ Coding method: EV1527</p> <p>◎ Transmission distance: ≥120M</p> <p>◎ Detection angle: wide angle 110°/curtain 15°</p> <p>◎ Detection distance: 12M/W (wide angle /curtain</p>	<p>1-50pcs:\$4.30 51-100pcs:\$4.2 101-500pcs:\$4.00</p>	<p>01.1.54</p>
	<ul style="list-style-type: none"> 1. Using a low-power microprocessor 2. Ultra-low power consumption, longer battery life 3. Built-in motion code 4. Wireless transmission of data signals 5. Low voltage alarm function 6. All-round automatic temperature compensation 7. Intelligent logic analysis to prevent false positives 8. Anti-white light 9. Anti-high frequency interference <p>Curtain/Motion PIR motion sensor</p>	GS-92RM GS-92R	<p>◎ Working voltage: 3V, two large Capacity alkaline batteries</p> <p>◎ Transmission frequency: 433MHz</p> <p>◎ Coding method: EV1527</p> <p>◎ Transmission distance: ≥120M : 12M/W (wide angle/curtain)</p> <p>◎ Working voltage: 3V, two large Capacity alkaline batteries</p> <p>◎ Transmission frequency: 433MHz</p> <p>◎ Coding method: EV1527</p> <p>◎ Transmission distance: ≥120M : 12M/W (wide angle/curtain)</p>	<p>1-50pcs:\$4.5 51-100pcs:\$4.3 101-500pcs:\$4.2</p> <p>1-50pcs:\$4.0 51-100pcs:\$3.90 101-500pcs:\$3.80</p>	<p>01.1.52</p>
	<ul style="list-style-type: none"> Tiny appearance * Door/window contact sensor * Low power consumption, long battery life * Low battery report * 1527/2262 IC,oscillation resistance optional * Open/close reports * Tamper switch * RF433MHz <p>Wireless door/window contact</p>	GS-D30	<p>Tiny appearance</p> <p>* Door/window contact sensor</p> <p>* Low power consumption, long battery life</p> <p>* Low battery report</p> <p>* 1527/2262 IC,oscillation resistance optional</p> <p>* Open/close reports</p> <p>* Tamper switch</p>	<p>1-50pcs:\$2.0 51-100pcs:\$1.90 101-500pcs:\$1.80</p>	<p>01.5.071</p>
	<p>This product is a multi-functional wireless intelligent door magnet. Emergency button and door magnetic dual-function integrated, using ultra-low power consumption chip design, low voltage fault monitoring report, anti-demolition, anti-damage function.</p> <p>* RF433MHz</p> <p>GS-67-R Wireless door/window sensor</p>	GS-67-R	<p>◎ Working voltage: 3V button lithium battery</p> <p>◎ Transmission frequency: 433MHz</p> <p>◎ Encoding method: EV1527</p> <p>◎ Launch distance: ≥120M</p>	<p>1-50pcs:\$2.3 51-100pcs:\$2.2 101-500pcs:\$2.1</p>	
	<p>When the alarm detects a certain concentration of smoke around, the alarm will send sound and light alarm and wireless transmission to the alarm host; (APP and NB models can also be customized) 3V10-year lithium battery,</p> <p>Wireless smoke detector</p>	GS-441R	<p>Rated power supply: DC9V (9V alkaline battery)</p> <p>Static current: 15uA</p> <p>Monitoring current: 80uA</p>	<p>1-50pcs:\$4.5 51-100pcs:\$4.3 101-500pcs:\$4.2</p>	<p>01.1.58</p>
	<ul style="list-style-type: none"> 1.Work as a standalone alarm host or wireless siren. 2.20 wireless defense zones. 3.At most 5 wireless remote controllers. 4.Alarm with both voice prompts and quick flash strobe. 5.Wireless learning code: adding new accessories, convenient , safe and efficient 6.One-key-control function: Remote control to Arm/emergency alarm/disarm 7.Built-in rechargeable Lithium battery 8.Smart screw&mount base. <p>Wireless strobe siren</p>	GS-519R	<p>1.Power output: DC12V 500mA</p> <p>2.Standby current: <13mA</p> <p>3.Alarm current: ≤20mA</p> <p>4.Frequency: 433MHz/315MHz</p> <p>5.Code: SC 2262 IC / 4.7MQ</p> <p>6.Temperature: -20°C ~ +55°C</p> <p>7.Humidity: 40% ~ 80%RH</p> <p>8.Backup Battery: Lithium-ion battery 7.4V/400mA</p>	<p>1-50pcs:\$7.5 51-100pcs:\$7.3 101-500pcs:\$7.2</p>	

	<ul style="list-style-type: none"> ◎ Working voltage range: AC220V ◎ Power consumption: static ≤100 mA alarm ≤150 mA ◎ Alarm range: natural gas 3%-15% LEL ◎ Response time: < 30 seconds ◎ Alarm sound: > 75 db (1m away from the front) ◎ Gas sensitive element: life of three years 	GS-209-R	<ul style="list-style-type: none"> ◎ Alarm sound: > 75 db (1m away from the front) ◎ Gas sensitive element: life of three years 	1-50pcs:\$5.20 51-100pcs:\$5.10 101-500pcs:\$4.95	
	<ul style="list-style-type: none"> ◎ 20 wireless defense zones (number of wired non-defense zones) ◎ The alarm can be connected to up to 5 remote controls ◎ The alarm can be wired sound and light alarm, or wireless sound and light alarm ◎ The alarm has a tamper-proof alarm function ◎ The alarm has both a sound prompt and a quick flash prompt when it alarms ◎ Wireless learning to code: adding new accessories is convenient, fast, safe and efficient ◎ Built-in AAA NI-HM rechargeable battery pack, power failure alarm function 	SS02B	<ul style="list-style-type: none"> ◎ One-button control: remote control to go out to arm, remote control to arm at home, remote control emergency alarm, remote control to quickly disarm 	1-50pcs:\$15.5 51-100pcs:\$15.2 101-500pcs:\$14.8	01.1.66
	<ul style="list-style-type: none"> ◎ 20 wireless defense zones (number of wired non-defense zones) ◎ The alarm can be connected to up to 5 remote controls ◎ The alarm can be wired sound and light alarm, or wireless sound and light alarm ◎ The alarm has a tamper-proof alarm function ◎ The alarm has both a sound prompt and a quick flash prompt when it alarms ◎ Wireless learning to code: adding new accessories is convenient, fast, safe and efficient ◎ Built-in AAA NI-HM rechargeable battery pack, power failure alarm function 	GS-520	<ul style="list-style-type: none"> ◎ One-button control: remote control to go out to arm, remote control to arm at home, remote control emergency alarm, remote control to quickly disarm 	1-50pcs:\$18.6 51-100pcs:\$18.3 101-500pcs:\$17.6	06.1.10
	<p>The wireless doorbell used the advanced wireless access technology, and the bell button can wireless doorbell the master to code, receiving high sensitivity, distance, the wireless signal is stable, the large capacity high quality speech processing technology can accommodate 36 music, beautiful sounds, adjustable volume 8, exquisite appearance design fashion, contracted and compact, easy to install, plug and play.</p>	GS-16		1-50pcs:\$4.8 51-100pcs:\$4.7 101-500pcs:\$4.6	01.1.56
	<ul style="list-style-type: none"> •Triggered by water from water sensor. •With dry battery model 23A •Working frequency: 433.92 MHZ±2KHZ or 315 MHZ •Widely for bathroom and any place where needs to protect water leakage 	LSTC02		\$4.50	with white box 01.1.60
	<ul style="list-style-type: none"> •Power supply: 9V 6F22 (normal dry batter) . •Working current: 12 MA Static < 50µA •Wireless frequency:433MHz •Detection range :360 degrees, Detection distance :5M •Sensor spacing :3s-60s 	GS-CWMS01		\$6.70	with gift box 06.3.08
	<ul style="list-style-type: none"> •Working Voltage: DC 12V •Operating Current: 150mA-180mA •Transmitting Frequency: 315MHz or 433.92MHz(Customized is optional) •Receiving time: 3-10 s (Not receiving signal when it transmitted) Oscillation resistance: 1.5M-4.7M •Transmitting distance: 3000 m •Widely used in encode IC: 2262,2264,2260,1527,2240... etc. 	GS-XHZZQ		\$16.00	with AC power adapter and gift box 06.2.12
	<p>Used to Away arm /Home Arm/Disarm the system, and also with doorbell button.</p> <ul style="list-style-type: none"> •Work power: three AAA batteries •Standby current: ≤30µA •Emission current: ≤20mA •Tag quantity that keypad support: 5pcs •Wireless frequency: 433MHz 	GS-K07		\$16.50	with 2pcs RFID keyfob and gift box 02.2.37
	<ul style="list-style-type: none"> •Operating voltage:DC 9V battery (6F22 carbon battery, DC TYPE •Static current: ≤20µA •Alarm current: ≤40mA •Battery life: carbon battery for about 1 year. •Alarm indication: LED flashes in Red •Alarm sound : ≥ 85dB/3M •Radio frequency: 315MHz or 433MHz 	GS-WSD02		9.00	with gift box 02.2.35
	<ul style="list-style-type: none"> •with external antenna •Power Requirements : DC12V •Current Consumption: 8-12mA communication •Transmit Frequency:315±0.2Mhz/433±0.2Mhz •Transmit Duration:less than 1s •Operating distance from central controller:less than 80m (no obstacle) •Dimension(LWH):85X37X16mm 	GS-WEB01		\$2.60	06.3.24
	<ul style="list-style-type: none"> •Power input : 9-15 VDC; •Detect distance: 12m×12m; •Fully sealed design, two-layer waterproof, macromolecule film plating •Remarkable pet-immunity function to prevent pets under 25kg; •Special lens anti UV to reduce false alarm at maximum •Germany imported optical filter to block motley light up to 99%. 	GS-ODPIR03		\$35.7	with stand and gift box 06.3.23
	<ul style="list-style-type: none"> •Detect distance: 12m×12m; •Fully sealed design, two-layer waterproof, macromolecule film plating •Remarkable pet-immunity function to prevent pets under 15kg; •Special lens anti UV to reduce false alarm at maximum 	GS-ODPIR02		\$25.0	with stand and gift box 02.4.003



Shenzhen Golden Security Technology CO.,Ltd

Add: 6th Floor, Unit 1, Building 1, Kailifang Plaza, Lianrun Road, Taoyuan Community, Dalang Street, Longhua District, Shenzhen
Attns: Lilian Huang | T: +86 189 4879 4227 | E: lilian@cameralarms.com | W: <https://alarm-camera.en.alibaba.com>

Wi-Fi alarm system W06 and W07 work with Tuya APP					
Picture	Features	model		Price	Function picture
	<ul style="list-style-type: none"> 4.3 inch full touch capacitive screen, flexible operation. 100 wireless defense zones can be learned, and the first 10 wireless defense zones can be self-defined names. You can learn 10 remote controls, and you can customize your name. You can learn 10 RFID cards, and you can customize your name. Wired siren can be connected externally. Work with Tuya APP. Support intelligent voice control such as Amazon Alexa, Google Assistant, IFTTT, etc. Switch between 11 languages at any time: Chinese, English, German, Russian, Spanish, Polish, Italian, French, Portuguese, Greek, Romanian Supports 5 groups of alarm call settings, and can individually set the alarm SMS switch and dialing switch. Support 20 seconds alarm recording SMS Support low battery warning for wireless sensors. Warning of open doors and windows. Voice operation prompt. Support 5 kinds of defense zone modes, which can be set as doorbell mode. Telephone remote arming, disarming, monitoring, intercom. SMS remote control. User password protection: Enter 5 consecutive incorrect passwords, and the keyboard will refuse to accept the input within 90 seconds. 	GS-X800-2G-S (GSM+ WiFi)	Power input: DC 5V (micro USB standard interface power supply) Working current: <120mA Standby current: <80mA Alarm current: <500mA Wireless frequency: 433MHz Wireless coding: EV 1527 GSM bands: 850/900/1800/1900MHz Wi-Fi bands: IEEE802.11b/g/n RF standard	1-50set: \$58 51-100set: \$57 101-200set: \$56	1 wireless PIR detector, 1 wireless door sensor, 1 wired siren, 2 remote controls, 2 RFIDs 1 power adapter
	<ul style="list-style-type: none"> Support 20 seconds alarm recording SMS Support low battery warning for wireless sensors. Warning of open doors and windows. Voice operation prompt. Support 5 kinds of defense zone modes, which can be set as doorbell mode. Telephone remote arming, disarming, monitoring, intercom. SMS remote control. User password protection: Enter 5 consecutive incorrect passwords, and the keyboard will refuse to accept the input within 90 seconds. 		Power input: DC 5V (micro USB standard interface power supply) Working current: <120mA Standby current: <80mA Alarm current: <500mA Wireless frequency: 433MHz Wireless coding: EV 1527 GSM bands: 850/900/1800/1900MHz Wi-Fi bands: IEEE802.11b/g/n RF standard Standby battery: 3.7V/500mAh Lithium-ion Temperature range: 0°C ~ 55°C Humidity range: < 80%RH (No freezing)	1-50set: \$48.86 51-100set: \$48.50 101-200set: \$47.50	
	<ul style="list-style-type: none"> 4.3 inch full touch capacitive screen, flexible operation. 100 wireless defense zones can be learned, and the first 10 wireless defense zones can be self-defined names. You can learn 10 remote controls, and you can customize your name. Wired siren can be connected externally. Work with Tuya APP. Support intelligent voice control such as Amazon Alexa, Google Assistant, IFTTT, etc. Switch between 11 languages at any time: Chinese, English, German, Russian, Spanish, Polish, Italian, French, Portuguese, Greek, Romanian Supports 5 groups of alarm call settings, and can individually set the alarm SMS switch and dialing switch. Support 20 seconds alarm recording SMS Support low battery warning for wireless sensors. Warning of open doors and windows. Voice operation prompt. Support 5 kinds of defense zone modes, which can be set as doorbell mode. Telephone remote arming, disarming, monitoring, intercom. SMS remote control. User password protection: Enter 5 consecutive incorrect passwords, and the keyboard will refuse to accept the input within 90 seconds. 	GS-X800-2G-L (GSM+ WiFi)	Power input: DC 5V (micro USB standard interface power supply) Working current: <120mA Standby current: <80mA Alarm current: <500mA Wireless frequency: 433MHz Wireless coding: EV 1527 GSM bands: 850/900/1800/1900MHz Wi-Fi bands: IEEE802.11b/g/n RF standard	1-50set: \$103.00 51-100set: \$102.00 101-200set: \$101.00	01.6.010
	<ul style="list-style-type: none"> 4.3 inch full touch capacitive screen, flexible operation. 100 wireless defense zones can be learned, and the first 10 wireless defense zones can be self-defined names. You can learn 10 remote controls, and you can customize your name. Wired siren can be connected externally. Work with Tuya APP. Support intelligent voice control such as Amazon Alexa, Google Assistant, IFTTT, etc. Switch between 11 languages at any time: Chinese, English, German, Russian, Spanish, Polish, Italian, French, Portuguese, Greek, Romanian Supports 5 groups of alarm call settings, and can individually set the alarm SMS switch and dialing switch. Support 20 seconds alarm recording SMS Support low battery warning for wireless sensors. Warning of open doors and windows. Voice operation prompt. Support 5 kinds of defense zone modes, which can be set as doorbell mode. Telephone remote arming, disarming, monitoring, intercom. SMS remote control. User password protection: Enter 5 consecutive incorrect passwords, and the keyboard will refuse to accept the input within 90 seconds. 		Power input: DC 5V (micro USB standard interface power supply) Working current: <120mA Standby current: <80mA Alarm current: <500mA Wireless frequency: 433MHz Wireless coding: EV 1527 GSM bands: 850/900/1800/1900MHz Wi-Fi bands: IEEE802.11b/g/n RF standard Standby battery: 3.7V/500mAh Lithium-ion Temperature range: 0°C ~ 55°C Humidity range: < 80%RH (No freezing)	1-50set: \$125.50 51-100set: \$124.50 101-200set: \$123.50	
	<p>W07_work with Tuya APP or life smart APP.</p> <ul style="list-style-type: none"> 1.Support English/ German/ Russian/ Spanish/ Polish /Italian/French/Portuguese/ Greek/Romanian language 2.GSM+ WiFi based alarm system,if Wi-Fi network was cut off,W07 will use GSM network automatically 3.The alarm host W07 can set 5 groups Mobile phone No. for call phone and SMS. 4.Support 200pcs wireless alarm accessories like Door/window contact , PIR motion sensor, remote controllers,doorbell,water leakage sensor,gas leakage sensor , wireless keypad etc. 5. Support entry delay , exit delay,auto-arm/disarm function and alarm duration time setting. 6. Support self-check whether door/window is closed function and door chime function. 7. APP can be freely shared with family members. 8. Support all series of Tuya products like IP camera, WiFi doorbell, wall switch, power strip, smart socket, RGB lamp, curtain motor, smart door lock, etc. 9. Support powerful automation function with WiFi devices. 	GS-W07 (2G+WIFI)	Power input: DC 5V Working current: <120mA Standby current: <80mA Alarm current: <500mA Wireless frequency: 433MHz Wireless coding: EV 1527 GSM bands: 850/900/1800/1900MHz	Sample:\$33.00 20~50 sets:\$32.00 51~500 sets:\$31.00 1000pcs : \$29.50	Black color for option 01.6.006
	<p>W08_work with Tuya APP or life smart APP, W08 is with 4G network version.</p> <ul style="list-style-type: none"> 1.Support English/ German/ Russian/ Spanish/ Polish /Italian/French/Portuguese/ Greek/Romanian language 2.GSM+ WiFi based alarm system,if Wi-Fi network was cut off,W08 will use GSM network automatically 3.The alarm host W08 can set 5 groups Mobile phone No. for call phone and SMS. 4.Support 200pcs wireless alarm accessories like Door/window contact , PIR motion sensor, remote controllers,doorbell,water leakage sensor,gas leakage sensor , wireless keypad etc. 5. Support 20 seconds voice record function. 6. Support self-check whether door/window is closed function and door chime function. 7. APP can be freely shared with family members. 8. Support all series of Tuya products like IP camera, WiFi doorbell, wall switch, power strip, smart socket, RGB lamp, curtain motor, smart door lock, etc. 9. Support powerful automation function with WiFi devices. 	W08-GSM+WiFi (2G+WiFi)	Power input: DC 5V (micro USB standard interface power supply) Working current: <120mA Standby current: <80mA Alarm current: <500mA Wireless frequency: 433MHz Wireless coding: EV 1527 GSM bands: 850/900/1800/1900MHz Wi-Fi bands: IEEE802.11b/g/n RF standard	1-50 sets:\$29.50 51~100 sets:\$29.00 101~500 sets:\$28.50	01. 1. 34
	<ul style="list-style-type: none"> 1. Self test function 2. Motorola IC control, Reliable without false alarming 3. Field audio and visual alarming 4. Simple installation 5. Excellent reliability & high stability 6. Low power consumption 7. Durable sensor head 8. Less affected by other organic solvent 9. Operating temperature: -0°C →+50°C 10. Humidity range: <80%RH (no freezing) 	GS210W	1. Working voltage: DC 5V (micro USB) 2. Alarm current: <120mA 3.Response time: <3s 4. Sound alert: 3s 5.Installation method:wall mounting 6.Air pressure:86~106Kpa 7.GSM bands:850/900/1800/1900MHz	1-50pcs:\$12 51-100pcs:\$11.5 101-500pcs:\$10.5	with stand and gift box 01.7.012509
	<ul style="list-style-type: none"> 1. High sensitivity smoke detection. 2. Built-in thermometer sensor, high temperature alarm function 3. Smart WiFi remotely push alarm information. 4. Smart APP control. 5. With manually test, manually mute. 6. Sound and light alarm. 	GS443W	1. Working voltage: DC 9V alkaline battery 2. Static current: ≤10mA 3. Alarm current: ≤100mA 4. Alarm sound:>90dB 5. Operating temperature:-0°C →+50°C 6. Humidity range: < 95%RH (no freezing) 7. Low voltage alert:3.9V±0.3V	1-50pcs:\$7.8 51-100pcs:\$7.6 101-500pcs:\$7.5	with stand and gift box 01.1.85
	<ul style="list-style-type: none"> 1. support tuya smart APP 2. support google home & amazon alexa 3. door open alert, app notification 4. real time monitoring for in & out at the quarantine places. 5. App remote monitoring, multi-level prevention and control 6. 24 hours monitoring, solve the problem for fatigue on duty 7. installation distance: ≤2cm 8. trigger range: 2-3cm 9. Operating temperature: -0°C →+50°C 	D41	1. Working voltage: 3V (2*AA battery) 2. Working current: <19.5mA 3. standby current: ≤35mA 4. connect method: wifi (802.11b/g/n) 5. wifi range: 30m	1-50pcs:\$5.3 51-100pcs:\$5.2 101-500pcs:\$5.1	with stand and gift box 02.4.0346
Accessories work with W08 and W07					
	<ul style="list-style-type: none"> Tiny appearance * Door/window contact sensor * Low power consumption, long battery life * Low cost * 1527/262 IC oscillation resistance optional * Open/close reports * Tamper switch * RF433MHz 	GS-D30	1. Power Supply: DC 3V (CR2032 Lithium Battery x1) 2. Standby Current: <8uA 3. Transmitting Distance: <80m (Without obstacles and no Interference) 4. Radio Frequency: 433MHz 5. Operation Temperature: -10~55°C	1-50pcs:\$2.0 51-100pcs:\$1.90 101-500pcs:\$1.80	01.5.071
	<ul style="list-style-type: none"> Low voltage alarm function Dynamic temperature compensation technology SMT design, anti-RFI, anti-EMI, anti-strong light, anti-heat, anti-wind Instant motion detection, no false alarm Low power consumption, long battery life (standby 2 years) Wireless frequency: 315MHz/433MHz/868MHz Built-in motion encoding Test/Low consumption mode 	GS-P20	1. Power Supply: DC 3V (CR2032 Lithium Battery x1) 2. Standby Current: <15uA 3. Transmitting Distance: <25m 4. Detection Scope: <12m/10° 5. Transmitting Distance: <100m (Without obstacles and no Interference) 6. Radio Frequency: 433MHz	1-50pcs:\$3.8 51-100pcs:\$3.6 101-500pcs:\$3.5	01.7.121

	<ul style="list-style-type: none"> Microprocessor with lower false alarm rate Low power consumption Dynamic temperature compensation technology SMT design, anti-RFI, anti-EMI, anti-strong light, anti-heat, anti-wind Intelligent logic analysis to prevent false alarm Low power consumption, long battery life (standby 2 years) Wireless frequency: 315MHz/433MHz/868MHz <p>Wireless PIR motion sensor</p>	GS-P10	<ul style="list-style-type: none"> 1. Power Supply: 1.2V AA Battery x3 2. Transmitting Distance: <30m (Open Area and No Interference) 3. Standby current: < 15 µA 4. Alarm current: >25mA; 5. Wireless transmitter codes: 1527 	1-50pcs:\$3.8 51-100pcs:\$3.6 101-500pcs:\$3.5	06.2.49
	<ul style="list-style-type: none"> Work as a standalone alarm hub or wireless siren Wireless learning code, 50 remote controllers and detectors can be learned Alarm with both High decibel sound and quick flash strobe. 1627 code (220K-470K) Built-in backup lithium battery AC wide voltage design (AC 100-240V) <p>Wireless Indoor Siren</p>	GS-V10	<ul style="list-style-type: none"> 1. Power supply: AC 100~240V 2. Built-in battery: 3.7V/150mAh 3. Standby current: <10mA 4. Alarm current: >20mA 5. Wireless frequency: 433MHz 6. Receiving distance: ≤120 m (open air) 	1-50pcs:\$6.50 51-100pcs:\$6.30 101-500pcs:\$6.20 501-5000pcs:\$6.1	01.1.92
	<ul style="list-style-type: none"> Work as a standalone alarm hub or wireless siren Wireless learning code, 50 remote controllers and detectors can be learned Alarm with both High decibel sound and quick flash strobe. 1627 code (220K-470K) Built-in built-in rechargeable Lithium battery Adding new wireless accessories, convenient, safe and efficient Tamper switch The hub internal siren sounds at 110dB on-site in the case of alarm. <p>Wireless outdoor Siren</p>	GS-V30	<ul style="list-style-type: none"> 1. Power Supply: +12VDC, 1000mA 2. Backup Battery: 3.7V, 500mAh Lithium Battery 3. Consumption: <150mA@normal 4. Alarm Volume: 110dB@powered by 12VDC 5. Radio Frequency: 433MHz 	1-50pcs:\$9.5 51-100pcs:\$8.5 101-500pcs:\$8.3 501-5000pcs:\$8.2	06.1.10
	<ul style="list-style-type: none"> Built-in lithium battery powered by solar energy. Work as a live/standalone alarm hub, wireless siren. Support 30 wireless defense zones and remote controllers. 2 wired zones for 2 wired detectors or wired alarm systems. Alarm with both loud sound and quick flash strobe. Wireless learning code for adding new accessories, convenient, safe and efficient. One-key-control function: Remote control to Arm/emergency alarm/disarm Anti-tamper <p>Wireless outdoor solar Siren</p>	GS-V40	<ul style="list-style-type: none"> 1.Power supply: DC 3.7V (3.7V/400mAh rechargeable lithium ion battery) 2.Max output current from solar panel: 6V/150mA 3.Max alarm current: >170mA 4.Wireless receiving distance: ≥100m 5.Ambient Humidity: ≤80% (no freezing) 6.Standby current: ≤1mA 7.Wireless frequency: 433MHz 	1-50pcs:\$17.5 51-100pcs:\$16.5 101-500pcs:\$16 501-5000pcs:\$15	06.1.25
	<ul style="list-style-type: none"> Alarm with indicator sound, voice prompt Test/Silence button Warm-up time: 180 seconds Temperature alarm Sensor life: about 5 years Tamper alarm 1.Power supply: Micro USB+5V/1A 2.Consumption <200mA 3.Detecting flammable gas(CH4), LPG 4.Working Environment Temperature: -10~55°C Humidity: <95%RH (non-condensing) 5.Range: 0~100%LEL 6.Alarm setting value: 6%LEL <p>Wireless gas leakage sensor</p>	GS-RQ20	<ul style="list-style-type: none"> 1.Response time: ≈ 30 seconds 2.Heat alarm value: 57°C 3.Alarm volume: >70dB 4.Valve/manipulator drive output: 12V/300mA output for 15 seconds 5.Dimension: 86x86x24.5mm 	1-50pcs:\$7.20 51-100pcs:\$7.00 101-500pcs:\$6.80	01.1.89
	<ul style="list-style-type: none"> Frequency: 125kHz No battery needed Panel Bandwidth: 10kHz <p>RFID card</p>	GS-R10		1-50pcs:\$0.6 51-100pcs:\$0.55 101-500pcs:\$0.5	02.2.36
	<p>Power Supply: DC 3V (CR2032 Lithium Battery x1) Standby Current: <10µA Transmitting Distance: <30m (Without obstacles and no interference) Radio Frequency: 433MHz Operation Temperature: -10~55 °C</p> <p>doorbell</p>	GS-DB		\$4.00	with Double-sided adhesive
	<ul style="list-style-type: none"> Triggered by water from water sensor. >with dry battery model:23A. >Working frequency: .433.92 MHz/ZigBee or 315 MHZ >Widely for bathroom and any place where needs to protect water leakage <p>water leakage sensor</p>	LSTC02		\$4.50	with white box 06.3.08
	<ul style="list-style-type: none"> Power supply: 9V 6F22 (normal dry batter) Working current: 12mA Static < 50µA Wireless frequency:433MHz Detection range: 360 degrees, Detection distance 5M Sensor spacing: 3s-6s <p>360° ceiling PIR Sensor</p>	GS-CWMS01		\$6.70	with gift box 06.2.12
	<ul style="list-style-type: none"> Working Voltage: DC 12V Operating Current: 150mA-180mA Transmitting Frequency: 315MHz or 433.92MHz(Customized is optional) Receiving time: 3-10 s (Not receiving signal when it transmitted) Oscillation resistance: 1.5M-4.7M Transmitting distance: 3000 m Mute: user can mute in: 3262.2964.2960.1627.2240 ... etc <p>wireless signal repeater</p>	GS-XHZZQ		\$8.58	with AC power adapter and gift box
	<ul style="list-style-type: none"> Used to Away sm/Home Arm/Disarm the system, also with doorbell button. Work power: three AAA batteries Standby current: <30mA Emission current: <20mA Tag quantity that keypad support: 5pcs Wireless frequency: 433MHz <p>Wireless RFID keypad</p>	GS-K07		\$16.50	with 2pcs RFID keyfob and gift box 02.2.35
	<ul style="list-style-type: none"> Operating voltage:DC 9V battery (6F22 carbon battery, DC TYPE Static current: <20mA Alarm current: <40mA Battery life: carbon battery for about 1 year. Alarm indication: LED flashes in Red Alarm sound : ≥ 85dB/30M Radio frequency: 315MHz or 433MHz <p>wireless smoke and temperature detector</p>	GS-WSD02		\$9.00	with gift box 06.3.24
	<ul style="list-style-type: none"> With external antenna Power Requirements : DC12V Current Consumption: 8-12mA communication Transmit Frequency:315±0.2MHz/433±0.2MHz Transmit Duration: 1s Operating distance from central controller: less than 80m (no obstacle) Dimension(LWH):85x37x16mm <p>SOS button</p>	GS-WEB01		\$2.60	02.4.003
	<p>Working voltage: DC3V Emission frequency: 315MHz/433MHz Coding method: E1287 Action distance: 25-35MM Emission distance: ≥ 120M (open space) Low Pressure Alarm: 2.2-2.4V</p> <p>Wireless door/window contact</p>	GS-WDS08		\$3	06.3.33
	<ul style="list-style-type: none"> High stability imported SMD components with SMT, surface acoustic resonator stabilization (SAW) & 1.5G UHF module Black and white color for choice 3.4 remote controller buttons 4. 433MHz,1527 CODE <p>Remote controller</p>	GS-RMC09		\$2.8	02.2.110
	<ul style="list-style-type: none"> Power input : 9-15 VDC; Detect distance: 12m×12m; Fully sealed design, two-layer waterproof, macromolecule film plating Remarkable pet-immunity function to prevent pets under 25kg; Special lens anti UV to reduce false alarm at maximum Germany imported optical black metal eye light up to 99%. <p>wireless solar outdoor motion sensor</p>	GS-ODPIR03		\$35.7	06.2.03
	<ul style="list-style-type: none"> Detect distance: 12m×12m; Fully sealed design, two-layer waterproof, macromolecule film plating Remarkable pet-immunity function to prevent pets under 15kg; Special lens anti UV to reduce false alarm at maximum <p>wired outdoor motion sensor</p>	GS-ODPIR02		\$25.0	06.2.14