




Shenzhen Golden Security Technology Co., Ltd


A: 6th Floor, Unit 1, Building 1, Kailifang Plaza, Lianrun Road, Taoyuan Community, Dalang Street, Longhua District, Shenzhen  
Attns: Lilian Huang | T: +86 189 4879 4227 | E: lilian@cameralarms.com | W: https://alarm-camera.en.alibaba.com

## Intercom Solution & Systems

### Villa building intercom

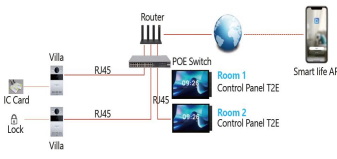



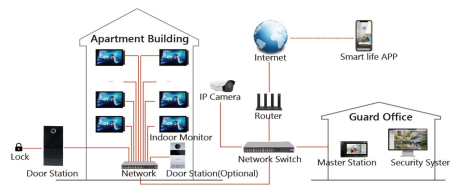





### Apartment building intercom



### Multi floors Apartment intercom system



No.	Picture	Model	Features	Price (EXW)	Compatible devices
1	 <b>10" Touch Control Panel with Tuya gateway+Music center-Intercom display 3 in 1</b>	GS-T2E-TPA10-M2A CN/US standard	<p><b>MAX is a Tuya smart central control panel, Zigbee &amp; Bluetooth independent chips, integrate Zigbee and Bluetooth gateway functions, support Bluetooth BLE &amp; BLE mesh Sub-device, and have edge capabilities for localized control.</b></p> <p>Device control: Fully compatible device access and diversified control forms are compatible with almost all Tuya ecological devices.</p> <p>Scene control: Customs physical buttons, screen interaction, and voice interaction can trigger scenes to meet different needs in life.</p> <p>I-Share technology and T- Control Technology</p> <p>Rich interface: A variety of base forms are supported, the standard base uses zero-fire wire wire</p> <p><b>Specification:</b></p> <ul style="list-style-type: none"><li>Color: grey</li><li>Operation system: Android 8.1</li><li>CPU: Quad-core Cortex-A35</li><li>CPU frequency: 1.5Ghz</li><li>Main screen size: 8 inch</li><li>Resolution: 1280*800</li><li>Material: IPS (full viewing angle)</li><li>Touch screen: Multi-touch capacitive screen</li><li>Storage: 3GB</li><li>Expandable memory: 8 GB</li><li>USB: 2.0 interface, can read 32G</li><li>LAN port: No</li><li>WiFi: Yes</li><li>Bluetooth: 4.0</li></ul> <p><b>Packing information:</b></p> <ul style="list-style-type: none"><li>Product weight: 0.4kg</li><li>Product dimension: 255*133*10mm</li><li>Giftbox weight: 1.5kg</li><li>Giftbox dimension: 342*213*73mm</li></ul>	<p>1-19pcs: \$198 20-99pcs: \$197 100-999pcs: \$192.00 1000-2999pcs: \$181.00 3000pcs or more: \$174.00</p>	   
2	 <b>5 inch Outdoor Station (Lithium Coin Batter Inside)</b>	GS-H51TYF-CR	<ul style="list-style-type: none"><li>* Linux System</li><li>* Video Intercom</li><li>* Access Control</li><li>* Face Recognition</li><li>* Maximum Rooms: 9999 Rooms</li><li>* Mode: Dial Mode or Room Listings</li><li>* PIN: Admin's PIN/User's PIN/Public's PIN</li><li>* Echo Cancellation</li><li>* Tuya Home: 1 (Up to 1000)</li><li>* Display: 5" IPS LCD 720*1280</li><li>* Camera: 2M pixels Dual-lens</li><li>* Power: DC12V/1A</li><li>* Input: Capacitive Touch</li><li>* Ringtone: 270db</li><li>* Video Codec: H.264/H.265</li></ul> <p>* Working Temperature: -20°C ~ +70°C</p> <p>* Material: Aluminum + Tempered Glass</p> <p>* Installation: Wall-mounted</p> <p>* IP Level: IP65</p> <p>* Relay Out: 1 (NO/COM)</p> <p>* RS485 Port: Support</p> <p>* Wi-Fi: Optional</p> <p>* Rain Cover: Optional</p> <p>* Product Size: 200*95*20mm</p> <p>* Package Size: 250*130*90mm</p> <p>* Gross Weight: 0.99KG</p>	<p>1-19pcs: \$180 20-99pcs: \$179 100-999pcs: \$178</p>	
3	 <b>8 inch Outdoor Station (Lithium Coin Batter Inside)</b>	GS-H8TYF-CR	<ul style="list-style-type: none"><li>* Linux System</li><li>* Video Intercom</li><li>* Access Control</li><li>* Face Recognition</li><li>* Maximum Rooms: 9999 Rooms</li><li>* Mode: Dial Mode or Room Listings</li><li>* PIN: Admin's PIN/User's PIN/Public's PIN</li><li>* Echo Cancellation</li><li>* Tuya Home: 1 (Up to 1000)</li><li>* Display: 8" IPS LCD 800*1280</li><li>* Camera: 2M pixels Dual-lens</li><li>* Power: DC12V/1A</li><li>* Input: Capacitive Touch</li><li>* Ringtone: 270db</li><li>* Video Codec: H.264/H.265</li><li>* RF Card Reader: 13.56Mhz IC Card</li><li>* NFC: Support</li></ul> <p>* Working Temperature: -20°C ~ +70°C</p> <p>* Material: Aluminum + Tempered Glass</p> <p>* Installation: Wall-mounted</p> <p>* RS485 Port: Support</p> <p>* RJ45 Network Port: Support</p> <p>* Wi-Fi: Optional</p> <p>* Rain Cover: Optional</p> <p>* Product Size: 270*132*20mm</p> <p>* Package Size: 320*170*75mm</p> <p>* Gross Weight: 1.58KG</p>	<p>1-19pcs: \$235 20-99pcs: \$234 100-999pcs: \$233.5</p>	
4	 <b>10 inch Outdoor Station (Lithium Coin Batter Inside)</b>	GS-H10TYF-CR	<ul style="list-style-type: none"><li>* Linux System</li><li>* Video Intercom</li><li>* Access Control</li><li>* Face Recognition</li><li>* Maximum Rooms: 9999 Rooms</li><li>* Mode: Dial Mode or Room Listings</li><li>* PIN: Admin's PIN/User's PIN/Public's PIN</li><li>* Echo Cancellation</li><li>* Tuya Home: 1 (Up to 1000)</li><li>* Display: 10.1" IPS LCD 800*1280</li><li>* Camera: 2M pixels Dual-lens</li><li>* Power: DC12V/1A</li><li>* Input: Capacitive Touch</li><li>* Ringtone: 270db</li><li>* Video Codec: H.264/H.265</li><li>* RF Card Reader: 13.56Mhz IC Card</li><li>* NFC: Support</li></ul> <p>* Working Temperature: -20°C ~ +70°C</p> <p>* Material: Aluminum + Tempered Glass</p> <p>* Installation: Wall-mounted</p> <p>* IP Level: IP65</p> <p>* Relay Out: 1 (NO/COM)</p> <p>* RS485 Port: Support</p> <p>* RJ45 Network Port: Support</p> <p>* Wi-Fi: Optional</p> <p>* Rain Cover: Optional</p> <p>* Product Size: 322*170*20mm</p> <p>* Package Size: 385*225*70mm</p> <p>* Gross Weight: 2.4KG</p>	<p>1-19pcs: \$276 20-99pcs: \$275 100-999pcs: \$274</p>	
5	 <b>Tuya 7 inch Indoor Monitor (Supercapacitor Inside)</b>	GS-P7007PROTY-W	<ul style="list-style-type: none"><li>* Linux System</li><li>* Video Intercom</li><li>* Audio Intercom</li><li>* Echo Cancellation</li><li>* Video Codec: H.264/H.265</li><li>* Monitor IPC(24-hour, Quad-split Display)</li><li>* Monitor Outdoor Station</li><li>* Alarm: SOS, Gas Detection</li><li>* Tuya Home: Optional</li><li>* Display: 7" IPS LCD 1024*600</li><li>* Power: DC12V or POE (IEEE 802.3af)</li><li>* Input: Capacitive touch</li><li>* Ringtone: 270db</li></ul> <p>* RS485 Port: Optional</p> <p>* RJ45 Network Port: Support</p> <p>* Wi-Fi: Optional</p> <p>* 4-Channel Input: Support</p> <p>* Power Output: 12V200mA</p> <p>* Size: 210x145x20 mm</p> <p>* Package Size: 150*36*235mm</p> <p>* Gross Weight: 22.2KG</p>	<p>1-19pcs: \$72.5 20-99pcs: \$71.9 100-999pcs: \$71.2</p>	

6	 <p><b>Tuya 10.1 inch Indoor Monitor (Supercapacitor Inside)</b></p>	<p><b>GS-P11PROTY-W</b></p> <ul style="list-style-type: none"> <li>* Linux System</li> <li>* Video Intercom</li> <li>* Audio Intercom</li> <li>* Echo Cancellation</li> <li>* Video Codec: H.264/H.265</li> <li>* Monitor IPC(24-hour, Quad-split Display)</li> <li>* Monitor Outdoor Station</li> <li>* Alarm: SOS, Gas Detection</li> <li>* Tuya Home: Optional</li> <li>* Display: 10.1" IPS LCD 1024*600</li> <li>* Power: DC12V or POE (IEEE 802.3af)</li> <li>* Input: Capacitive touch</li> <li>* Ringtone: 270db</li> </ul> <ul style="list-style-type: none"> <li>* Up to 10 Extension Each Rooms</li> <li>* Energy Storage Capacitor 50.3Wh</li> <li>* RS485 Port: Optional</li> <li>* RJ45 Network Port: Support</li> <li>* 4-Channel Input: Support</li> <li>* Power Output: 12V200mA</li> <li>* Size: 254x166x20mm</li> <li>* Package Size: 305*205*45mm</li> <li>* Gross Weight: 0.85KG</li> </ul>	<p><b>1-19pcs: \$90.5</b>  <b>20-99pcs: \$90</b>  <b>100-999pcs: \$89.5</b></p>	
2	 <p><b>TPD01 Villa Outdoor Machine</b></p>	<p><b>GS-TPD01</b></p> <p><b>S212 enables you to make the video call with villa entrance door, and open the door remotely from indoor monitor or mobile APP. It also makes an easy integration with SIP devices.</b></p> <p><b>Key Features:</b>  1. Powered by PoE or power adapter (DC12V/2A)  2. Support IC (13.56MHz) &amp; ID (125kHz) card  3. 3 Indicator Lights  4. 2 relays supported  5. Tamper alarm</p> <p><b>Physical:</b>  *System: Linux  *RAM: 64 MB  *ROM: 128 MB  *Front Panel: Aluminum  *Power Supply: PoE (802.3af) or DC 12V/2A  *Standby Power: 1.5 W  *Rated Power: 3.5 W  *Camera: 2MP, CMOS  *Indicator Light: 3  *Wiegand Port: Support  *Ethernet Port: 1 x RJ45, 10/100 Mbps adaptive  *Door Entry: IC (13.56MHz) &amp; ID (125kHz) card  *Reset Button: 1  *RS485 Port: 1</p> <p><b>Audio</b>  *Audio Codec: G.711  *Echo Cancellation  *DTMF: RFC2833  *Microphone: Built-in microphone  *Speaker: Built-in speaker</p> <p><b>Video</b>  Video Codec: H.264  Video Resolution: 1280 x 720  Viewing Angle: 110° (H) / 60° (V) / 125° (D)  Max. Image Transfer Rate: 720p – 25fps  Light Compensation: LED white light</p> <p><b>Networking:</b> Protocol: ONVIF, SIP, UDP, TCP, RTP, RTSP, NTP, DNS, HTTP, DHCP, IPV4, ARP, ICMP</p> <p>*Installation: Surface Mounting  *Surface Mounting DIM: 168 x 88 x 34 mm  *Working Temperature: -40°C to +55°C  *Storage Temperature: -40°C to +70°C</p>	<p><b>1-100pcs: \$154.50</b>  <b>101-300pcs: \$152.00</b>  <b>&gt;300pcs: \$149.00</b></p>	<p>Package Features  Package Content:  - DNAKE S212 (Power adapter not included)  - Bracket  - Screwing Kit  - Quick Start Guide  Qty/CTN: 12 pcs  N.W/PCS: 0.71 kg  G.W/CTN: 11.08 kg  Giftbox Size: 215 x 135 x 73 mm  Carton Size: 470 x 235 x 295 mm</p> <p>02.4.0591 明装款</p>
3	 <p><b>S280SD Villa Outdoor Intercom Machine</b></p>	<p><b>280SD-C60/S</b></p> <p><b>The 280SD-C60 enables you to make the video call with villa entrance door, and open the door remotely from indoor monitor or mobile APP. It also makes an easy integration with SIP devices.</b></p> <p><b>Key Features:</b>  1. Powered by PoE or power adapter (DC12V/2A)  2. Support IC (13.56MHz) &amp; ID (125kHz) card  3. 3 Indicator Lights  4. 2 relays supported  5. Tamper alarm</p> <p><b>Physical</b>  * System: Linux  * RAM: 64 MB  * ROM: 128 MB  * Front Panel: Aluminum  * Power Supply: PoE (802.3af) or DC 12V/2A  * Standby Power: 1.5 W  * Rated Power: 3.5 W  * Camera: 2MP, CMOS  * Indicator Light: 3  * Wiegand Port: Support  * Ethernet Port: 1 x RJ45, 10/100 Mbps adaptive</p> <ul style="list-style-type: none"> <li>Door Entry: IC (13.56MHz) &amp; ID (125kHz) card</li> <li>Reset Button: 1</li> <li>RS485 Port: 1</li> <li>Relay Out: 2</li> <li>Input: 2</li> <li>IP / IK Rating: IP65 / IK06</li> <li>Installation: Surface Mounting</li> <li>Surface Mounting DIM: 168 x 88 x 34 mm</li> <li>Working Temperature: -40°C to +55°C</li> <li>Storage Temperature: -40°C to +70°C</li> <li>Working Humidity: 10% to 90% (non-condensing)</li> </ul>	<p><b>1-100pcs: \$129</b>  <b>101-300pcs: \$128</b>  <b>&gt;300pcs: \$127</b></p>	<p>Package Features  Package Content:  - DNAKE S280SD (Power adapter not included)  - Bracket  - Screwing Kit  - Quick Start Guide  Qty/CTN: 12 pcs  N.W/PCS: 0.71 kg  G.W/CTN: 11.08 kg  Giftbox Size: 215 x 135 x 73 mm  Carton Size: 470 x 235 x 295 mm</p> <p>02.4.0857</p>
4	 <p><b>Apartment Machine/Apartment Door station</b></p>	<p><b>GS-TPD06</b></p> <p><b>S215 enables you to make the video call with apartment entrance door, and open the door remotely from indoor monitor or mobile APP. It also makes an easy integration with SIP devices and lift control system.</b></p> <p><b>Key Features</b>  *Induction loop for hearing impaired  *Braille dot for visually impaired  *3 output relays for door locks  *Tamper alarm  *Support IC (13.56MHz) &amp; ID (125kHz) card, PIN code</p> <p><b>Physical</b>  *System: Linux  *Front Panel: Aluminum  *Button: Mechanical  *Power Supply: PoE (802.3af) or DC 12V/2A  *Standby Power: 1.5 W  *Rated Power: 9 W  *Camera: 2MP, CMOS  *IR Sensor: Support  *Wiegand Port: Support  *Ethernet Port: 1 x RJ45, 10/100 Mbps adaptive  *Door Entry: IC (13.56MHz) &amp; ID (125kHz) card, PIN code</p> <p><b>Display</b>  Display: 4.3-inch TFT LCD</p> <p><b>Audio</b>  Audio Codec: G.711  Echo Cancellation  DTMF: RFC2833  Microphone: Built-in microphone</p> <p>*Reset Button: 1  *RS485 Port: 1  *Relay Out: 3  *Input: 4  *IP / IK Rating: IP65 / IK08  *Installation: Surface Mounting  *Surface Mounting DIM: 295 x 133 x 42.7 mm  *Working Temperature: -40°C to +55°C  *Storage Temperature: -40°C to +70°C</p> <p><b>Networking:</b> Protocol: ONVIF, SIP, UDP, TCP, RTP, RTSP, NTP, DNS, HTTP, DHCP, IPV4, ARP, ICMP</p>	<p><b>1-100pcs: \$375.50</b>  <b>101-300pcs: \$372.50</b>  <b>&gt;300pcs: \$356.00</b></p>	<p>Video Codec: H.264  Video Resolution: 1280 x 720  Viewing Angle: 110°(H) / 67°(V) / 127°(D)  Max. Image Transfer Rate: 720p – 25fps  Light Compensation: LED white light</p> <p><b>Package Features</b>  Package Content:  - DNAKE S215 (Power adapter not included)  - Surface Mounting Box  - Screwing Kit  - Quick Start Guide  Qty/CTN: 10 pcs  N.W/PCS: 1.53 kg  G.W/CTN: 20 kg  Giftbox Size: 362 x 170 x 100 mm  Carton Size: 490 x 420 x 88 mm</p> <p>02.4.0664</p>
5	 <p><b>Apartment Machine/Apartment Door station</b></p>	<p><b>280D-B63F</b></p> <p><b>The 280D-B63 enables you to make the video call with apartment entrance door, and open the door remotely from indoor monitor or mobile APP. It also makes an easy integration with SIP devices and lift control system.</b></p> <p><b>Key Features:</b>  1. Induction loop for hearing impaired  2. Braille dot for visually impaired  3. 3 output relays for door locks  4. Tamper alarm  5. Support IC (13.56MHz) &amp; ID (125kHz) card, PIN code, Bluetooth (Optional)</p> <p><b>Physical</b>  * System: Linux  * Front Panel: Aluminum  * Button: Mechanical  * Power Supply: PoE (802.3af) or DC 12V/2A  * Standby Power: 1.5 W  * Rated Power: 9 W  * Camera: 2MP, CMOS  * IR Sensor: Support  * Wiegand Port: Support  * Ethernet Port: 1 x RJ45, 10/100 Mbps adaptive  * Door Entry: IC (13.56MHz) &amp; ID (125kHz) card, PIN code, Bluetooth (Optional)</p> <ul style="list-style-type: none"> <li>Reset Button: 1</li> <li>RS485 Port: 1</li> <li>Relay Out: 3</li> <li>Input: 4</li> <li>IP / IK Rating: IP65 / IK06</li> <li>Installation: Surface Mounting</li> <li>Surface Mounting DIM: 295 x 133 x 43 mm</li> <li>Working Temperature: -40°C to +55°C</li> <li>Storage Temperature: -40°C to +70°C</li> <li>Working Humidity: 10% to 90% (non-condensing)</li> </ul>	<p><b>1-100pcs: \$312</b>  <b>101-300pcs: \$309</b>  <b>&gt;300pcs: \$305</b></p>	<p>Video Codec: H.264  Video Resolution: 1280 x 720  Viewing Angle: 110°(H) / 67°(V) / 127°(D)  Max. Image Transfer Rate: 720p – 25fps  Light Compensation: LED white light</p> <p>Package Features  Package Content:  - DNAKE S215 (Power adapter not included)  - Surface Mounting Box  - Screwing Kit  - Quick Start Guide  Qty/CTN: 10 pcs  N.W/PCS: 1.53 kg  G.W/CTN: 20 kg  Giftbox Size: 362 x 170 x 100 mm  Carton Size: 490 x 420 x 450 mm</p> <p>预增款02.4.0858</p>
6	 <p><b>Master Machine</b></p>	<p><b>902C-A</b></p> <p><b>Property Center Management Machine</b>  The 902C-A is mainly used in guard station, it enables concierge to send messages, for example: utilities, weather forecast, etc. to apartment residents  It can also manage the access control for visitors, to give you the combined benefit of security and convenience.</p> <p><b>Key Features</b>  10.1-inch capacitive touch screen  Android System  Alarm/Call logs  Message Sending/Receiving  Powered by PoE or power adapter(DC12V/2A)  Support SIP 2.0 protocol, easy integration with other SIP devices  Support monitoring 16 IP cameras</p> 	<p><b>1-100pcs: \$415</b>  <b>101-300pcs: \$410</b>  <b>&gt;300pcs: \$398</b></p>	<p>Physical  System: Android  RAM: 512 MB  ROM: 4 GB  Front Panel: Plastic  Power Supply: PoE(802.3af) or DC 12V/2A  Standby Power: 3 W  Rated Power: 10 W  Camera: 0.3MP, CMOS  SD Card Port: 1  Ethernet Port: 1 x RJ45, 10/100 Mbps adaptive  Installation: Desktop  Dimension: 303x195x35 mm  Working Temperature: -10°C to +55°C  Storage Temperature: -40°C to +70°C  Working Humidity: 10% to 90% (non-condensing)</p> <p>02.4.0882</p>