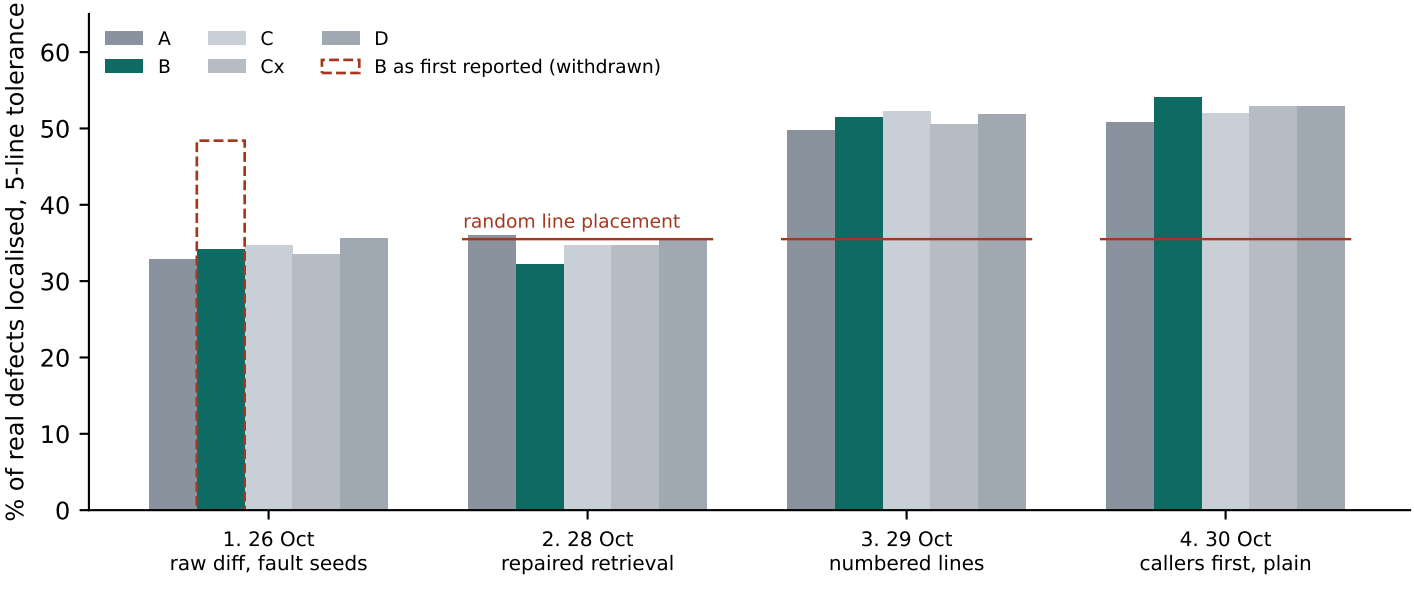
% of real defects localised, 5-line tolerance
0
10
20
30
40
50
60
A
B
C
Cx
D
B as first reported (withdrawn)
random line placement
1. 26 Oct
raw diff, fault seeds
2. 28 Oct
repaired retrieval
3. 29 Oct
numbered lines
4. 30 Oct
callers first, plain