




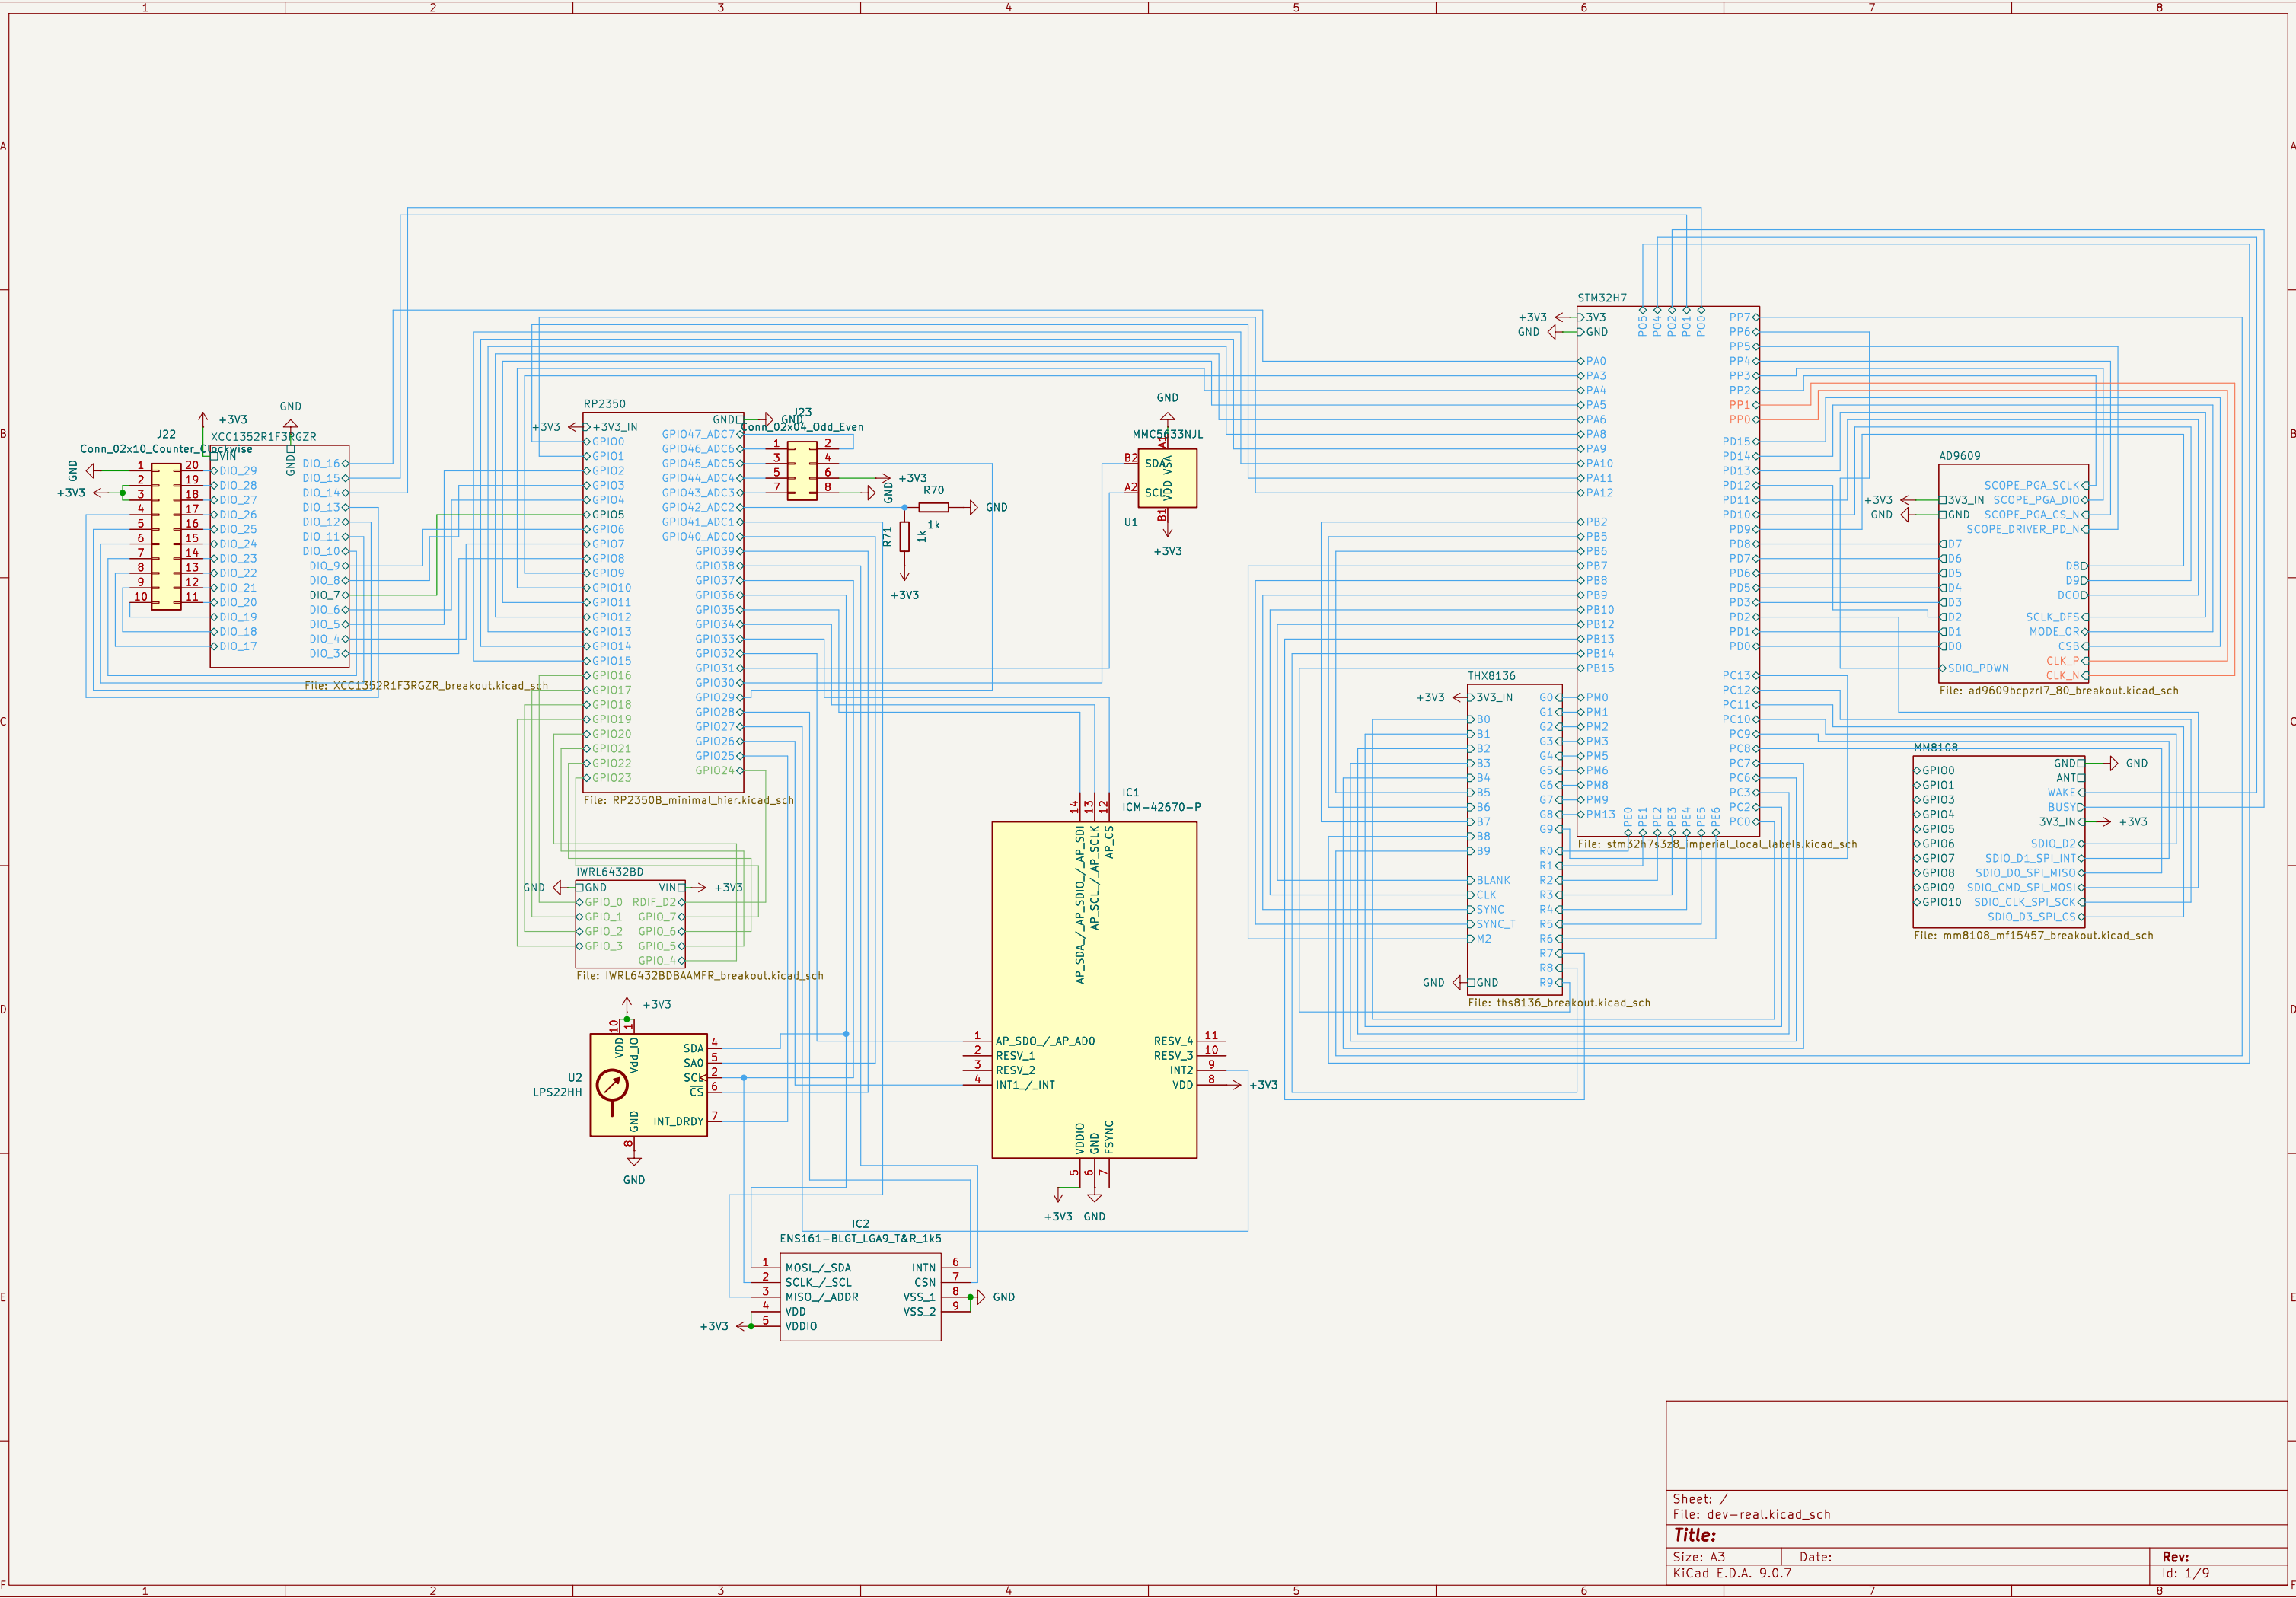

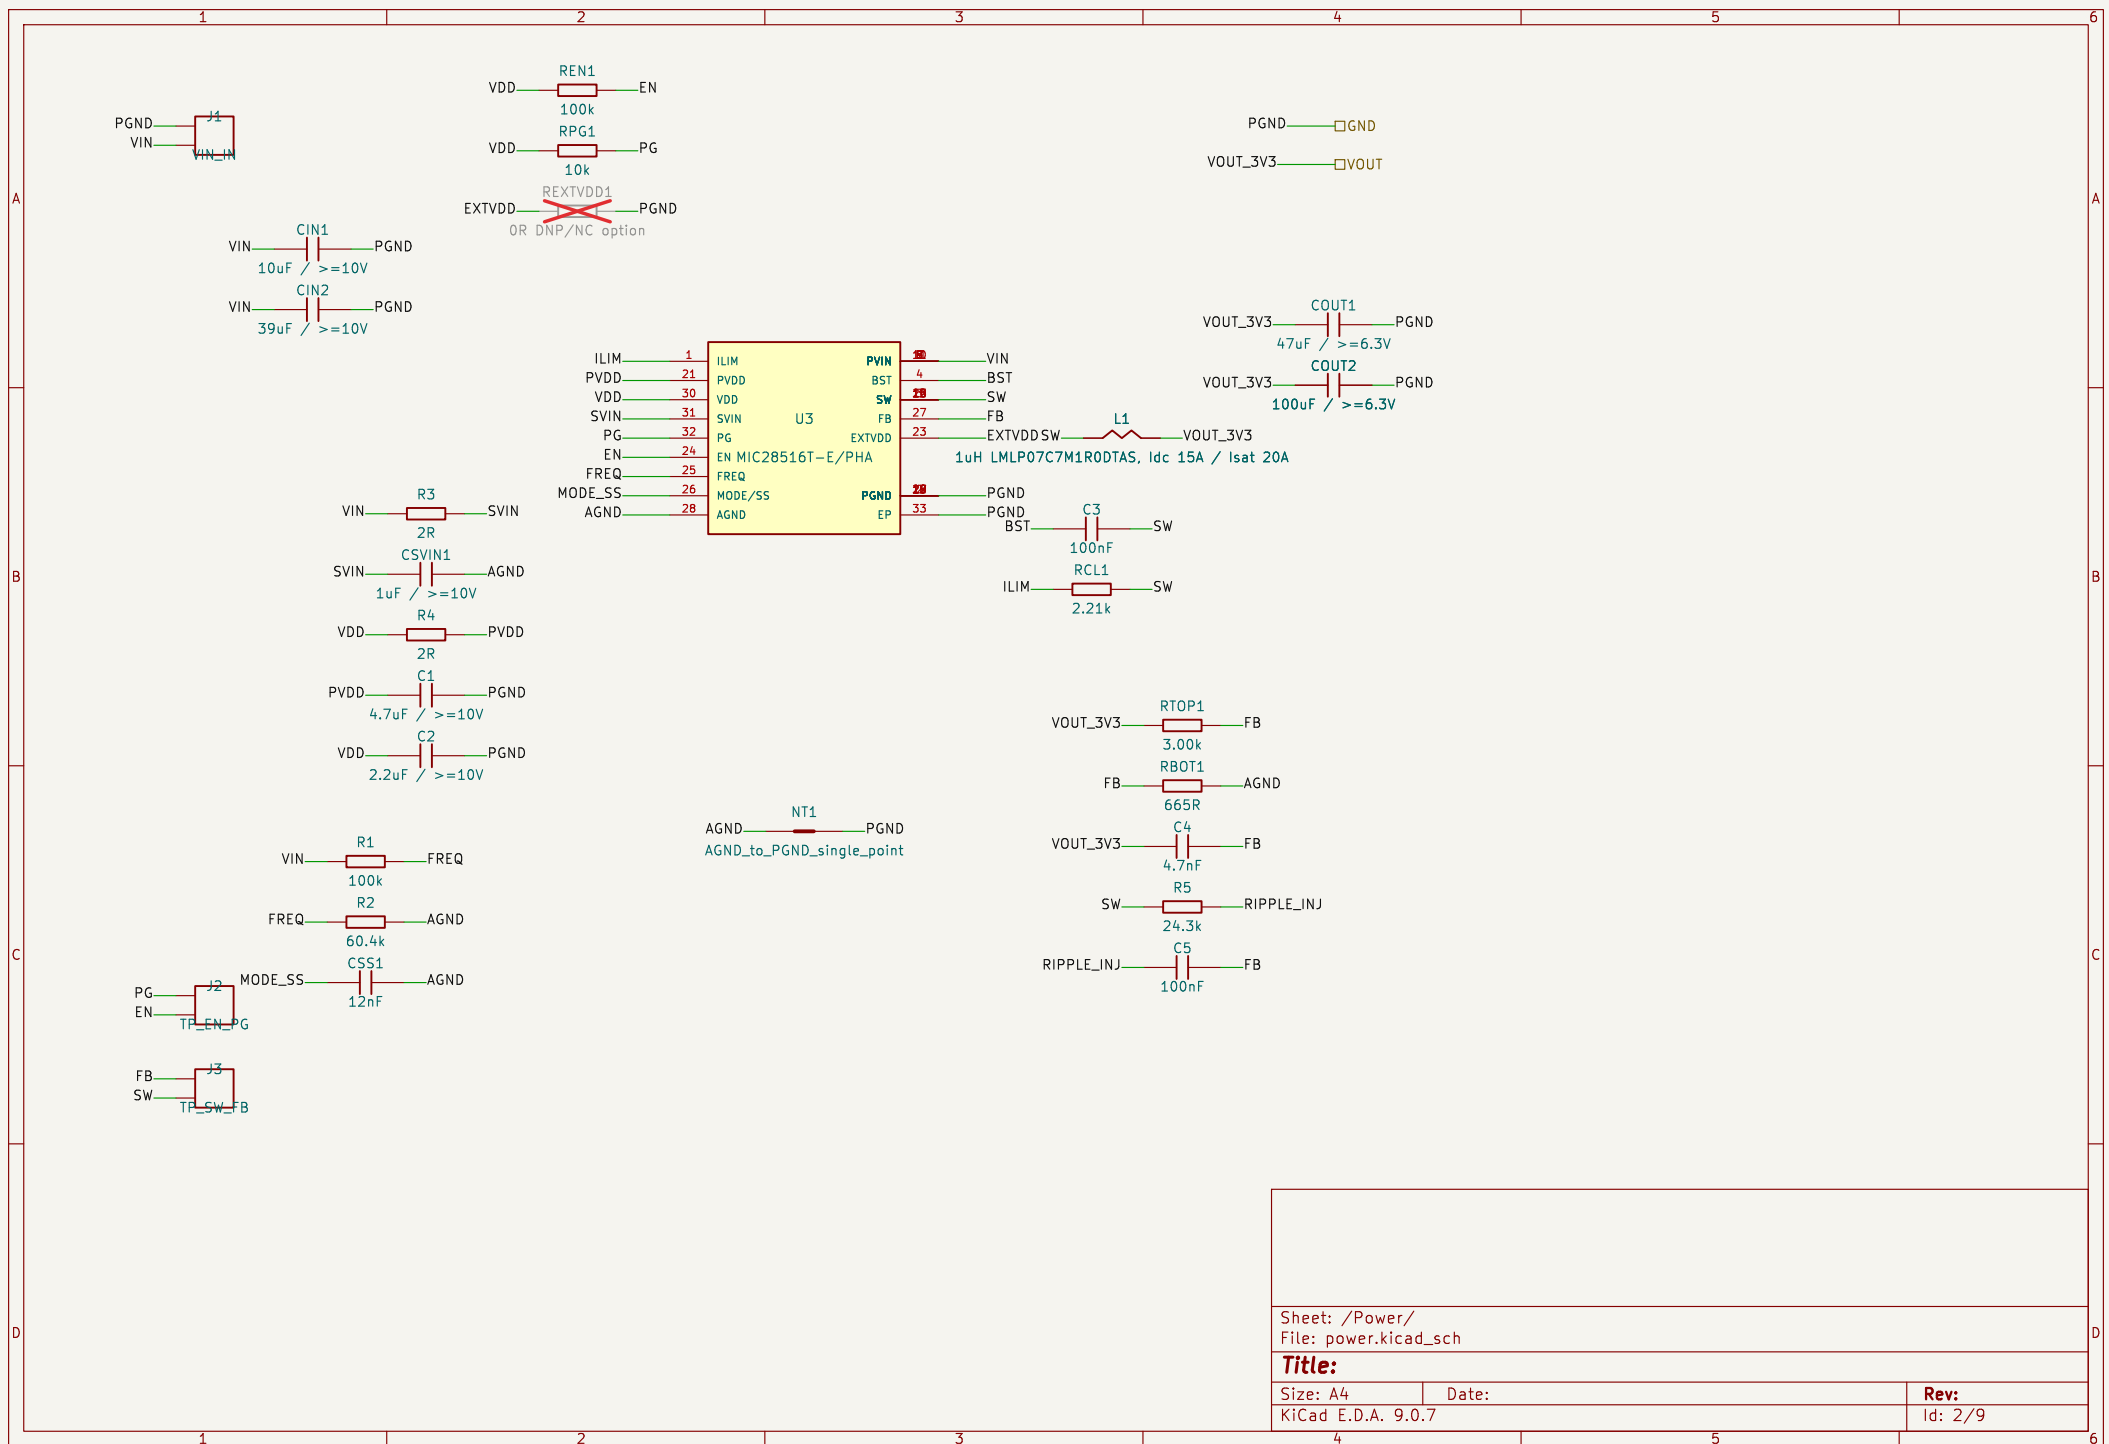


Regulator layout is critical: keep L1/C6/C7/C9/R3 tight to U1 VREG pins and return VREG_PGND carefully.





VREG_FB +1V1


3.3V / 1.1V decoupling caps




12MHz ABM8-272-T3



USB_VBUS	A4	VBUS	A6	USB_D_P_CONN
USB_VBUS	A9	VBUS	D+	B6
USB_VBUS	B4	VBUS	D-	B6
USB_VBUS	B9	VBUS	D-	B7
CC1	A5	CC1	GND	A12
CC2	B5	CC2	GND	A12
NC_SBU1	A8	SBU1	GND	B1
NC_SBU2	B8	SBU2	GND	B1
GND	S1	SHIELD	GND	B12



id: 3/9

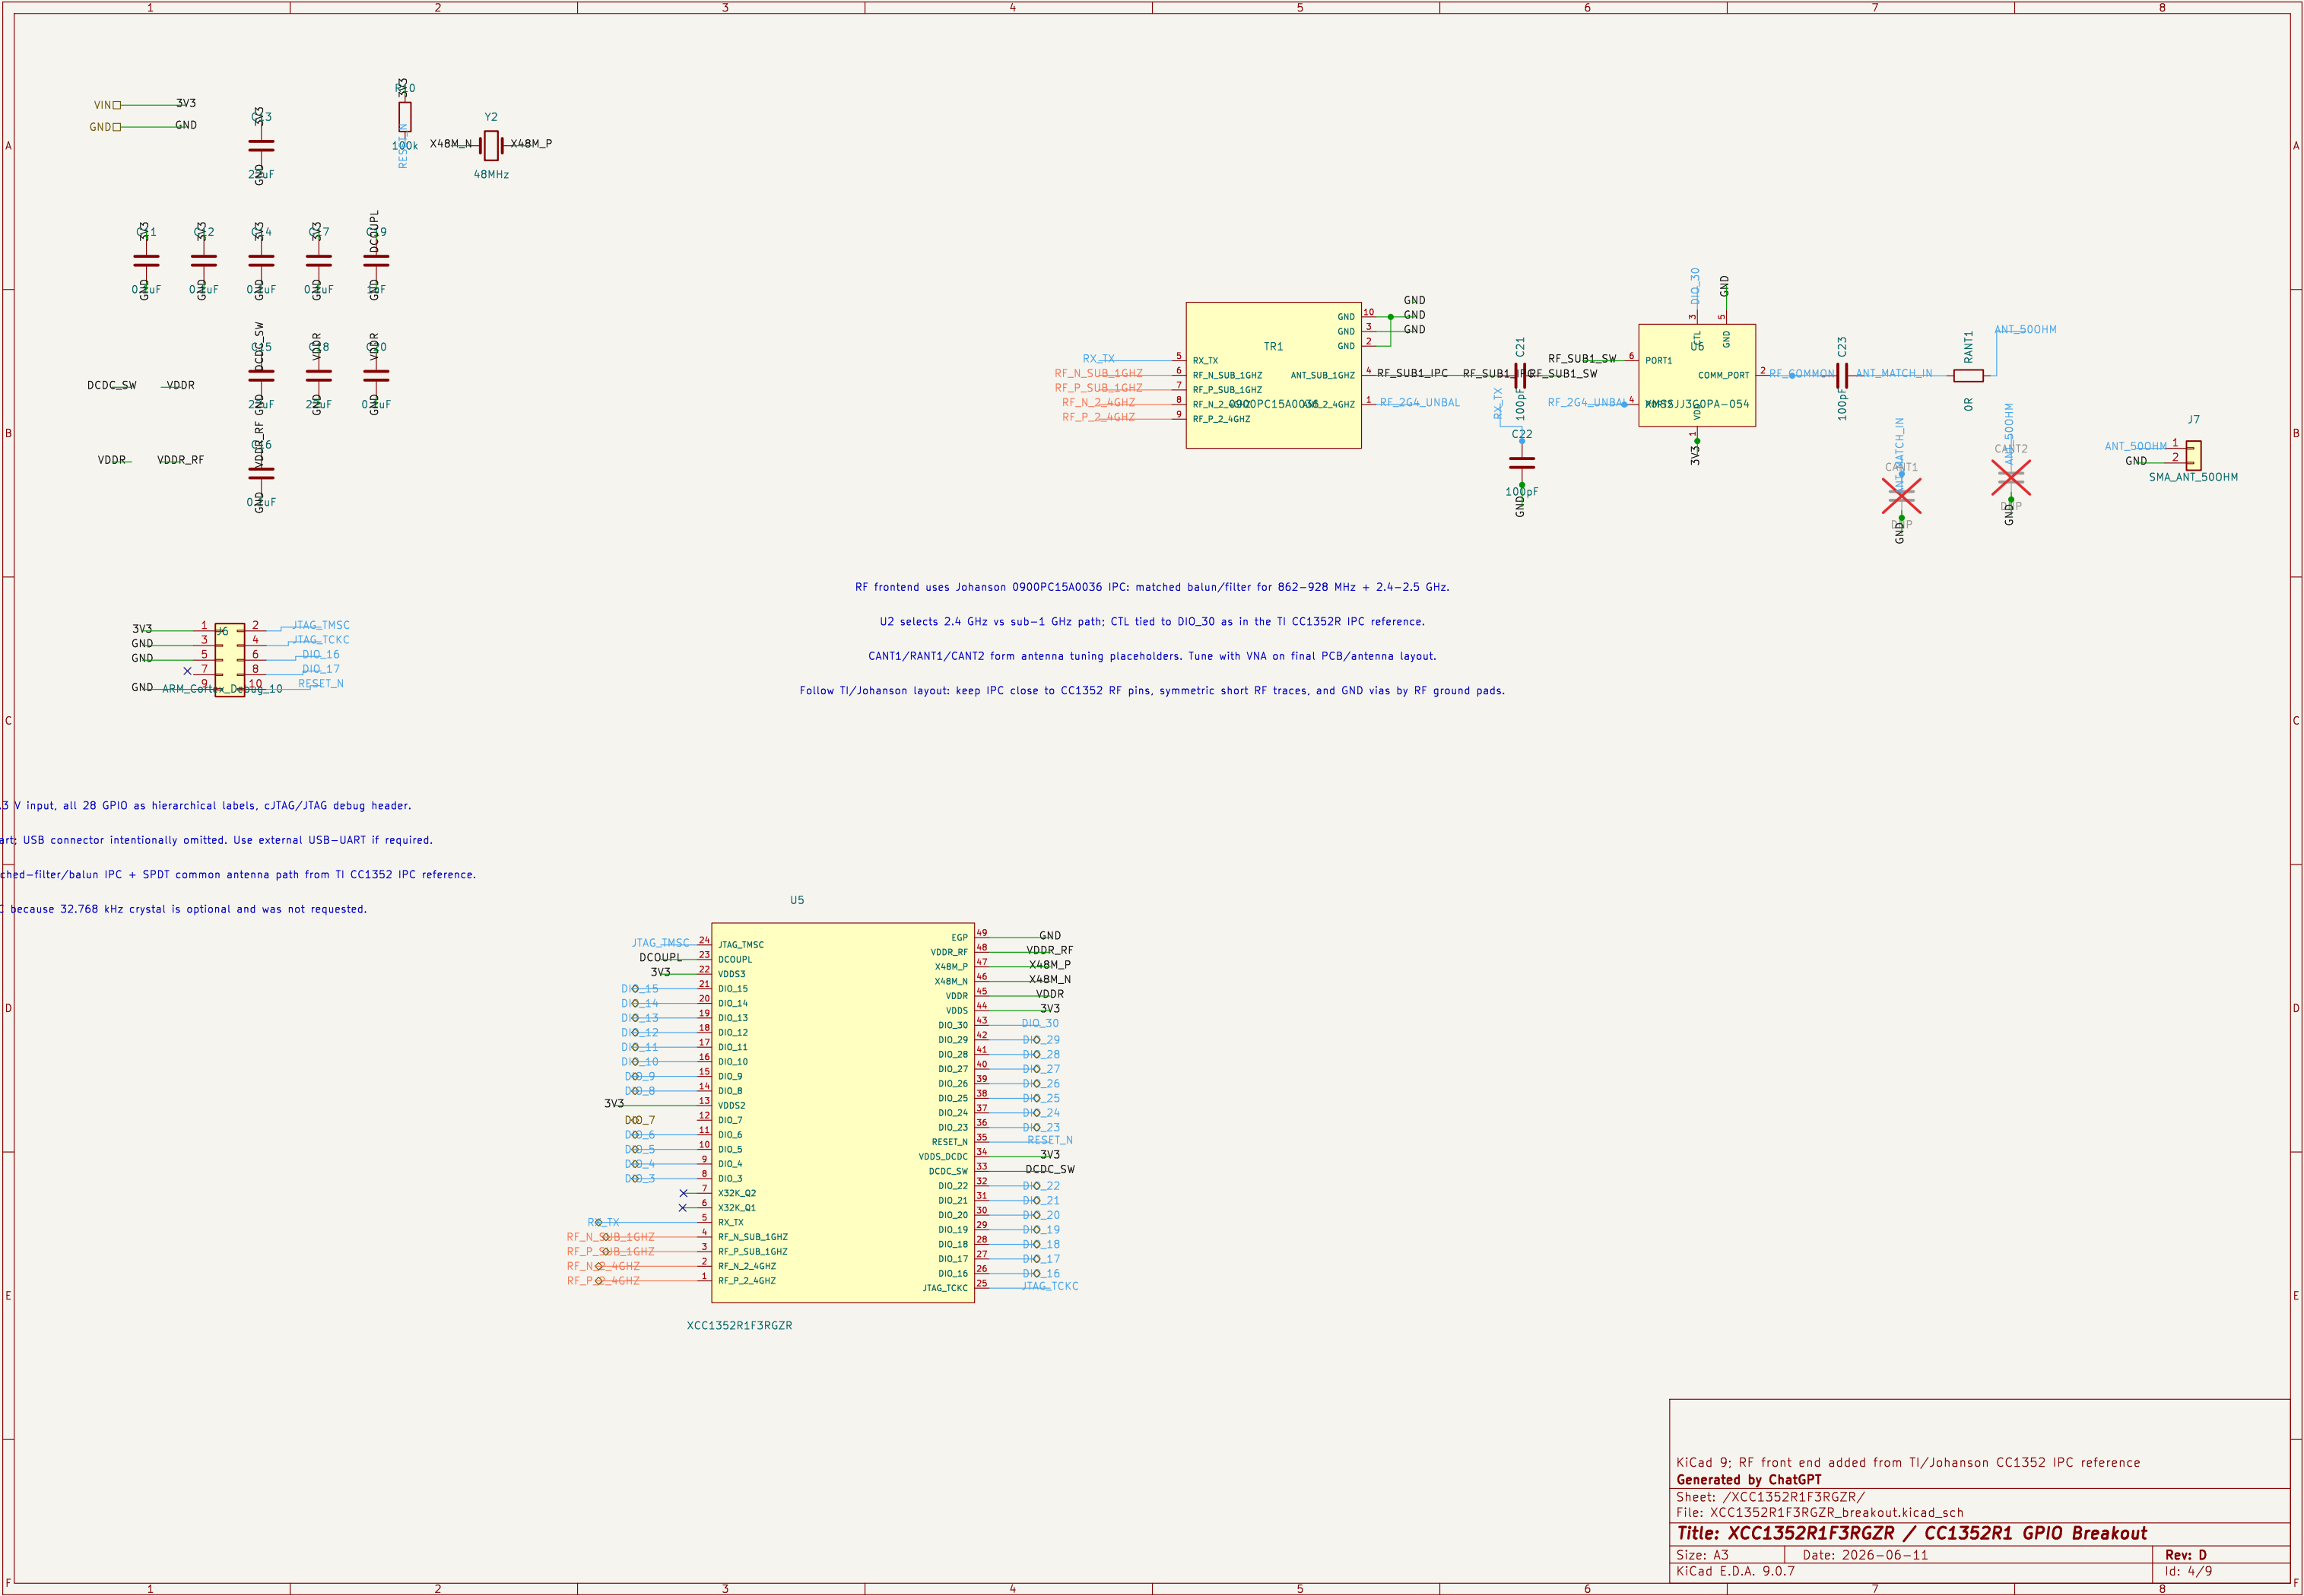

KiCad 9; RF front end added from TI/Johanson CC1352 IPC reference

Generated by ChatGPT

Sheet: /XCC1352R1F3RGZR/
File: XCC1352R1F3RGZR_breakout.kicad_sch

Title: XCC1352R1F3RGZR / CC1352R1 GPIO Breakout

Size: A3 Date: 2026-06-11

Rev: D

KiCad E.D.A. 9.0.7

Id: 4/9

