



stereoBoy_power




File: stereoBoy_power.kicad_sch

stereoBoy_audio




File: stereoBoy_audio.kicad_sch

stereoBoy_cpu




File: stereoBoy_cpu.kicad_sch

stereoBoy_display




File: stereoBoy_display.kicad_sch

stereoBoy_input




File: stereoBoy_input.kicad_sch

USB Type-C

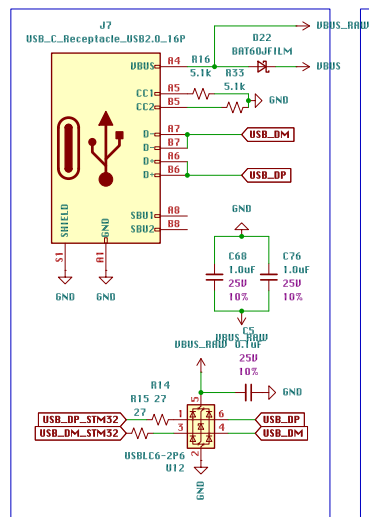


BOOST CONVERTER MODULE


Verified!
with Adafruit Powerboost 500 basic
Boosts 2xAAA (3V) to 5V

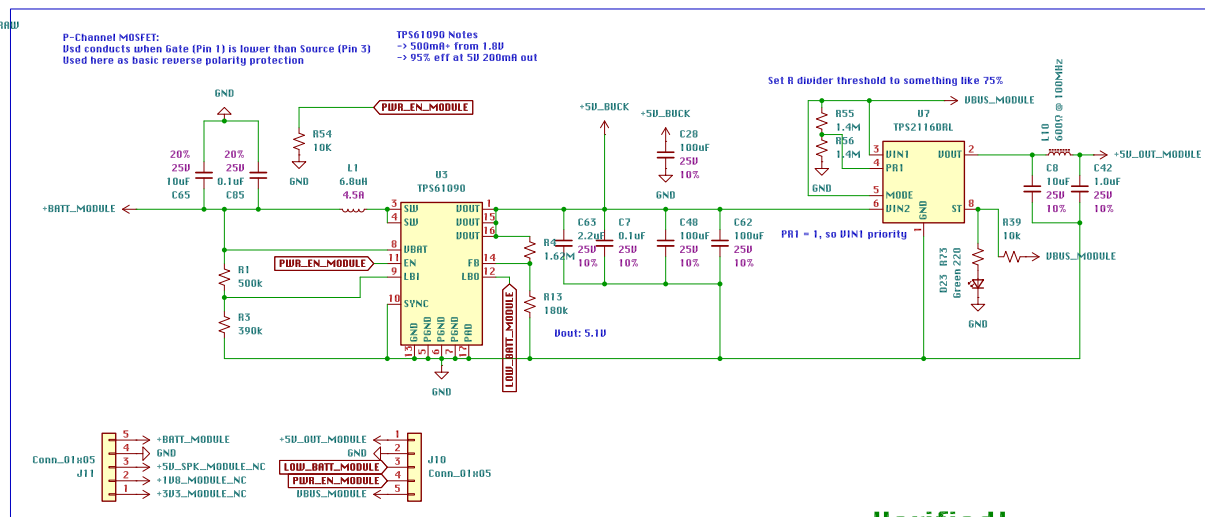

STATUS LEDs

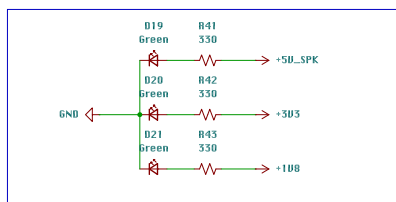


MODULE MOUNT




BUCK CONUS


Converts 5V to 3.3V and 1.8V with Adafruit TLV62565 modified for 3.3V and 1.8V

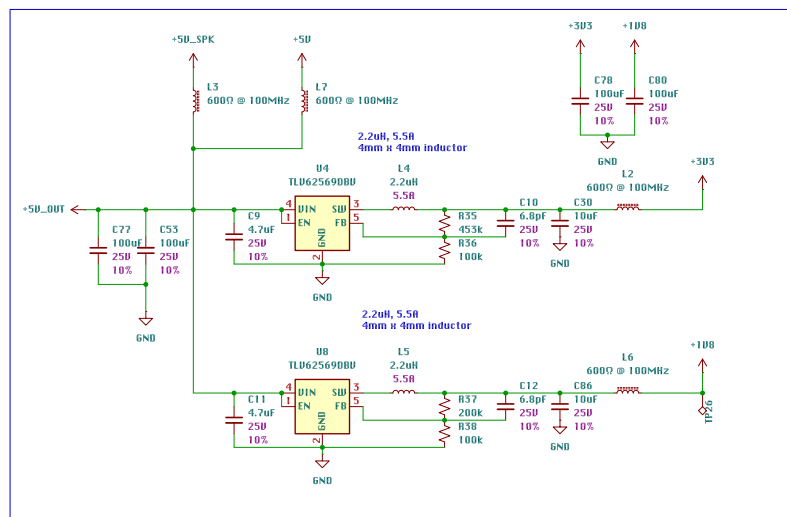

AAA BATTERY CLIPS

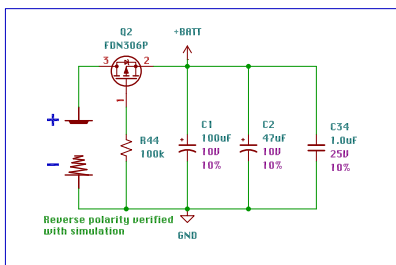

POWER SWITCH



VERIFIED FOR FAB

Audio Co-processor

**Tested with Adafruit VS1053B breakout board
using SD card and codec on same SPI bus**



[illegible]


Figure 6-17. Jack Connections for Headphone Detection

Decoupling capacitors

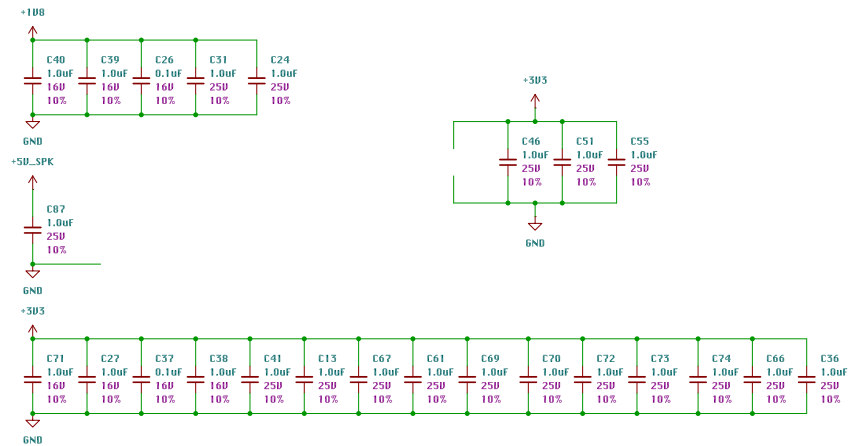


Final audio output stage

Tested with Adafruit TLV320DAC3100 breakout connected to US1053B with I2S and RP2350 with I2C (SCL=21 SDA=20)

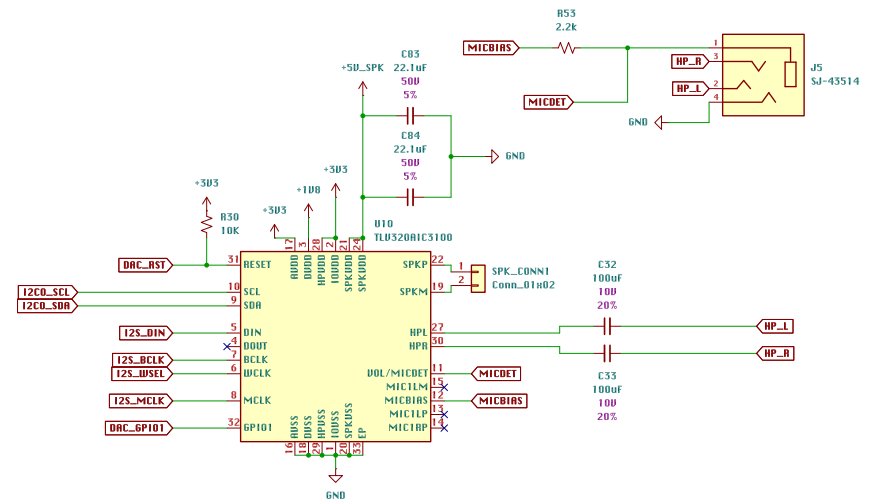


VERIFIED FOR FAB


CARTRIDGE PORT

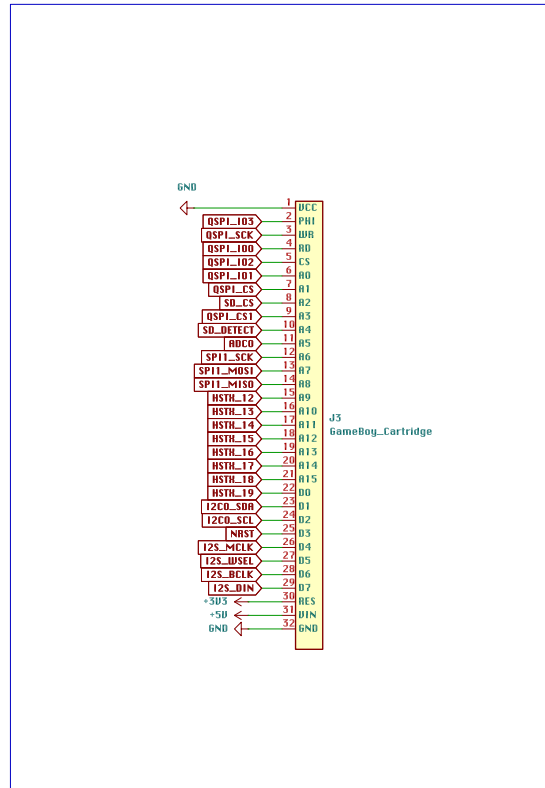


RP2350B MICROCONTROLLER **Verified!** With Purdue Proton

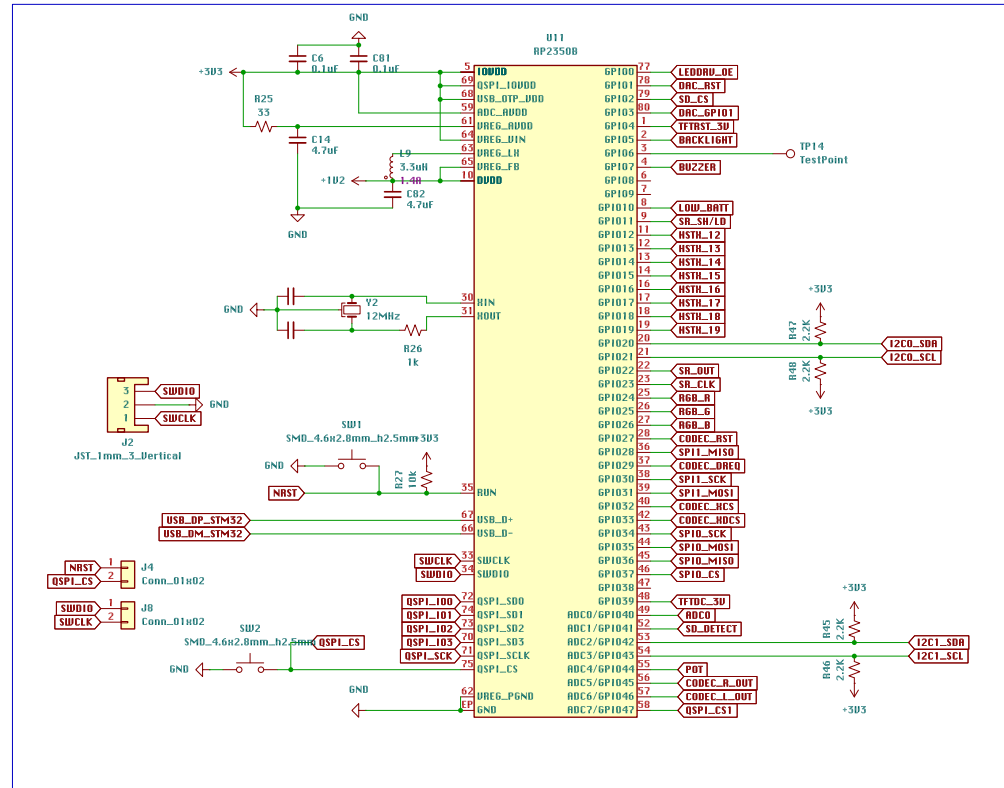

POWER DECOUPLING

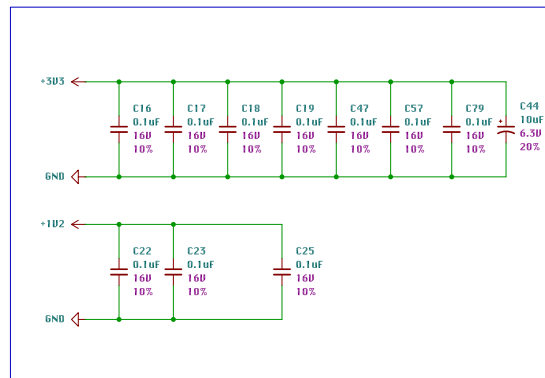


I2C FRAM

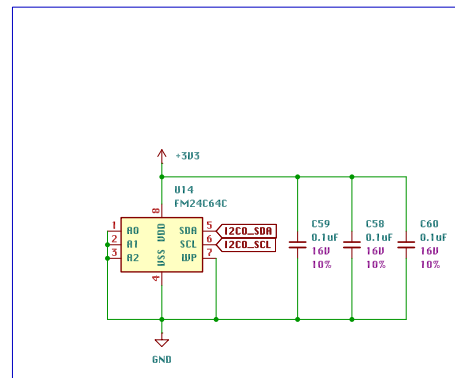


VERIFIED FOR FAB


RGB LED

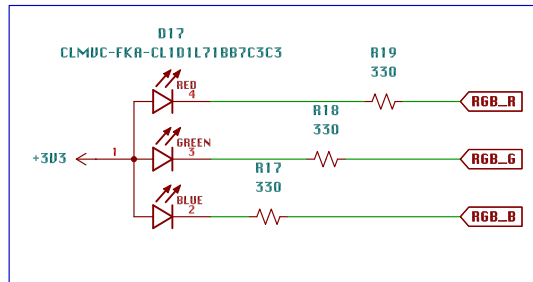


PIEZO BUZZER

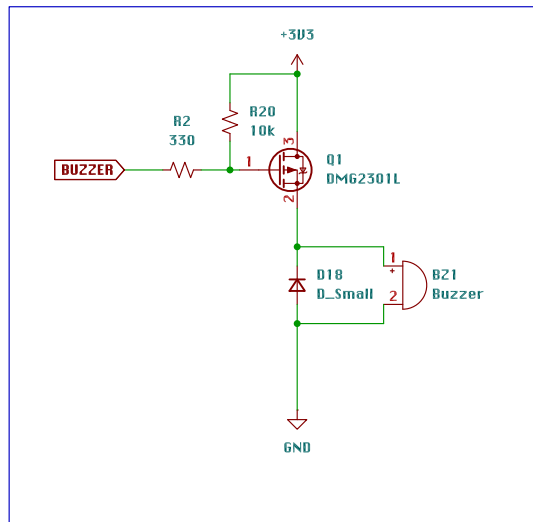

PCA9685 LED DRIVER Verified! with PCA9685 IC on breadboard

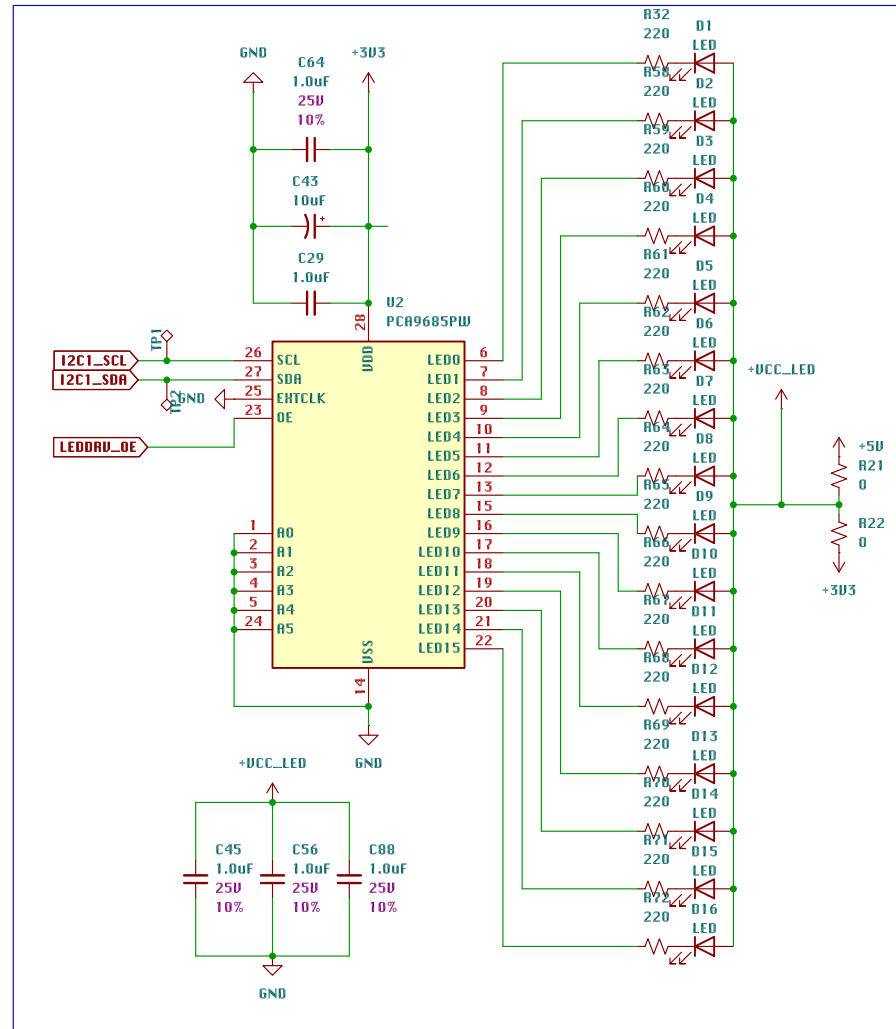


1.54" IPS LCD

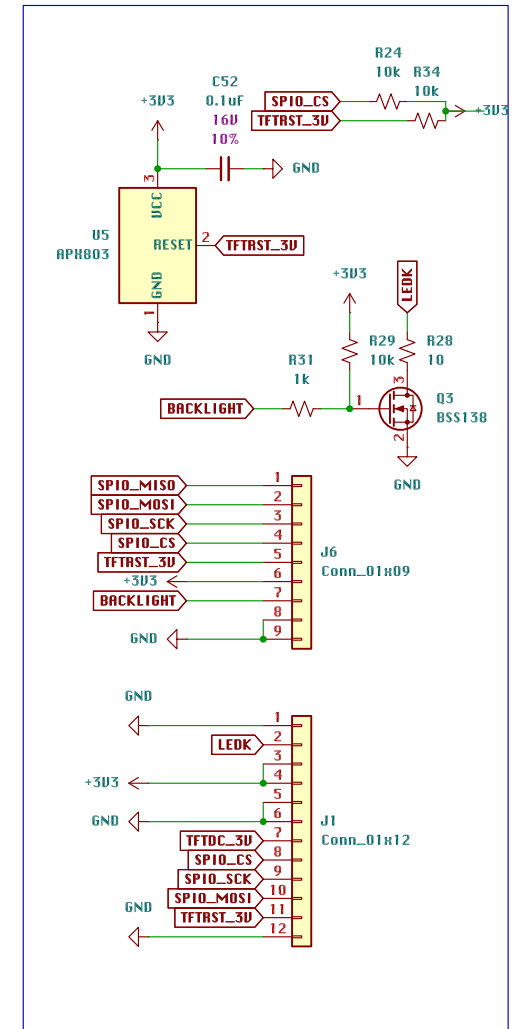


VERIFIED FOR FAB

D-PAD/A/B/START/SELECT

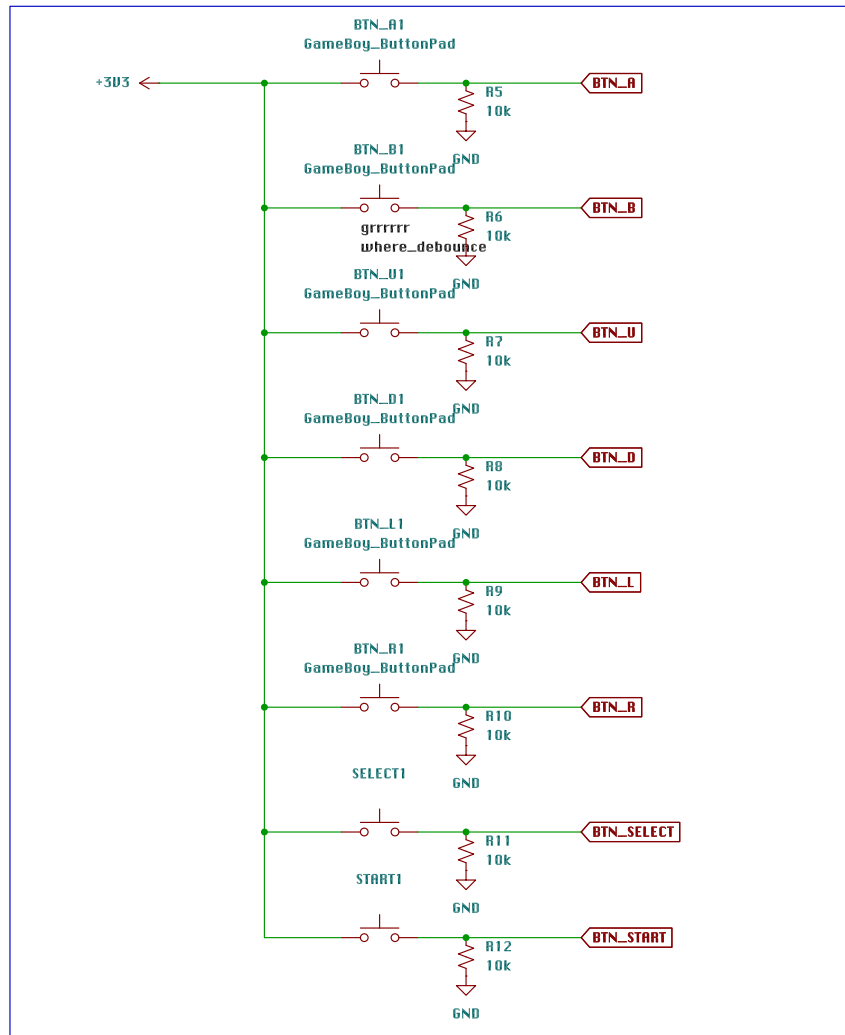


74HC165 SHIFT REG

Verified!
with 74HC165 on breadboard

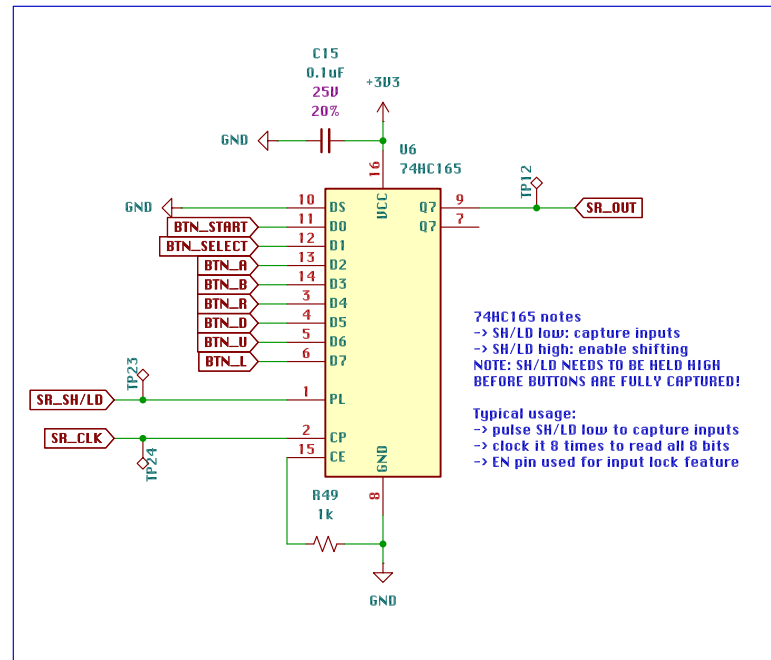

POTENTIOMETER

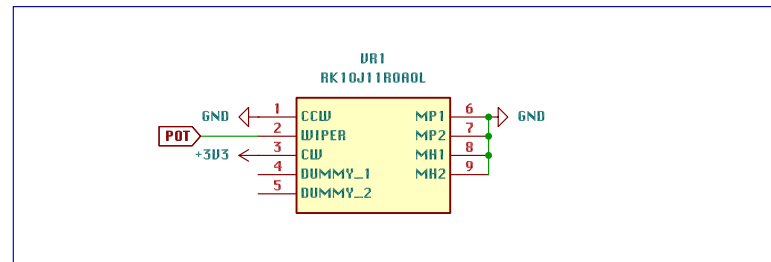

VERIFIED FOR FAB