

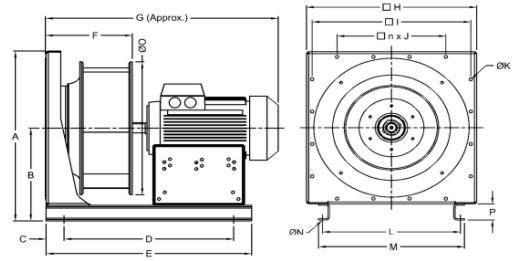


Plug Fan Model: KDPF - Keso-315

Description	Value	
Reference Density :	1.204	kg/m ³
Medium Temperature :	20	°C
Maximum Fan Weight :	37	kg
Feed data		
Frequency :	50	Hz
Rated motor data		
Voltage- Phases- Frequency :	415 V / 3 Phase / 50 Hz	
Frame Size :	80 M	
Power (P _n):	1.1	kW
Speed (N _n):	2840	min ⁻¹
Current (I _n):	2.5	A
Operational limits		
Maximum Fan Speed (nMax.):	3450	min ⁻¹
Minimum Fan Speed (nMin.):	1440	min ⁻¹



A	B	C	D	E	F	G	H	I
440	245	50	330	430	202	454	390	356
J	K	L	M	N	O	P	n x j	
-	10	302	324	11	320	50	3 x 100	

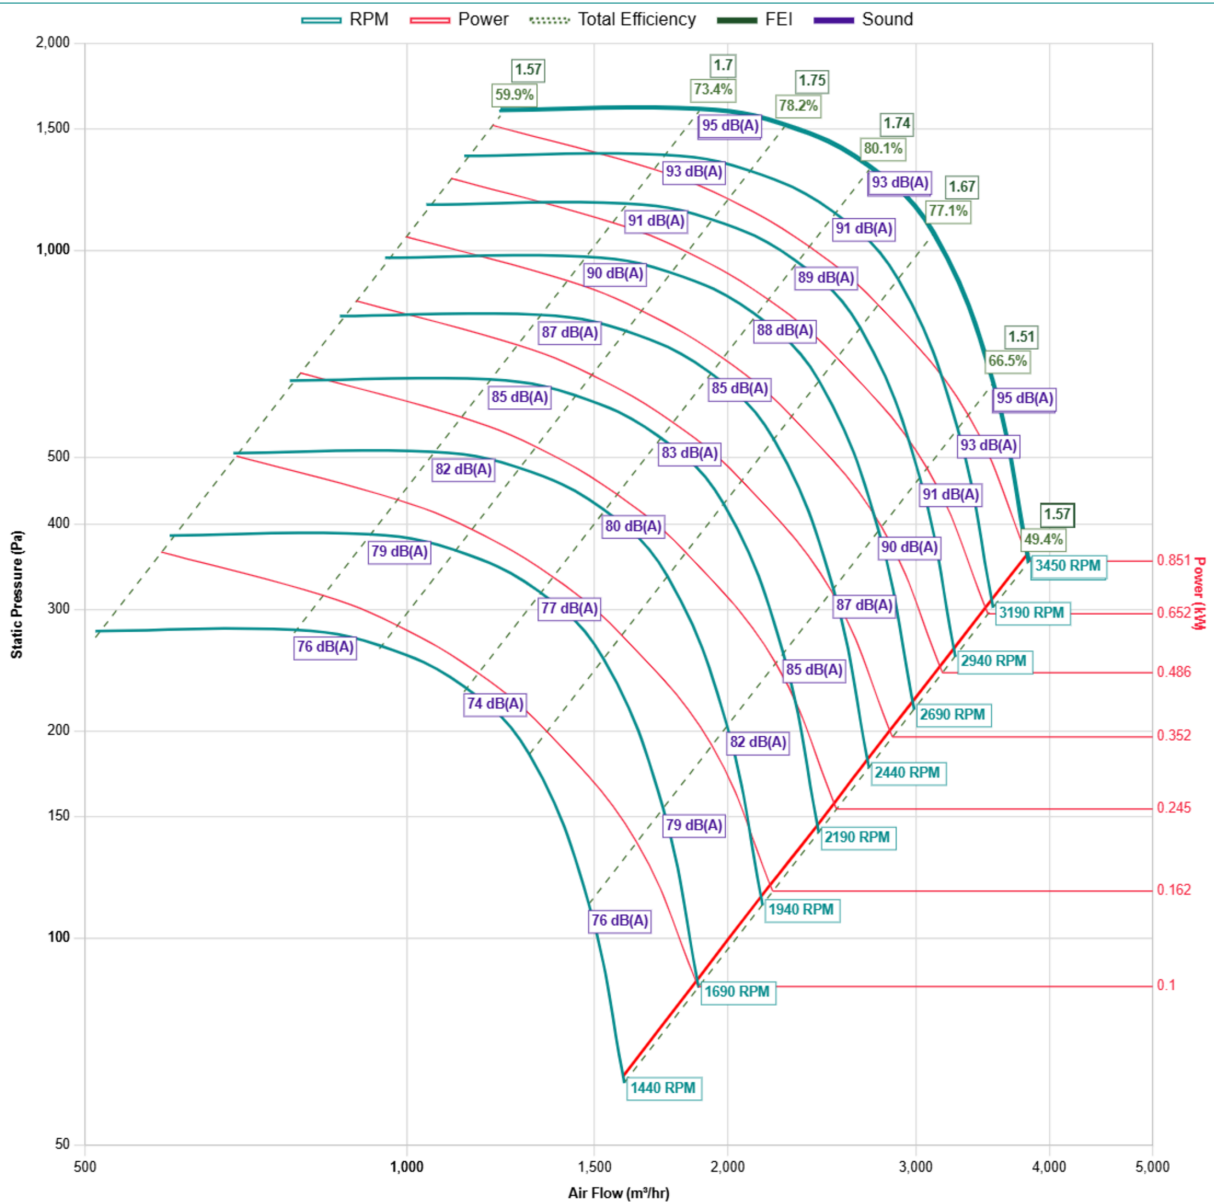

Keso-315	Flow (CMH)	Static Pressure (Pa)	Speed (RPM)	Absorbed Power (BkW) (kW)	Sound Power Levels (Lwo) (dB)								Overall (LwoA) (dBA)
					63	125	250	500	1000	2000	4000	8000	
	3463	0	2850	0.410	99	81	90	92	88	86	86	85	95
	2932	440	2850	0.566	98	82	89	87	85	82	82	73	91
	2241	909	2850	0.707	98	80	85	85	83	81	77	71	88
	1553	1099	2850	0.640	99	82	90	88	84	83	78	71	90



Performance certified is for installation type A: Free Inlet- Free Outlet. Performance ratings do not include the effects of Appurtenances (accessories) Power rating kW is fan input power. The Sound, Power Level ratings are shown in decibels, referred to 10^{-12} watts, calculated per ANSI / AMCA Standard 210-16. Values shown are for inlet Lw and LwA sound power levels for Installation type A: Free Inlet-Free Outlet. Ratings include the effects of duct and correction. The A-weighted sound ratings shown have been calculated per ANSI/AMCA Standard 210-16.