
The room / coloured 2.5D plan

Curved LED walls on both sides. Fossil displays beside the table. Blue chairs and plush silver-grey carpet.

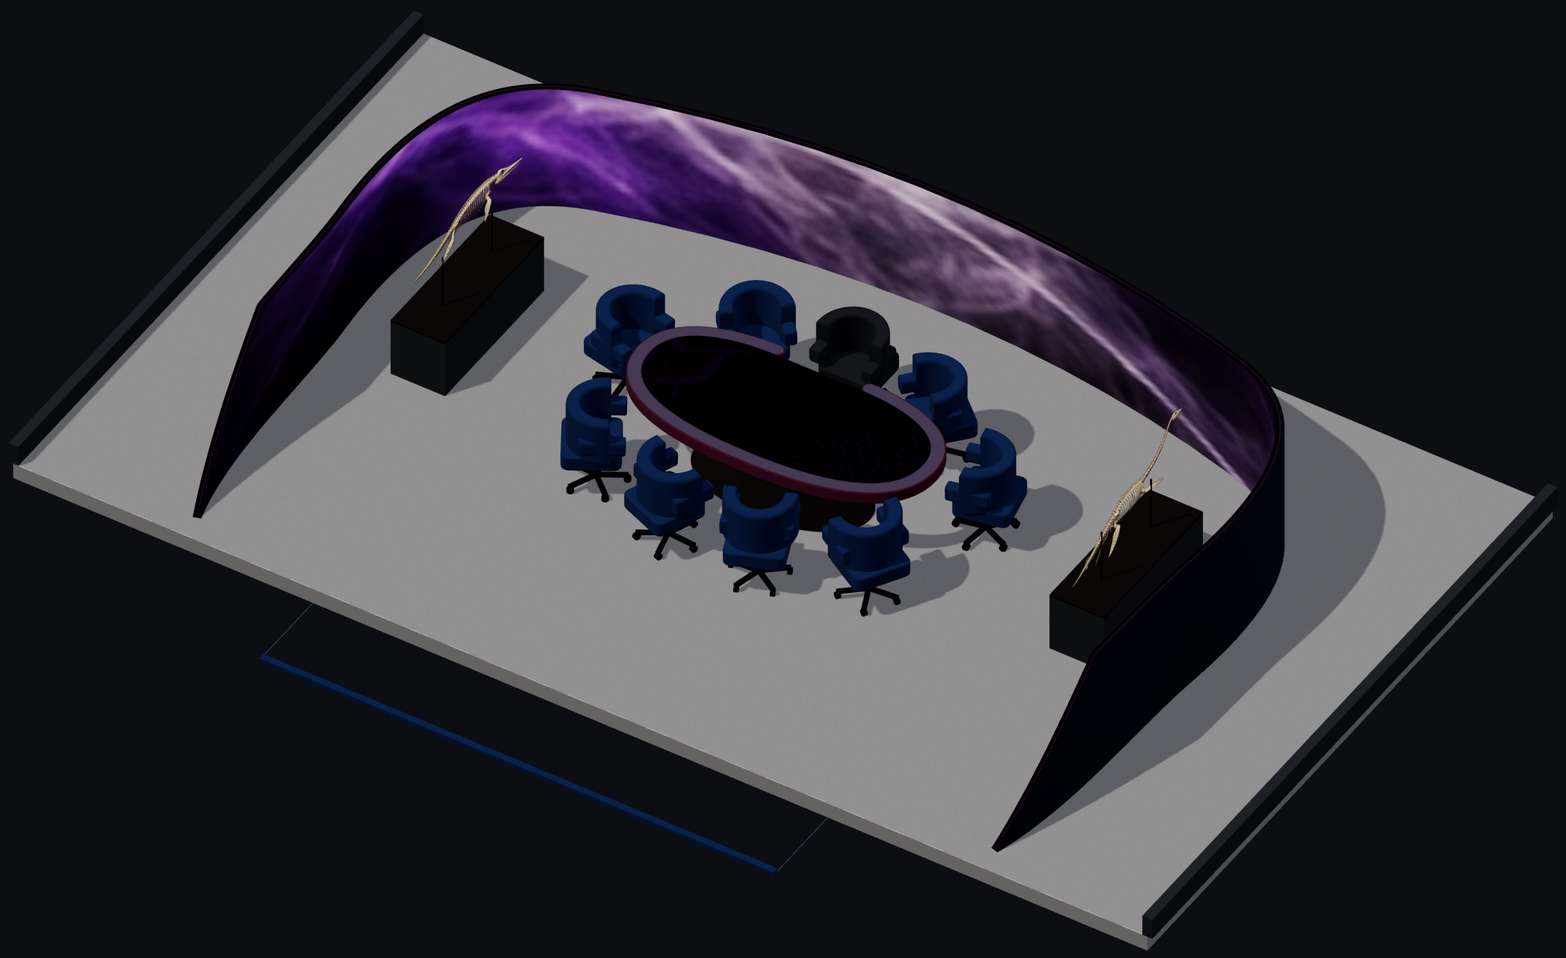

11,455 x 6,553

Room outline / mm

Curved LED wrap

Both side walls curve inward.
Both exposed ends slope at 45 degrees down to the carpet.

Table / 3,000 x 1,500

Exact inherited rail outline.
Eight players plus one dealer.
Dealer faces toward the window.

Plush silver-grey carpet

60% visual grey / soft cut pile.
Blue upholstered swivel chairs.
Materials follow room references.


COLOUR KEY

- Navy / seating and equipment
- Wine / inherited table rail

Fossil displays occupy the owner-marked positions beside the table.
Furniture and screen footprints are proposed; room is drawing-derived.

Floor plan / positions & orientation

Curved side LED walls with 45-degree sloping ends to the floor. Fossils located beside the table as marked.

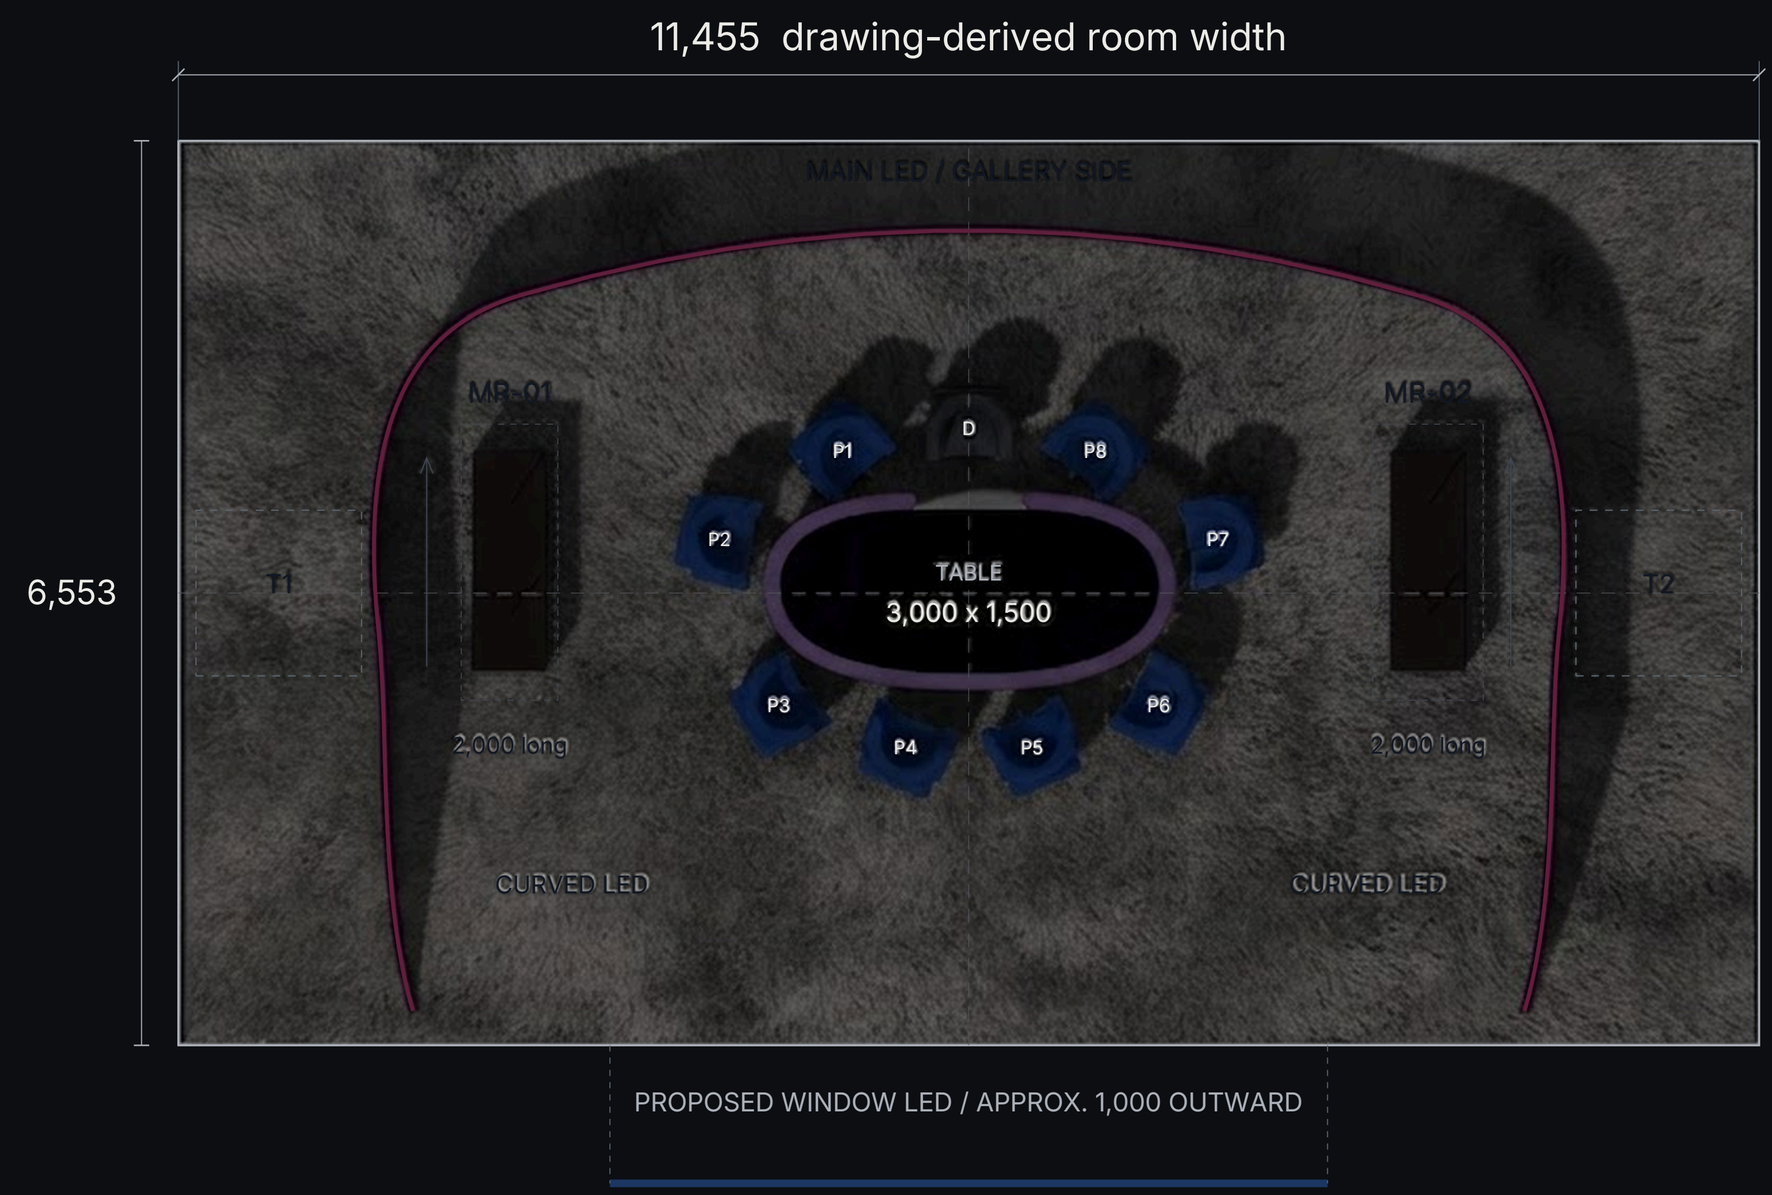



MR-01 / LEFT

Head toward gallery



MR-02 / RIGHT

Head toward gallery

Centre from side: 2,400

From window line: 3,500

Stand: 550 x 1,600

Location follows markup.

Plush 60% silver grey.

Proposed sizes / mm.

Ring plan / precise, parallel & serviceable

Two constant-width curved halves. Native table geometry retained beneath the suspended assembly.




Constant 300 mm band

9 mm inner and outer walls.
200 mm body depth.
Both lower edges carry LED.
40 mm recessed spot lenses.

10 concealed spotlights


Five stations on each half.
Circles = fitting centres.
Squares = 6 suspension stations.
Final focus follows chair clearance.

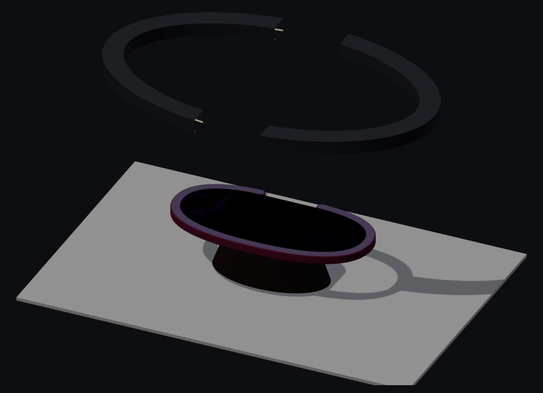

Plan and 3D share one ring geometry.

Truss / room placement & suspension

One cross-room span and two side towers. Proposed rig shown in the same room coordinates as the floor plan.

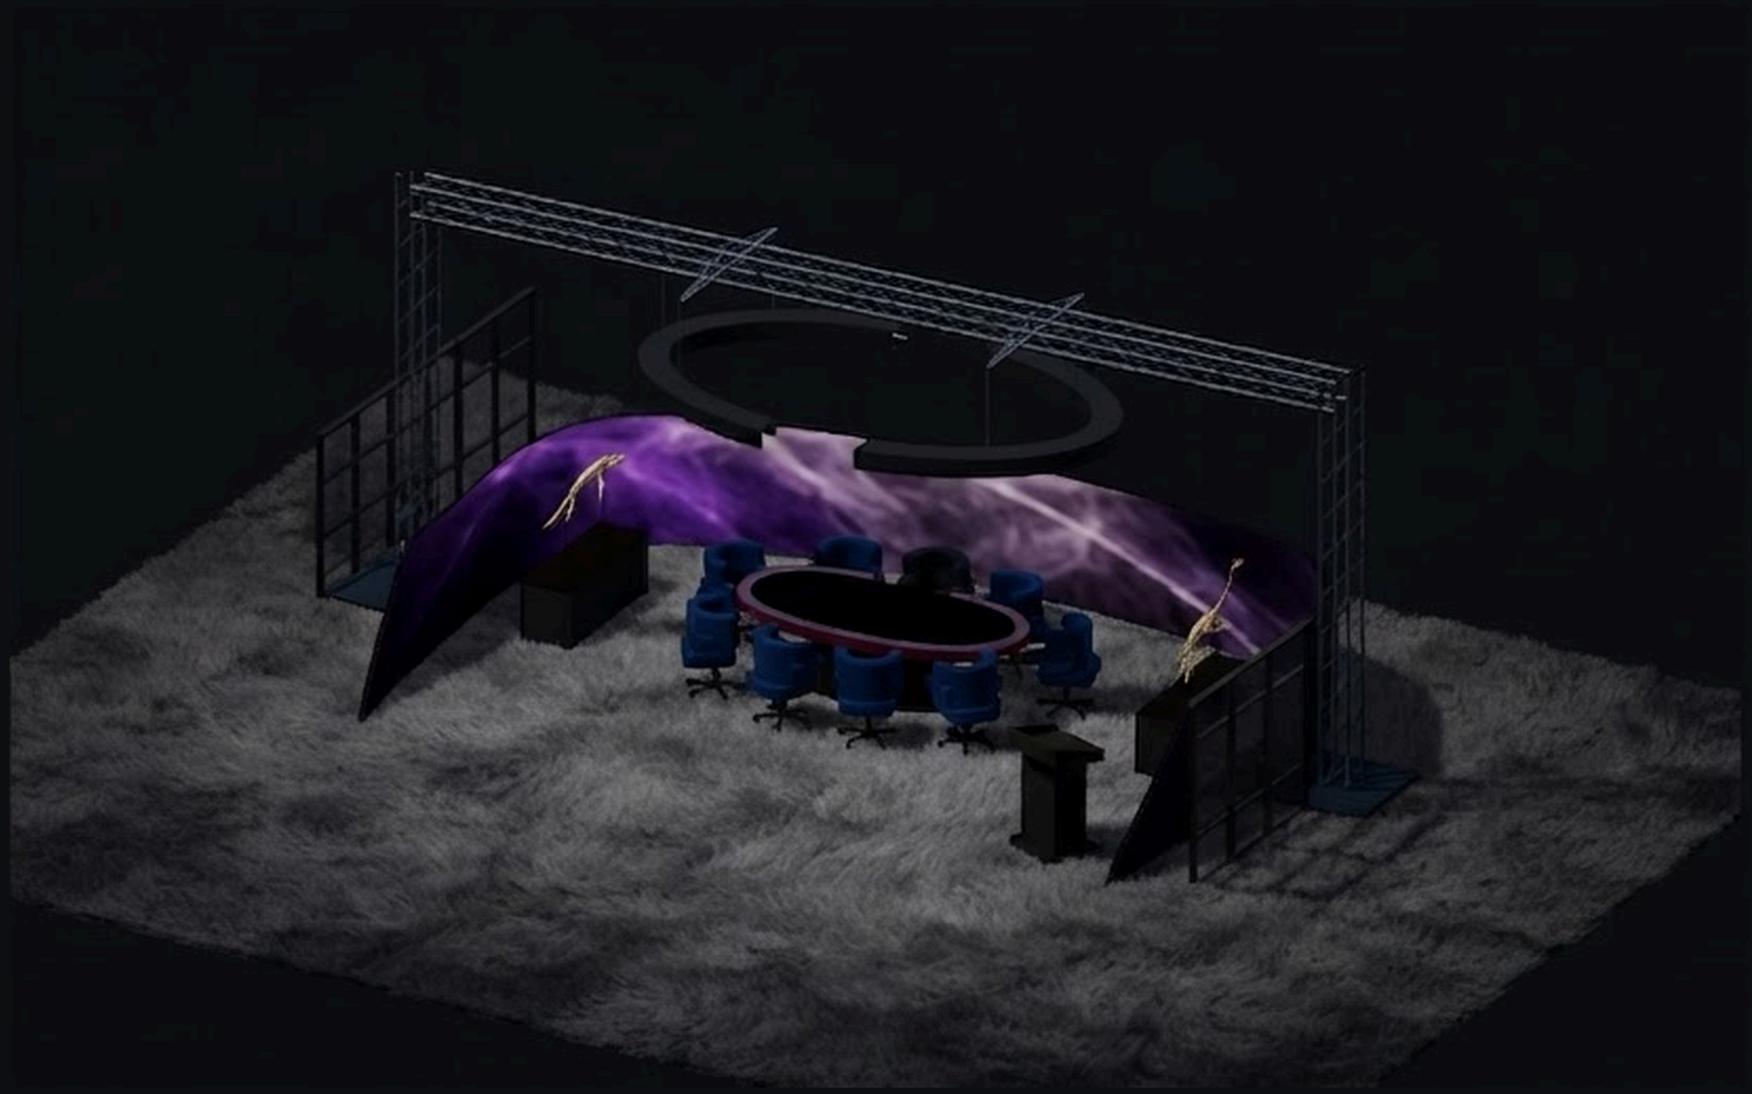

10,000 tower centres

T1 / T2 are behind the side LEDs.
Wider span clears the curved walls.
Base service access is unresolved.

6 suspension points

Three per curved half.
Braced arms project from the
main span to the ring stations.

Vertical coordination

3,000 ring underside above floor.
4,000 proposed lower chord.
300 truss section allowance.
1,200 square base reservations.

T1 / T2 location Y = 3,277 from original window line


Ring centred above the table; suspension stations share the top-view model.

Proposed, not existing.

Rear LED service zone intersects
the base reserve: resolve before build.

Dual light edges / thicker aluminium

Both lower edges carry a housed LED line. The inverted-U channel stays open below.

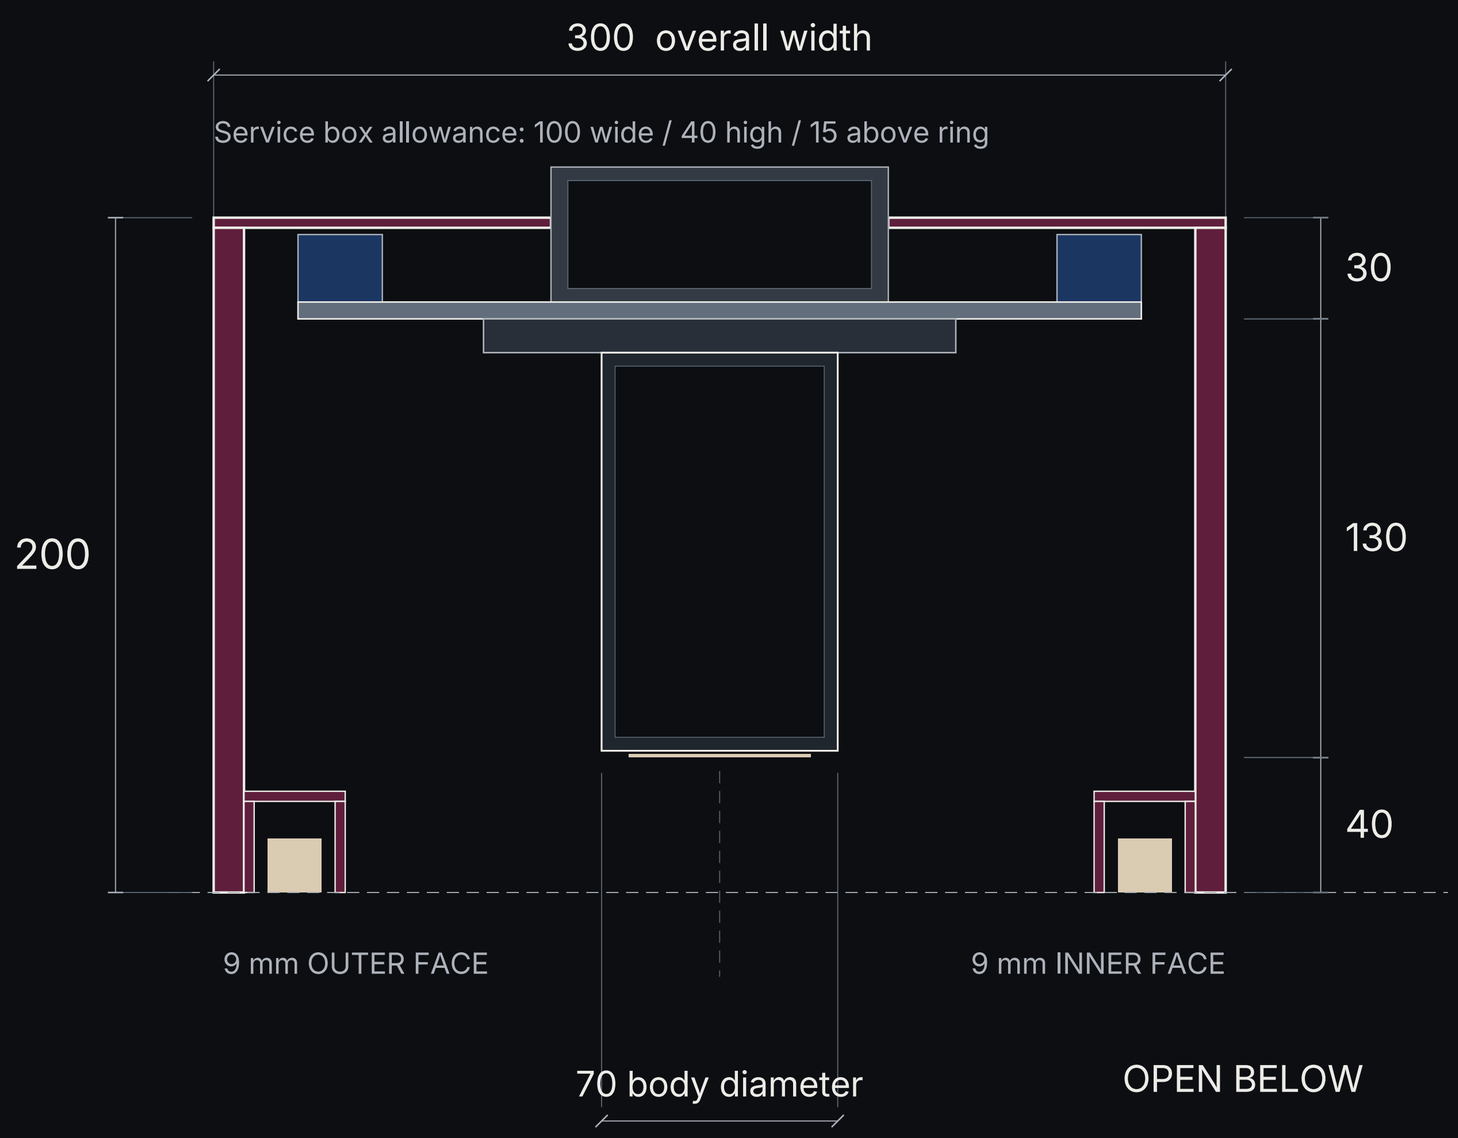

200 = 30 + 130 + 40

30 Ring top to mounting face
130 Fitting space to lens
40 Lens above both edges

40 mm recess

Measured to the light-emitting lens, not the end of a decorative tube.

Both edges / 2700 K


30 x 30 curved housing each side.
9 mm faces: three times the former 3.
Same 40 mm lens recess.
222 mm open access below.

Design allowances

200 fascia depth / 215 with box.
Supplier fit and loads to be checked.
Top web remains 3 mm.

Real housings / open access

Two light channels are integrated behind the lower edges. No plate closes the middle.

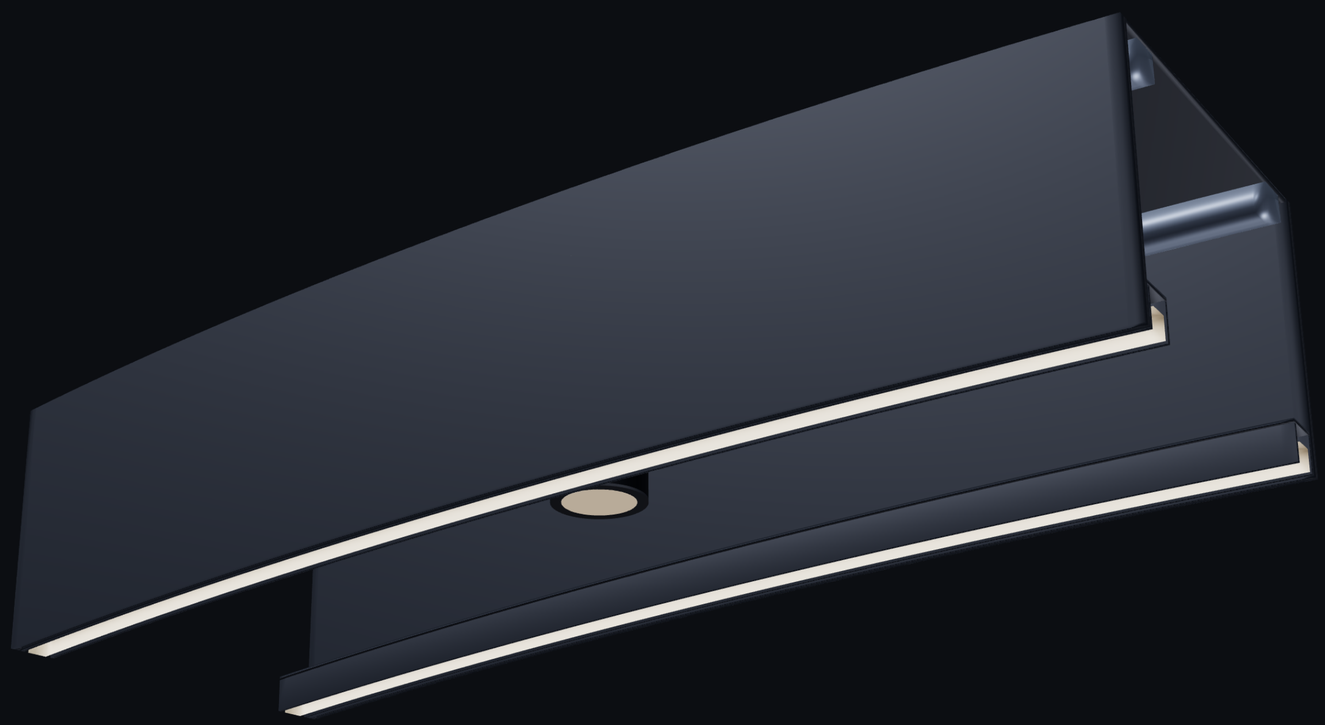

01 Substantial edges

9 mm rolled aluminium faces.
Matte black inside and outside.


02 Two housed light lines

30 x 30 aluminium housing each.
Side-bending light follows the oval.

03 Service from below

LED inserts removable downward.
222 mm central opening stays clear.

Space at the canopy

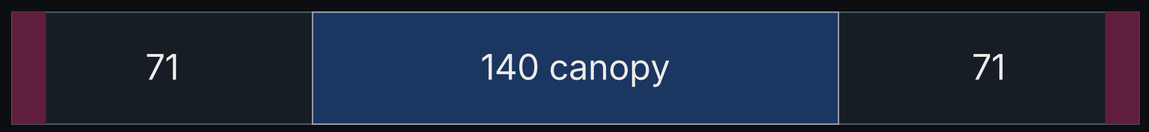

300 overall - two 9 mm faces = 282 clear

Top support rails and removable bridge.
Electrical box accessed from above.
Bottom: 282 - 30 - 30 = 222 clear.
LED housings sit inside the walls.
Test removal with a complete sample.

Material & fitting schedule

A restrained exterior, serviceable interior and separately controlled sources of light.

01	Ring shell	9 mm rolled aluminium / 3 mm top web Three times the former wall thickness; alloy and temper to suit rolling. Deburr, pretreat and fine-texture matte black powder-coat inside/out.
02	Support & mounting	Internal rails with removable fixture bridge Frame and suspension connections sized by the engineer. Isolate the decorative skin from the primary suspension load.
03	Spotlight	2700 K / black straight cylinder / dimmable Reference: ELCO E25FB-0727-FC, 10.5 W, 18-50 degree focus. Proposed space: 70 body / 140 canopy / 130 lens-to-mount; verify fit.
04	Two continuous edges	2700 K side-bending linear LED / 30 x 30 housings Use curved aluminium retainers and removable downward-facing inserts. Dim both edges together, separately from spots; approve one curved sample.

Before fabrication	Confirm fitting dimensions, cooling clearances, dimming and camera glare; test maintenance access. Register ring height and fixture positions to the chair-clear floor targets in the measured room model.

Product reference: ELCO Lighting / Koto Sylo Surface Mount with Focus Module