
Dual light edges / thicker aluminium

Both lower edges carry a housed LED line. The inverted-U channel stays open below.

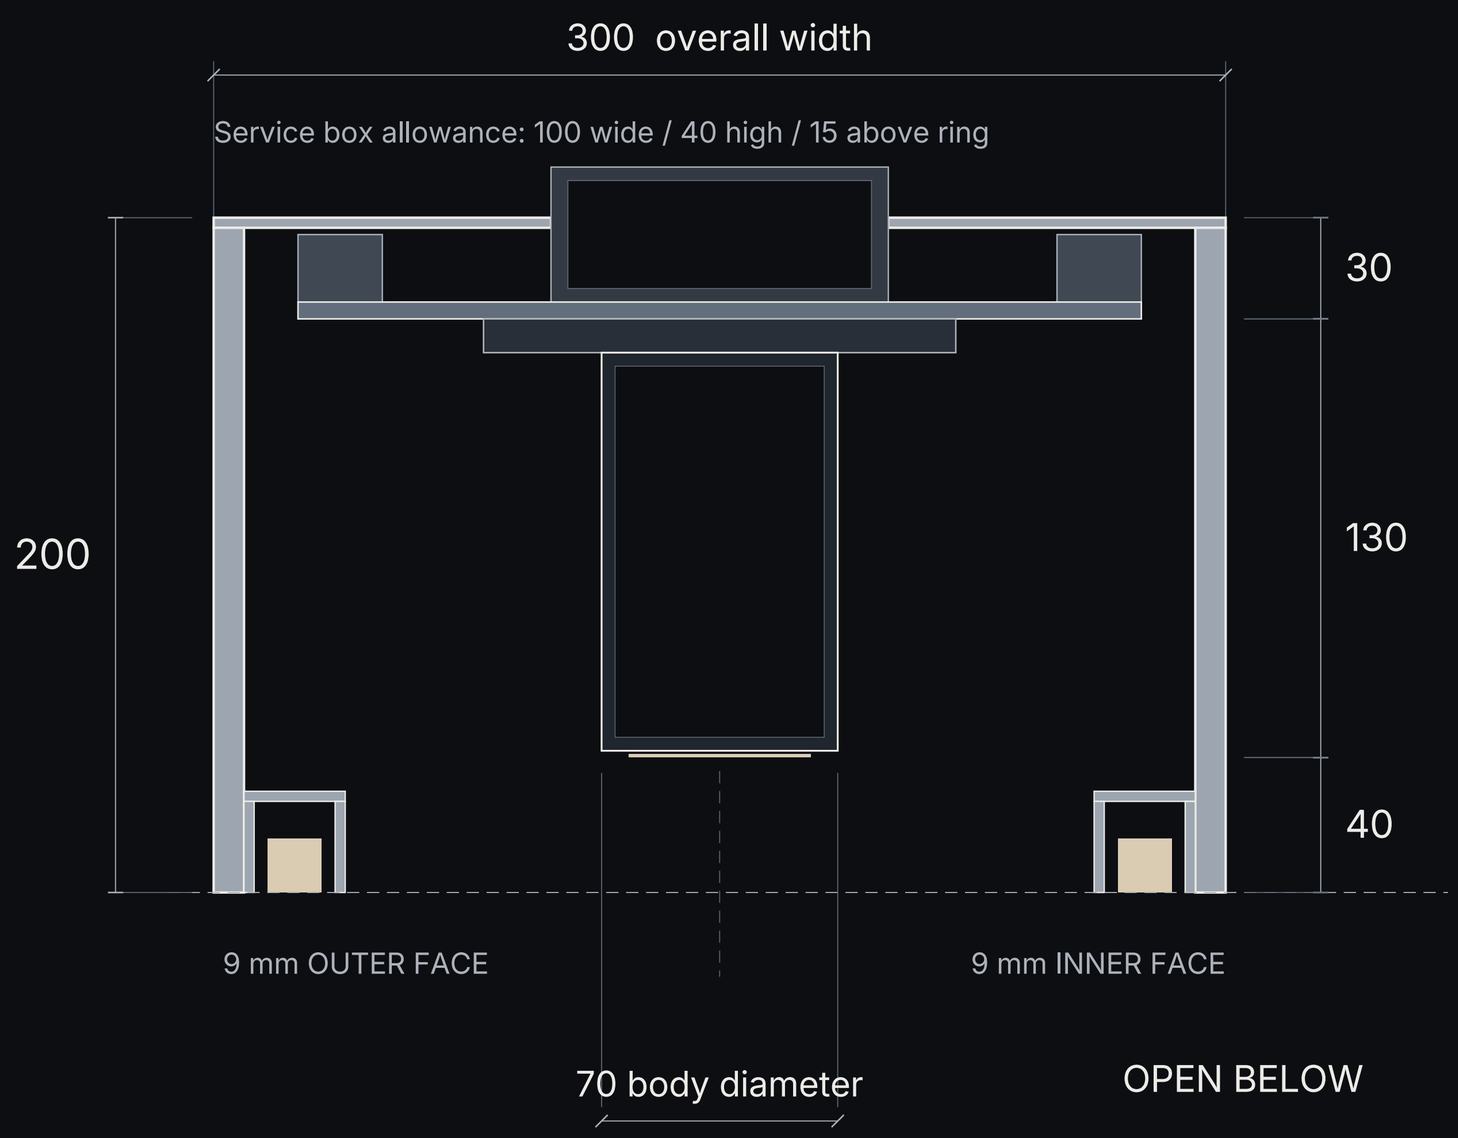

200 = 30 + 130 + 40

30 Ring top to mounting face
130 Fitting space to lens
40 Lens above both edges

40 mm recess

Measured to the light-emitting lens, not the end of a decorative tube.

Both edges / 2700 K


30 x 30 curved housing each side.
9 mm faces: three times the former 3.
Same 40 mm lens recess.
222 mm open access below.

Design allowances

200 fascia depth / 215 with box.
Supplier fit and loads to be checked.
Top web remains 3 mm.

Real housings / open access

Two light channels are integrated behind the lower edges. No plate closes the middle.

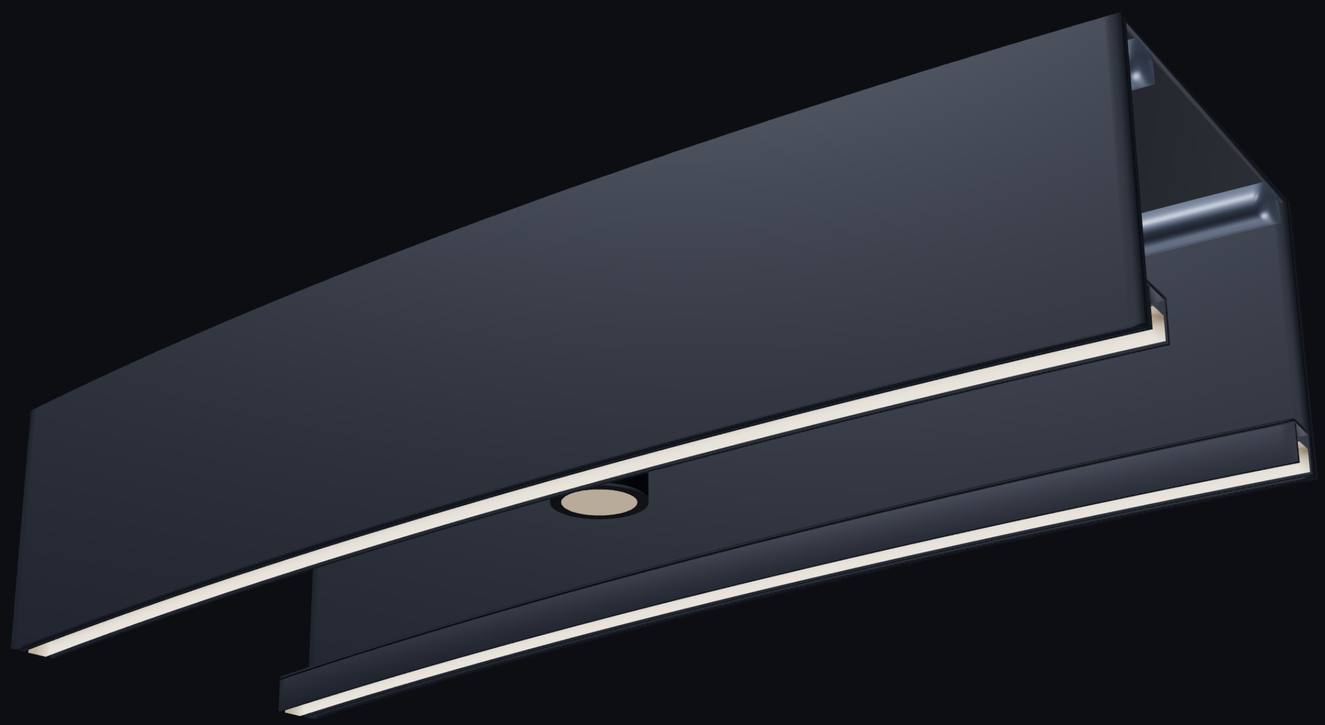

01 Substantial edges

9 mm rolled aluminium faces.
Matte black inside and outside.


02 Two housed light lines

30 x 30 aluminium housing each.
Side-bending light follows the oval.

03 Service from below

LED inserts removable downward.
222 mm central opening stays clear.

Space at the canopy

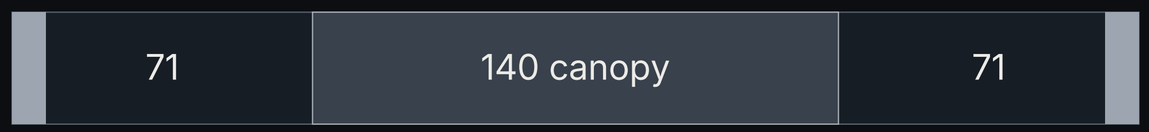

300 overall - two 9 mm faces = 282 clear

Top support rails and removable bridge.
Electrical box accessed from above.
Bottom: 282 - 30 - 30 = 222 clear.
LED housings sit inside the walls.
Test removal with a complete sample.

Material & fitting schedule

A restrained exterior, serviceable interior and separately controlled sources of light.

01	Ring shell	9 mm rolled aluminium / 3 mm top web Three times the former wall thickness; alloy and temper to suit rolling. Deburr, pretreat and fine-texture matte black powder-coat inside/out.
02	Support & mounting	Internal rails with removable fixture bridge Frame and suspension connections sized by the engineer. Isolate the decorative skin from the primary suspension load.
03	Spotlight	2700 K / black straight cylinder / dimmable Reference: ELCO E25FB-0727-FC, 10.5 W, 18-50 degree focus. Proposed space: 70 body / 140 canopy / 130 lens-to-mount; verify fit.
04	Two continuous edges	2700 K side-bending linear LED / 30 x 30 housings Use curved aluminium retainers and removable downward-facing inserts. Dim both edges together, separately from spots; approve one curved sample.

Before fabrication	Confirm fitting dimensions, cooling clearances, dimming and camera glare; test maintenance access. Register ring height and fixture positions to the chair-clear floor targets in the measured room model.

Product reference: ELCO Lighting / Koto Sylo Surface Mount with Focus Module