
DESCRIPTION


- 38.10mm (1.5")Single digit numeric display series.
- Standard brightness.
- Low current operation.
- Excellent character apperance.
- Easy mounting on P.C.boards or sockets

Package Dimensions &Internal Circuit Diagram

FYS-15012 Series



FYS-15012Ax

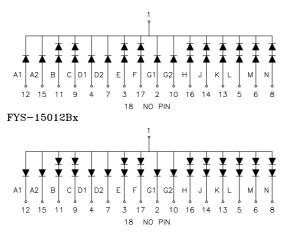

Notes:

- · All dimensions are in millimeters (inches)
- Tolerance is $\pm 0.25(0.01")$ unless otherwise noted.
- · Specificaions are subject to change whitout notice.



: Absolute maximum ratings ($Ta=25^{\circ}C$)

Damanatan	Symbol	Test Condition	Va	11 11	
Parameter			Min	Max	Unit
Reverse Voltage	VR	IR=30μA	5		V
Forward Current	IF			30	mA
Power Dissipation Pd				100	mW
Pulse Current	Ipeak	Duty=0.1mS, 1KHz		150	mA
Operating Temperature	Topr		-40	+85	° C
Storage Temperature	Tstr		-40	+85	° C

■ Description:

• Color Code & Chip characteristics: (Test Condition: IF=20mA)


Emitting Color		Dice Material	Peak Wave Length	Spectral Line halfwidth(\triangle	Forward Voltage(VF) Unit:V		Luminous Intensity (Iv)
			(^λ P)	λ1/2 ₎	Тур	Max	Unit:ucd
Н	Red	GaP/GaP	700nm	90nm	2.25	2.50	500
S	Hi Red	GaAlAs/GaAs,SH	660nm	20nm	1.85	2.20	3500
D	Super Red	GaAlAs/GaAs,DH	660nm	20nm	1.85	2.20	6000
UR	Ultra Red	GaAlAs/GaAs,DD H	660nm	20nm	1.85	2.20	12000
Е	Orange	GaAsP/GaP	635nm	35nm	2.10	2.50	2500
Υ	Yellow	GaAsP/GaP	585nm	35nm	2.10	2.50	2000
G	Green	GaP/GaP	570nm	30nm	2.20	2.50	2500

· -XX: Surface / Lens color:

Number	0	1	2	3	4	5
Ref Surface Color	White	Black	Gray	Red	Green	
Epoxy Color	Water clear	White diffused	Red Diffused	Green Diffused	Yellow Diffused	


ADD: NO.115 QiXin Road NingBo Zhejiang China TEL: 0086-574-87927870 87933652 FAX:008 Http://www.foryard.com E-mail:sa

ang China ZIP.: 315051 FAX:0086-574-87927917 E-mail:sales@foryard.com

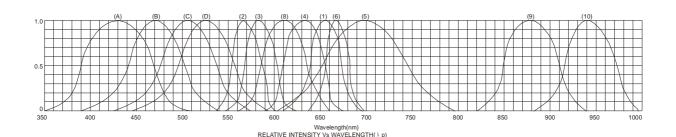


- (1) GaAsP/GaAs 655nm/Red
- (2) GaP 570nm/Yellow Green
- (3) GaAsP/GaP 585nm/Yellow
- (4) GaAsp/GaP 635nm/Orange & Hi-Eff Red
- (5) GaP 700nm/Bright Red
- (6) GaAlAs/GaAs 660nm/Super Red
- (8) GaAsP/GaP 610nm/Super Red


- (9) GaAlAs 880nm
- (10) GaAs/GaAs & GaAlAs/GaAs 940nm
- (A) GaN/SiC 430nm/Blue
- (B) InGaN/SiC 470nm/Blue
- (C) InGaN/SiC 505nm/Ultra Green
- (D) InGaAl/SiC 525nm/Ultra Green




FORWARD VOLTAGE (Vf) FORWARD CURRENT VS. FORWARD VOLTAGE





FORWARD CURRENT (mA) RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT




AMBIENT TEMPERATURE Ta(°C) FORWARD CURRENT VS. AMBIENT TEMPERATURE

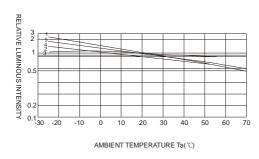







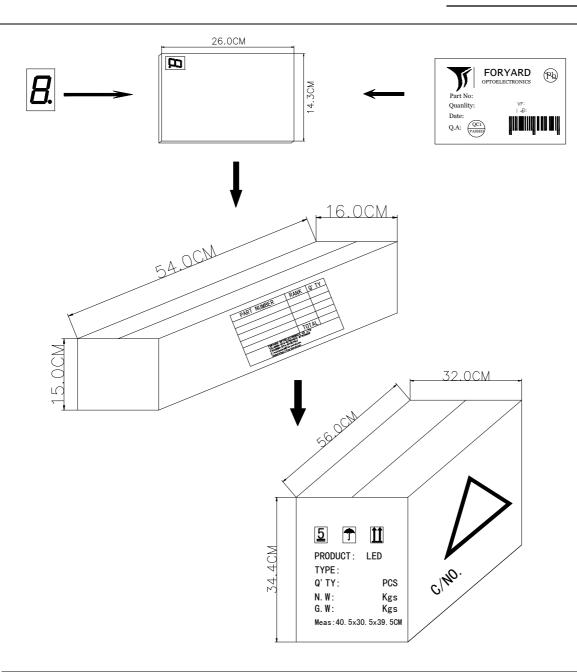

tapy	QTY/foam(pcs)	QTY /Bundle (pcs)	QTY / CARTONDimension
FYS-15012A/Bx-xx	4*5=20	20*16=320	320*4=1280

ADD: NO.115 QiXin Road NingBo Zhejiang China TEL: 0086-574-87927870 87933652 FAX:008 Http://www.foryard.com E-mail:sa

Zhejiang China ZIP.: 315051 FAX:0086-574-87927917 E-mail:sales@foryard.com