
CSC645/745 COMPUTER NETWORKS Homework 1

Due: 7:00PM, Thursday, 02/11/2016

- 1. What advantage does a circuit-switched network have over a packet-switched network? Consider an application that transmits data at a steady rate. Also, when such an application starts, it will continue running for a relatively long period of time. Would a packet-switched network or a circuit-switched network be more appropriate for this application? Why? (10 Points)
- 2. What are the five layers in the Internet protocol stack? What are the principal responsibilities of each of these layers? (10 Points)
- 3. Consider the following circuit-switched network. There are 4 circuits on each link.
 - a. What is the maximum number of simultaneous connections that can be in progress at any one time in this network? (5 Points)
 - b. Suppose that all connections are between switches A and C. What is the maximum number of simultaneous connections that can be in progress? (5 Points)
 - c. Suppose we want to make four connections between switches A and C, and another four connections between switches B and D. Can we route these calls through the four links to accommodate all eight connections? (5 Points)



4. Consider two hosts, A and B, connected by a single link of rate *R* bps. Suppose that the two hosts are separated by *m* meters, and suppose the propagation speed along the

link is *s* meters/sec. Host A is to send a packet of size *L* bits to Host B.

- a. Express the propagation delay, d_{prop} , in terms of m and s. (3 Points)
- b. Determine the transmission time of the packet, d_{trans} , in terms of L and R. (3 Points)
- c. Ignoring processing and queuing delays, obtain an expression for the end-to-end delay. (3 Points)
- d. Suppose Host A begins to transmit the packet at time t = 0. At time $t = d_{trans}$, where is the last bit of the packet? (3 Points)
- e. Suppose d_{prop} is greater than d_{trans} . At time $t = d_{trans}$, where is the first bit of the packet? (3 Points)
- f. Suppose d_{prop} is less than d_{trans} . At time $t = d_{trans}$, where is the first bit of the packet? (3 Points)
- 5. Suppose Host A wants to send a large file to Host B. The path from Host A to Host B has three links, of rates $R_1 = 500$ kbps, $R_2 = 2$ Mbps, and $R_3 = 1$ Mbps.
 - a. Assuming no other traffic in the network, what is the throughput for the file transfer? (3 Points)
 - b. Suppose the file is 4 million bytes. Dividing the file size by the throughput, roughly how long will it take to transfer the file to Host B? (3 Points)
 - c. Repeat (a) and (b), but now with R2 reduced to 100 kbps. (6 Points)
- 6. Consider a packet of length L which begins at end system A and travels over three links to a destination end system. These three links are connected by two packet switches. Let d_i , s_i , and R_i denote the length, propagation speed, and the transmission rate of link i, for i = 1, 2, 3. The packet switch delays each packet by d_{proc} . Assuming no queuing delays, in terms of d_i , s_i , R_i , (i = 1,2,3), and L, what is the total end-to-end delay for the packet? Suppose now the packet is 1,500 bytes, the propagation speed on all three links is 2.5×10^8 m/s, the transmission rates of all three links are 2 Mbps, the packet switch processing delay is 3 msec, the length of the first link is 5,000 km, the length of the second link is 4,000 km, and the length of the last link is 1,000 km. For these values, what is the end-to-end delay? (10 Points)
- 7. Suppose you would like to urgently deliver 40 terabytes (1 terabyte = 10¹² bytes) data from Boston to Los Angeles. You have available a 100 Mbps dedicated link for data transfer. Would you prefer to transmit the data via this link or instead use FedEx overnight delivery? Explain. (5 Points)
- 8. In modern packet-switched networks, including the Internet, the source host segments long, application-layer messages (for example, an image or a music file) into smaller

packets and sends the packets into the network. The receiver then reassembles the packets back into the original message. We refer to this process as message segmentation. Figure 1.27 illustrates the end-to-end transport of a message with and without message segmentation. Consider a message that is 8×106 bits long that is to be sent from source to destination in Figure 1.27. Suppose each link in the figure is 2 Mbps. Ignore propagation, queuing, and processing delays.

- a. Consider sending the message from source to destination without message segmentation. How long does it take to move the message from the source host to the first packet switch? Keeping in mind that each switch uses store-and-forward packet switching, what is the total time to move the message from source host to destination host? (8 Points)
- b. Now suppose that the message is segmented into 800 packets, with each packet being 10,000 bits long. How long does it take to move the first packet from source host to the first switch? When the first packet is being sent from the first switch to the second switch, the second packet is being sent from the source host to the first switch. At what time will the second packet be fully received at the first switch? (8 Points)
- c. How long does it take to move the file from source host to destination host when message segmentation is used? Compare this result with your answer in part (a) and comment. (4 Points)

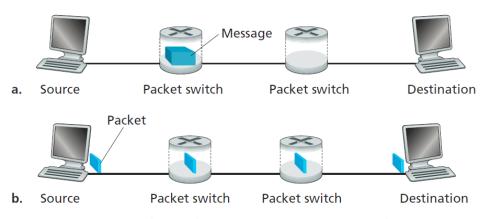


Figure 1.27 ◆ End-to-end message transport: (a) without message segmentation; (b) with message segmentation

Bonus Question

In class, we know that the end-to-end delay of sending one packet of length L over N links of transmission rate R from source host to destination host is $N \cdot L/R$. What is the end-to-end delay for sending P such packets back-to-back over the N links? (5 Points)