


STANDARD INSTRUMENT CHART - ICAO


DISTANCES IN NAUTICAL MILES
BEARINGS, TRACKS AND RADIALS ARE MAGNETIC
ALTITUDES AND ELEVATIONS ARE IN FEET

GLASGOW NORBO (Jet aircraft only)

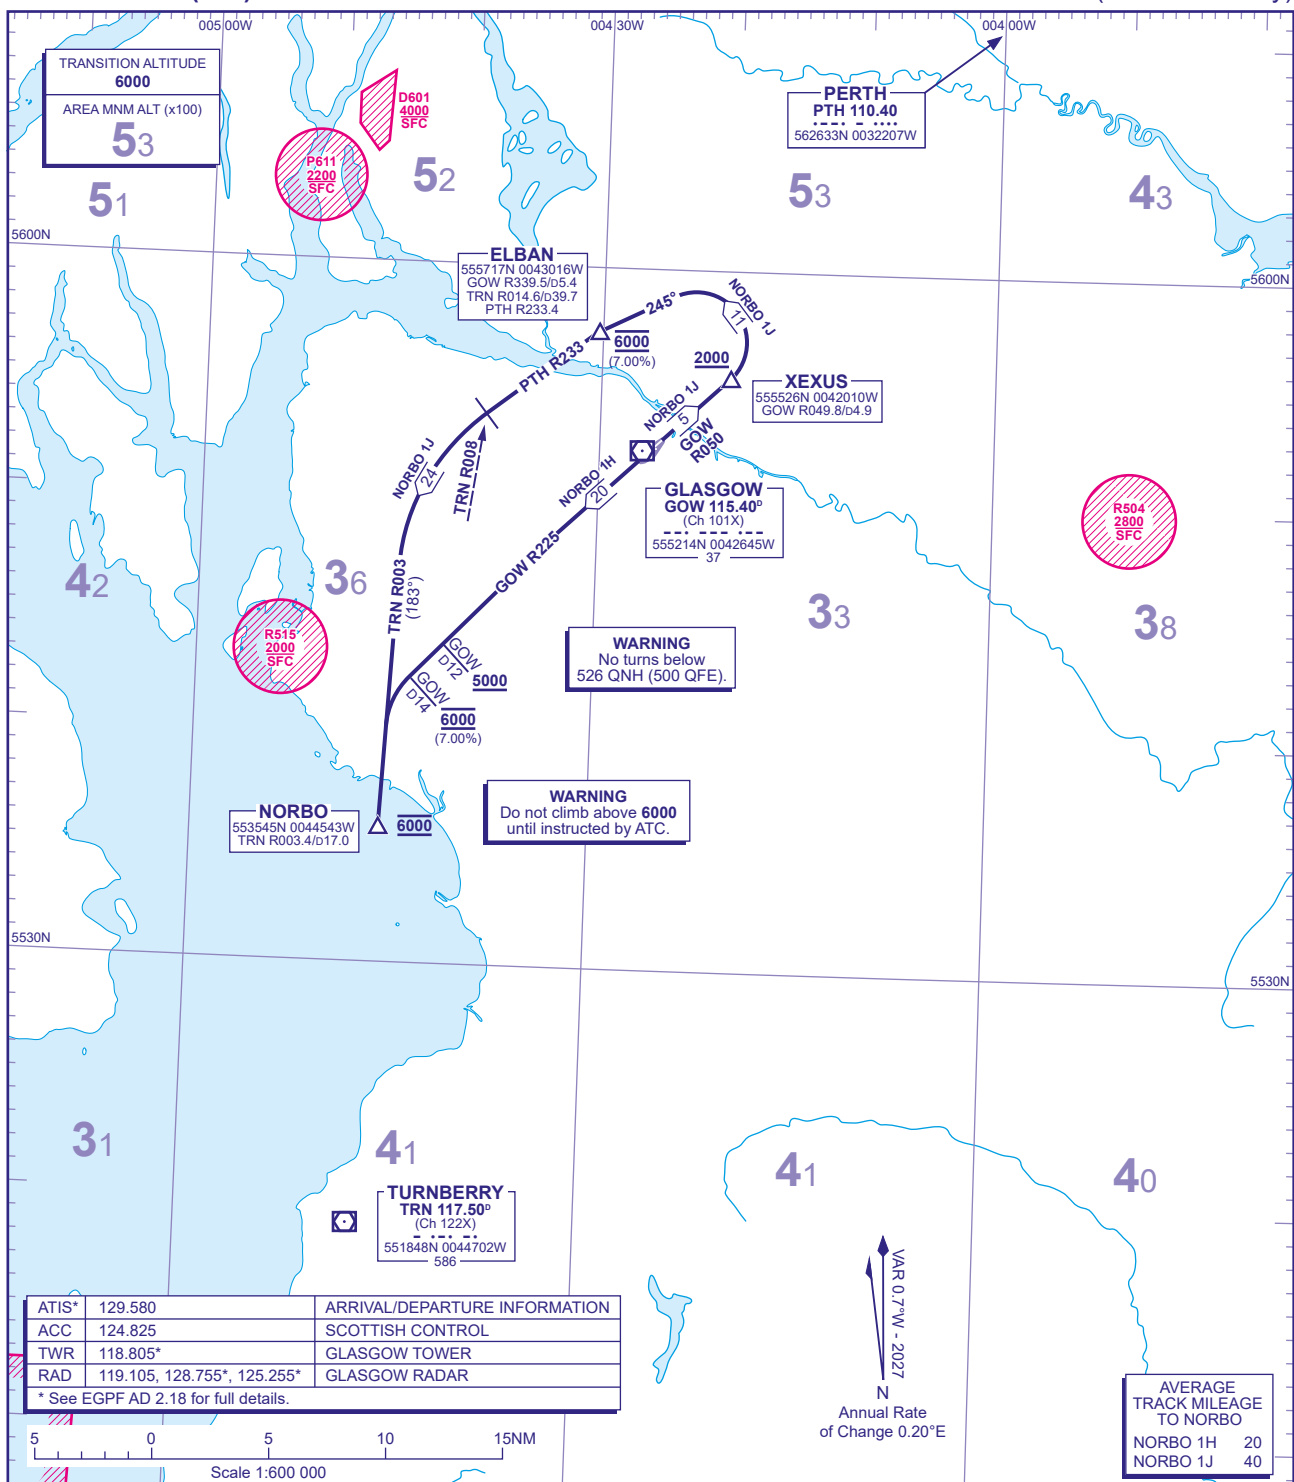

ATIS*	129.580	ARRIVAL/DEPARTURE INFORMATION
ACC	124.825	SCOTTISH CONTROL
TWR	118.805*	GLASGOW TOWER
RAD	119.105, 128.755*, 125.255*	GLASGOW RADAR

* See EGPF AD 2.18 for full details.



NORBO 1H RWY 23	Climb straight ahead to intercept GOW VOR R225 . Cross GOW D12 5000 or above. Cross GOW D14 at 6000 then turn left onto TRN VOR R003 to NORBO .	T256, L186, Y96.
OBSTACLE CLEARANCE - RWY 23: Maintain minimum 3.8% climb to 1200.		
NORBO 1J RWY 05	Climb straight ahead to intercept GOW VOR R050 . Cross GOW D4.9 (XEXUS) 2000 or above then turn left onto track 245° to ELBAN (TRN VOR R014.6) , crossing ELBAN at 6000 (7%) , to intercept PTH VOR R233 . At TRN VOR R008 turn left onto TRN VOR R003 to NORBO .	T256, L186, Y96.
OBSTACLE CLEARANCE - RWY 05: Maintain minimum 4.5% climb to 1500.		

- GENERAL INFORMATION
- SIDs reflect Noise Abatement Procedures. See EGPF AD 2.21 for Noise Abatement Procedures.
 - Climb gradients greater than 3.3% are required for obstacle clearance purposes, as indicated. In addition climb gradients greater than those necessary for obstacle clearance are required for ATC and airspace requirements as indicated.
 - En-route cruising levels will be issued after take-off by 'Scottish Control'. Report callsign, SID designator, current altitude and cleared altitude on first contact with 'Scottish Control'.
 - Maximum 250KIAS below FL100 unless otherwise authorised.
 - Expect first CPDLC Data Link Authority to be EGPF.

CHANGE (5/26): GOW VOR RECALIBRATED. MAG VAR. MAG TRACKS.