


STANDARD INSTRUMENT CHART -
INSTRUMENT (SID) - ICAO

DISTANCES IN NAUTICAL MILES
BEARINGS, TRACKS AND RADIALS ARE MAGNETIC
ALTITUDES AND ELEVATIONS ARE IN FEET

GLASGOW
LUSIV (Non-jet aircraft only)

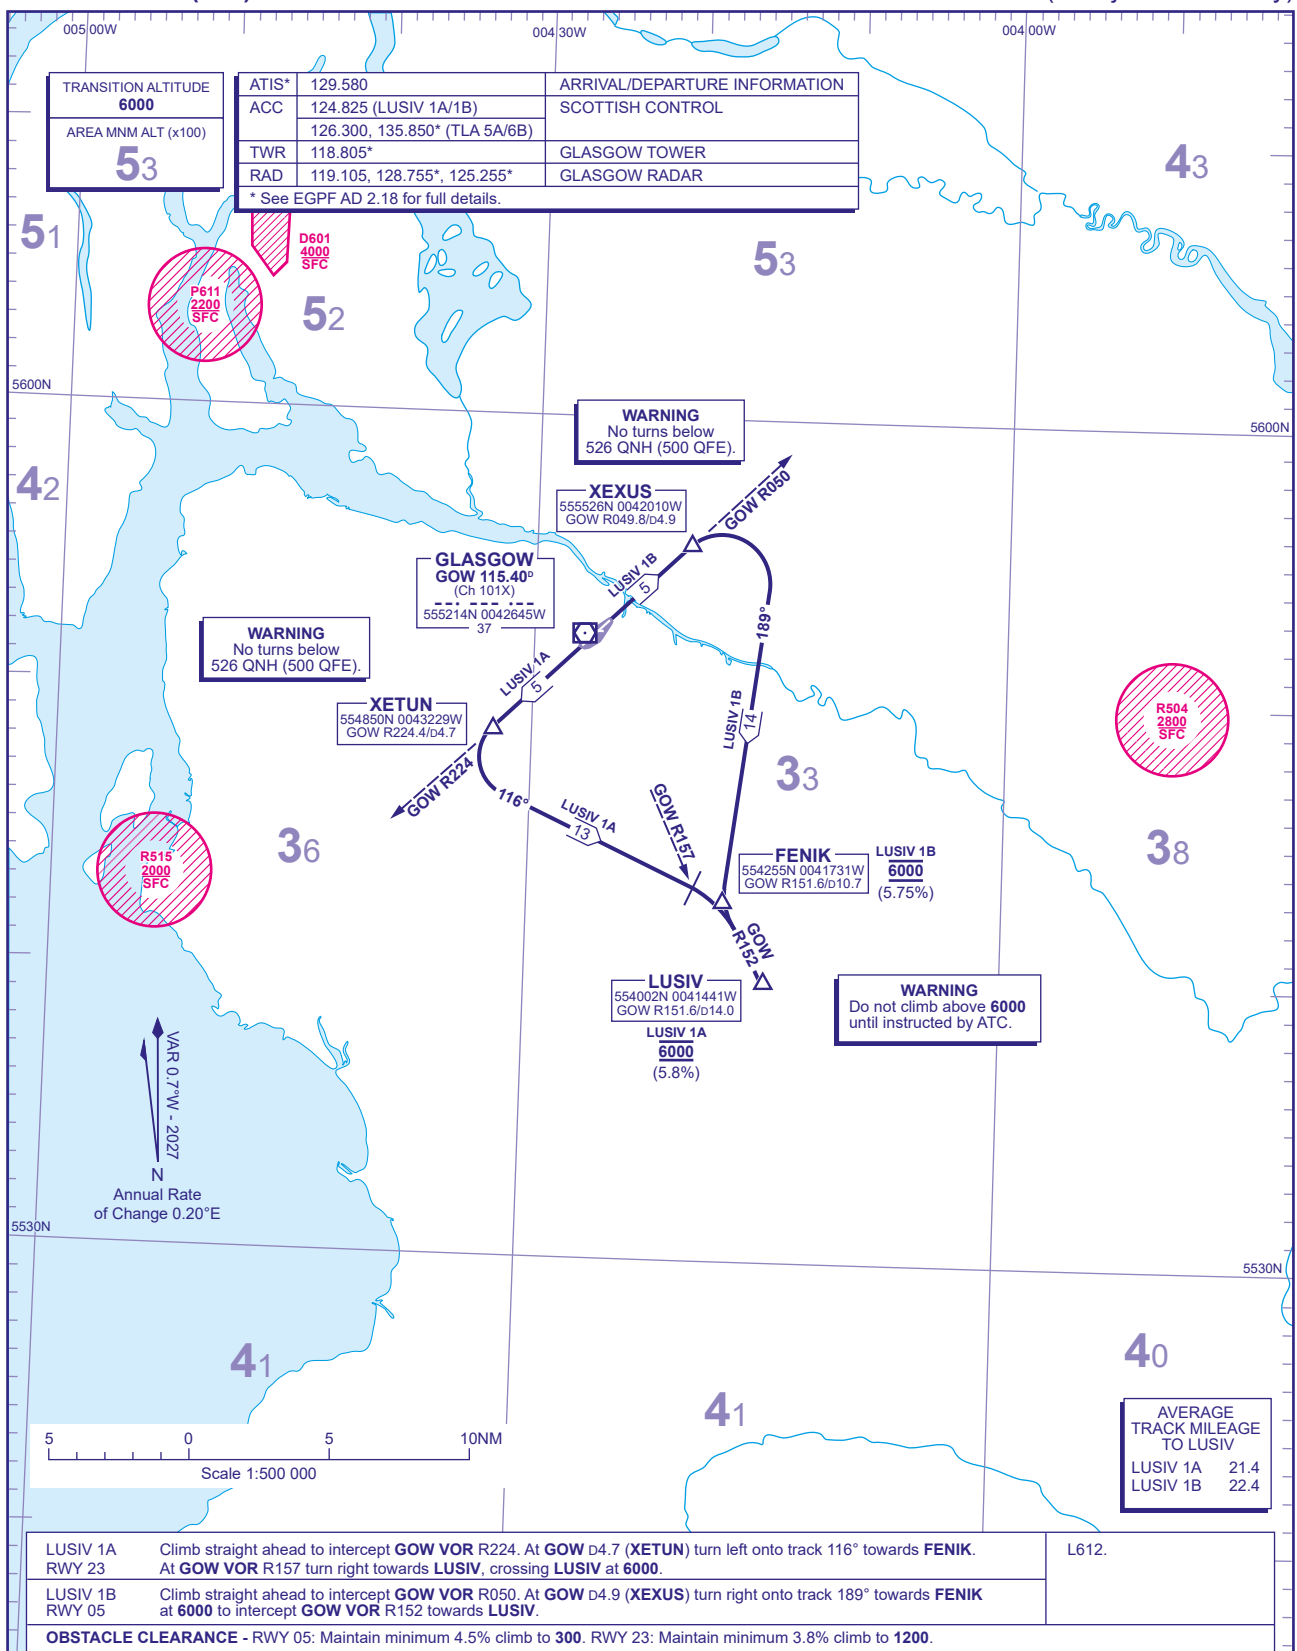

LUSIV 1A
RWY 23
Climb straight ahead to intercept GOW VOR R224. At GOW D4.7 (XETUN) turn left onto track 116° towards FENIK.
At GOW VOR R157 turn right towards LUSIV, crossing LUSIV at 6000.

LUSIV 1B
RWY 05
Climb straight ahead to intercept GOW VOR R050. At GOW D4.9 (XEXUS) turn right onto track 189° towards FENIK
at 6000 to intercept GOW VOR R152 towards LUSIV.

L612.

OBSTACLE CLEARANCE - RWY 05: Maintain minimum 4.5% climb to 300. RWY 23: Maintain minimum 3.8% climb to 1200.

GENERAL INFORMATION

- SIDs reflect Noise Abatement Procedures. See EGPF AD 2.21 for Noise Abatement Procedures.
- Climb gradients greater than 3.3% are required for obstacle clearance purposes, as indicated. In addition climb gradients greater than those necessary for obstacle clearance are required for ATC and airspace requirements as indicated.
- En-route cruising levels will be issued after take-off by 'Scottish Control'. Report callsign, SID designator, current altitude and cleared altitude on first contact with 'Scottish Control'.
- Maximum 250KIAS below FL100 unless otherwise authorised.

CHANGE (5/26): GOW VOR RECALIBRATED. MAG VAR. MAG TRACKS.