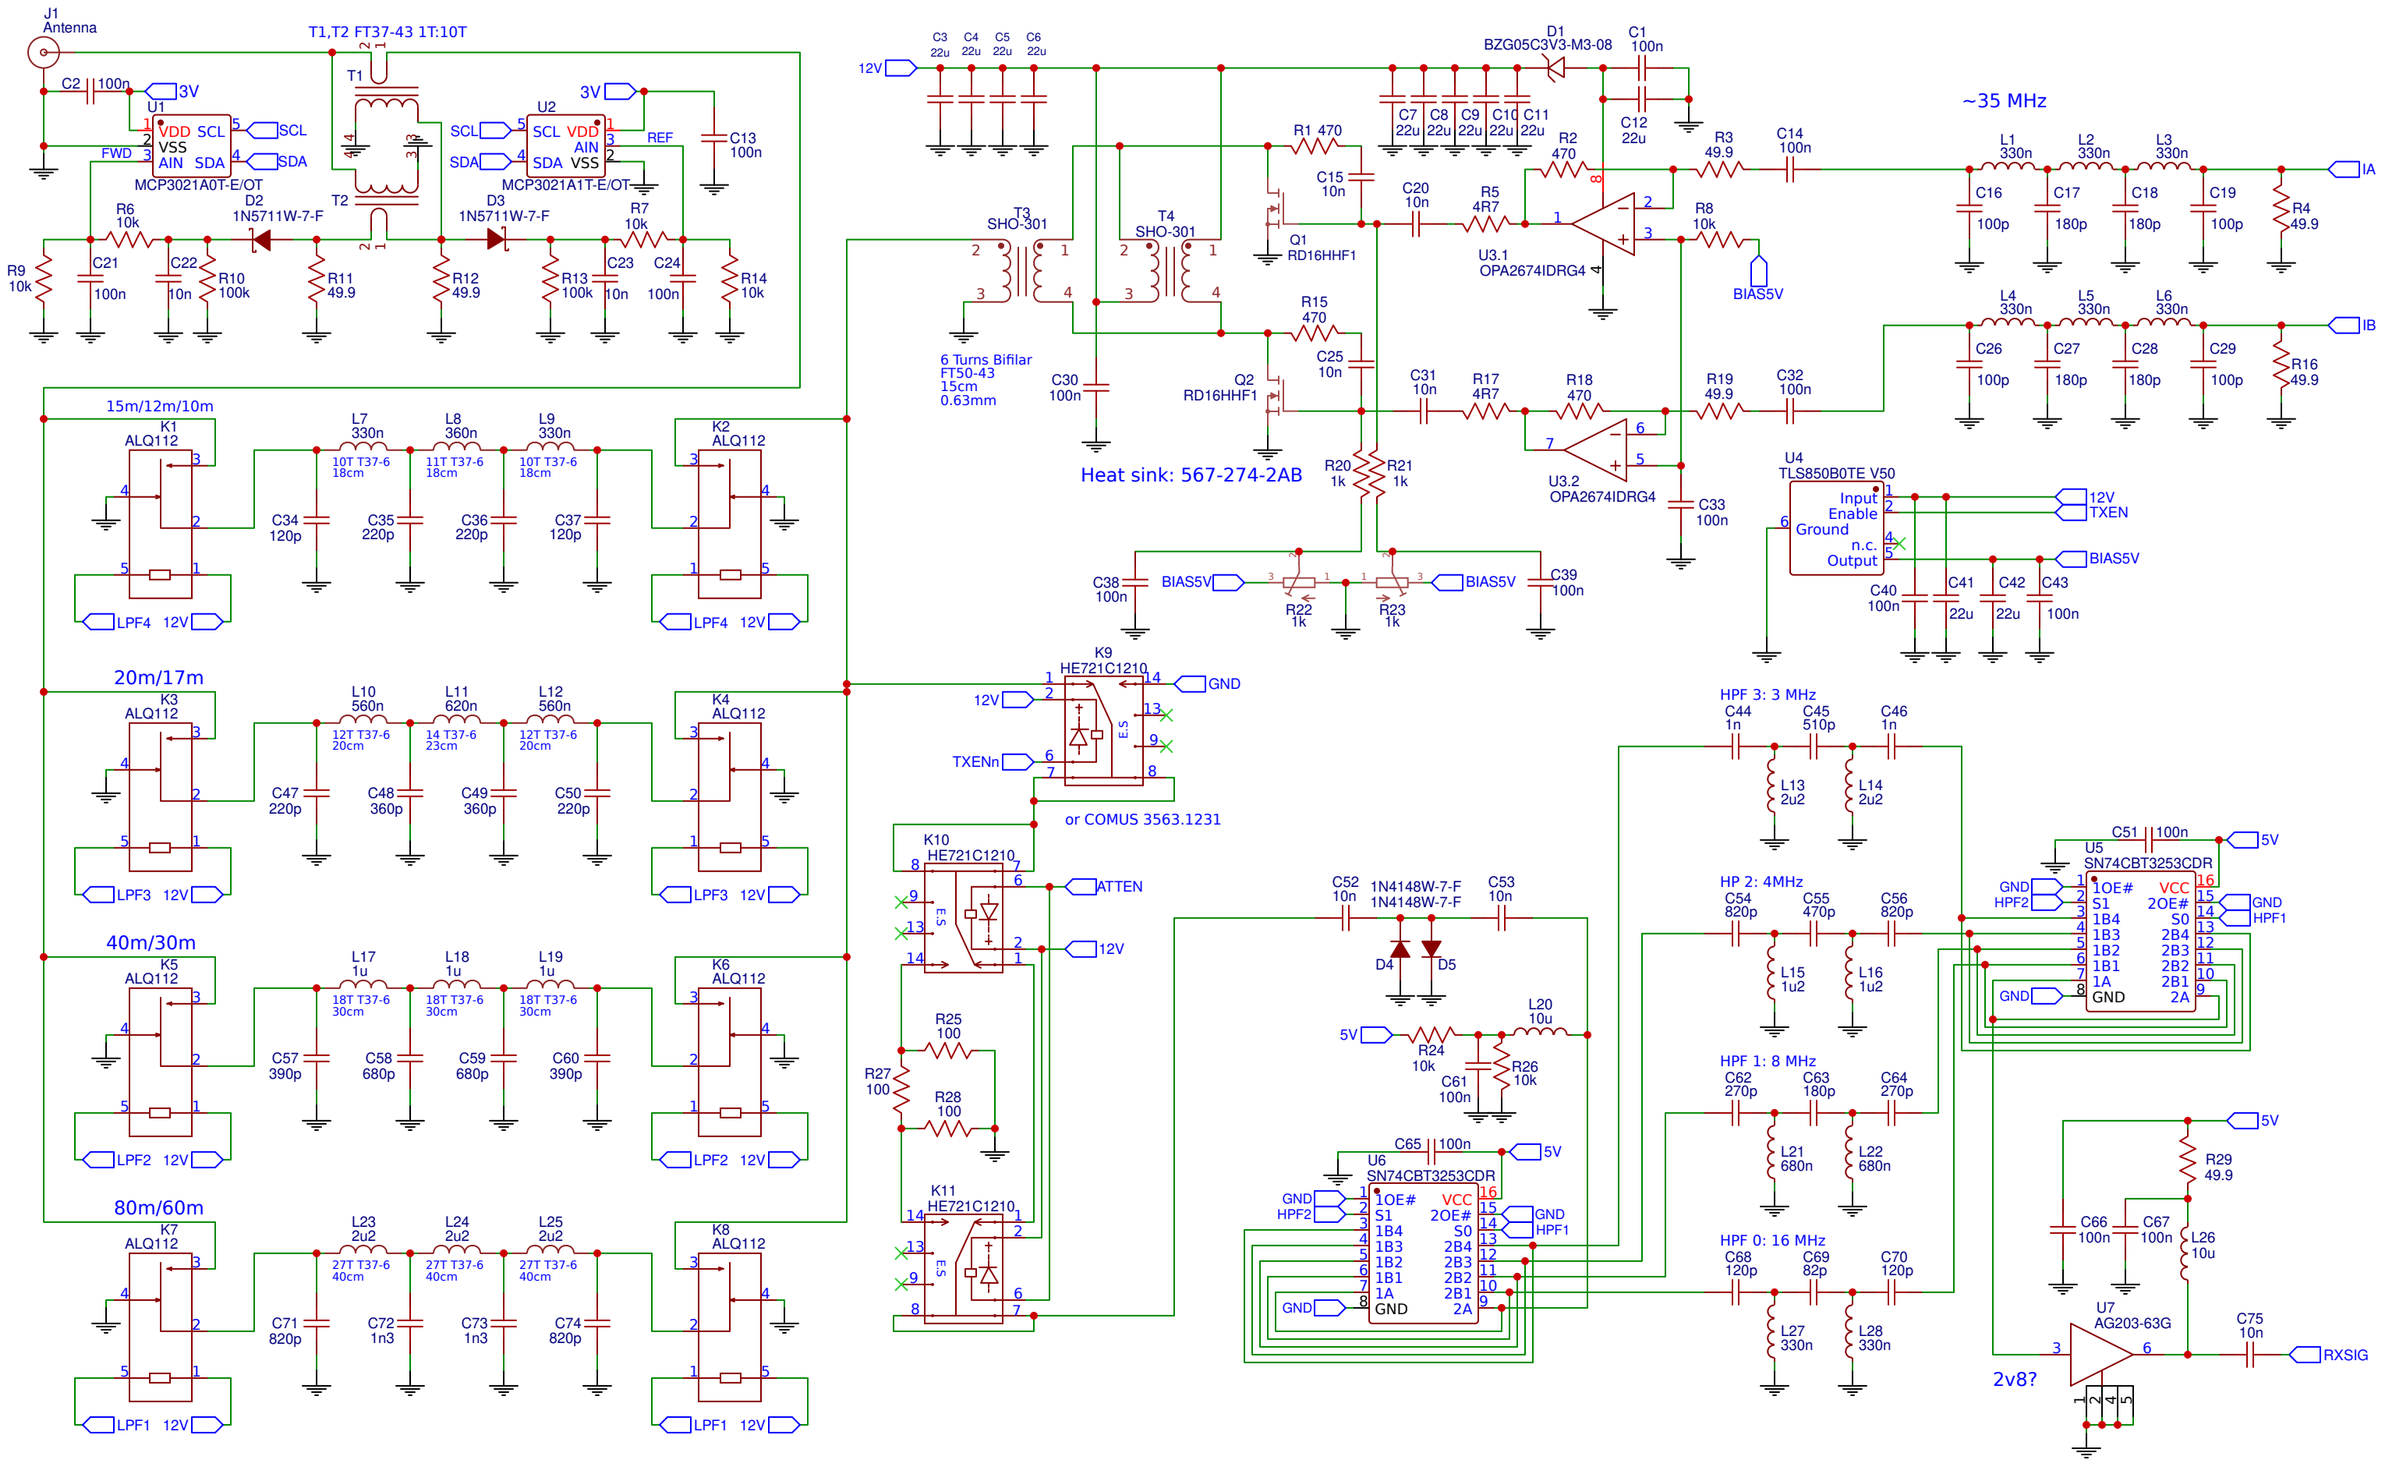

J1
Antenna
T1,T2 FT37-43 1T:10T
U1
MCP3021A0T-E/OT
U2
MCP3021A1T-E/OT
D1
BZG05C3V3-M3-08
D2
1N5711W-7-F
D3
1N5711W-7-F
T3
SHO-301
T4
SHO-301
6 Turns Bifilar
FT50-43
15cm
0.63mm
Q1
RD16HHF1
Q2
RD16HHF1
Heat sink: 567-274-2AB
U3.1
OPA2674IDRG4
U3.2
OPA2674IDRG4
~35 MHz
BIAS5V
U4
TLS850B0TE V50
15m/12m/10m
K1
ALQ112
K2
ALQ112
LPF4
20m/17m
K3
ALQ112
K4
ALQ112
LPF3
40m/30m
K5
ALQ112
K6
ALQ112
LPF2
80m/60m
K7
ALQ112
K8
ALQ112
LPF1
K9
HE721C1210
or COMUS 3563.1231
K10
HE721C1210
K11
HE721C1210
ATTEN
TXENn
GND
HPF 3: 3 MHz
HP 2: 4MHz
HPF 1: 8 MHz
HPF 0: 16 MHz
U5
SN74CBT3253CDR
U6
SN74CBT3253CDR
U7
AG203-63G
2v8?
RXSIG
Mic
PTT
480HZ
150Hz
4 KHz
8KHz
LMV321SN3T1G
J4 Paddle
SW1
PEC09-SWITCH-T
Main Tune
FPGA
U8
BRS-100-GW1NR9
ADC
U9
AD9236BRURL7-80
DAC
U10
AD9740ARZRL
Bypass on pin 19
compatible with
DAC900 from TI.
IO_LOC "spi_tw_sck" 40;
IO_LOC "spi_tw_mosi" 41;
IO_LOC "spi_tw_cs_n" 42;
IO_LOC "tx_rx" 57;
IO_LOC "spi_iq_sck" 56;
IO_LOC "spi_iq_mosi" 55;
IO_LOC "spi_iq_miso" 54;
IO_LOC "spi_iq_cs_n" 53;
IO_LOC "data_ready" 51;
Revision 1.1
* minor PCB silk updates
* Pico PCB clearance improved
* change R59 to 2.4W
* add wire lengths
* T3, T4, FT50-43 alternative
f = 1/(356*2*PI*100e-9)
f = 4463 Hz
U12
LM1117
LM4875MX/NOPB U14
Phones
U13
Raspberry Pi Pico 2 Castellated
Pi Pico 2
U16
ULQ2003D1013TRY
U17
TCA9534DWR
U18
MC7805CD2TR4G
T5
78602/4JC-2
T6 PA4339.501
J5
Power
TITLE:
uDST - Direct Sampling Transceiver
REV: 1.1
Company: VK7IAN
Sheet: 1/1
Date: 2026-08-13
Drawn By: ianm
EasyEDA