

MOVING-GOODS construction hoist is a rack & pinion passenger /materials lift, being widely used on a great variety of high-rise construction projects. Our hoists have the following features:

1.Safe and reliable.


- Ground enclosure with vertical sliding door and electro-mechanical interlocking switch.
- Limit switches for entrance and exit doors to the cage.
- Top and bottom limit switches.
- 3-phase switch.
- Slack rope switch (only for hoist with counter-weight).
- Emergency brake on separate pinion.
- Buffer springs on the ground.
- Safety hooks on the cage holding the mast.
- Overload prevention device (optional).
- Drop test remote control.
- Manual brake release enabling the cage to be lowered in the event of power failure.
- Top mast section without racks.

2.Reasonable design, smooth running and high work efficiency.

- 3-phase asynchronous hoisting motor with disc brake, able to work with power supply of 380V. 50Hz or 440V. 60Hz.
- Advanced plane double enveloping toroidal worm gearbox with high transmission efficiency, reliability and durability. Reduction ratio 1:16 or 1:14.
- Presion guide rollers and mast sections ensure the cage runs smoothly with minimum noise.
- High work efficiency with lifting speed of 34m/min (using 1:16 gearbox) or 38m/min (using 1:14 gearbox).
- Single-cage hoist can be transformed into twin-cage hoist by adding racks, cage and ground enclosure.
- The capacity of SC100 & SC100/100 can be increased from 1000kg per cage to 2000kg per cage by adding counter-weights.
- SC200, SC200/200 & SC270/270 hoists with drive device on the cage roof, with large capacity, big space inside the cage, easy to install.
- High speed or stepless speed control can be achieved by adding frequency invertor.

3.Easy installation, dismantlement and maintenance.

The erection jib on the cage roof can assist in the installation and dismantlement.

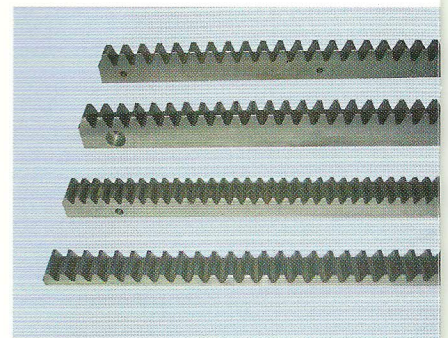

Racks