Physics Laboratory Report: Motion on an Inclined Plane

IBRAHIM H.I. ABU SHAWISH

Instructor's Name: Res. Assist. Dr. ERDİNÇ ULAŞ SAKA

Group ID: 4, Course & Section Number: PHYS1203

Experiment Date: March 6, 2024
Report Submission Date: March 13, 2024

Abstract

The experiment was carried out by first calculating the surface's μ_s (*Static friction coefficient*) with the air compressor on when the steel air disc is just at rest. μ_k (*Kinetic friction coefficient*) was calculated after gathering the data, which is produced by measuring the ΔX for each interval generated by the spark oscillator that sparks every $0.02s$ throughout the experiment. The gathered data is used to calculate the acceleration and velocity quantities with the presence and absence of a pulley which is essential for calculating μ_k.

Introduction

The motion of objects on inclined planes adheres to the principles laid out by Newton's *Laws of Motion*.

$$\sum \vec{F} = m\vec{a}, \quad \vec{F}_{action} = -\vec{F}_{reaction}, \quad \sum \vec{F} = 0 \Rightarrow a = 0$$

For an inclined plane, additional factors have to be considered such as the angle θ of the incline and the force of gravity.

The angle of the incline is the angle formed between the inclined plane and the horizontal surface. As the incline becomes steeper, the force of gravity acting on the object also increases proportionally. The force of gravity is a force that attracts objects towards the center of the Earth and is always acting in a downward direction.

The experiment examines how a pulley system affects the acceleration of a steel air disc as it slides down an inclined plane. This was done by timing the disc's descent over a fixed distance with and without the pulley. Through analyzing the relationship between the pulley's presence, the incline angle, and

the recorded times, the goal was to understand the pulley's role in the disc's acceleration and its interaction.

Procedure

The experiment setup is shown in Figure 1. In this experiment, the air compressor is used to blow air underneath the steel air disc to lower the friction. For the whole experiment, the μ_s, μ_k and measured $\vec{v}$, $\vec{a}$ are calculated while the air compressor on. Experimentally, The friction coefficients were expected to be low, with the understanding that they could not reach zero due to physical constraints.

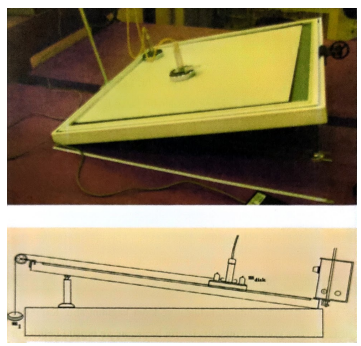

Figure 1: Motion on an inclined plane experiment setup & setup diagram.

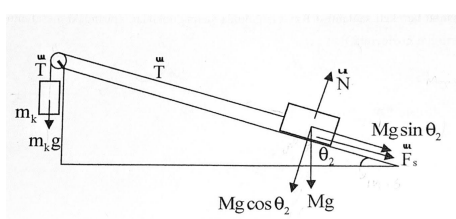

Figure 2: The forces acting on the disc.

Initially, the μ_s coefficient is calculated by measuring the θ angle when it is just in rest as shown in the diagram in Figure 2. Using the following equations:

$$T = mgsin\theta + \mu_s N$$

$$T = mgsin\theta + \mu_s cos\theta$$

$$m_k g = mgsin\theta + \mu_s cos\theta$$

$$\mu_s = |\frac{m_k g - mgsin\theta}{mgcos\theta}|$$

Substituting the equation above for μ_s; with $m_k = 0.135kg$ and $\theta = 17.7^o$ is the angle found as a "just in rest" state, additionally the m value is $0.527kg$ being the disc, $\mu_s = 0.051$ is found.

Subsequently, using the spark oscillator we have been able to measure the ΔX for every $0.02s$ which has been used to calculate the $\vec{v}$ then $\vec{a}$ from the following equations as in Figure 3:

$$\vec{v}_n = \frac{\Delta X_n}{0.02} m/s \qquad \vec{a}_n = \frac{\Delta \vec{v}_n}{0.02} m/s^2$$

$$\vec{v}_{final} = \frac{\sum_{i=0}^{n} \Delta x_i}{n0.02} \qquad \vec{a}_{final} = \frac{\sum_{i=0}^{m} \vec{a}_i}{m}$$

1	Time	Delta_x	Velocity	Acceleration
2	0.02	0.005	0.25	0
3	0.04	0.005	0.25	0
4	0.06	0.005	0.25	2.5
5	0.08	0.006	0.3	1.25
6	0.1	0.0065	0.325	0
7	0.12	0.0065	0.325	0
8	0.14	0.0065	0.325	1
9	0.16	0.0069	0.345	0
10	0.18	0.0069	0.345	0
11	0.2	0.0069	0.345	1.5
12	0.22	0.0075	0.375	0
13	0.24	0.0075	0.375	0.75
14	0.26	0.0078	0.39	0
15	0.28	0.0078	0.39	0.5
16	0.3	0.008	0.4	1.75
17	0.32	0.0087	0.435	0.25
18	0.34	0.0088	0.44	0.25
19	0.36	0.0089	0.445	0.5
20	0.38	0.0091	0.455	1
21	0.4	0.0095	0.475	0.5
22	0.42	0.0097	0.485	0
23	0.44	0.0097	0.485	0.5
24	0.46	0.0099	0.495	0
25	0.48	0.0099	0.495	0.25
26	0.5	0.01	0.5	1.25
27	0.52	0.0105	0.525	0.75
28	0.54	0.0108	0.54	0.25
29	0.56	0.0109	0.545	0.25
30	0.58	0.011	0.55	0
31	0.6	0.011	0.55	1.25
32	0.62	0.0115	0.575	1.25

(a) Data & variables with pulley system.

1	Time	Delta_x	Velocity	Acceleration
2	0.02	0.007	0.35	1.25
3	0.04	0.0075	0.375	2.5
4	0.06	0.0085	0.425	3.75
5	0.08	0.01	0.5	2.5
6	0.1	0.011	0.55	6.25
7	0.12	0.0135	0.675	1.25
8	0.14	0.014	0.7	2.5
9	0.16	0.015	0.75	2.5
10	0.18	0.016	0.8	0
11	0.2	0.016	0.8	7.5
12	0.22	0.019	0.95	2.25
13	0.24	0.0199	0.995	2.75
14	0.26	0.021	1.05	5
15	0.28	0.023	1.15	5
16	0.3	0.025	1.25	2.5
17	0.32	0.026	1.3	2.5
18	0.34	0.027	1.35	5
19	0.36	0.029	1.45	0

(b) Data & variables with non-pulley system.

Figure 3: Raw Data & variables.

Similarly, ΔX data have been gathered for a non-pulley system for the same time intervals $0.02s$ and $m = 0.507kg$ as shown in Figure 3b to compare μ_k values calculated by acceleration data from each system using the following equations.

Finding the μ_k with the pulley system by applying a free-body both on the m and m_k objects using the following equations:

For m;

$$\vec{F} = m\vec{a} = mgsin\theta - T - f_k$$

And for m_k;

$$m_k a = T - m_k g$$

$$T = m_k a + m_k g$$

Solving for μ_k and substituting T resulting the following:

$$\mu_k = |\frac{ma - mgsin\theta + m_k(g + a)}{mgcos\theta}|$$

On the other hand, μ_k is found from the non-pulley system using the following equations:

$$ma = mgsin\theta - f_k$$

$$f_k = mgsin\theta - ma$$

Substituting f_k and solving for μ_k:

$$\mu_k mgcos\theta = mgsin\theta - ma$$

$$\mu_k = |\frac{mgsin\theta - ma}{mgcos\theta}|$$

Results

The ΔX is measured to calculate $\vec{v}_{av}$, $\vec{a}_{av}$ and then compute μ_k of the system under two conditions: one employing a pulley system and another without one. In the setup with the pulley, the $\vec{v}_{av}$ was $0.425m/s$ while $\vec{a}_{av} = 0.565m/s^2$ which results with a μ_k value of 0.015. However, when we removed the pulley, $\vec{v}_a v$ increased to $0.888m/s$ in this manner, $\vec{a}_{av}$ is also increased to $3.056m/s^2$ which Leads to μ_k being 0.032 as demonstrated in Figure 4.

1		Pulley system	Non-pulley system
2	Average Velocity (m/s)	0.425	0.888
3	Average Acceleration (m/s²)	0.565	3.056
4	Kinetic Friction Coeffitiont (μ_k)	0.015	0.032

Figure 4: Data Results.

Our previous measurement established a static friction coefficient μ_s of 0.051. Continuing the analysis, data visualization (refer to Figure 5) and the application of a regression model was used to illustrate the graphical findings.

Analysis and Discussion

Having presented the results, the focus shifts to a detailed analysis and discussion of these findings.

Effect of Pulley System

The presence of a pulley system significantly affects the acceleration of the steel air disc. With the pulley, the average acceleration was found to be 0.565 m/s^2, while without the pulley, it increased to 3.056 m/s^2. This substantial difference demonstrates the pulley's role in reducing the acceleration of the disc, likely due to the pulley providing additional resistance and changing the magnitude of the force applied.

Friction Coefficients

The calculated kinetic friction coefficient (μ_k) also varies between the two setups. With the pulley, μ_k was calculated to be 0.015, whereas without the pulley, it increased to 0.032. This indicates that the presence of the pulley system reduces the friction between the disc and the inclined plane, allowing for smoother motion.

Comparison of Methods

The experimental approach of measuring ΔX for each time interval proved to be effective in calculating velocity and acceleration. This method provided accurate data for both the pulley and non-pulley systems, enabling the calculation of friction coefficients and the comparison of results. Visualization of the data, as shown in Figure 5, allows us to check that the models and data behave as expected for each graph plotted. This confirms the validity of the experimental setup and the reliability of the data obtained.

Limitations and Sources of Error

It is important to note that several factors could have introduced errors into the experiment. Air resistance, slight variations in the incline angle, and imperfections in the pulley system are potential sources of error that could have impacted the results. Additionally, the assumption of uniform acceleration may not hold true in real-world scenarios, which could have affected the accuracy of the calculated values.

Future Improvements

To improve the accuracy of the experiment, measures could be taken to minimize sources of error. Using a more precise incline angle measurement, reducing air resistance, and ensuring the pulley system operates smoothly could all contribute to more reliable results. Additionally, conducting the experiment multiple times and averaging the results could help mitigate random errors.

Conclusion

The experiment conducted to study the motion of a steel air disc on an inclined plane provided valuable insights into the effects of a pulley system on acceleration and friction coefficients. The presence of the pulley system was found to significantly reduce the acceleration of the disc, demonstrating the pulley's role in providing additional resistance. This effect was reflected in the calculated kinetic friction coefficients, which were lower with the pulley compared to without.

The comparison of methods, particularly the measurement of ΔX for each time interval, proved to be effective in calculating velocity and acceleration. The visualization of data through graphs allowed for a clear understanding of the relationship between variables and provided a means to verify that the models and data behaved as expected.

Limitations of the experiment included potential errors introduced by factors such as air resistance, variations in the incline angle, and imperfections in the pulley system. These limitations highlight the importance of careful experimental design and execution to minimize sources of error.

To improve the accuracy of future experiments, measures could be taken to reduce these sources of error, such as using more precise measurement tools and ensuring the experimental setup is free from external influences.

In conclusion, the experiment provided valuable insights into the motion of objects on inclined planes and demonstrated the importance of factors such as friction and pulley systems in determining the motion of objects.

Certainly! Here's an improved version of your procedure section with minor changes for clarity:

Procedure

The experiment was conducted to investigate the motion of a steel air disc on an inclined plane, with and without a pulley system, to determine the effect on acceleration and friction coefficients.

1. **Setup**: The inclined plane was set at a fixed angle of θ degrees. The steel air disc was placed at the top of the inclined plane, and the pulley system was attached to the disc. The air compressor was used to blow air underneath the disc to reduce friction.

   ruby Copy code

2. **Measurement of μ_s**: The angle of the incline was adjusted until the disc was just at rest. This angle was recorded as the angle for which μ_s was measured. Using the equation $\mu_s = |\frac{m_k g - mg\sin\theta}{mg\cos\theta}|$, where m_k is the mass of the disc, m is the total mass on the disc, and g is the acceleration due to gravity, μ_s was calculated.

3. **Data Collection**: The experiment was conducted with and without the pulley system. For each setup, the time taken for the disc to travel a fixed distance was recorded at regular intervals using the spark oscillator, which sparked every 0.02 seconds. This data was used to calculate velocity and acceleration.

4. **Calculation of μ_k**: Using the equations of motion and free-body diagrams, μ_k was calculated for both setups. For the pulley system, μ_k was calculated using the equation $\mu_k = |\frac{ma - mg\sin\theta + m_k(g+a)}{mg\cos\theta}|$. For the non-pulley system, μ_k was calculated using the equation $\mu_k = |\frac{mg\sin\theta - ma}{mg\cos\theta}|$.

5. **Data Analysis**: The collected data was analyzed to determine the average acceleration and friction coefficients for each setup. Graphs were plotted to visualize the data and compare the results between the pulley and non-pulley systems.

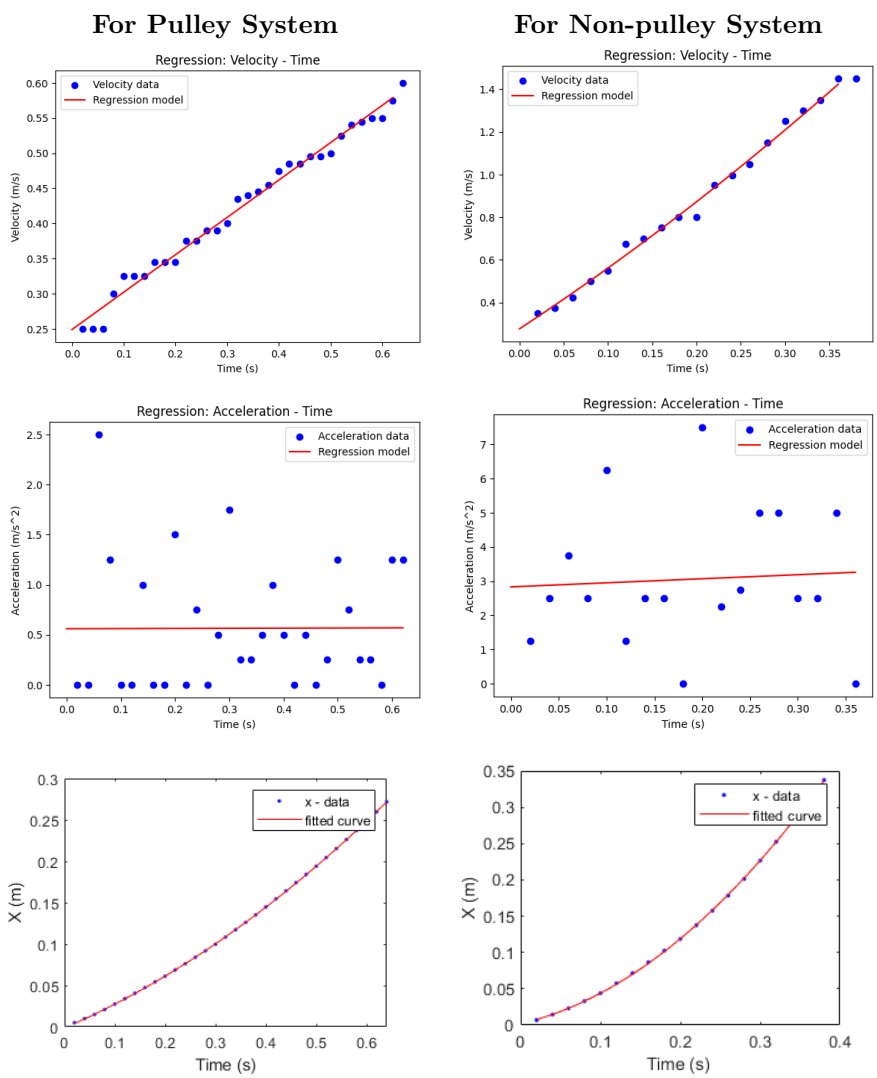

Figure 5: Data Visualization.