
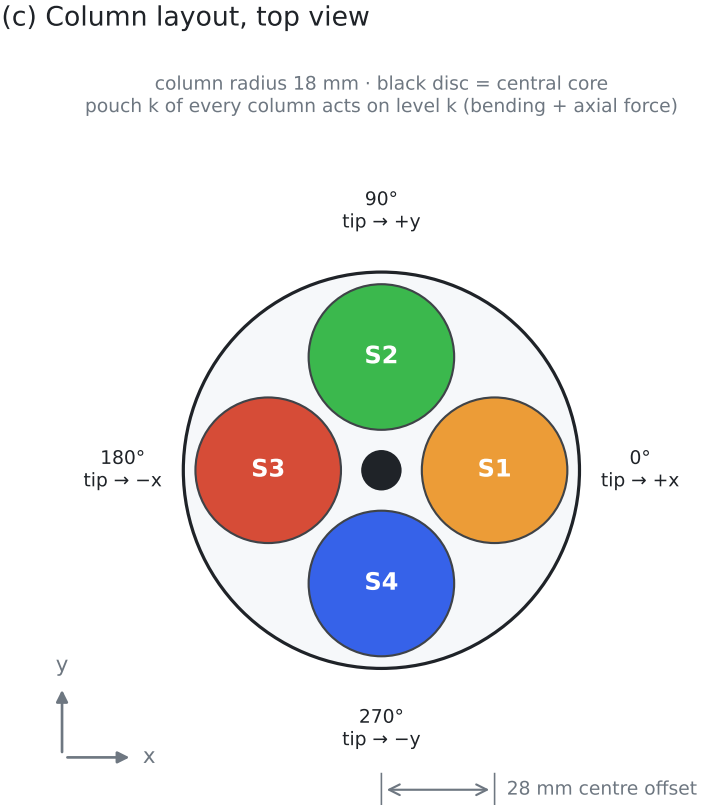
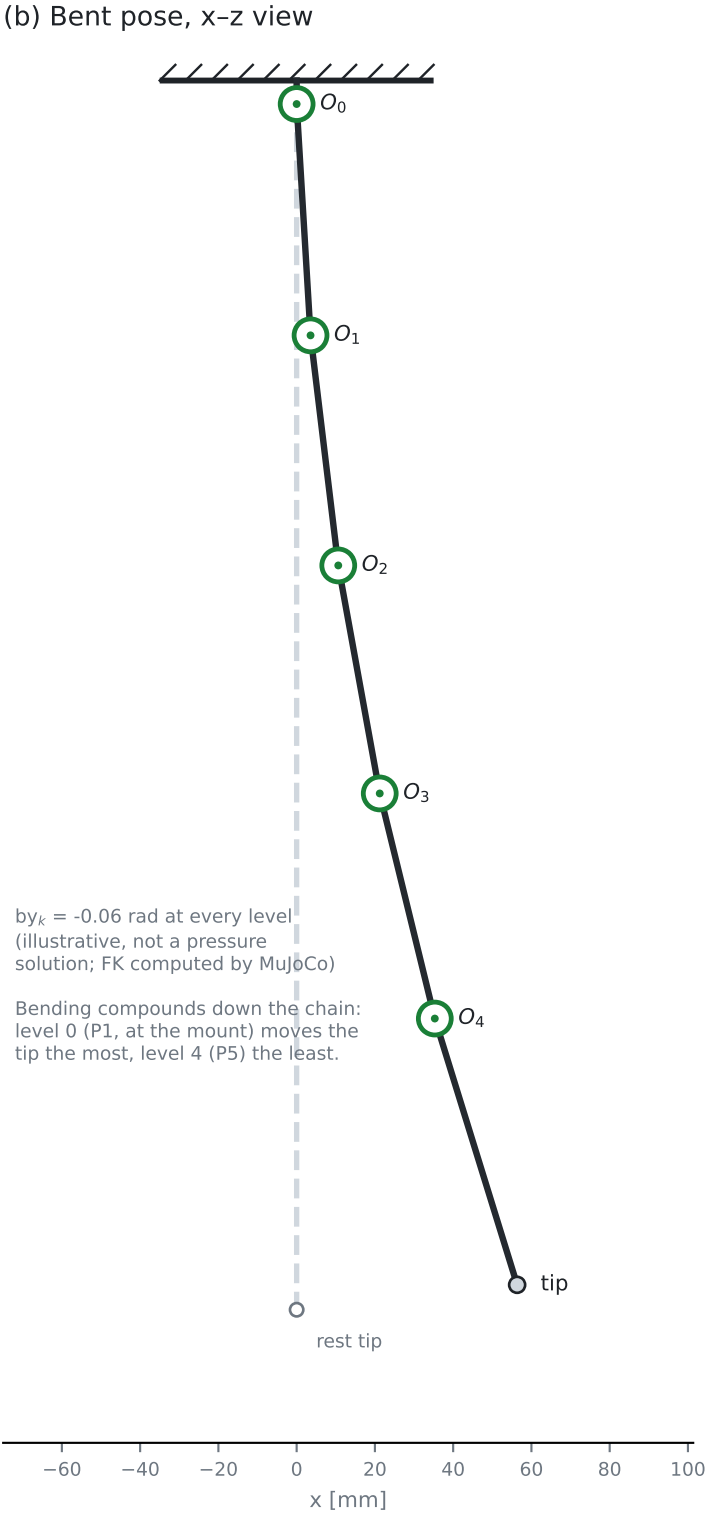


Soft pneumatic arm — kinematic structure of the MuJoCo model (5 levels × [P, R, R] = 15 DOF)

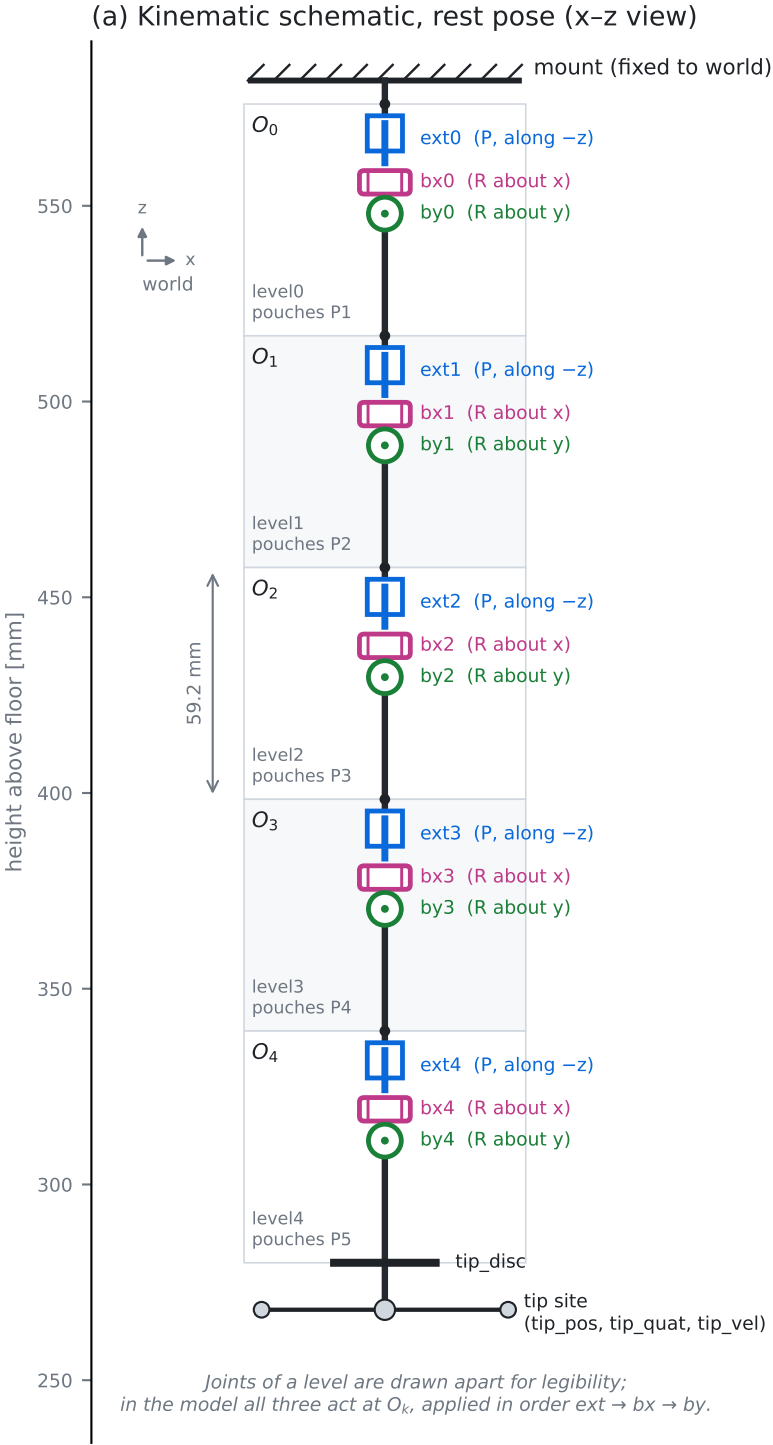

 prismatic  $ext_k$  (axial slide)  revolute  $bx_k$  (axis x, in plane)  revolute  $by_k$  (axis y, out of plane)

| joint        | type         | range         | stiffness      | damping          |
|--------------|--------------|---------------|----------------|------------------|
| $ext_k$      | slide, $-z$  | -5 ... +30 mm | 934.2 N/m      | 61.51 N·s/m      |
| $bx_k, by_k$ | hinge, x / y | unbounded     | 0.4168 N·m/rad | 0.3629 N·m·s/rad |