


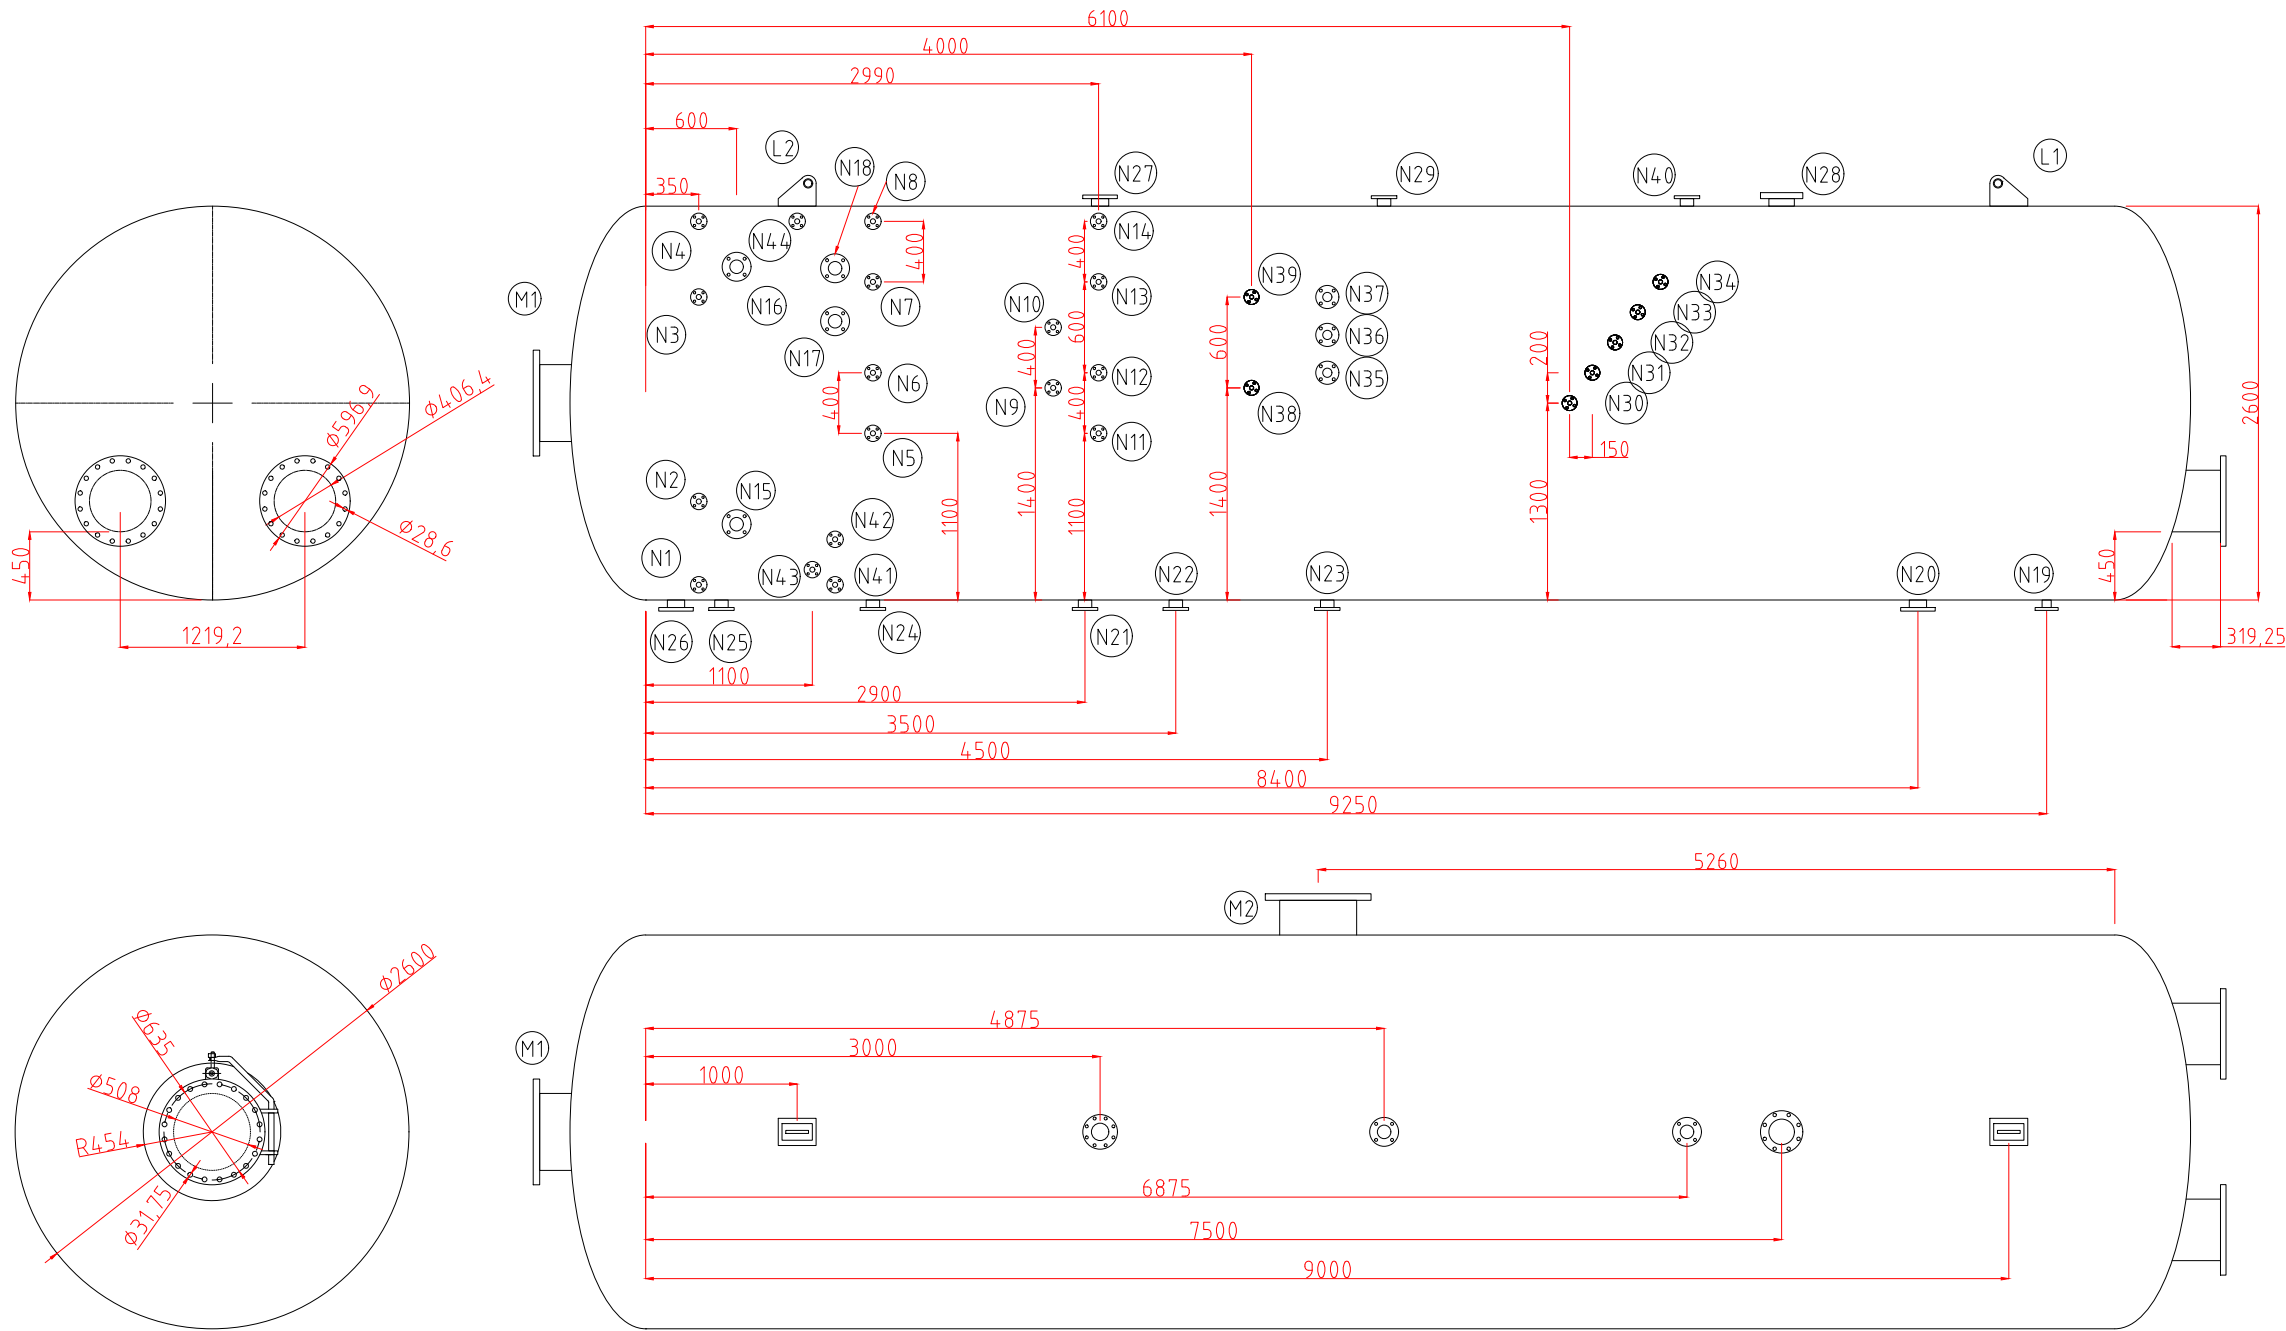

DIMS IN MM

NOZZLE	DIMS/QTY		DESCRIPTION	SPECIFICATION
N1 - N14	1"	14	SIGHT GLASS	SA106-GR.B SA105-B16.5
N15 - N18	3"	4	LEVEL SWITCHES	SA106-GR.B SA105-B16.5
N19	2"	1	FRESH WATER INLET	SA106-GR.B SA105-B16.5
N20	4"	1	CRUDE OIL INPUT	SA106-GR.B SA105-B16.5
N21 - N23	3"	3	WATER DRAIN	SA106-GR.B SA105-B16.5
N24 - N25	3"	2	OIL DRAIN	SA106-GR.B SA105-B16.5
N26	4"	1	OIL OUTLET	SA106-GR.B SA105-B16.5
N27	6"	1	GAS OUTLET	SA106-GR.B SA105-B16.5
N28	4"	1	GAS OUTLET	SA106-GR.B SA105-B16.5
N29	3"	1	GAS OUTLET	SA106-GR.B SA105-B16.5
N30 - N34	3/4"	5	SAMPLING NOZZLE	SA106-GR.B SA105-B16.5
N35 - N37	2"	3	OIL/WATER SENSOR	SA106-GR.B SA105-B16.5
N38 - N39	3/4"	2	TEMPERATURE TRANSMITTER	SA106-GR.B SA105-B16.5
N40	3"	1	2ND STAGE	SA106-GR.B SA105-B16.5
N41 - N43	1"	3	SENSORS	SA106-GR.B SA105-B16.5
N44	1"	1	PRESSURE GAUGE	SA106-GR.B SA105-B16.5
L1 - L2	-	2	LIFTING LUGS	SA516-GR.70 SA105-B16.5
M1 - M2	20"	2	MANHOLE	SA516-GR.70 SA105-B16.5

PETROTEC


INDUSTRIAL ENGINEERING COMPANY

HEATER TREATER

GENERAL ASEMBLY - MECHANICAL DETAILS

VESSEL MATERIAL	VESSEL THICKNESS	LENGTH	DIAMETER	SERIAL NO.
SA-283 Grade C	8MM	9.7M	2.6M	PT-00412
ENDCAP MATERIAL	ENDCAP THICKNESS	ENDCAP TYPE	TOTAL WEIGHT	
SA-283 Grade C	8MM	ELLIPTICAL	16 TON	
DWG. NO.	DRAWN BY	DESIGNED BY	REV.	DATE
PT-026-2	ENG. I.H	ENG. TAREK HAMMAD	02	04-May-26

- GENERAL NOTES :
- CODE OF CONSTRUCTION -ASME SEC.VIII-DIV.I-EDD-STAMPED.
 - MAWP: For Shell side=50 psig
 - MDMT=+ 30 F
 - Hydrotest: Shell side=1.3x50=65 psig for duration of 1/2 hour.
 - UW-2 FOR LETHAL SERVICE - NON LETHAL .
 - IMPACT TEST Exempted - UG - 22 (F) , UCS.
 - Stress Relief exempted as per ASME STD.
 - Dimension Tollarence as per ASME SEC VIII.
 - E= 0.60 in Calculation as per ASME STD conditions

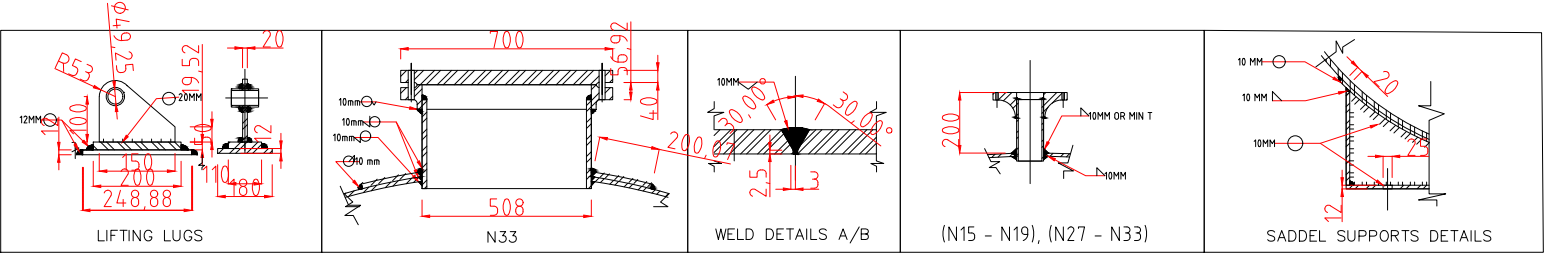

NOZZEL	X (CM)	Y (CM)	DIAMETER (INCH)	NOZZEL2	X (CM)2	Y (CM)2	DIAMETER (INCH)2
N1	350	100	1	N23	4500	0	3
N2	350	650	1	N24	1500	0	3
N3	350	2000	1	N25	500	0	3
N4	350	2500	1	N26	200	0	4
N5	1500	1100	1	N27	3000	2600	4
N6	1500	1500	1	N28	7500	2600	6
N7	1500	2100	1	N29	4875	2600	3
N8	1500	2500	1	N30	6100	1300	3/4
N9	2690	1400	1	N31	6250	1500	3/4
N10	2690	1800	1	N32	6400	1700	3/4
N11	2990	1100	1	N33	6550	1900	3/4
N12	2990	1500	1	N34	6700	2100	3/4
N13	2990	2100	1	N35	4500	1500	2
N14	2990	2500	1	N36	4500	1750	2
N15	600	500	3	N37	4500	2000	2
N16	600	2200	3	N38	4000	1400	3/4
N17	1250	1840	3	N39	4000	2000	3/4
N18	1250	2190	3	N40	6850	2600	3
N19	9250	0	2	N41	1250	100	1
N20	8400	0	3	N42	1250	400	1
N21	2990	0	3	N43	1100	200	1
N22	3500	0	3	N44	1000	2500	1