



NOZZLE	DIMS/ QTY		DESCRIPTION	SPECIFICATION
N1 - N4	1"	4	SIGHT GLASS	SA106-GR.B SA105-B16.5
N5 - N6	3"	2	LEVEL SWITCHES	SA106-GR.B SA105-B16.5
N7 - N9	1"	3	TEMP SENSOR	SA106-GR.B SA105-B16.5
N10	3"	1	LEVEL SWITCHE	SA106-GR.B SA105-B16.5
N11	3"	1	TEMP SENSOR	SA106-GR.B SA105-B16.5
N12 - N16	1"	5	SIGHT GLASS	SA106-GR.B SA105-B16.5
N17 - N18	2"	2	OIL/WATER SENSOR	SA106-GR.B SA105-B16.5
N19 - N22	1"	4	SAMPLING NOZZLE	SA106-GR.B SA105-B16.5
N23	2"	1	LEVEL SWITCH	SA106-GR.B SA105-B16.5
N24 - N25	4"	2	GAS OUTLET	SA106-GR.B SA105-B16.5
N26	4"	1	OIL OUTLET	SA106-GR.B SA105-B16.5
N27, N29, N30, N32	3"	4	WATER DRAIN	SA106-GR.B SA105-B16.5
N28, N33	4"	2	WATER DRAIN	SA106-GR.B SA105-B16.5
N31	2"	1	WATER RECYCLE	SA106-GR.B SA105-B16.5
N34	3"	1	FRESH WATER INLET	SA106-GR.B SA105-B16.5
M1	20"	1	MANHOLE	SA516-GR.70 SA105-B16.5
L1 - L2	-	2	LIFTING LUGS	SA516-GR.70 SA105-B16.5

PETROTEC

INDUSTRIAL ENGINEERING COMPANY


HEATER TREATER

GENERAL ASSEMBLY - MECHANICAL DETAILS

VESSEL MATERIAL	VESSEL THICKNESS	LENGTH	DIAMETER	SERIAL NO.
SA-283 Grade C	8MM	9.12M	2.4M	PT-00410
ENDCAP MATERIAL	ENDCAP THICKNESS	ENDCAP TYPE	TOTAL WEIGHT	
SA-283 Grade C	8MM	ELLIPTICAL	15 TON	
DWG. NO.	DRAWN BY	DESIGNED BY	REV.	DATE
PT-026-4	ENG. I.H	ENG. TAREK HAMMAD	01	04-May-26

GENERAL NOTES :

1. CODE OF CONSTRUCTION - ASME SEC.VIII-DIV.I-EDD-STAMPED.
2. MAWP: For Shell side=50 psig
3. MDMT=+ 30 F
4. Hydrotest: Shell side=1.3x50=65 psig
for duration of 1/2 hour.
5. UW-2 FOR LETHAL SERVICE - NON LETHAL .
6. IMPACT TEST Exempted - UG - 22 (F) , UCS.
7. Stress Relieif exempted as per ASME STD.
8. Dimension Tollerance as per ASME SEC VIII.
9. E= 0.60 in Calculation as per ASME STD conditions

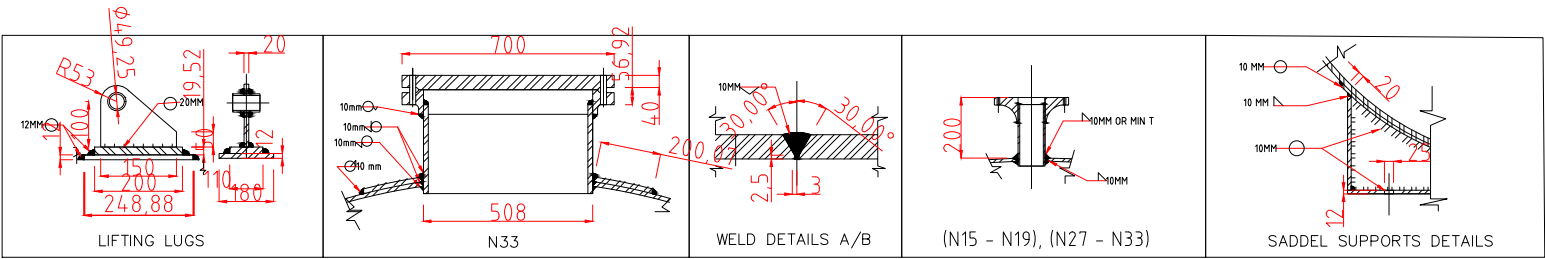

PROPERTY OF PETROTEC. REPRODUCTION OR UNAUTHORIZED USE WITHOUT PRIOR WRITTEN APPROVAL IS PROHIBITED AND SUBJECT TO LEGAL ACTION.

NOZZEL	X (CM)	Y (CM)	DIAMETER (INCH)	NOZZEL2	X (CM)2	Y (CM)2	DIAMETER (INCH)2
N1	25	25	1	N18	195	140	2
N2	25	65	1	N19	235	160	1
N3	25	160	1	N20	245	170	1
N4	25	220	1	N21	255	180	1
N5	50	40	3	N22	265	190	1
N6	50	170	3	N23	805	210	3
N7	95	55	1	N24	55	240	4
N8	110	150	1	N25	165	240	4
N9	130	90	1	N26	40	0	4
N10	130	140	3	N27	85	0	3
N11	130	175	3	N28	125	0	4
N12	165	70	1	N29	200	0	3
N13	165	120	1	N30	240	0	3
N14	165	140	1	N31	275	0	2
N15	165	180	1	N32	510	0	3
N16	165	215	1	N33	780	0	4
N17	185	155	2	N34	810	0	3