


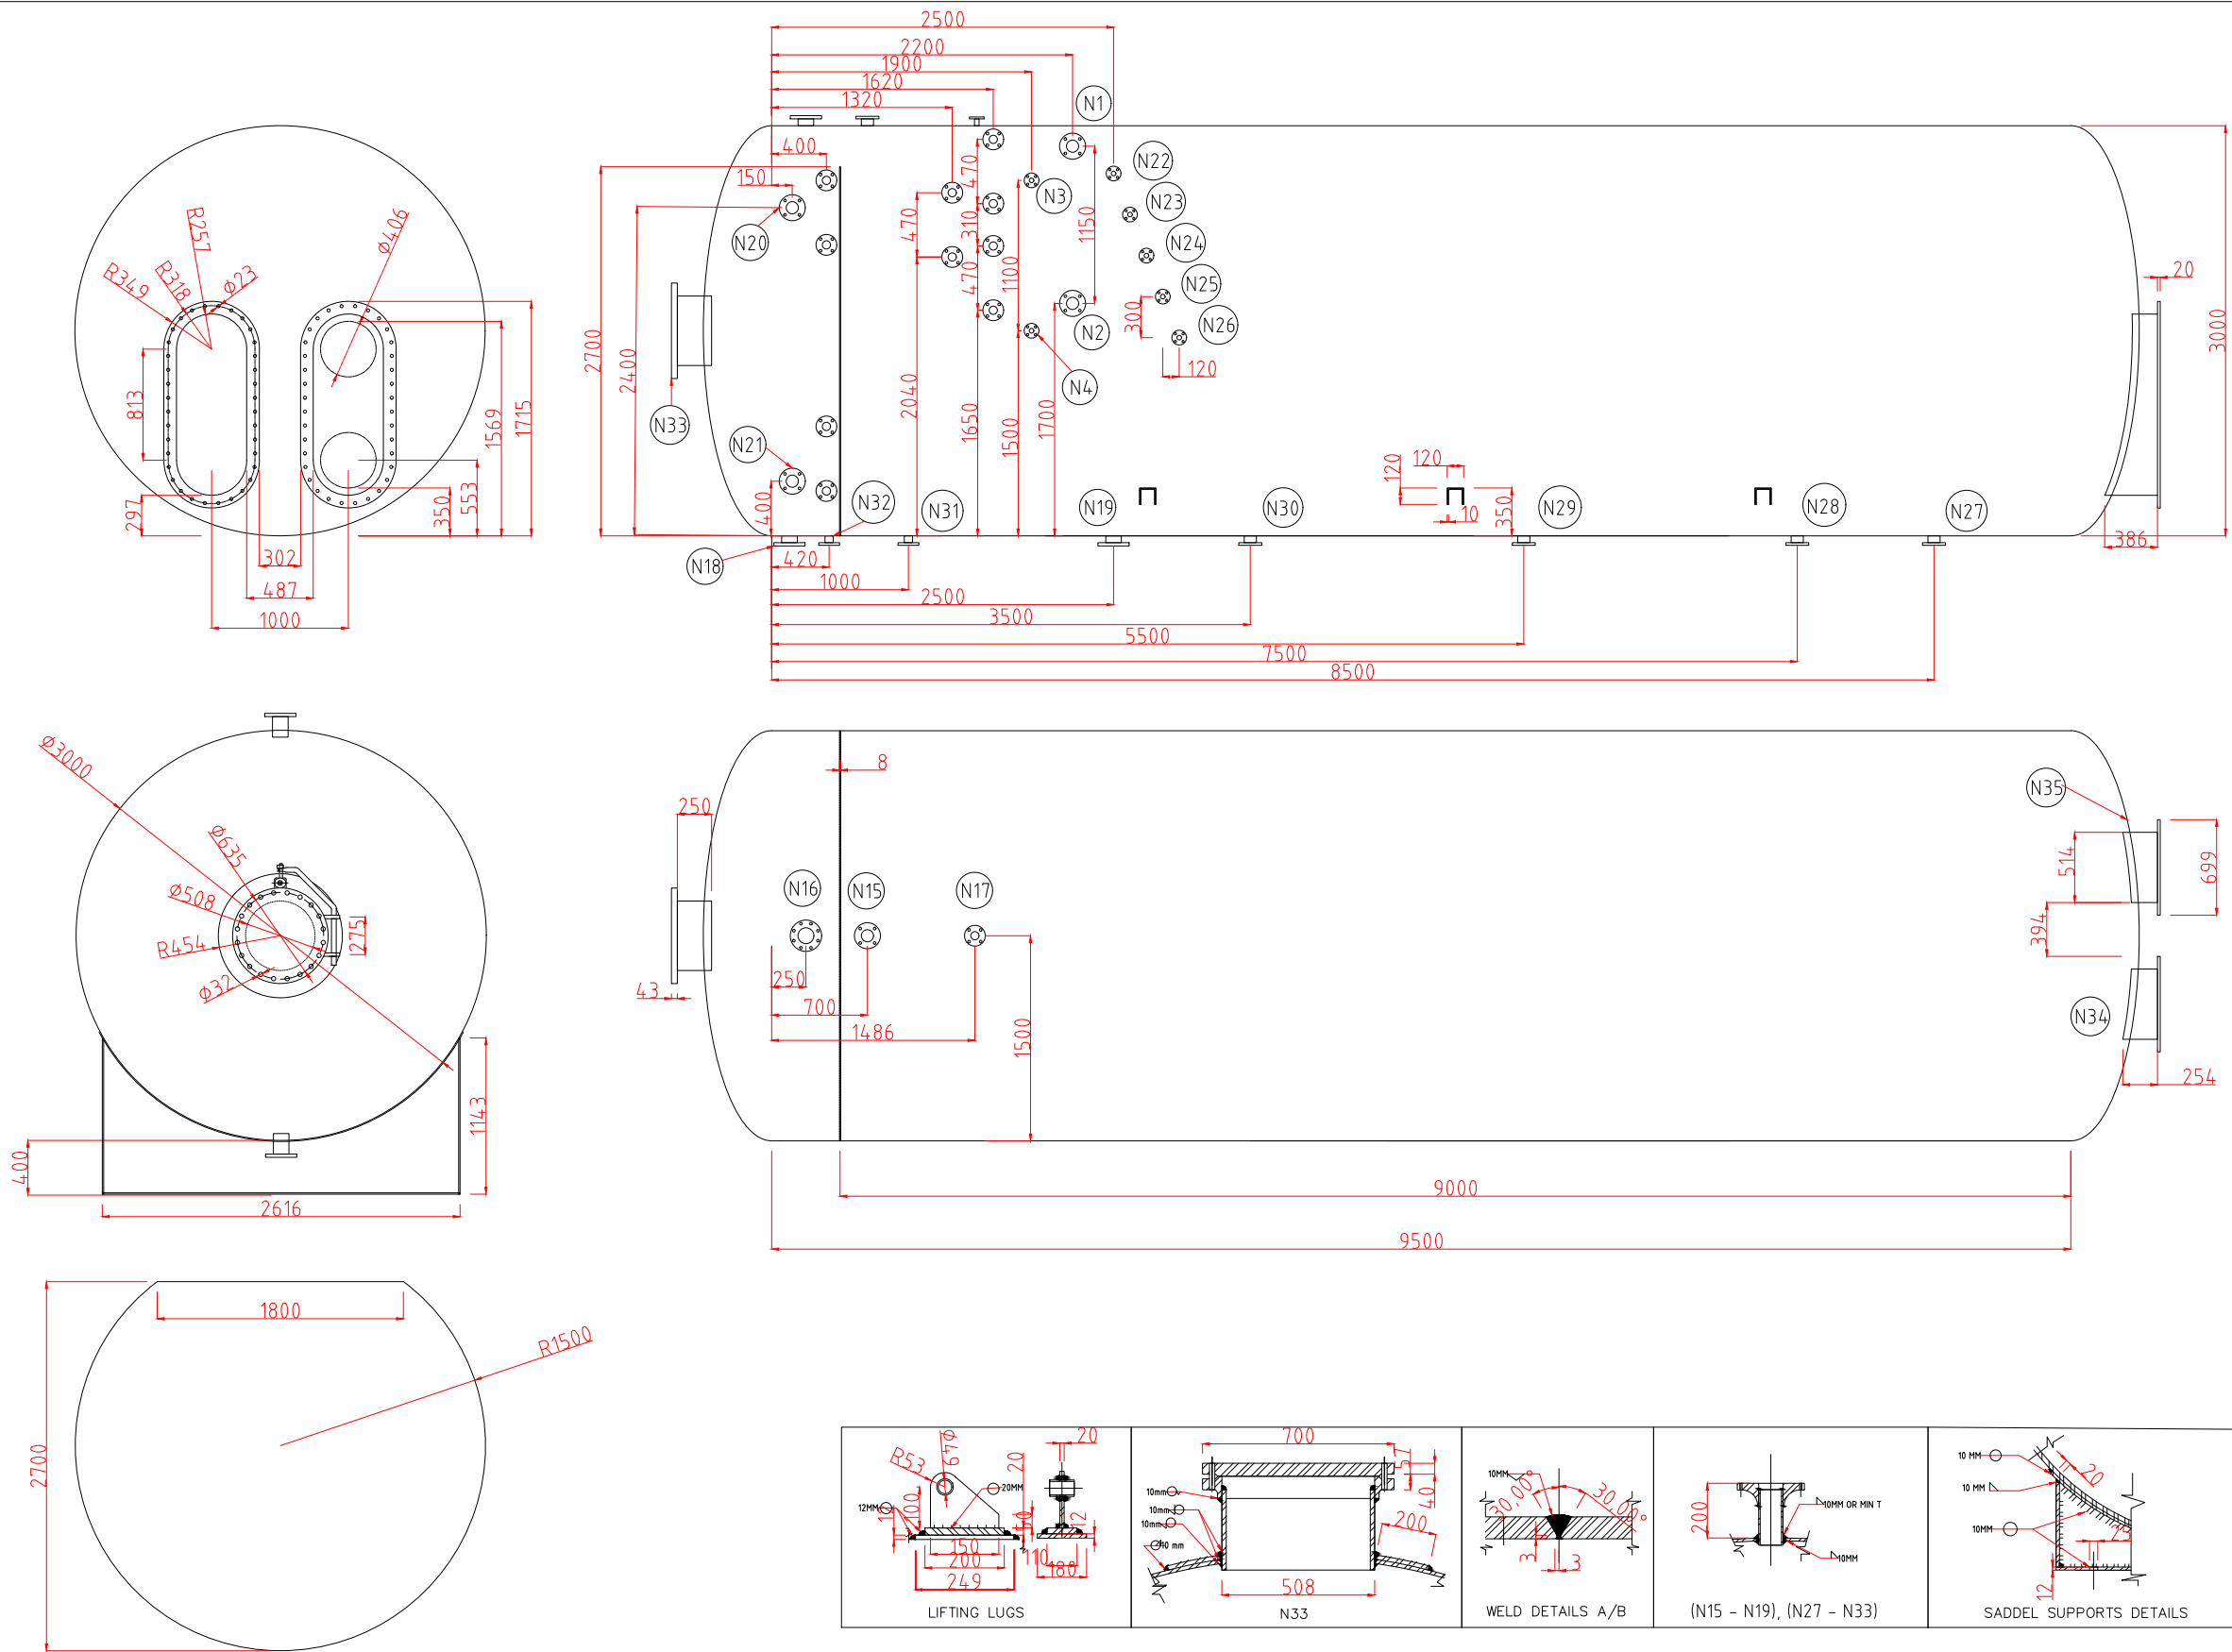

DIMS IN MM

NOZZLE	DIMS	QTY	DESCRIPTION	SPECIFICATION
N1	3"	1	HIGH HIGH LEVEL SWITCH	SA106-GR.B SA105-B16.5
N2	3"	1	LOW LOW LEVEL SWITCH	SA106-GR.B SA105-B16.5
N3 - N4	1"	2	TEMPERATURE TRANSMITTER	SA106-GR.B SA105-B16.5
N5 - N14	2"	10	SIGHT GLASS	SA106-GR.B SA105-B16.5
N15	3"	1	PRESSURE SAFETY VALVE	SA106-GR.B SA105-B16.5
N16	4"	1	GAS OUTLET	SA106-GR.B SA105-B16.5
N17	2"	1	PRESSURE GAUGE	SA106-GR.B SA105-B16.5
N18	4"	1	OIL OUTLET	SA106-GR.B SA105-B16.5
N19	4"	1	CRUDE OIL INPUT	SA106-GR.B SA105-B16.5
N20 - N21	3"	2	OIL LEVEL SWITCHES	SA106-GR.B SA105-B16.5
N22 - N26	1"	5	SAMPLING NOZZLE	SA106-GR.B SA105-B16.5
N27	3"	1	FRESH WATER INLET	SA106-GR.B SA105-B16.5
N28 - N31	3"	4	WATER DRAIN	SA106-GR.B SA105-B16.5
N32	2"	1	WATER DRAIN	SA106-GR.B SA105-B16.5
N33	20"	1	MANHOLE NECK ROLLED PLATE 10MM	SA516-GR.70 SA105-B16.5
N34 - N35	20"	2	FIRETUBE FLANGE OPENING	SA516-GR.70 SA105-B16.5

APPROVED FOR CONSTRUCTION DATE: 10-May-26

PETROTEC

INDUSTRIAL ENGINEERING COMPANY

HEATER TREATER
GENERAL ASEMBLY - MECHANICAL DETAILS

VESSEL MATERIAL	VESSEL THICKNESS	LENGTH	DIAMETER	SERIAL NO.
SA-283 Grade C	12 MM	9.5 M	3.04M	PT-009
ENDCAP MATERIAL	ENDCAP THICKNESS	ENDCAP TYPE	TOTAL WEIGHT	
SA-283 Grade C	12 MM	ELLIPTICAL	19 TON	
DWG. NO.	DRAWN BY	DESIGNED BY	REV.	DATE
PT-026-1	ENG. I.H	ENG. TAREK HAMMAD	01	04-May-26

NOZZEL	X (CM)	Y (CM)	DIAMETER (INCH)	NOZZEL2	X (CM)2	Y (CM)2	DIAMETER (INCH)2
N1	220	285	3	N18	13	0	4
N2	220	170	3	N19	250	0	4
N3	190	260	1	N20	15	240	3
N4	190	152	1	N21	15	40	3
N5	162	290	2	N22	250	265	1
N6	162	243	2	N23	262	235	1
N7	162	165	2	N24	274	205	1
N8	162	212	2	N25	286	175	1
N9	40	260	2	N26	298	145	1
N10	40	213	2	N27	850	0	3
N11	40	80	2	N28	750	0	3
N12	40	33	2	N29	550	0	3
N13	132	251.1	2	N30	350	0	3
N14	132	204.1	2	N31	100	0	3
N15	70	300	3	N32	42	0	2
N16	25	300	4	N33	-	150	20
N17	150	300	2				