Ibrahim Johar Farooqi
BAI-6A
23K-0074
CN Lab - Lab 09 Tasks

Task 01

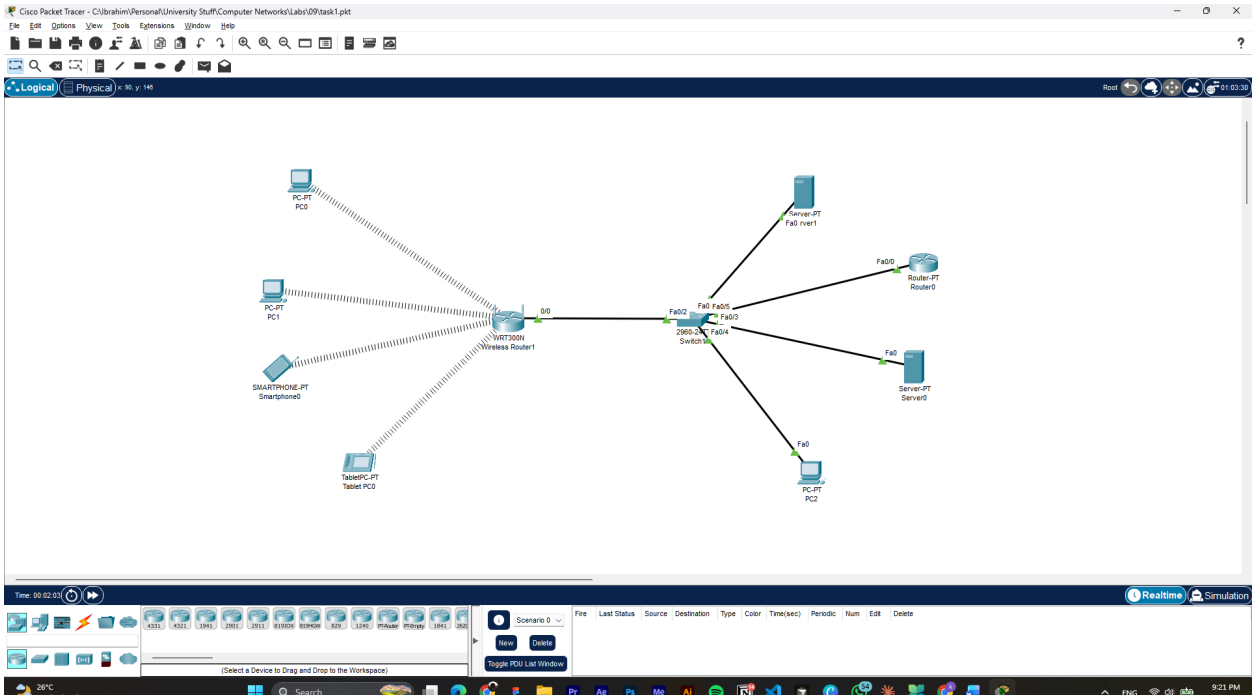

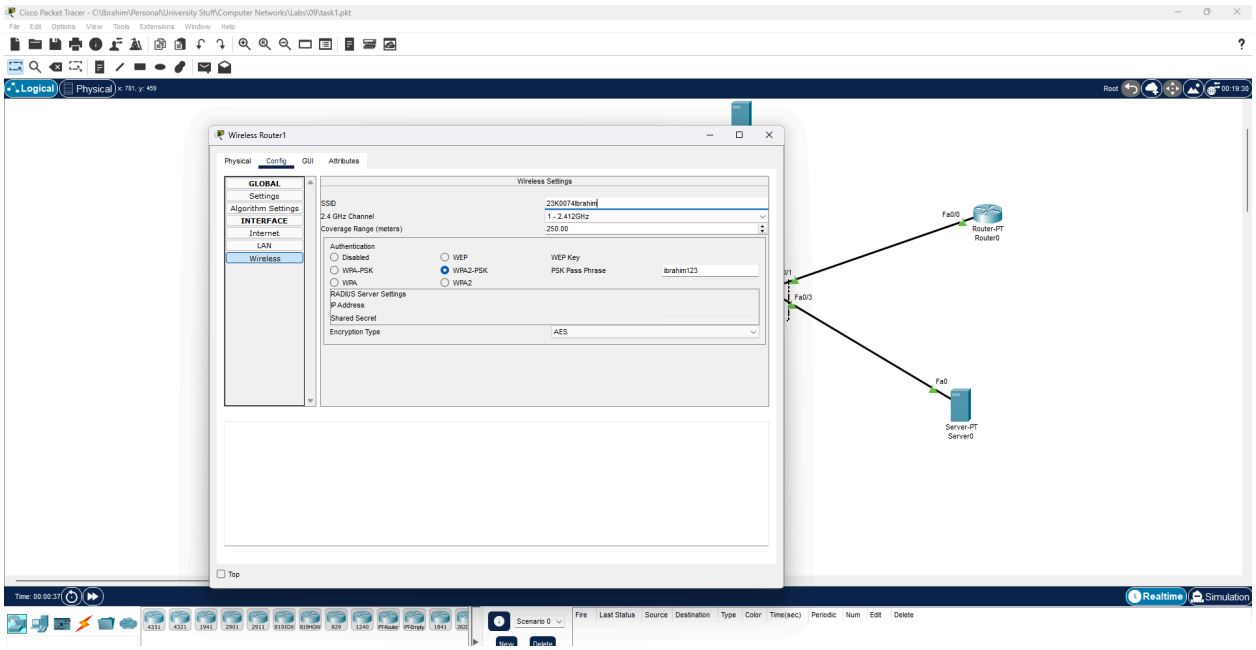

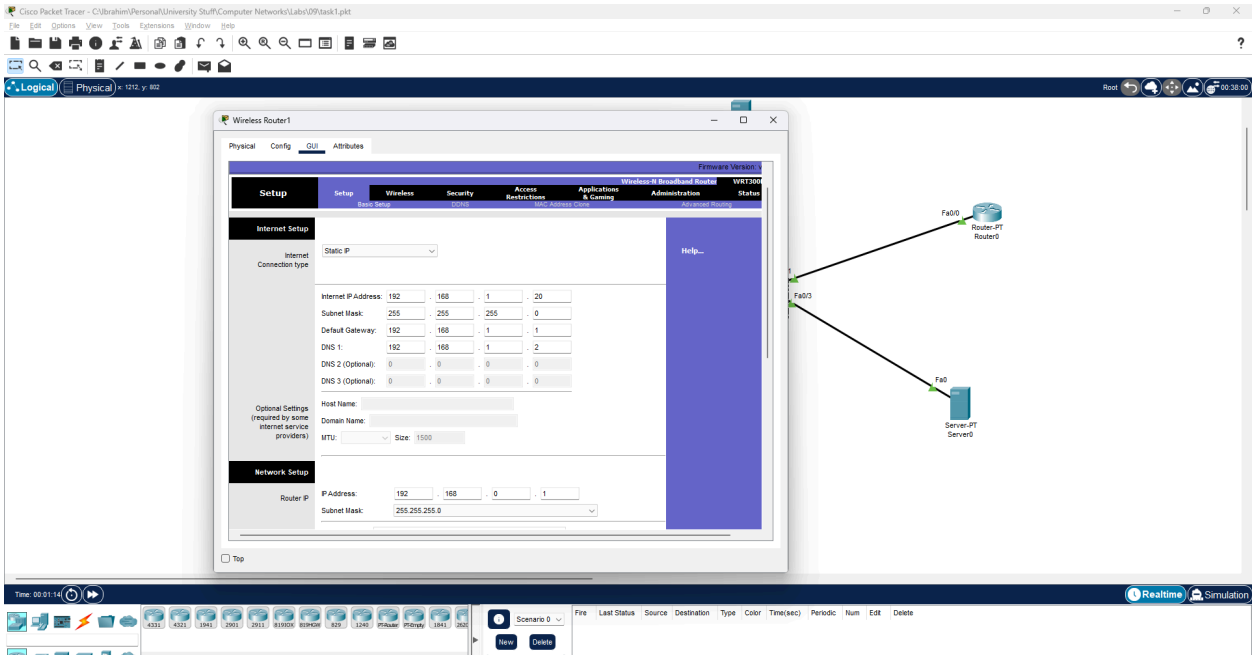
Cisco Packet Tracer - C:\Ibrahim\Personal\University Stuff\Computer Networks\Labs\09\task1.pkt
Wireless Router1
Physical
Config
GUI
Attributes
Setup
Internet Setup
Internet Connection type
Static IP
Internet IP Address: 192 . 168 . 1 . 20
Subnet Mask: 255 . 255 . 255 . 0
Default Gateway: 192 . 168 . 1 . 1
DNS 1: 192 . 168 . 1 . 2
DNS 2 (Optional): 0 . 0 . 0 . 0
DNS 3 (Optional): 0 . 0 . 0 . 0
Optional Settings (required by some internet service providers)
Host Name:
Domain Name:
MTU:
Size: 1500
Network Setup
Router IP
IP Address: 192 . 168 . 0 . 1
Subnet Mask: 255.255.255.0
Help...
Fa0/0
Router-PT Router0
Fa0/3
Fa0
Server-PT Server0

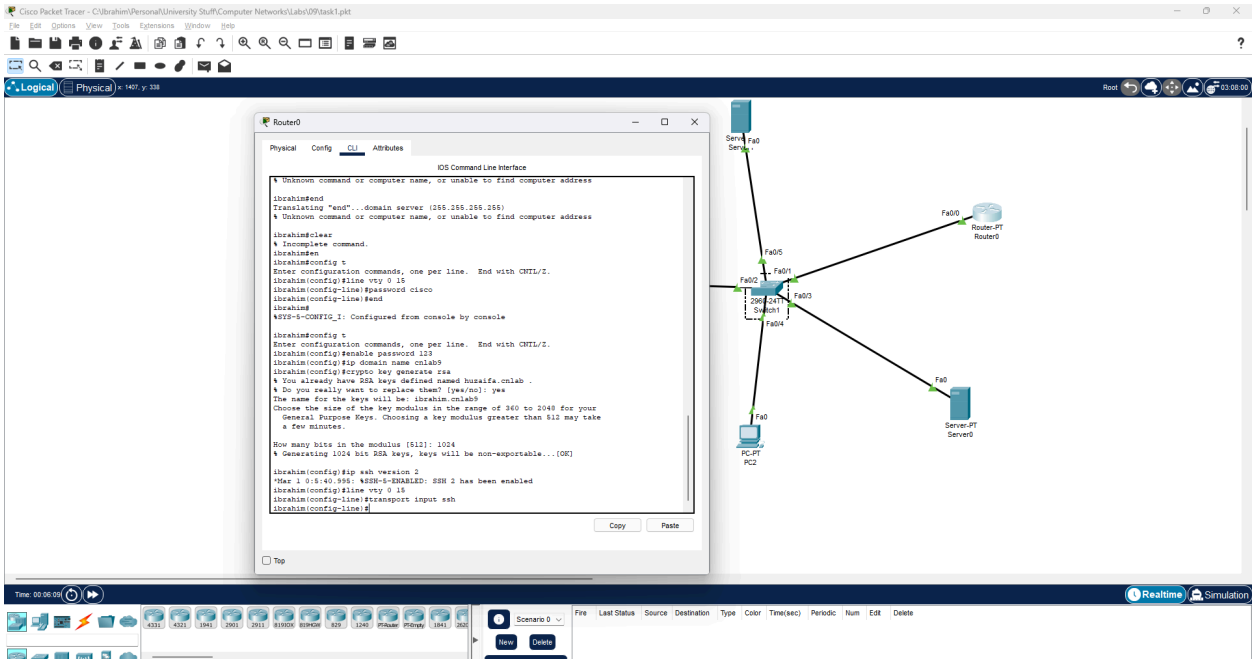
Cisco Packet Tracer - C:\Ibrahim\Personal\University Stuff\Computer Networks\Labs\09\task1.pkt
Router0
Physical
Config
CLI
Attributes
IOS Command Line Interface
% Unknown command or computer name, or unable to find computer address
ibrahim#end
Translating "end"...domain server (255.255.255.255)
% Unknown command or computer name, or unable to find computer address
ibrahim#clear
% Incomplete command.
ibrahim#en
ibrahim#config t
Enter configuration commands, one per line. End with CNTL/Z.
ibrahim(config)#line vty 0 15
ibrahim(config-line)#password cisco
ibrahim(config-line)#end
ibrahim#
%SYS-5-CONFIG_I: Configured from console by console
ibrahim#config t
Enter configuration commands, one per line. End with CNTL/Z.
ibrahim(config)#enable password 123
ibrahim(config)#ip domain name cnlab9
ibrahim(config)#crypto key generate rsa
% You already have RSA keys defined named hurzifa.cnlab .
% Do you really want to replace them? [yes/no]: yes
The name for the keys will be: ibrahim.cnlab9
Choose the size of the key modulus in the range of 360 to 2048 for your
General Purpose Keys. Choosing a key modulus greater than 512 may take
a few minutes.
How many bits in the modulus [512]: 1024
% Generating 1024 bit RSA keys, keys will be non-exportable...[OK]
ibrahim(config)#ip ssh version 2
*Mar 1 0:5:40.995: %SSH-5-ENABLED: SSH 2 has been enabled
ibrahim(config)#line vty 0 15
ibrahim(config-line)#transport input ssh
ibrahim(config-line)#
Copy
Paste
Fa0/0
Router-PT Router0
Fa0/5
Fa0/1
Fa0/2
Fa0/3
Fa0/4
Fa0
PC-PT PC2
Server-PT Server0

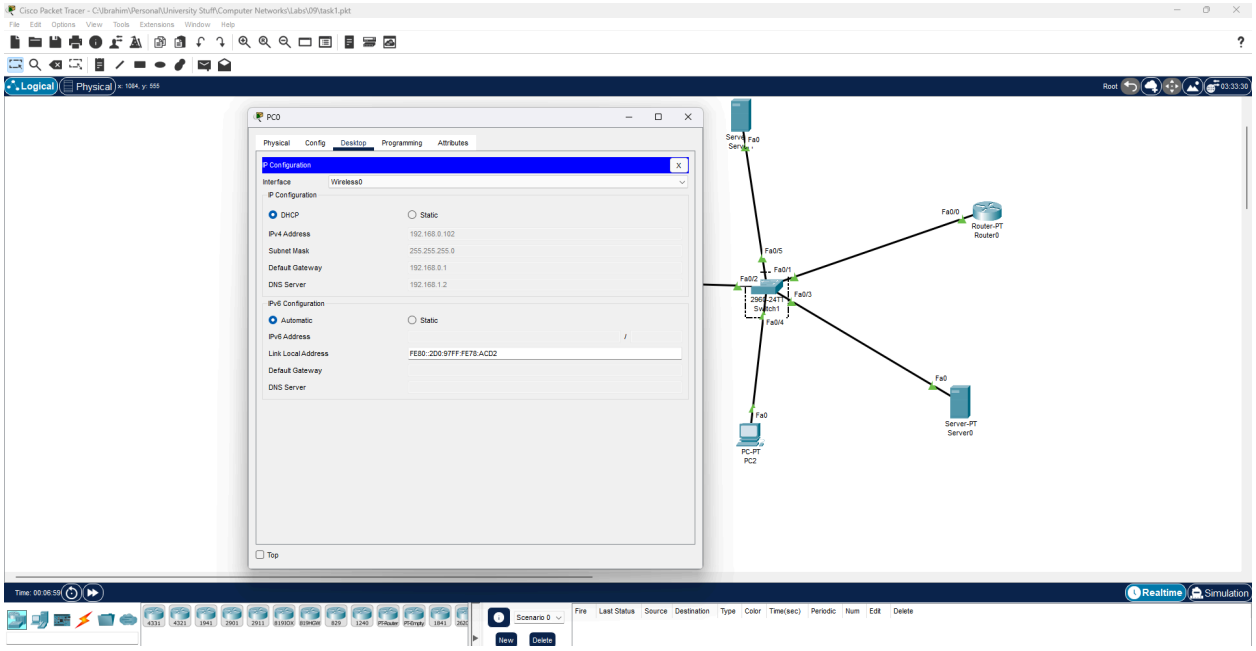
Cisco Packet Tracer - C:\Ibrahim\Personal\University Stuff\Computer Networks\Labs\09\task1.pkt
PC0
Physical
Config
Desktop
Programming
Attributes
IP Configuration
Interface
Wireless0
DHCP
Static
IPv4 Address
192.168.0.102
Subnet Mask
255.255.255.0
Default Gateway
192.168.0.1
DNS Server
192.168.1.2
IPv6 Configuration
Automatic
IPv6 Address
Link Local Address
FE80::2D0:97FF:FE78:ACD2
Top
Server-PT Server1
Router-PT Router0
2960-24TT Switch1
Server-PT Server0
PC-PT PC2
Realtime
Simulation

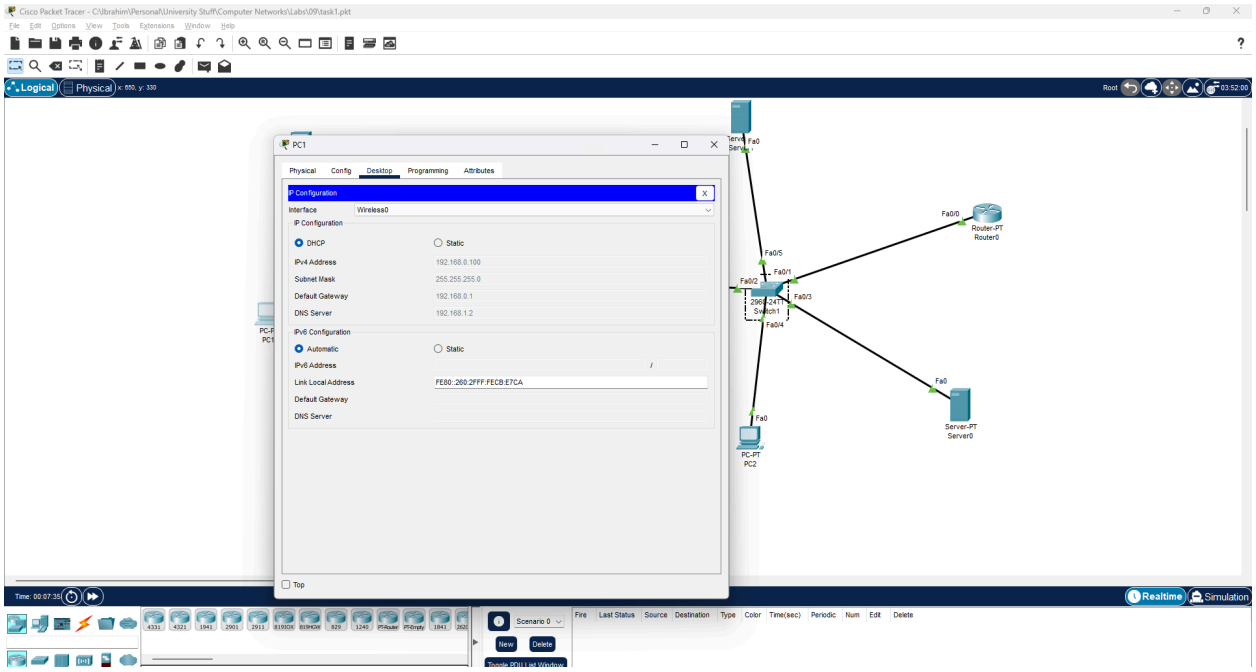
Cisco Packet Tracer - C:\Ibrahim\Personal\University Stuff\Computer Networks\Labs\09\task1.pkt
PC1
Physical
Config
Desktop
Programming
Attributes
IP Configuration
Interface
Wireless0
DHCP
Static
IPv4 Address
192.168.0.100
Subnet Mask
255.255.255.0
Default Gateway
192.168.0.1
DNS Server
192.168.1.2
IPv6 Configuration
Automatic
IPv6 Address
Link Local Address
FE80::260:2FFF:FECB:E7CA
Top
Server-PT Server1
Router-PT Router0
2960-24TT Switch1
Server-PT Server0
PC-PT PC2
Realtime
Simulation

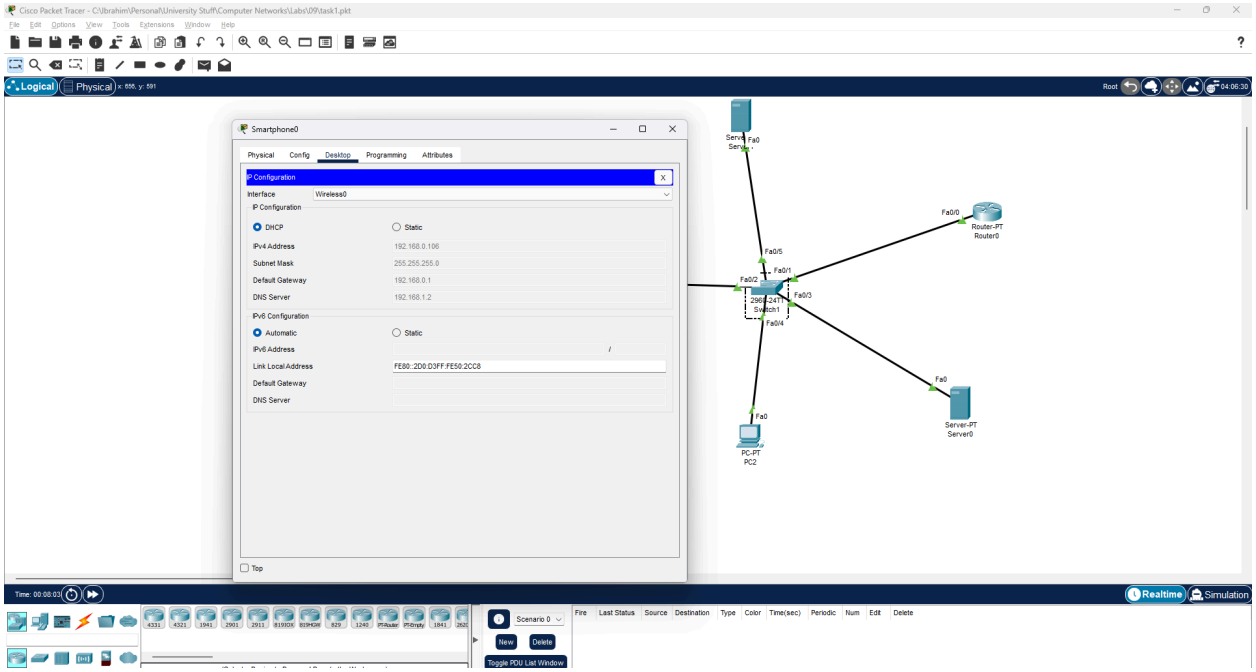
Cisco Packet Tracer - C:\Ibrahim\Personal\University Stuff\Computer Networks\Labs\09\task1.pkt
Smartphone0
Physical
Config
Desktop
Programming
Attributes
IP Configuration
Interface
Wireless0
DHCP
Static
IPv4 Address
192.168.0.106
Subnet Mask
255.255.255.0
Default Gateway
192.168.0.1
DNS Server
192.168.1.2
IPv6 Configuration
Automatic
Static
IPv6 Address
Link Local Address
FE80::2D0:D3FF:FE50:2CC8
Default Gateway
DNS Server
Top
Fa0/0
Router-PT
Router0
Fa0/5
Fa0/1
Fa0/2
Fa0/3
Fa0/4
Switch1
Fa0
Server-PT
Server0
PC-PT
PC2
Realtime
Simulation
Scenario 0
New
Delete
Toggle PDU List Window

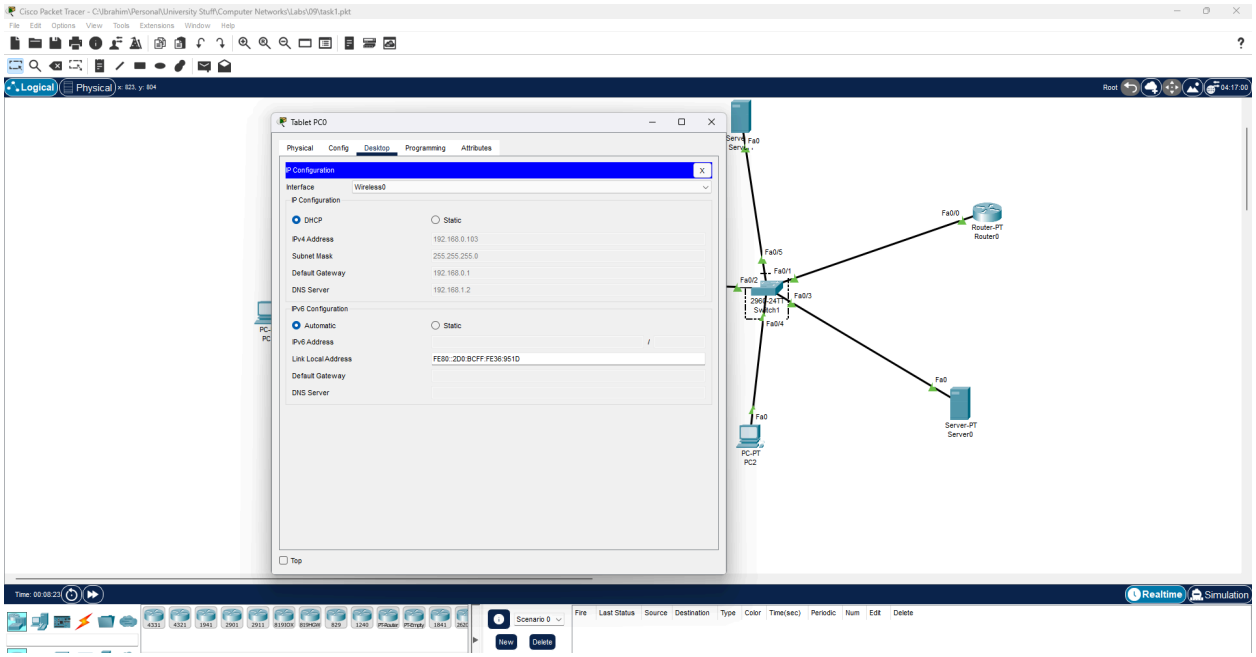
Cisco Packet Tracer - C:\Ibrahim\Personal\University Stuff\Computer Networks\Labs\09\task1.pkt
Tablet PC0
Physical
Config
Desktop
Programming
Attributes
IP Configuration
Interface
Wireless0
DHCP
Static
IPv4 Address
192.168.0.103
Subnet Mask
255.255.255.0
Default Gateway
192.168.0.1
DNS Server
192.168.1.2
IPv6 Configuration
Automatic
Static
IPv6 Address
Link Local Address
FE80::2D0:BCFF:FE36:951D
Default Gateway
DNS Server
Top
Fa0/0
Router-PT
Router0
Fa0/5
Fa0/1
Fa0/2
Fa0/3
Fa0/4
Switch1
Fa0
Server-PT
Server0
PC-PT
PC2
Realtime
Simulation
Scenario 0
New
Delete

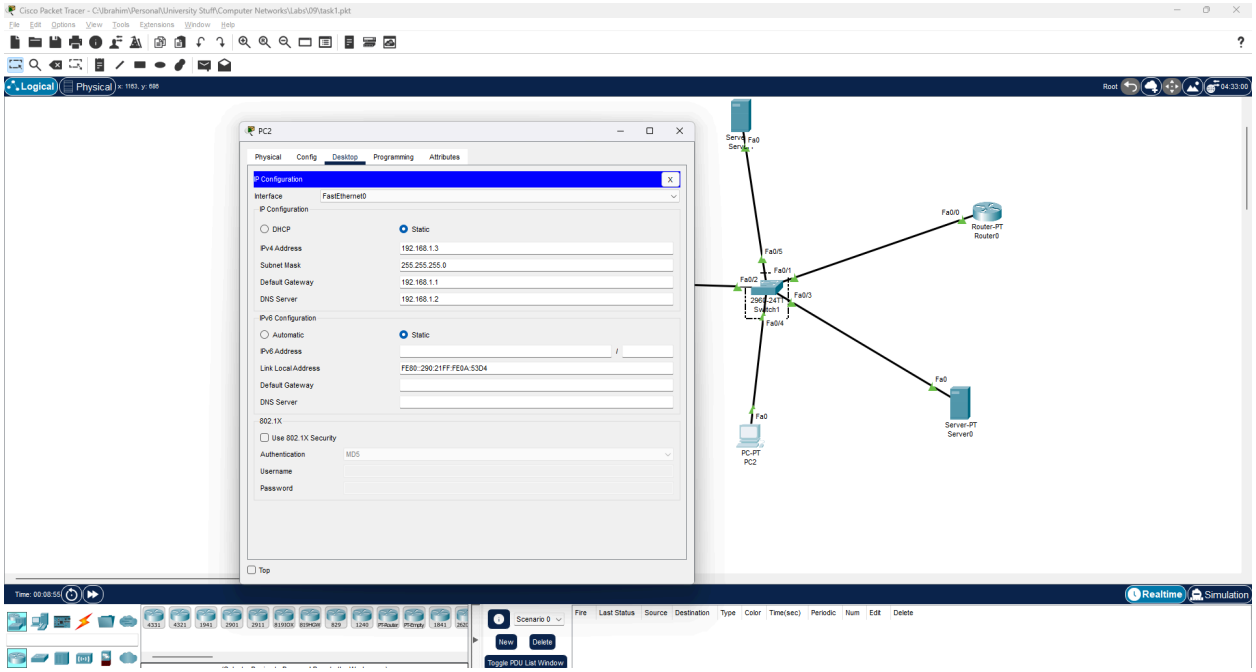
Cisco Packet Tracer - C:\Ibrahim\Personal\University Stuff\Computer Networks\Labs\09\task1.pkt
File Edit Options View Tools Extensions Window Help
Logical
Physical
PC2
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address 192.168.1.3
Subnet Mask 255.255.255.0
Default Gateway 192.168.1.1
DNS Server 192.168.1.2
IPv6 Configuration
Automatic
Static
IPv6 Address
Link Local Address FE80::290:21FF:FE0A:53D4
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top
Fa0/0
Router-PT
Router0
Fa0/5
Fa0/1
Fa0/2
Fa0/3
Fa0/4
Switch1
Fa0
Server-PT
Server0
PC-PT
PC2
Realtime
Simulation
Scenario 0
New
Delete
Toggle PDU List Window
Fire
Last Status
Source
Destination
Type
Color
Time(sec)
Periodic
Num
Edit
Delete

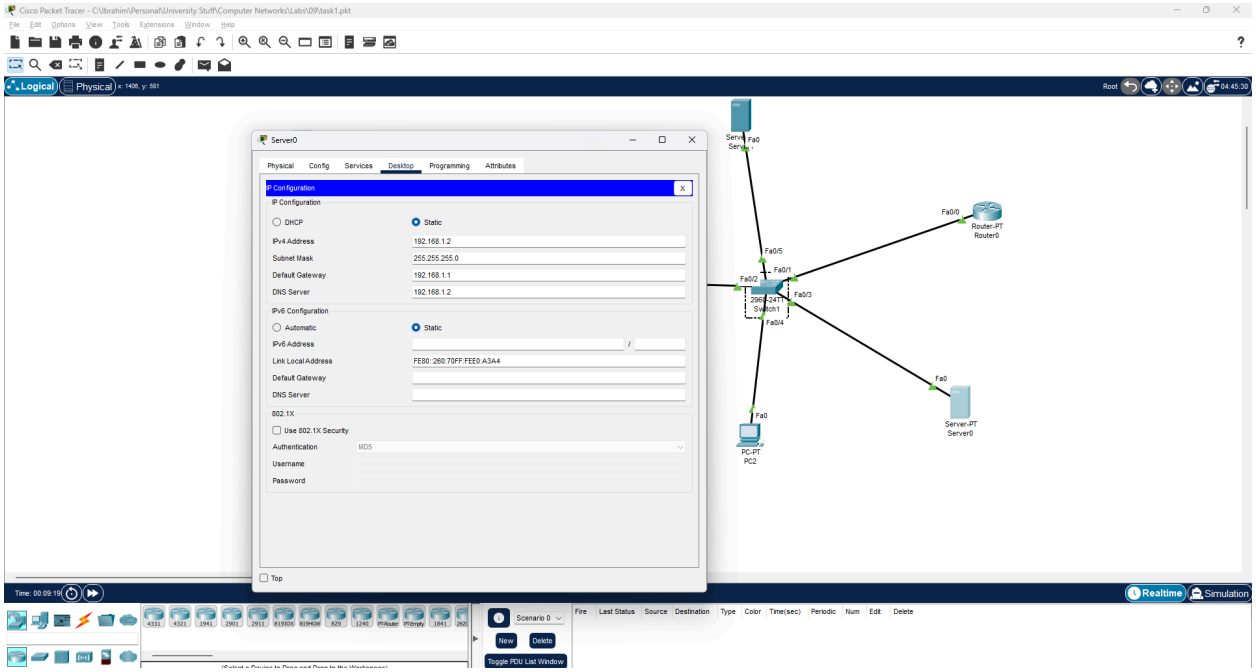
Cisco Packet Tracer - C:\Ibrahim\Personal\University Stuff\Computer Networks\Labs\09\task1.pkt
File Edit Options View Tools Extensions Window Help
Logical
Physical
Server0
Physical Config Services Desktop Programming Attributes
IP Configuration
IP Configuration
DHCP
Static
IPv4 Address 192.168.1.2
Subnet Mask 255.255.255.0
Default Gateway 192.168.1.1
DNS Server 192.168.1.2
IPv6 Configuration
Automatic
Static
IPv6 Address
Link Local Address FE80::260:70FF:FEE9:A3A4
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top
Fa0/0
Router-PT
Router0
Fa0/5
Fa0/1
Fa0/2
Fa0/3
Fa0/4
Switch1
Fa0
Server-PT
Server0
PC-PT
PC2
Realtime
Simulation
Scenario 0
New
Delete
Toggle PDU List Window
Fire
Last Status
Source
Destination
Type
Color
Time(sec)
Periodic
Num
Edit
Delete

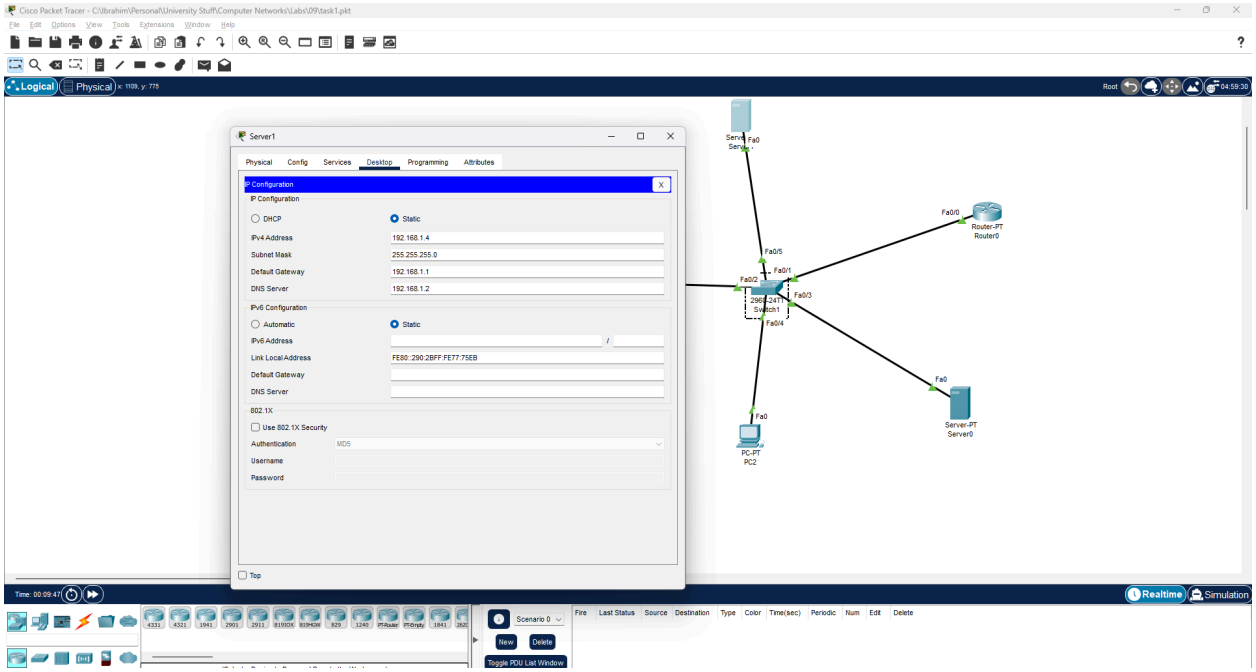
Server1
Physical
Config
Services
Desktop
Programming
Attributes
IP Configuration
DHCP
Static
IPv4 Address
192.168.1.4
Subnet Mask
255.255.255.0
Default Gateway
192.168.1.1
DNS Server
192.168.1.2
IPv6 Configuration
Automatic
Static
IPv6 Address
Link Local Address
FE80::290:2BFF:FE77:75EB
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top
Router-PT
Router0
Server-PT
Server0
PC-PT
PC2
Realtime
Simulation

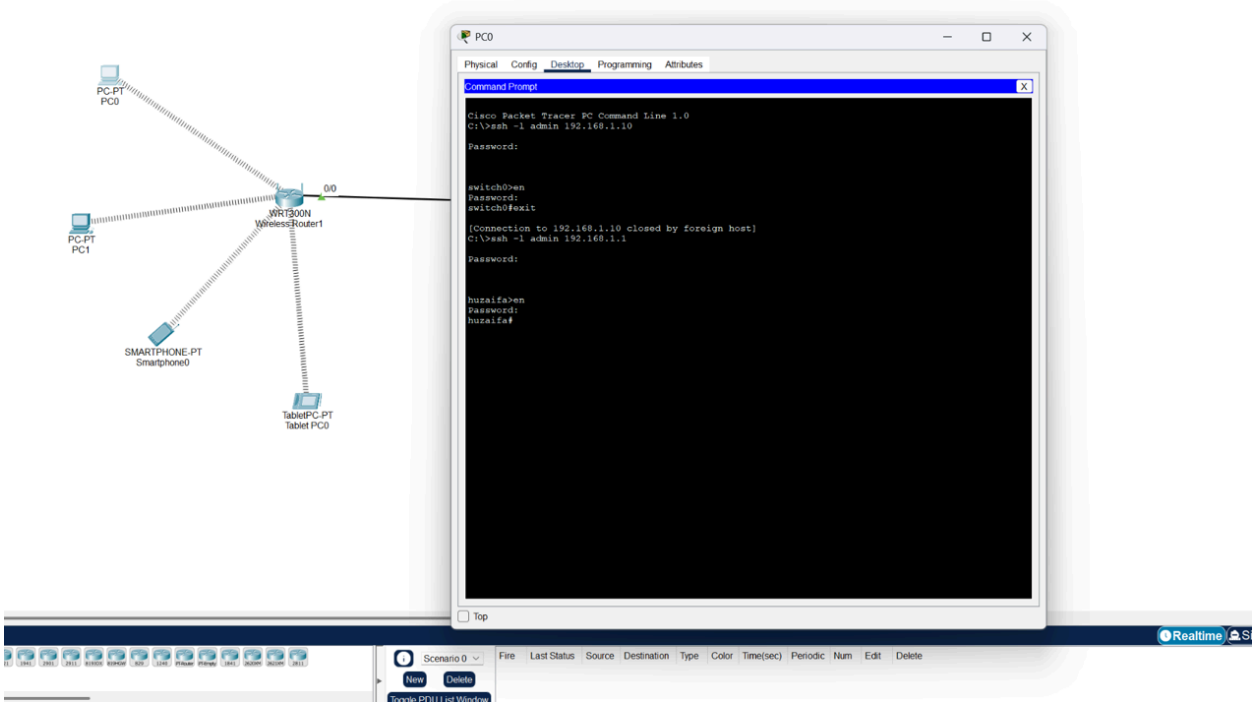
PC0
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ssh -l admin 192.168.1.10
Password:
switch0>en
Password:
switch0#exit
[Connection to 192.168.1.10 closed by foreign host]
C:\>ssh -l admin 192.168.1.1
Password:
huzaifa>en
Password:
huzaifa#
Top
PC-PT
PC0
PC-PT
PC1
WRT300N
WirelessRouter1
SMARTPHONE-PT
Smartphone0
TabletPC-PT
Tablet PC0
Realtime

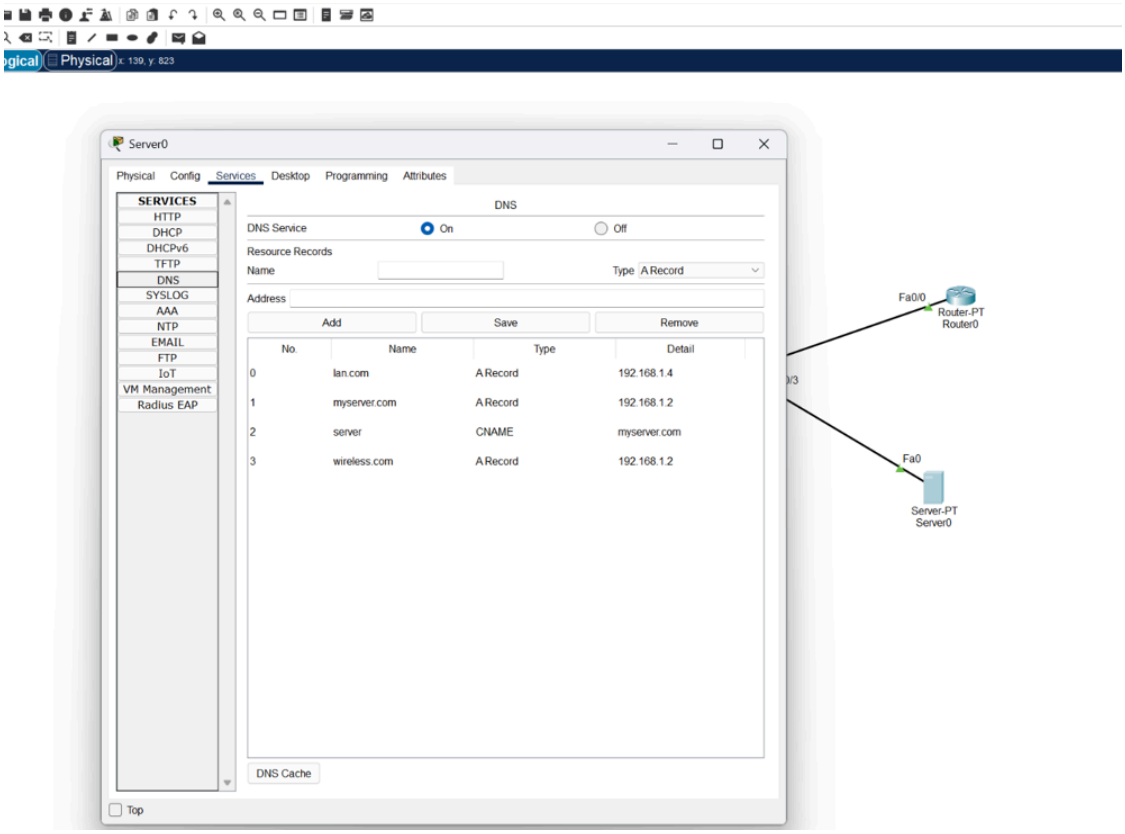
Physical
x: 139, y: 823
Server0
Physical Config Services Desktop Programming Attributes
SERVICES
HTTP
DHCP
DHCPv6
TFTP
DNS
SYSLOG
AAA
NTP
EMAIL
FTP
IoT
VM Management
Radius EAP
DNS
DNS Service
On
Off
Resource Records
Name
Type A Record
Address
Add
Save
Remove
No. Name Type Detail
0 lan.com A Record 192.168.1.4
1 myserver.com A Record 192.168.1.2
2 server CNAME myserver.com
3 wireless.com A Record 192.168.1.2
DNS Cache
Top
Fa0/0
Router-PT
Router0
Fa0
Server-PT
Server0

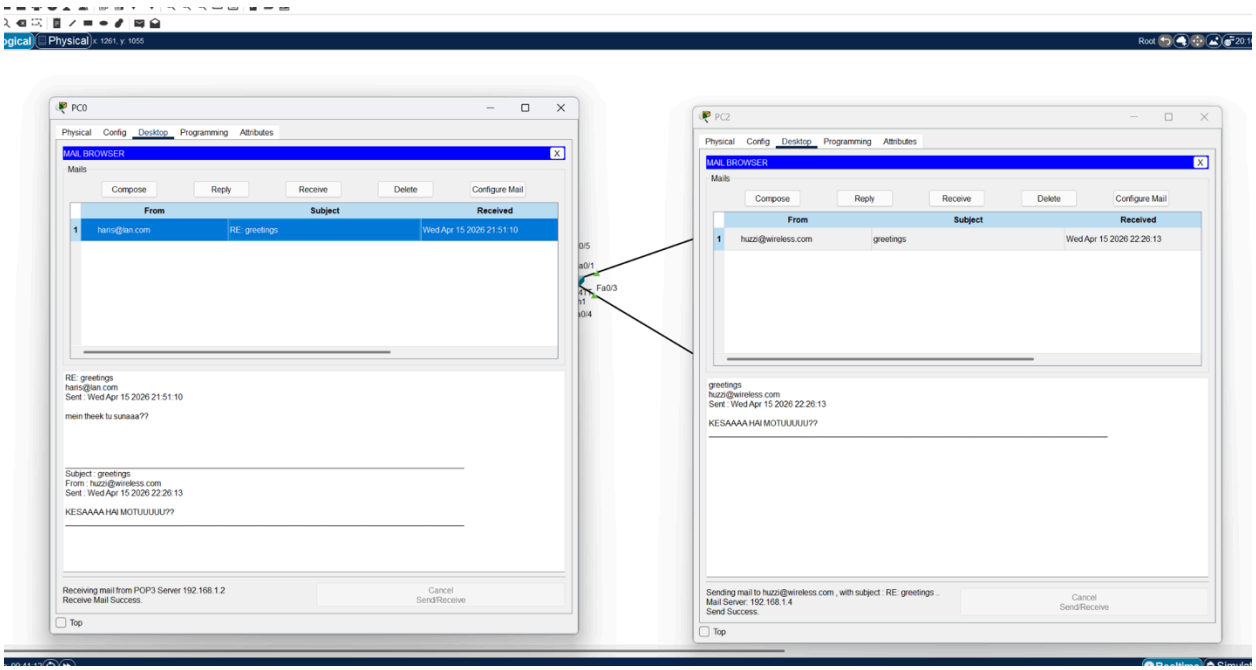
Physical
x: 1261, y: 1055
PC0
Physical Config Desktop Programming Attributes
MAIL BROWSER
Mails
Compose Reply Receive Delete Configure Mail
From Subject Received
1 haris@lan.com RE: greetings Wed Apr 15 2026 21:51:10
RE: greetings
haris@lan.com
Sent : Wed Apr 15 2026 21:51:10
mein theek tu sunaaa??
Subject : greetings
From : huzzi@wireless.com
Sent : Wed Apr 15 2026 22:26:13
KESAAAA HAI MOTUUUUU??
Receiving mail from POP3 Server 192.168.1.2
Receive Mail Success.
Cancel
Send/Receive
Top
Fa0/3
PC2
Physical Config Desktop Programming Attributes
MAIL BROWSER
Mails
Compose Reply Receive Delete Configure Mail
From Subject Received
1 huzzi@wireless.com greetings Wed Apr 15 2026 22:26:13
greetings
huzzi@wireless.com
Sent : Wed Apr 15 2026 22:26:13
KESAAAA HAI MOTUUUUU??
Sending mail to huzzi@wireless.com , with subject : RE: greetings ..
Mail Server: 192.168.1.4
Send Success.
Cancel
Send/Receive
Top

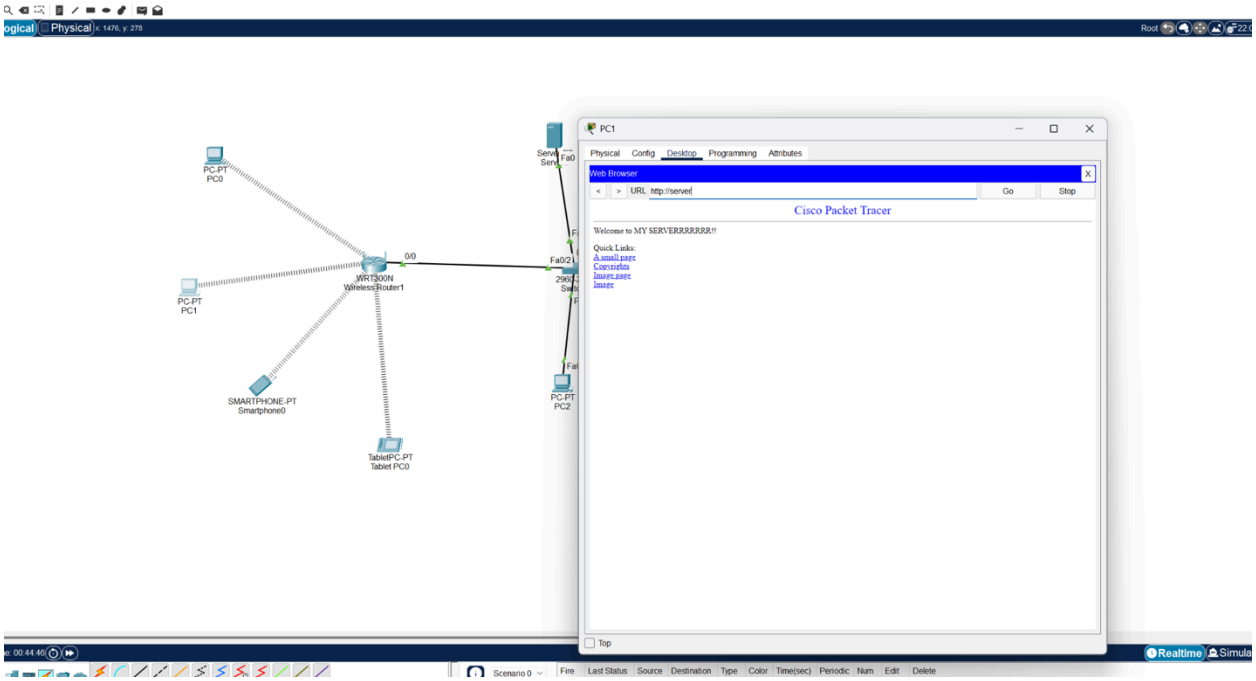
PC1
Physical
Config
Desktop
Programming
Attributes
Web Browser
URL http://server
Go
Stop
Cisco Packet Tracer
Welcome to MY SERVERRRRRRR!!
Quick Links:
A small page
Copyrights
Image page
Image
Top
PC-PT
PC0
PC-PT
PC1
WRT300N
Wireless Router1
0/0
SMARTPHONE-PT
Smartphone0
TabletPC-PT
Tablet PC0
Fa0/2
PC-PT
PC2
Fa0
Realtime
Scenario 0
Fire
Last Status
Source
Destination
Type
Color
Time(sec)
Periodic
Num
Edit
Delete

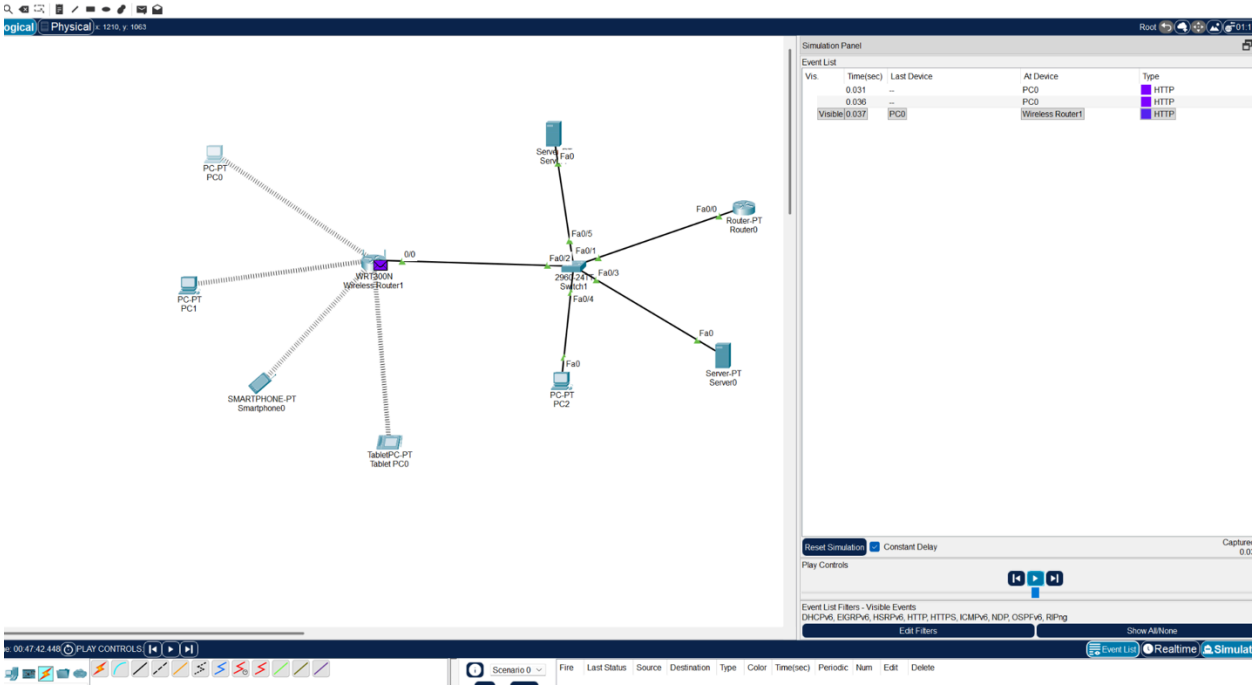
Simulation Panel
Event List
Vis.
Time(sec)
Last Device
At Device
Type
0.031
PC0
HTTP
0.036
PC0
HTTP
Visible
0.037
PC0
Wireless Router1
HTTP
PC-PT
PC0
PC-PT
PC1
WRT300N
Wireless Router1
0/0
SMARTPHONE-PT
Smartphone0
TabletPC-PT
Tablet PC0
Fa0/2
Fa0/5
Fa0/1
Fa0/3
Fa0/4
Fa0/0
Router-PT
Router0
Fa0
Server-PT
Server0
PC-PT
PC2
Reset Simulation
Constant Delay
Play Controls
Event List Filters - Visible Events
DHCPv6, EIGRPv6, HSRPv6, HTTP, HTTPS, ICMPv6, NDP, OSPFv6, RIPng
Edit Filters
Show All/None
Realtime
Scenario 0
Fire
Last Status
Source
Destination
Type
Color
Time(sec)
Periodic
Num
Edit
Delete

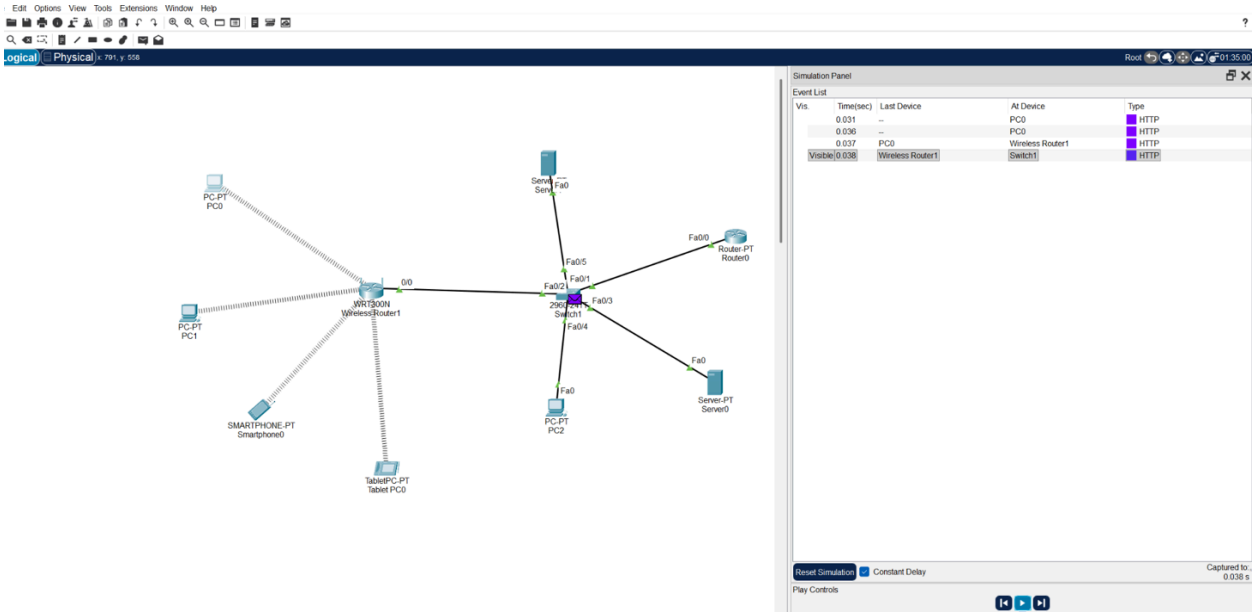
Edit Options View Tools Extensions Window Help
Physical
Simulation Panel
Event List
Vis. Time(sec) Last Device At Device Type
0.031 -- PC0 HTTP
0.036 -- PC0 HTTP
0.037 PC0 Wireless Router1 HTTP
Visible 0.038 Wireless Router1 Switch1 HTTP
PC-PT PC0
PC-PT PC1
SMARTPHONE-PT Smartphone0
TabletPC-PT Tablet PC0
WRT300N Wireless Router1
0/0
Fa0/5
Fa0/1
Fa0/2
Fa0/3
Fa0/4
Switch1
Fa0/0
Router-PT Router0
Fa0
Server-PT Server0
PC-PT PC2
Reset Simulation
Constant Delay
Play Controls

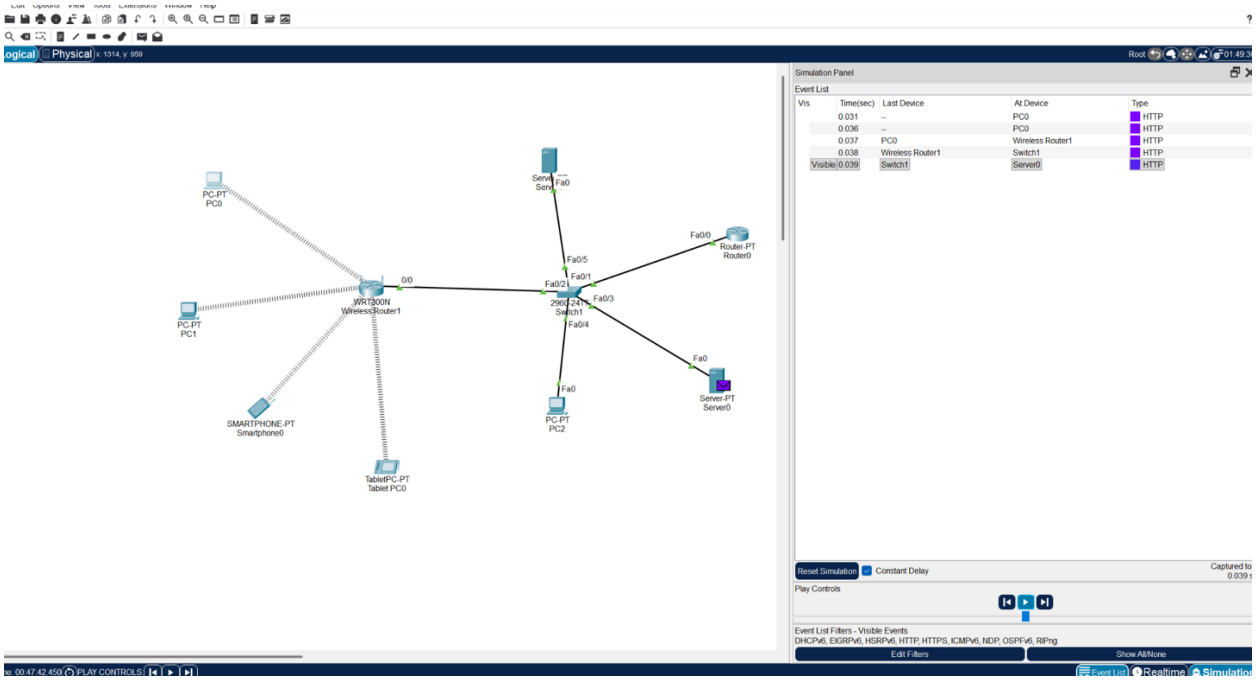
Physical
Simulation Panel
Event List
Vis. Time(sec) Last Device At Device Type
0.031 -- PC0 HTTP
0.036 -- PC0 HTTP
0.037 PC0 Wireless Router1 HTTP
0.038 Wireless Router1 Switch1 HTTP
Visible 0.039 Switch1 Server0 HTTP
PC-PT PC0
PC-PT PC1
SMARTPHONE-PT Smartphone0
TabletPC-PT Tablet PC0
WRT300N Wireless Router1
0/0
Fa0/5
Fa0/1
Fa0/2
Fa0/3
Fa0/4
Switch1
Fa0/0
Router-PT Router0
Fa0
Server-PT Server0
PC-PT PC2
Reset Simulation
Constant Delay
Play Controls
Event List Filters - Visible Events
DHCPv6, EIGRPv6, HSRPv6, HTTP, HTTPS, ICMPv6, NDP, OSPFv6, RIPng
Edit Filters
Show All/None
Realtime

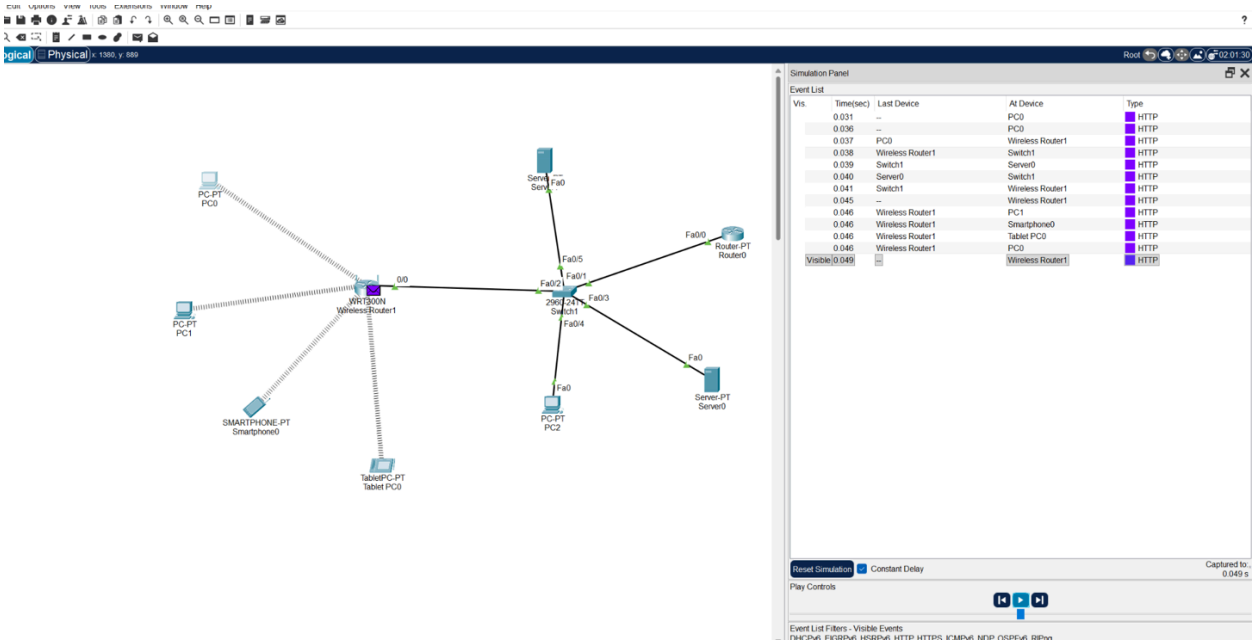
Physical
Simulation Panel
Event List
Vis. | Time(sec) | Last Device | At Device | Type
0.031 | -- | PC0 | HTTP
0.036 | -- | PC0 | HTTP
0.037 | PC0 | Wireless Router1 | HTTP
0.038 | Wireless Router1 | Switch1 | HTTP
0.039 | Switch1 | Server0 | HTTP
0.040 | Server0 | Switch1 | HTTP
0.041 | Switch1 | Wireless Router1 | HTTP
0.045 | -- | Wireless Router1 | HTTP
0.046 | Wireless Router1 | PC1 | HTTP
0.046 | Wireless Router1 | Smartphone0 | HTTP
0.046 | Wireless Router1 | Tablet PC0 | HTTP
0.046 | Wireless Router1 | PC0 | HTTP
Visible 0.049 | -- | Wireless Router1 | HTTP
Reset Simulation
Constant Delay
Play Controls
PC-PT PC0
PC-PT PC1
SMARTPHONE-PT Smartphone0
TabletPC-PT Tablet PC0
WRT300N Wireless Router1
2960-24TT Switch1
PC-PT PC2
Server-PT Server0
Router-PT Router0

Task 02:

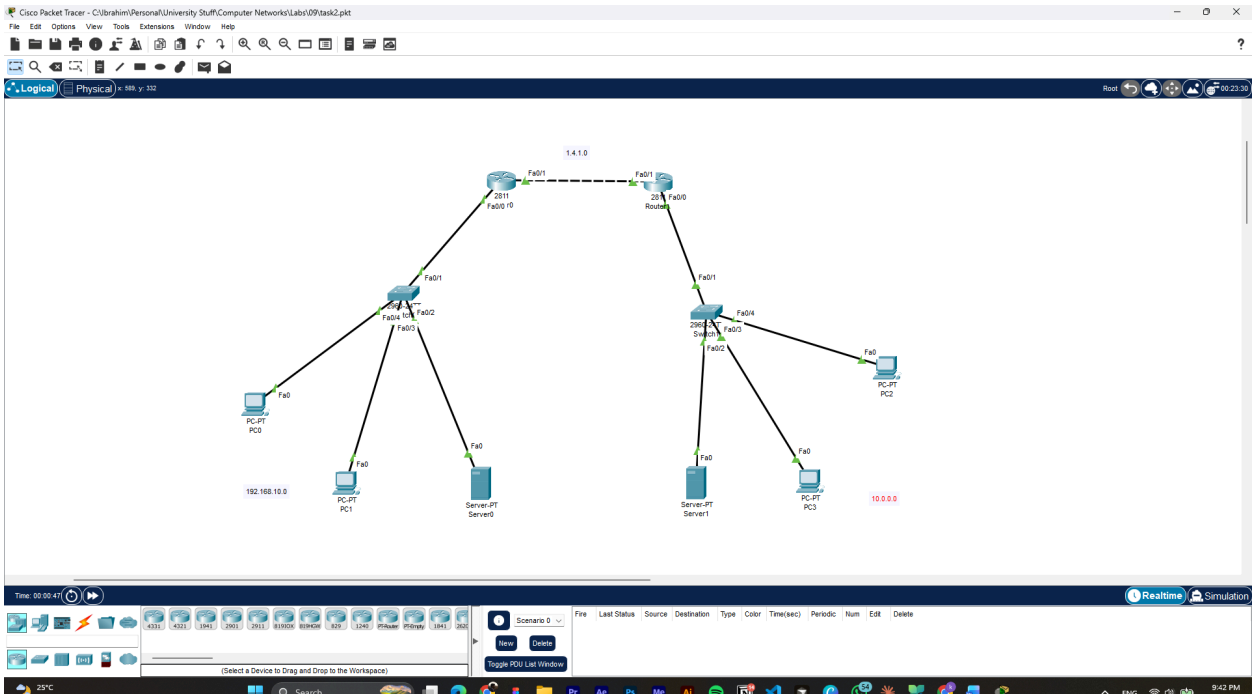
Cisco Packet Tracer - C:\Ibrahim\Personal\University Stuff\Computer Networks\Labs\09\task2.pkt
Logical
Physical
1.4.1.0
2811 Router
2811 Router
2960-24TT Switch1
PC-PT PC0
PC-PT PC1
Server-PT Server0
Server-PT Server1
PC-PT PC3
PC-PT PC2
192.168.10.0
10.0.0.0
Realtime
Simulation
(Select a Device to Drag and Drop to the Workspace)

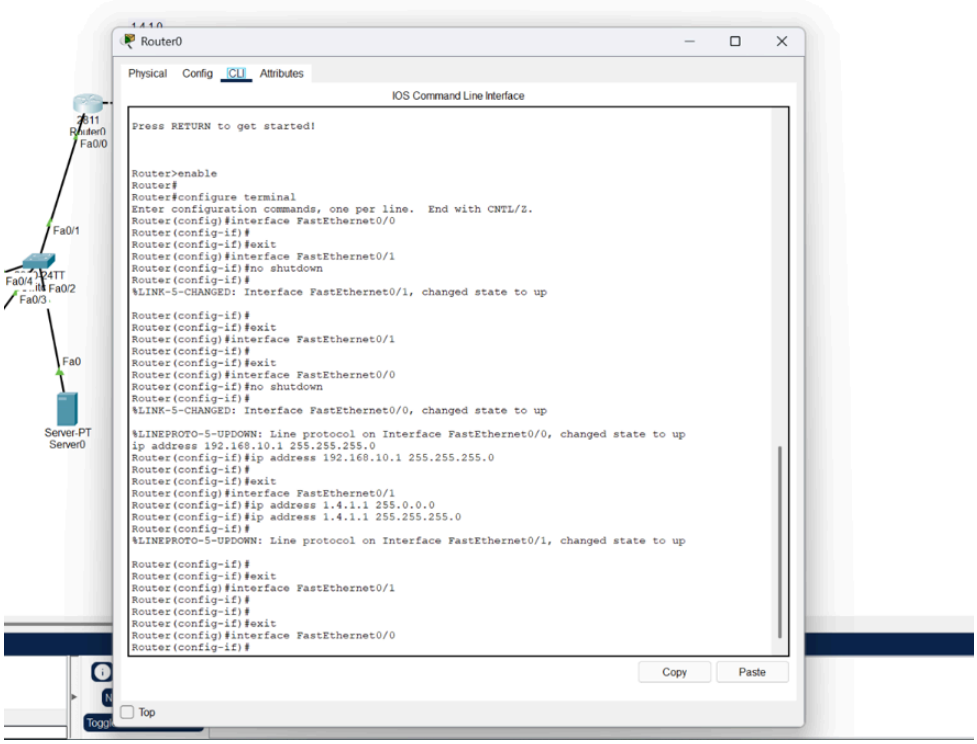


```
Press RETURN to get started!


Router>enable
Router#
Router#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#interface FastEthernet0/0
Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet0/1
Router(config-if)#no shutdown
Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up

Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet0/1
Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet0/0
Router(config-if)#no shutdown
Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up
ip address 192.168.10.1 255.255.255.0
Router(config-if)#ip address 192.168.10.1 255.255.255.0
Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet0/1
Router(config-if)#ip address 1.4.1.1 255.0.0.0
Router(config-if)#ip address 1.4.1.1 255.255.255.0
Router(config-if)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up

Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet0/1
Router(config-if)#
Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet0/0
Router(config-if)#
```

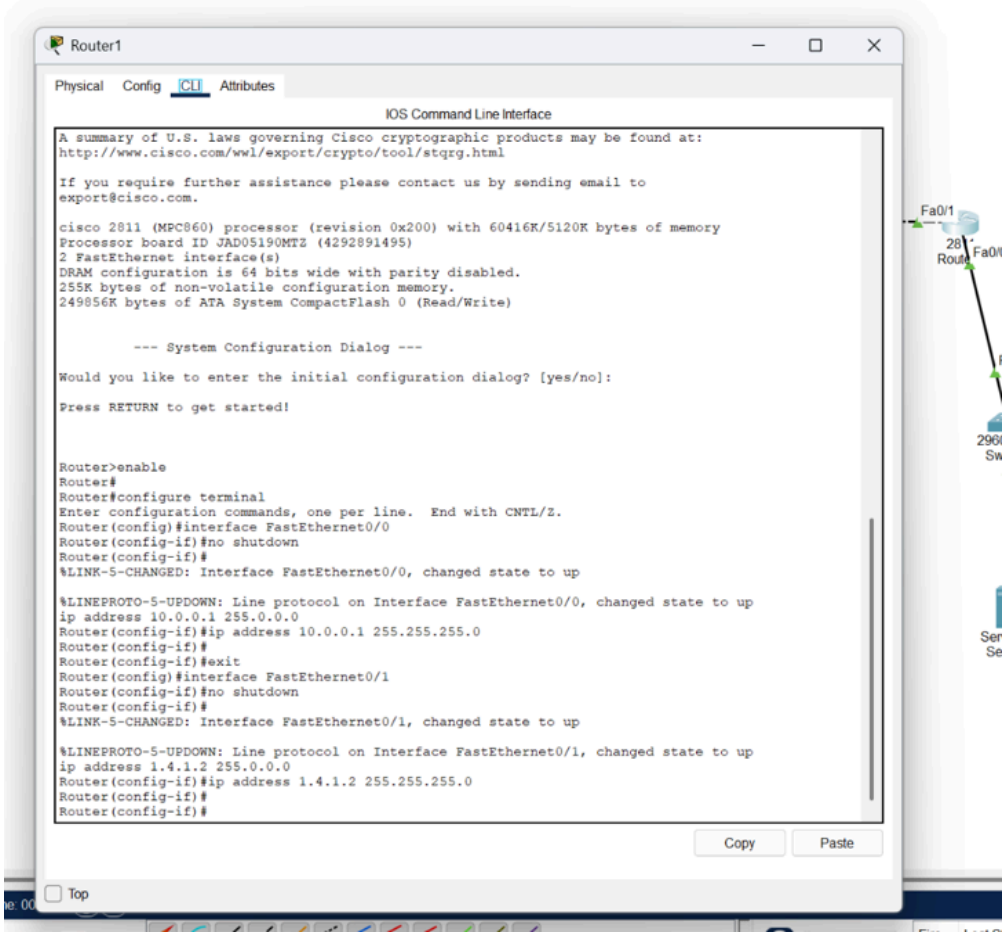


```
A summary of U.S. laws governing Cisco cryptographic products may be found at:
http://www.cisco.com/wwl/export/crypto/tool/stqrg.html

If you require further assistance please contact us by sending email to
export@cisco.com.

cisco 2811 (MPC860) processor (revision 0x200) with 60416K/5120K bytes of memory
Processor board ID JAD05190MTZ (4292891495)
2 FastEthernet interface(s)
DRAM configuration is 64 bits wide with parity disabled.
255K bytes of non-volatile configuration memory.
249856K bytes of ATA System CompactFlash 0 (Read/Write)


         --- System Configuration Dialog ---

Would you like to enter the initial configuration dialog? [yes/no]:

Press RETURN to get started!


Router>enable
Router#
Router#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#interface FastEthernet0/0
Router(config-if)#no shutdown
Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up
ip address 10.0.0.1 255.0.0.0
Router(config-if)#ip address 10.0.0.1 255.255.255.0
Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet0/1
Router(config-if)#no shutdown
Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up
ip address 1.4.1.2 255.0.0.0
Router(config-if)#ip address 1.4.1.2 255.255.255.0
Router(config-if)#
Router(config-if)#
```

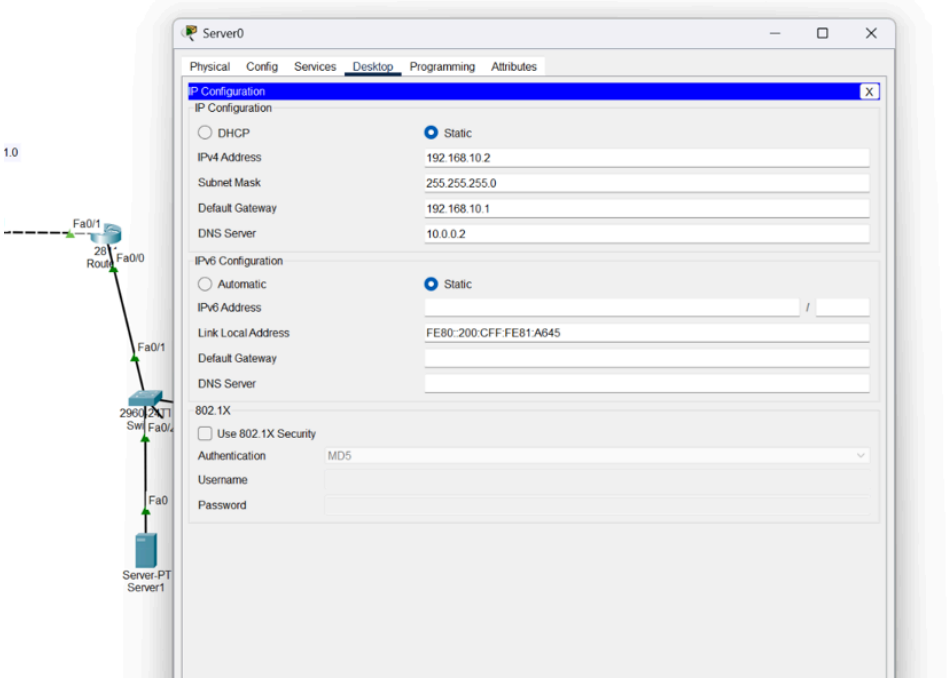
Server0
Physical
Config
Services
Desktop
Programming
Attributes
IP Configuration
IP Configuration
DHCP
Static
IPv4 Address
192.168.10.2
Subnet Mask
255.255.255.0
Default Gateway
192.168.10.1
DNS Server
10.0.0.2
IPv6 Configuration
Automatic
Static
IPv6 Address
Link Local Address
FE80::200:CFF:FE81:A645
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
1.0
Fa0/1
Fa0/0
Fa0/1
Fa0
Server-PT
Server1

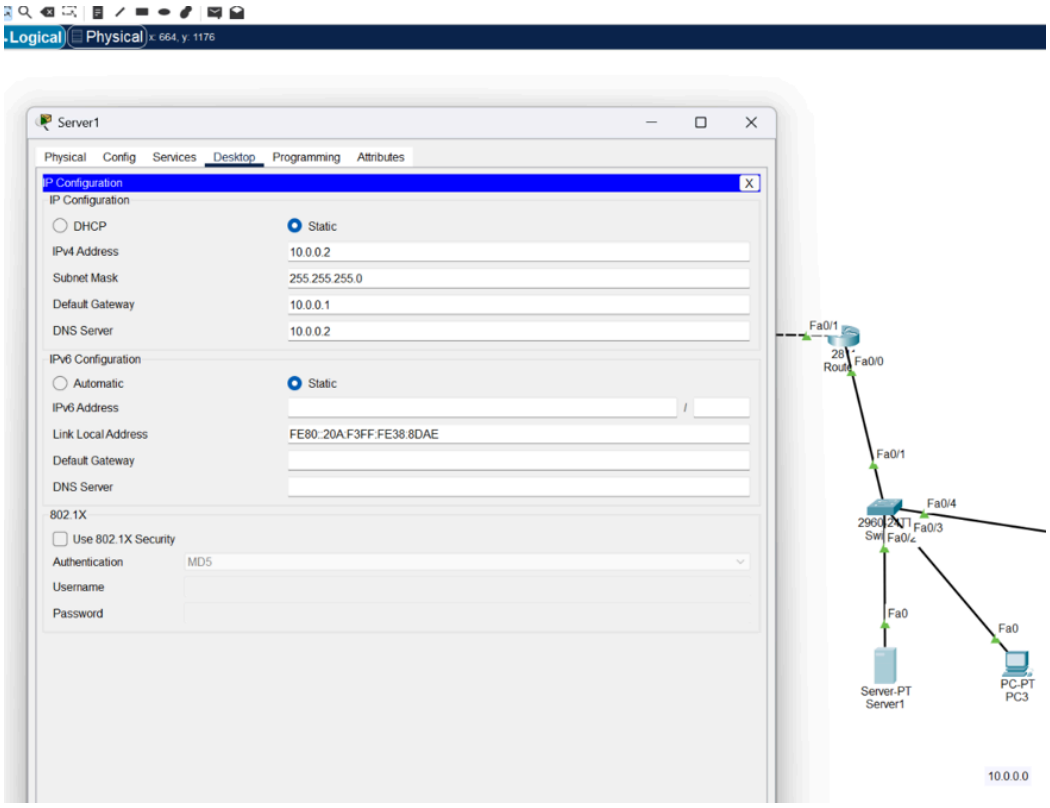
Logical
Physical
x: 664, y: 1176
Server1
Physical
Config
Services
Desktop
Programming
Attributes
IP Configuration
IP Configuration
DHCP
Static
IPv4 Address
10.0.0.2
Subnet Mask
255.255.255.0
Default Gateway
10.0.0.1
DNS Server
10.0.0.2
IPv6 Configuration
Automatic
Static
IPv6 Address
Link Local Address
FE80::20A:F3FF:FE38:8DAE
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Fa0/1
Fa0/0
Fa0/1
Fa0/4
Fa0/3
Fa0
Fa0
Server-PT
Server1
PC-PT
PC3
10.0.0.0

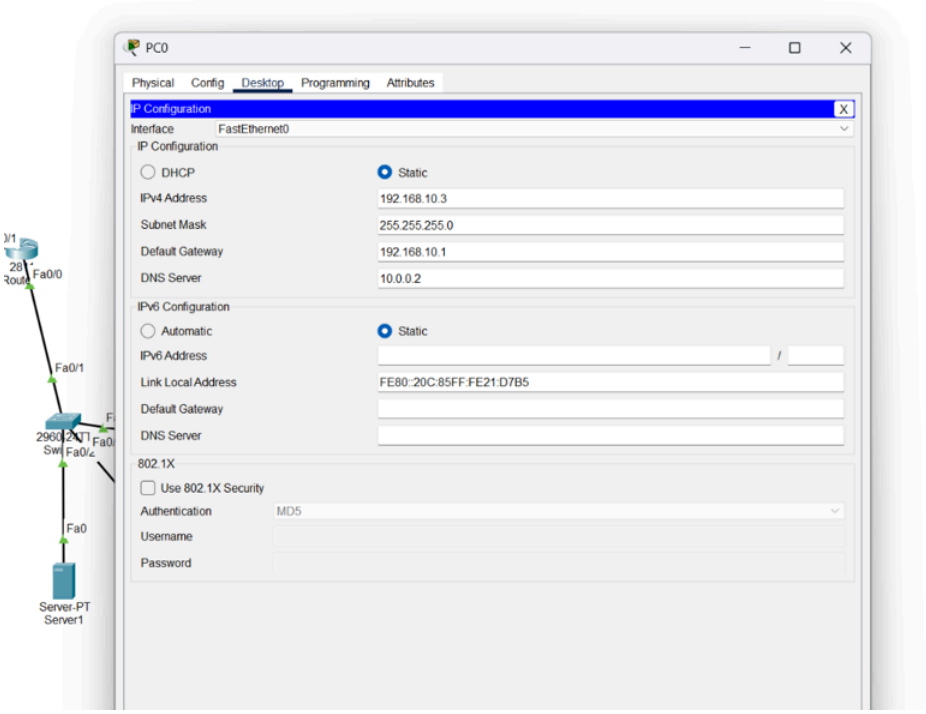
PC0
Physical
Config
Desktop
Programming
Attributes
IP Configuration
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.10.3
Subnet Mask
255.255.255.0
Default Gateway
192.168.10.1
DNS Server
10.0.0.2
IPv6 Configuration
Automatic
Static
IPv6 Address
Link Local Address
FE80::20C:85FF:FE21:D7B5
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Fa0/0
Fa0/1
Fa0
Server-PT
Server1

Logical
Physical
x: 1551, y: 706

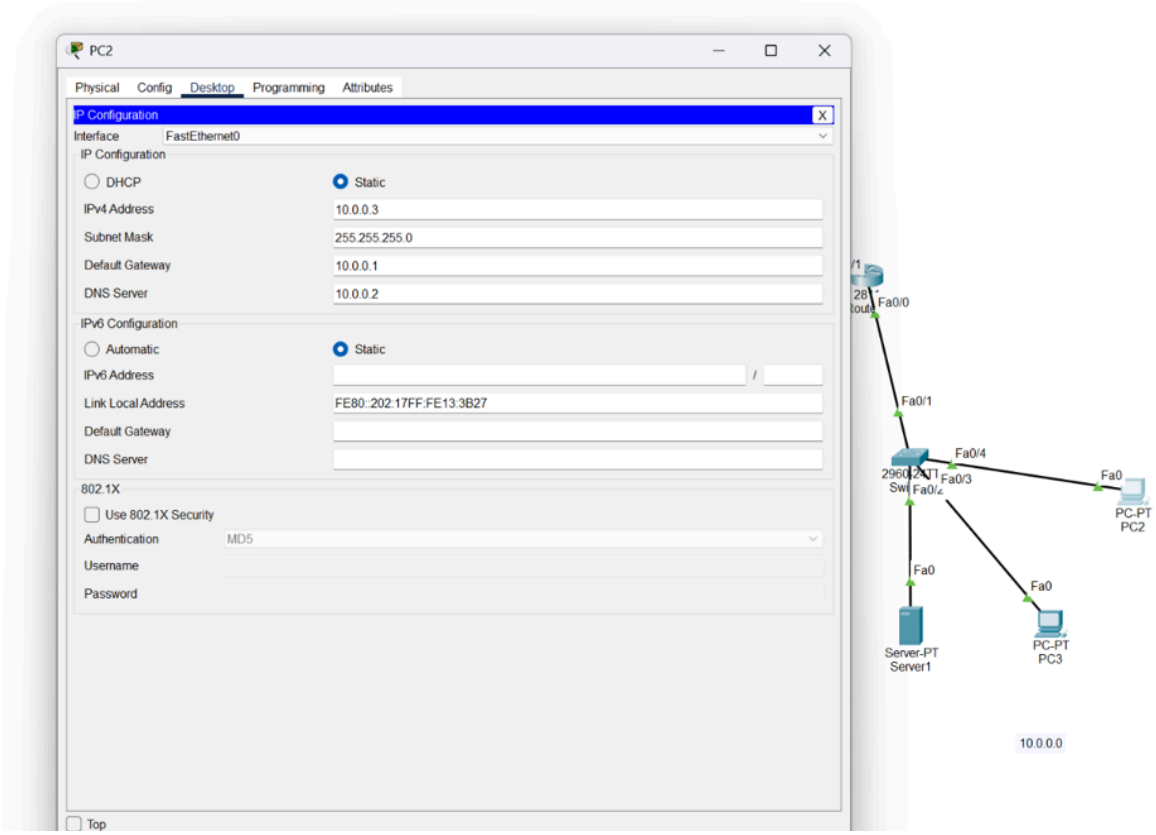
PC2
Physical
Config
Desktop
Programming
Attributes
IP Configuration
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
10.0.0.3
Subnet Mask
255.255.255.0
Default Gateway
10.0.0.1
DNS Server
10.0.0.2
IPv6 Configuration
Automatic
Static
IPv6 Address
Link Local Address
FE80::202:17FF:FE13:3B27
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top
Fa0/0
Fa0/1
Fa0/4
Fa0/3
Fa0
PC-PT
PC2
Fa0
Server-PT
Server1
Fa0
PC-PT
PC3
10.0.0.0

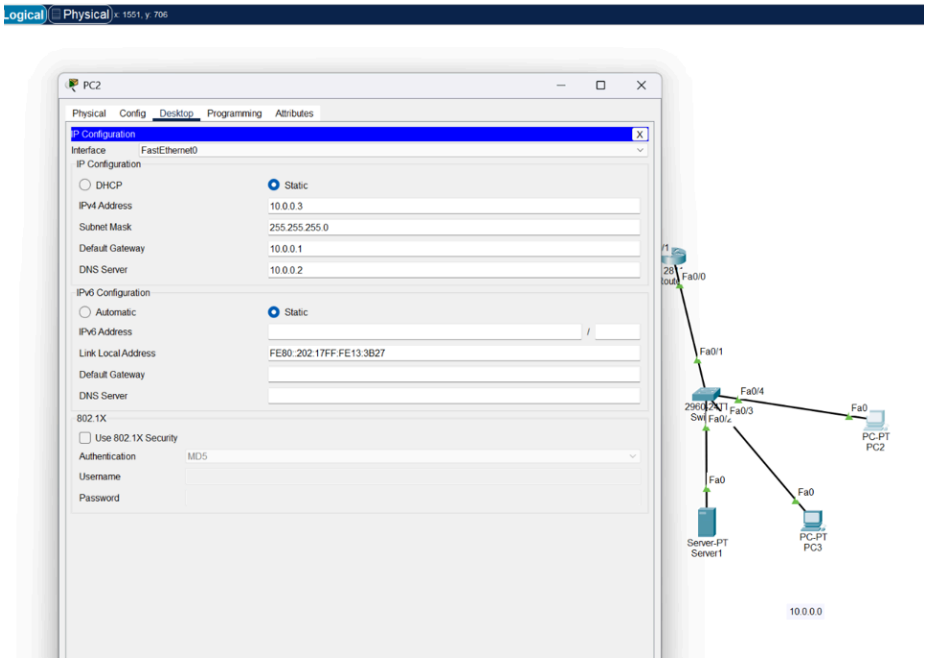
Logical
Physical
x: 1551, y: 706
PC2
Physical
Config
Desktop
Programming
Attributes
IP Configuration
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
10.0.0.3
Subnet Mask
255.255.255.0
Default Gateway
10.0.0.1
DNS Server
10.0.0.2
IPv6 Configuration
Automatic
Static
IPv6 Address
Link Local Address
FE80::202:17FF:FE13:3B27
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Fa0/0
Fa0/1
Fa0/4
Fa0/3
Fa0
PC-PT
PC2
Server-PT
Server1
PC-PT
PC3
10.0.0.0

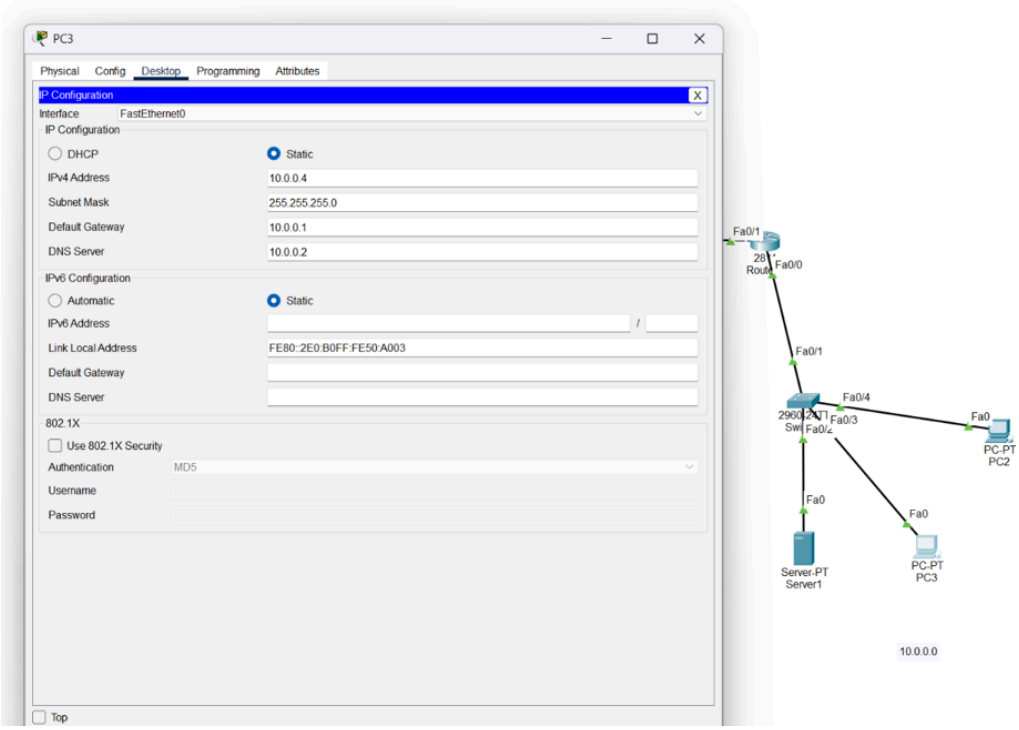
PC3
Physical
Config
Desktop
Programming
Attributes
IP Configuration
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
10.0.0.4
Subnet Mask
255.255.255.0
Default Gateway
10.0.0.1
DNS Server
10.0.0.2
IPv6 Configuration
Automatic
Static
IPv6 Address
Link Local Address
FE80::2E0:B0FF:FE50:A003
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top
Fa0/1
Fa0/0
Fa0/1
Fa0/4
Fa0/3
Fa0
PC-PT
PC2
Fa0
Server-PT
Server1
Fa0
PC-PT
PC3
10.0.0.0

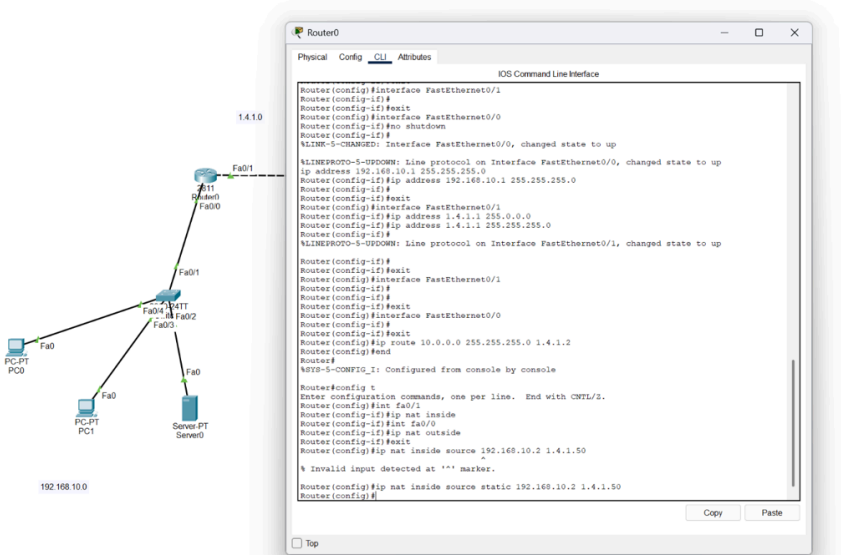
Router0
Physical
Config
CLI
Attributes
IOS Command Line Interface
Router(config)#interface FastEthernet0/1
Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet0/0
Router(config-if)#no shutdown
Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up
ip address 192.168.10.1 255.255.255.0
Router(config-if)#ip address 192.168.10.1 255.255.255.0
Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet0/1
Router(config-if)#ip address 1.4.1.1 255.0.0.0
Router(config-if)#ip address 1.4.1.1 255.255.255.0
Router(config-if)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up
Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet0/1
Router(config-if)#
Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet0/0
Router(config-if)#
Router(config-if)#exit
Router(config)#ip route 10.0.0.0 255.255.255.0 1.4.1.2
Router(config)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#int fa0/1
Router(config-if)#ip nat inside
Router(config-if)#int fa0/0
Router(config-if)#ip nat outside
Router(config-if)#exit
Router(config)#ip nat inside source 192.168.10.2 1.4.1.50
^
% Invalid input detected at '^' marker.
Router(config)#ip nat inside source static 192.168.10.2 1.4.1.50
Router(config)#
Copy
Paste
Top
1.4.1.0
Fa0/1
Fa0/0
Fa0/1
Fa0/4
Fa0/2
Fa0/3
Fa0
Fa0
Fa0
PC-PT
PC0
PC-PT
PC1
Server-PT
Server0
192.168.10.0

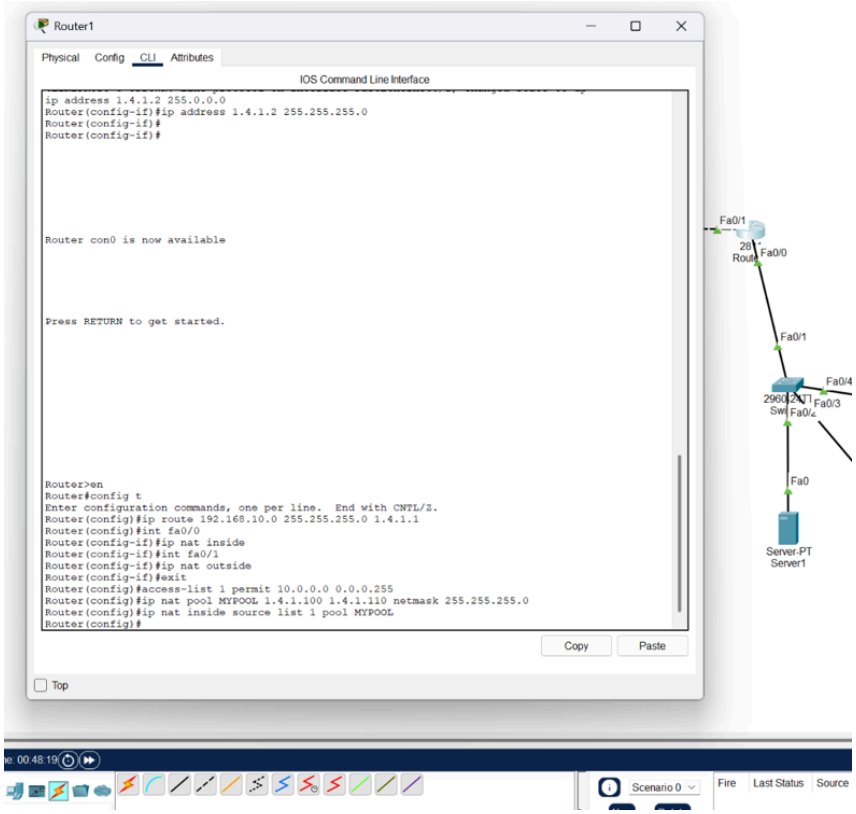
Router1
Physical
Config
CLI
Attributes
IOS Command Line Interface
ip address 1.4.1.2 255.0.0.0
Router(config-if)#ip address 1.4.1.2 255.255.255.0
Router(config-if)#
Router(config-if)#
Router con0 is now available
Press RETURN to get started.
Router>en
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip route 192.168.10.0 255.255.255.0 1.4.1.1
Router(config)#int fa0/0
Router(config-if)#ip nat inside
Router(config-if)#int fa0/1
Router(config-if)#ip nat outside
Router(config-if)#exit
Router(config)#access-list 1 permit 10.0.0.0 0.0.0.255
Router(config)#ip nat pool MYPOOL 1.4.1.100 1.4.1.110 netmask 255.255.255.0
Router(config)#ip nat inside source list 1 pool MYPOOL
Router(config)#
Copy
Paste
Top
Fa0/1
Fa0/0
Fa0/1
Fa0/4
Fa0/3
Fa0
Server-PT
Server1
Scenario 0
Fire
Last Status
Source

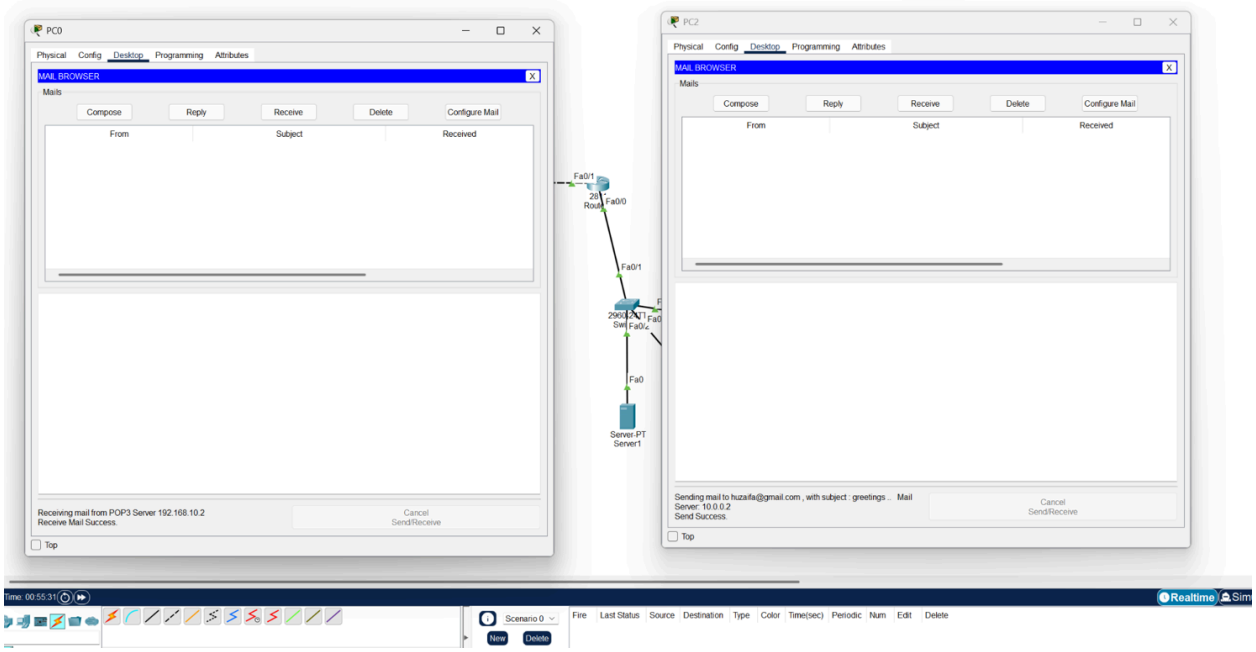
PC0
Physical
Config
Desktop
Programming
Attributes
MAIL BROWSER
Mails
Compose
Reply
Receive
Delete
Configure Mail
From
Subject
Received
Receiving mail from POP3 Server 192.168.10.2
Receive Mail Success.
Cancel
Send/Receive
Top
Fa0/1
Fa0/0
Fa0/1
Fa0
Server-PT
Server1
PC2
Sending mail to huzaifa@gmail.com , with subject : greetings ... Mail
Server: 10.0.0.2
Send Success.
Realtime
Scenario 0
New
Delete
Fire
Last Status
Source
Destination
Type
Color
Time(sec)
Periodic
Num
Edit
Delete

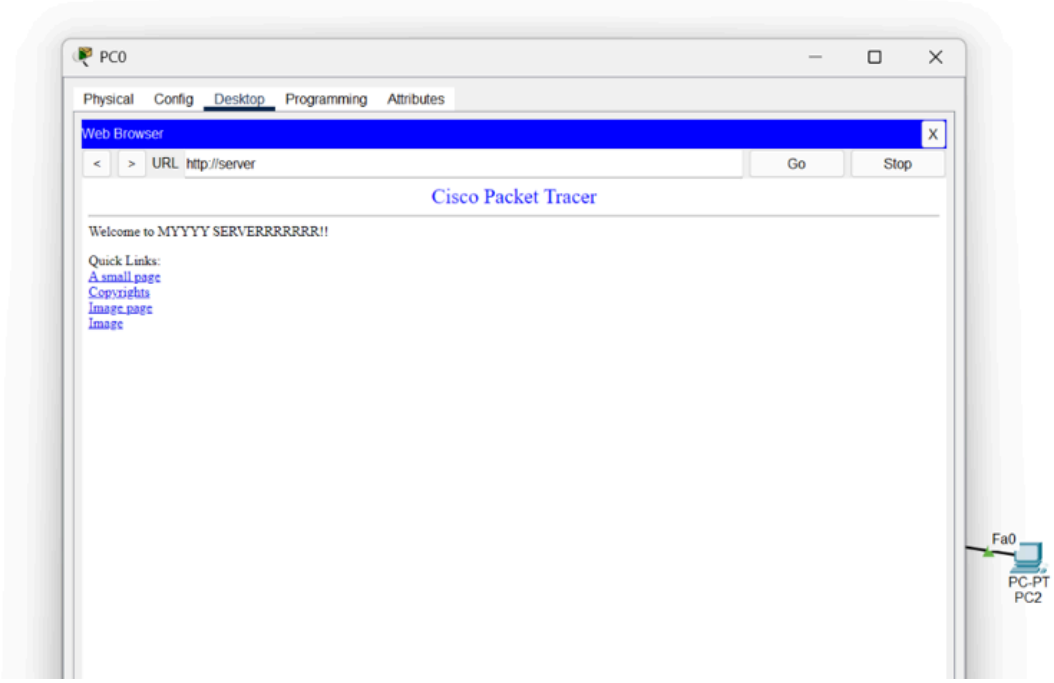
PC0
Physical
Config
Desktop
Programming
Attributes
Web Browser
URL
http://server
Go
Stop
Cisco Packet Tracer
Welcome to MYYYY SERVERRRRRRR!!
Quick Links:
A small page
Copyrights
Image page
Image
Fa0
PC-PT
PC2