PHILIPS

**BVP150 LED30/CW PSU 30W SWB G4**

911401863588



# Essential SmartBright G6 LED Floodlight, 3000 lm, 30 W, 865 cool daylight, 110°, Safety class I, Mounting bracket

Essential SmartBright G6 LED Floodlight is the new successor with robust die-cast aluminum housing and corrosion-proof coating which suitable for general outdoor application. Product has high efficacy which is energy saving for customers. Product has anti-siphon function to ensure a reliable performance in the long lifetime.

## General Information

| | |
|---|---|
| Number of gear units | 1 unit |
| Gear | EB [Electronic] |
| Driver included | Yes |
| Light source engine type | LED |
| Warranty period | 2 years |

## Light Technical

| | |
|---|---|
| Luminous Flux | 3,000 lm |
| Correlated Color Temperature (Nom) | 6500 K |
| Luminous Efficacy (rated) (Nom) | 100 lm/W |
| Color rendering index (CRI) | ≥80 |
| Number of light sources | 1 |
| Beam angle of light source | 110 degree(s) |
| Light source color | 865 cool daylight |
| Optic type | Reflector |
| Luminaire light beam spread | 110° |
| Unified glare rating CEN | Not applicable |
| Effective projected area | 0.013 $m^2$ |

## Operating and Electrical

| | |
|---|---|
| Input Voltage | 220 to 240 V |
| Line Frequency | 50 or 60 Hz |
| Inrush current | 3 A |
| Inrush time | 0.03 ms |
| Power Consumption | 30 W |
| Power Factor (Fraction) | 0.9 |
| Connection | Flying leads/wires |
| Cable | Cable 0.6 m without plug |

| | |
|---|---|
| Number of products on MCB of 16 A type B | 72 |
| Suitable for random switching | No |
| Protection class IEC | Safety class I |

## Controls and Dimming

| | |
|---|---|
| Dimmable | - |
| Control interface | - |
| Maximum dim level | Not applicable |

## Mechanical and Housing

| | |
|---|---|
| Housing Material | Aluminum die-cast |
| Reflector material | Polycarbonate |
| Optic material | Glass |
| Optical cover material | Tempered glass |
| Housing Color | Black |
| Mounting device | Mounting bracket |
| Optical cover finish | Clear |
| Overall length | 181 mm |
| Overall width | 143 mm |
| Overall height | 23 mm |
| Dimensions (Height x Width x Depth) | 23 x 143 x 181 mm |
| Ingress protection code | IP65 [Water-protected] |
| Mech. impact protection code | IK06 [1 J] |
| Optical cover type | Tempered glass |
| Net Weight (Piece) | 0.440 kg |

## Approval and Application

| | |
|---|---|
| Glow-wire test | Temperature 650 °C, duration 30 s |
| Flammability mark | For mounting on normally flammable surfaces |
| CE mark | Yes |
| ENEC mark | - |
| Photobiological risk | Photobiological risk group 1 @200mm to EN62778 |
| Photobiological risk specification | 0.2 m |
| EU RoHS compliant | Yes |
| Performance ambient temperature Tq | 25 °C |
| Ambient temperature range | -40 to +50 °C |


## Initial Performance (IEC Compliant)

| | |
|---|---|
| Luminous flux tolerance | +/-10% |
| Initial chromaticity | (0.31, 0.34) SDCM≤6 |
| Power consumption tolerance | +/-10% |

## Product Data

| | |
|---|---|
| Order product name | BVP150 LED30/CW PSU 30W SWB G4 |
| Full product name | BVP150 LED30/CW PSU 30W SWB G4 |
| Full product code | 872110334110599 |
| Order code | 911401863588 |
| Material Nr. (12NC) | 911401863588 |
| Numerator - Quantity Per Pack | 1 |
| EAN/UPC - Product/Case | 8721103341105 |
| Numerator - Packs per outer box | 24 |
| EAN/UPC - Case | 8721103341426 |

## Dimensional drawing

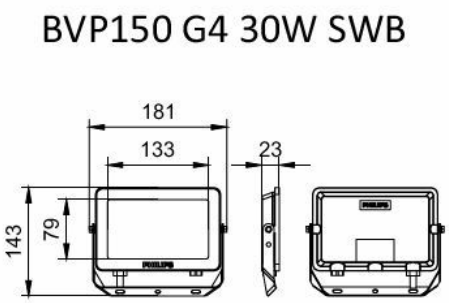


## Related Documents

| Photometry and lighting design | Document Name | Download |
|---|---|---|
| IES File | IES-BVP150G4-30W-4000K6500K.ies | Download |

© 2026 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.