


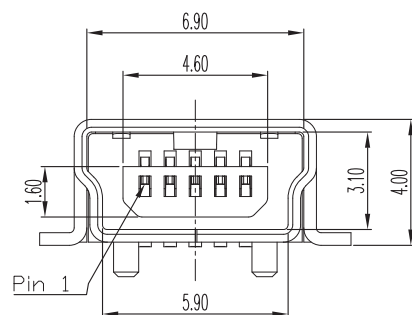



Specifications:
 Current Rating:1.0A AC/DC
 Voltage Rating:30V AC/DC
 Contact Resistance:20m ohm. max.
 Insulation Resistance:1,000M ohm. min.
 Withstanding Voltage:750V AC For One Minute
 Operating Temperature Range:-40°C to +105°C
 Material and Finish
 Insulator:High Temp. plastic.(LCP UL94V-0)
 Insulator Color:Black
 Contact:Phosphor Bronze
 Plating:Gold Plated on Contact area,
 Tin Plated on Solder tail.
 Shell:Brass,Tin Plated
 Packing:Tube
 How To Order
 5075BMR-05-SM



DETAIL A
 SCALE 2/1

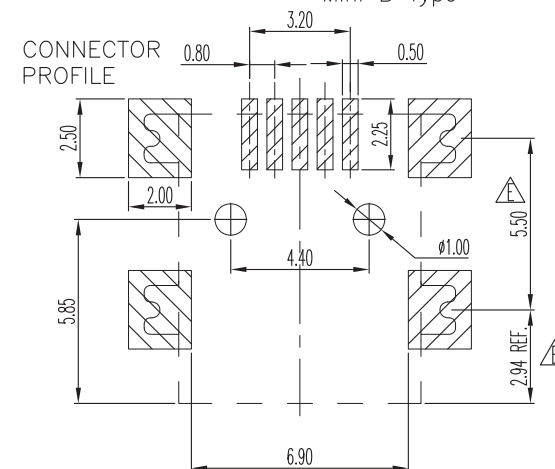

Recommended PCB Layout RoHS Compliant

				DRAWN: Andrew	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	<div></div> <div>繼德工業股份有限公司 Neltron Industrial Co., Ltd.</div>		
F				CHECKED: Jeremy Liu	UNIT: MM	DESCRIPTION: Mini USB Socket 5P B Type		SIZE A4
E	10-Jul-2007	ECN-CN070715	Andrew		SCALE:1:1			
D	28-Sep-2005	(PC0001)	Cel king	APPROVAL: Mike Wu	SHEET: 1 / 1	PART NO: 5075BMR-05-SM		
REV	DATE	FILE	BY		PROJECTION: 