## SIPMOS ® Power Transistor

- N channel
- Enhancement mode
- Avalanche-rated
- Logic Level
- dv/dt rated
- Ultra low on-resistance
- 175 °C operating temperature
- also in TO-220 SMD available

VPT05155
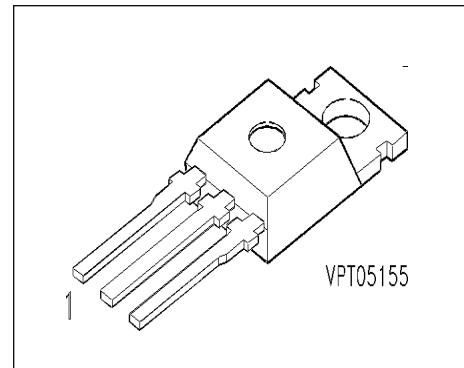
Pin 1	Pin 2	Pin 3
G	D	S

Type	V_{DS}	I_D	$R_{DS(on)}$	Package	Ordering Code
BUZ 100L	50 V	60 A	0.018 Ω	TO-220 AB	C67078-S1354-A2

Maximum Ratings

Parameter	Symbol	Values	Unit
Continuous drain current T_C = 101 °C	I_D	60	A
Pulsed drain current T_C = 25 °C	I_{Dpuls}	240	
Avalanche energy, single pulse I_D = 60 A, V_{DD} = 25 V, R_{GS} = 25 Ω L = 70 µH, T_j = 25 °C	E_{AS}	250	mJ
Reverse diode dv/dt I_S = 60 A, V_{DS} = 40 V, di_F/dt = 200 A/µs T_{jmax} = 175 °C	dv/dt	6	kV/µs
Gate source voltage	V_{GS}	± 14	V
Gate-source peak voltage, aperiodic	V_{gs}	± 20	
Power dissipation T_C = 25 °C	P_{tot}	250	W

Maximum Ratings

Parameter	Symbol	Values	Unit
Operating temperature	T_j	-55 ... + 175	°C
Storage temperature	T_{stg}	-55 ... + 175	
Thermal resistance, chip case	R_{thJC}	≤ 0.6	K/W
Thermal resistance, chip to ambient	R_{thJA}	≤ 75	
DIN humidity category, DIN 40 040		E	
IEC climatic category, DIN IEC 68-1		55 / 175 / 56	

Electrical Characteristics, at T_j = 25°C, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	

Static Characteristics

Parameter	Symbol	min.	typ.	max.	Unit
Drain- source breakdown voltage	$V_{(BR)DSS}$				V
$V_{GS} = 0$ V, $I_D = 0.25$ mA, $T_j = -40$ °C		50	-	-	
Gate threshold voltage	$V_{GS(th)}$				
$V_{GS} = V_{DS}$, $I_D = 1$ mA		1.2	1.6	2	
Zero gate voltage drain current	I_{DSS}				
$V_{DS} = 50$ V, $V_{GS} = 0$ V, $T_j = 25$ °C		-	0.1	1	µA
$V_{DS} = 50$ V, $V_{GS} = 0$ V, $T_j = -40$ °C		-	1	100	nA
$V_{DS} = 50$ V, $V_{GS} = 0$ V, $T_j = 150$ °C		-	10	100	µA
Gate-source leakage current	I_{GSS}				nA
$V_{GS} = 20$ V, $V_{DS} = 0$ V		-	10	100	
Drain-Source on-resistance	$R_{DS(on)}$				Ω
$V_{GS} = 5$ V, $I_D = 30$ A		-	0.014	0.018	

Electrical Characteristics, at $T_j = 25°C$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	**typ.**	**max.**	
Dynamic Characteristics					
Transconductance $V_{DS} \geq 2 * I_D * R_{DS(on)max}$, $I_D = 30$ A	g_{fs}	25	45	-	S
Input capacitance $V_{GS} = 0$ V, $V_{DS} = 25$ V, $f = 1$ MHz	C_{iss}	-	2800	3750	pF
Output capacitance $V_{GS} = 0$ V, $V_{DS} = 25$ V, $f = 1$ MHz	C_{oss}	-	830	1250	
Reverse transfer capacitance $V_{GS} = 0$ V, $V_{DS} = 25$ V, $f = 1$ MHz	C_{rss}	-	350	525	
Turn-on delay time $V_{DD} = 30$ V, $V_{GS} = 5$ V, $I_D = 3$ A $R_{GS} = 50 \ \Omega$	$t_{d(on)}$	-	45	70	ns
Rise time $V_{DD} = 30$ V, $V_{GS} = 5$ V, $I_D = 3$ A $R_{GS} = 50 \ \Omega$	t_r	-	140	210	
Turn-off delay time $V_{DD} = 30$ V, $V_{GS} = 5$ V, $I_D = 3$ A $R_{GS} = 50 \ \Omega$	$t_{d(off)}$	-	350	470	
Fall time $V_{DD} = 30$ V, $V_{GS} = 5$ V, $I_D = 3$ A $R_{GS} = 50 \ \Omega$	t_f	-	100	135	

Electrical Characteristics, at T_j = 25°C, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Reverse Diode					
Inverse diode continuous forward current T_C = 25 °C	I_S	-	-	60	A
Inverse diode direct current,pulsed T_C = 25 °C	I_{SM}	-	-	240	
Inverse diode forward voltage V_{GS} = 0 V, I_F = 120 A	V_{SD}	-	1.15	1.8	V
Reverse recovery time V_R = 30 V, $I_{F=}I_S$, di_F/dt = 100 A/µs	t_{rr}	-	85	-	ns
Reverse recovery charge V_R = 30 V, $I_{F=}I_S$, di_F/dt = 100 A/µs	Q_{rr}	-	130	-	µC

Power dissipation

$P_{tot} = f(T_C)$
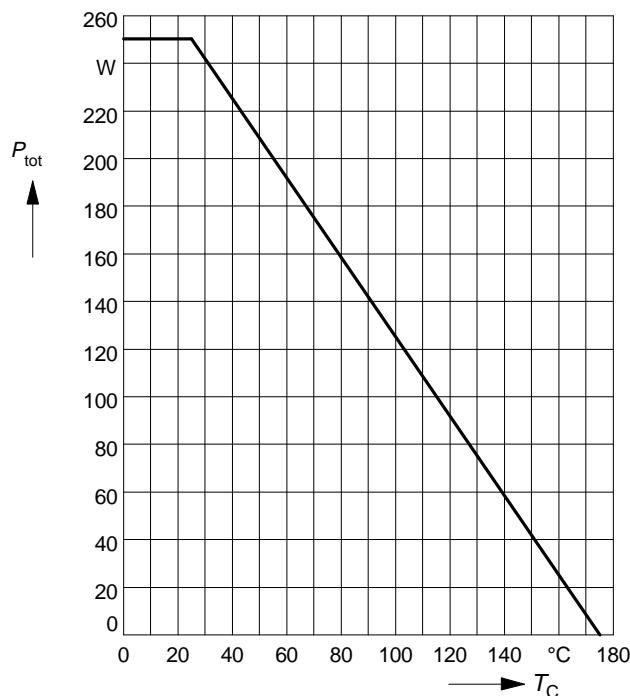
Drain current

$I_D = f(T_C)$
parameter: $V_{GS} \geq 5$ V
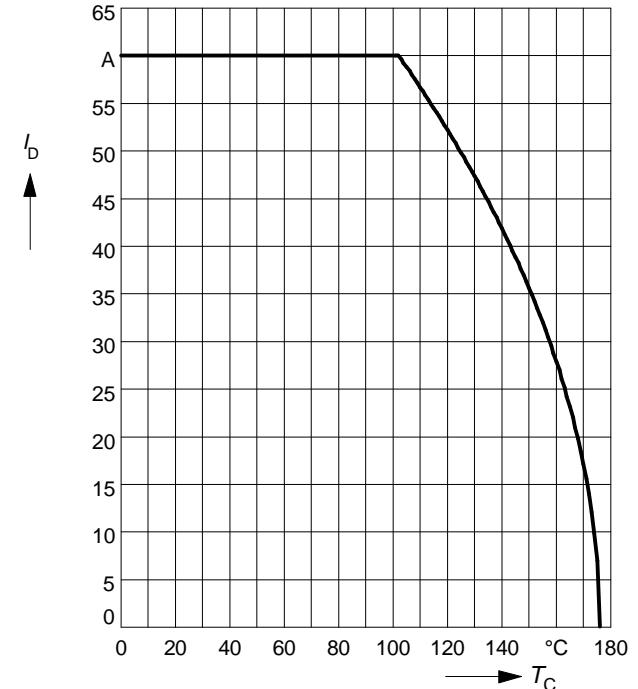
Safe operating area

$I_D = f(V_{DS})$
parameter: $D = 0.01$, $T_C = 25°C$
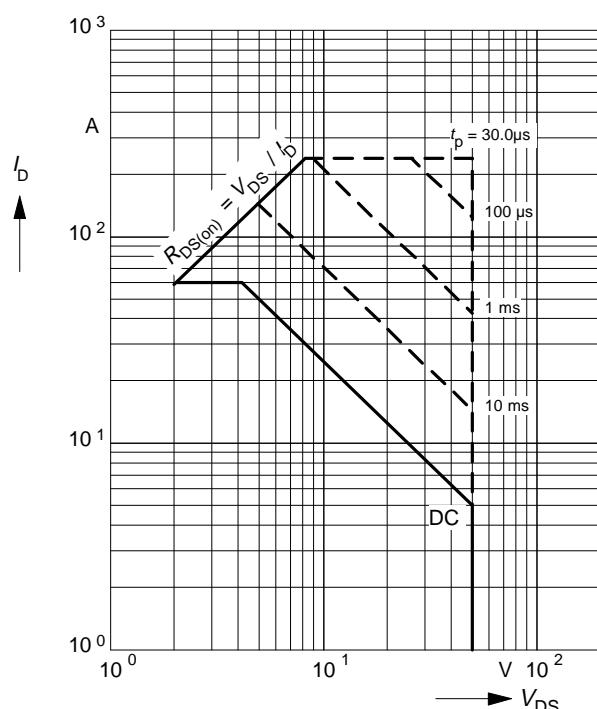
Transient thermal impedance

$Z_{th\ JC} = f(t_p)$
parameter: $D = t_p / T$
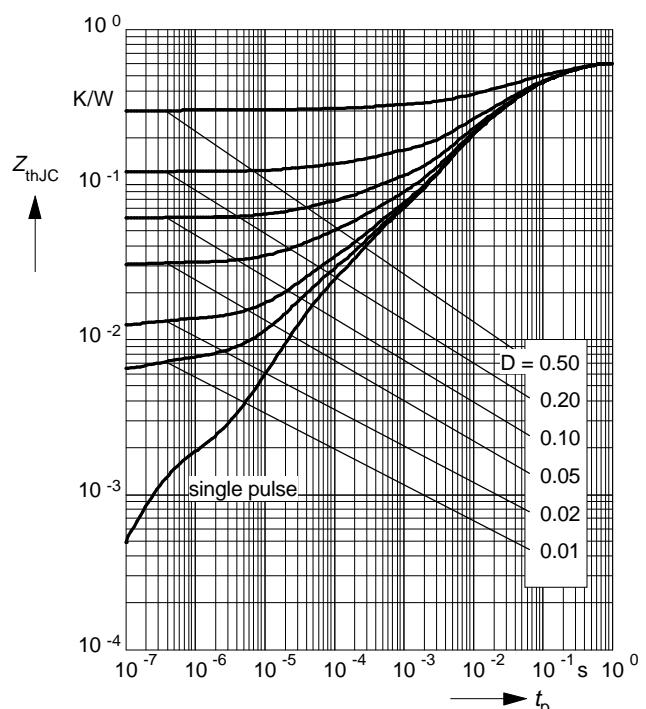
Typ. output characteristics

$I_D = f(V_{DS})$
parameter: $t_p = 80$ µs


Drain-source on-resistance

$R_{DS\,(on)} = f(T_j)$
parameter: $I_D = 30$ A, $V_{GS} = 5$ V

Typ. transfer characteristics $I_D = f(V_{GS})$

parameter: $t_p = 80$ µs
$V_{DS} \geq 2 \times I_D \times R_{DS(on)max}$
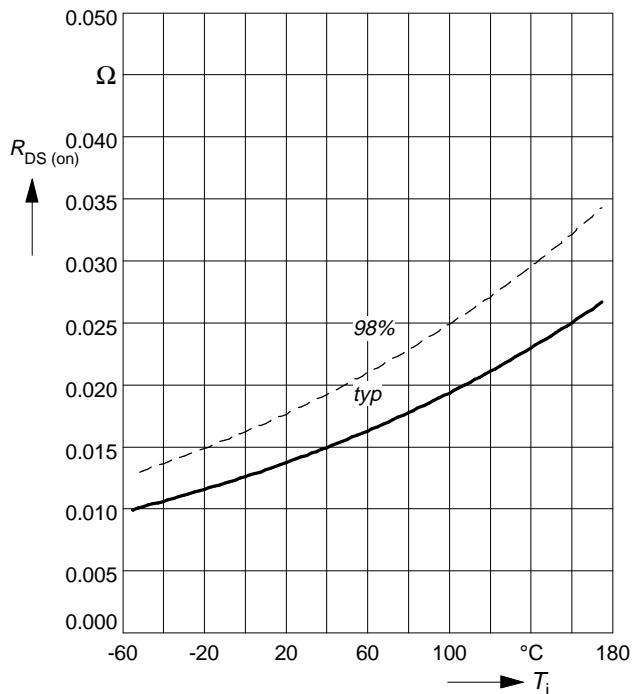
Typ. forward transconductance $g_{fs} = f(I_D)$

parameter: $t_p = 80$ µs,
$V_{DS} \geq 2 \times I_D \times R_{DS(on)max}$
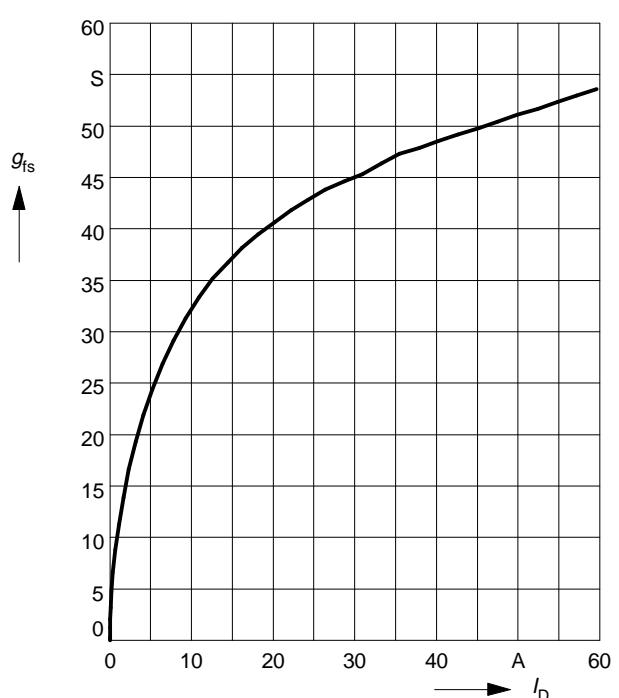
Typ. drain-source on-resistance

$R_{DS\,(on)} = f(I_D)$
parameter: V_{GS}
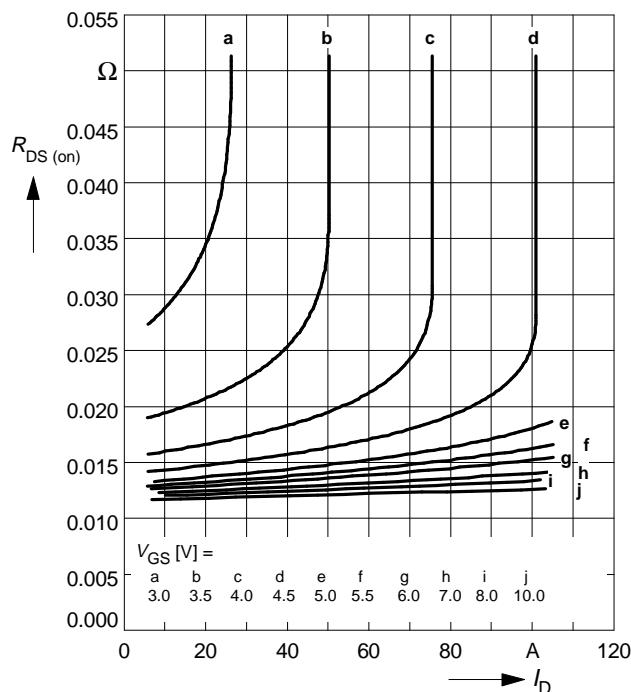
Gate threshold voltage

$V_{GS\,(th)} = f(T_j)$
parameter: $V_{GS} = V_{DS}$, $I_D = 1$ mA
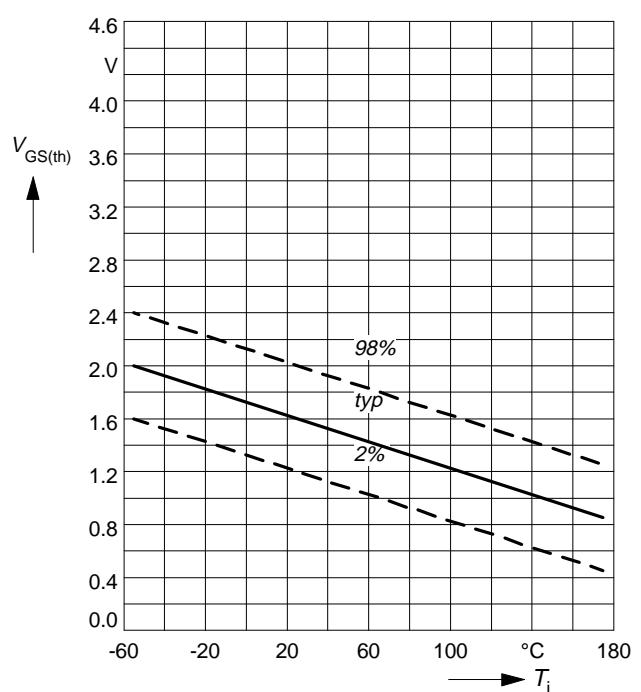
Typ. capacitances

$C = f(V_{DS})$
parameter: $V_{GS} = 0V$, $f = 1$MHz
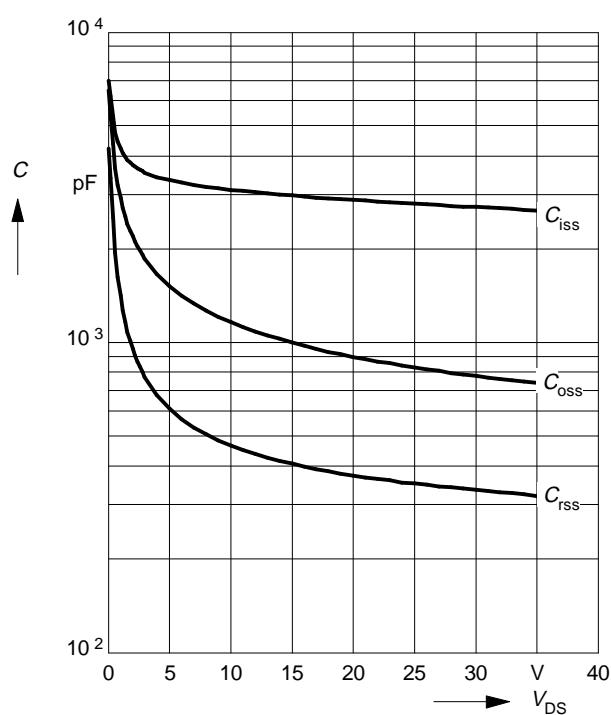
Forward characteristics of reverse diode

$I_F = f(V_{SD})$
parameter: T_j, $t_p = 80$ µs
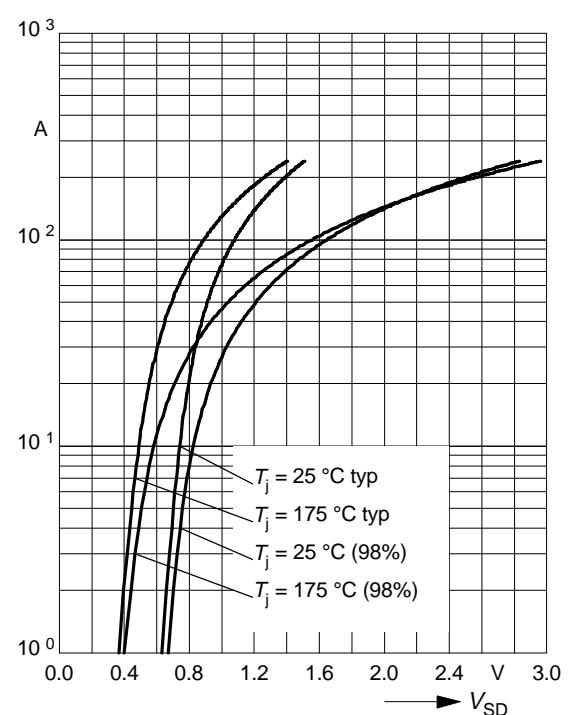
Avalanche energy $E_{AS} = f(T_j)$
parameter: $I_D = 60$ A, $V_{DD} = 25$ V
$R_{GS} = 25$ Ω, $L = 70$ µH
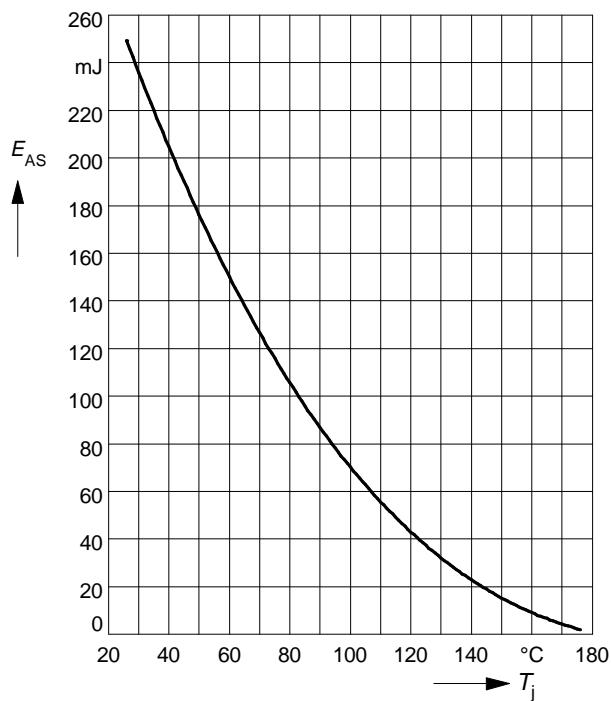
Typ. gate charge
$V_{GS} = f(Q_{Gate})$
parameter: $I_{D\ puls} = 90$ A
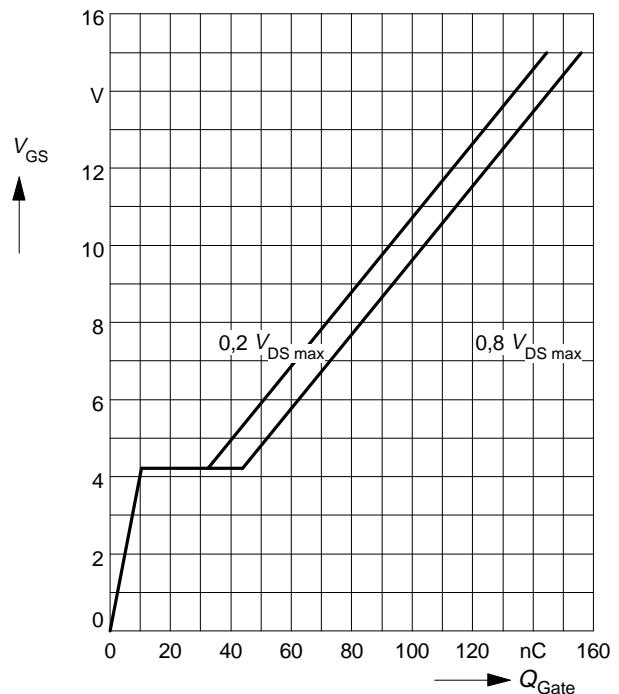
**Drain-source breakdown voltage**
$V_{(BR)DSS} = f(T_j)$
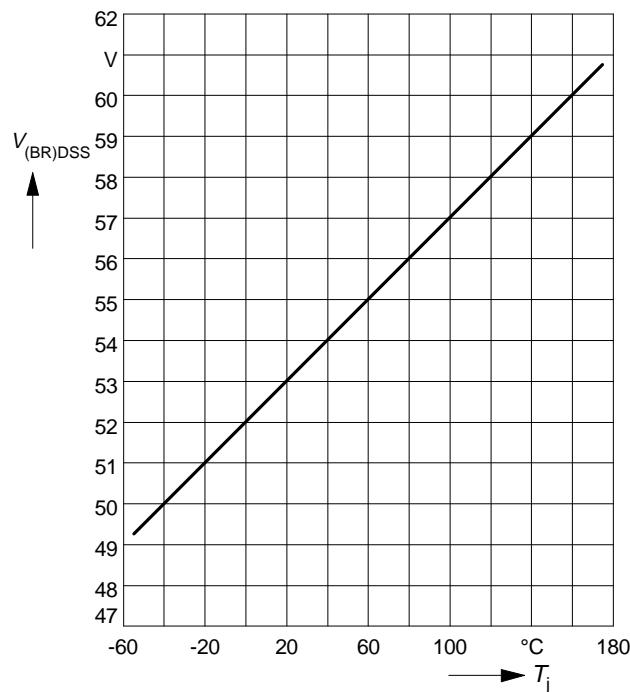
Package Outlines

TO-220 AB

Dimension in mm
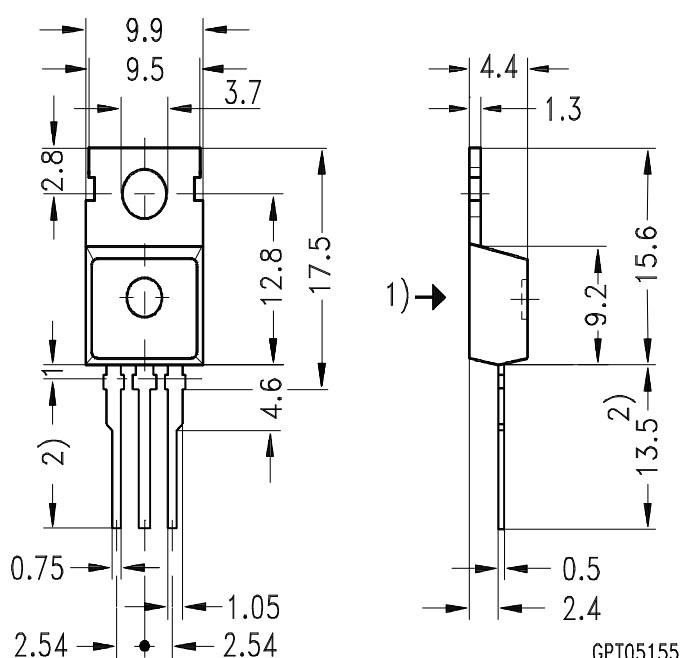
1) punch direction, burr max. 0.04

2) dip tinning

3) max. 14.5 by dip tinning press burr max. 0.05