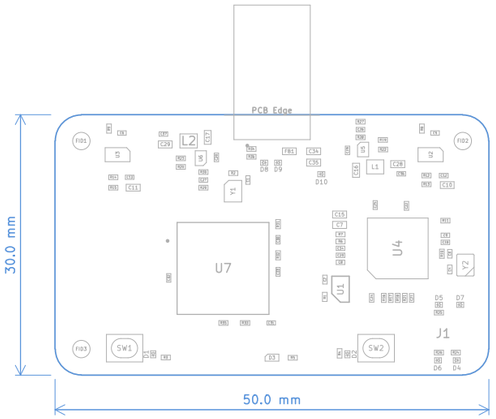


## BOARD CHARACTERISTICS

| | | | |
|---|---|---|---|
| Copper Layer Count: | 4 | Board Thickness: | 0.8012 mm |
| Board overall dimensions: | 50.0000 mm x 30.0000 mm | | |
| Min track/spacing: | 0.1270 mm / 0.1000 mm | Min hole diameter: | 0.2000 mm |
| Copper Finish: | ENIG | Impedance Control: | Yes |
| Castellated pads: | No | Plated Board Edge: | No |
| Edge card connectors: | No | | |

JLC04161H-7628 0.8mm

| Layer Name | Type | Material | Thickness (mm) | Color | Epsilon R | Loss Tangent |
|---|---|---|---|---|---|---|
| F.Silkscreen | Top Silk Screen | Not specified | 0 mm | White | 1 | 0 |
| F.Paste | Top Solder Paste | | 0 mm | | 1 | 0 |
| F.Mask | Top Solder Mask | Not specified | 0.015 mm | Green | 3.3 | 0 |
| F.Cu | copper | | 0.035 mm | | 1 | 0 |
| Dielectric 1 | core | FR4 | 0.2104 mm | | 4.6 | 0.02 |
| In1.Cu | copper | | 0.0152 mm | | 1 | 0 |
| Dielectric 2 | prepreg | FR4 | 0.25 mm | | 4.6 | 0.02 |
| In2.Cu | copper | | 0.0152 mm | | 1 | 0 |
| Dielectric 3 | core | FR4 | 0.2104 mm | | 4.6 | 0.02 |
| B.Cu | copper | | 0.035 mm | | 1 | 0 |
| B.Mask | Bottom Solder Mask | Not specified | 0.015 mm | Green | 3.3 | 0 |
| B.Paste | Bottom Solder Paste | | 0 mm | | 1 | 0 |
| B.Silkscreen | Bottom Silk Screen | Not specified | 0 mm | White | 1 | 0 |

USB-C Thermal Camera based on RP2040 and Flir lepton

**www.cezarchirila.com**

Sheet:

File: picothermal-hardware.kicad_pcb

***Title: picothermal***

| | | |
|---|---|---|
| Size: A4 | Date: 2022-12-26 | **Rev: 1.0** |
| KiCad E.D.A. kicad (6.0.9) | | Id: 1/1 |