


FAX 06-6748-2464

Email: kanaonline@kana.co.jp [blank]



Request for quotation

| | |
|--------------|-------------|
| Company name | |
| Division | |
| Name | |
| Address | |
| Phone | |
| FAX | |
| E-mail | |
| Ordernumber | FBK80B13D30 |

| | |
|----------|--|
| Quantity | |
|----------|--|

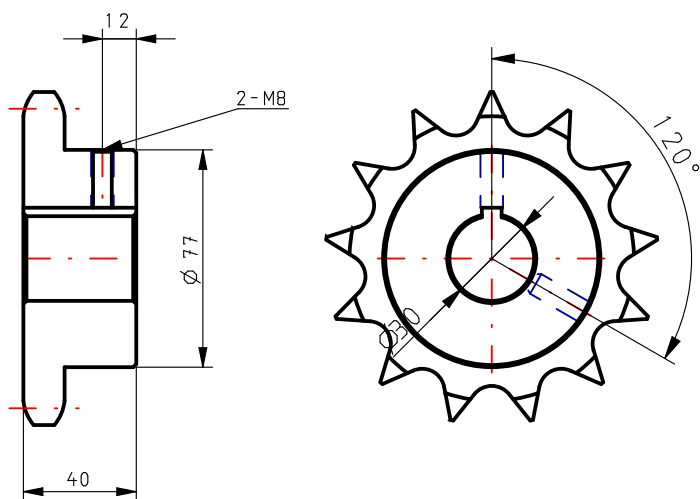

| |
|----------|
| Comments |
|----------|

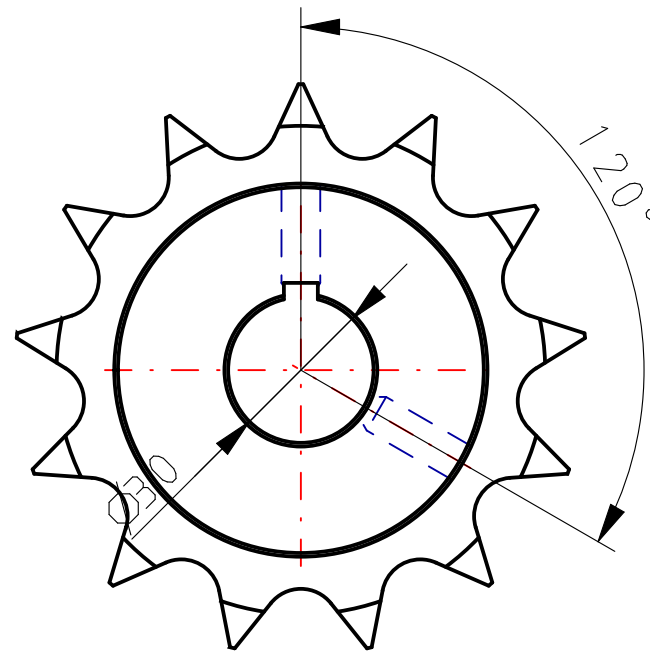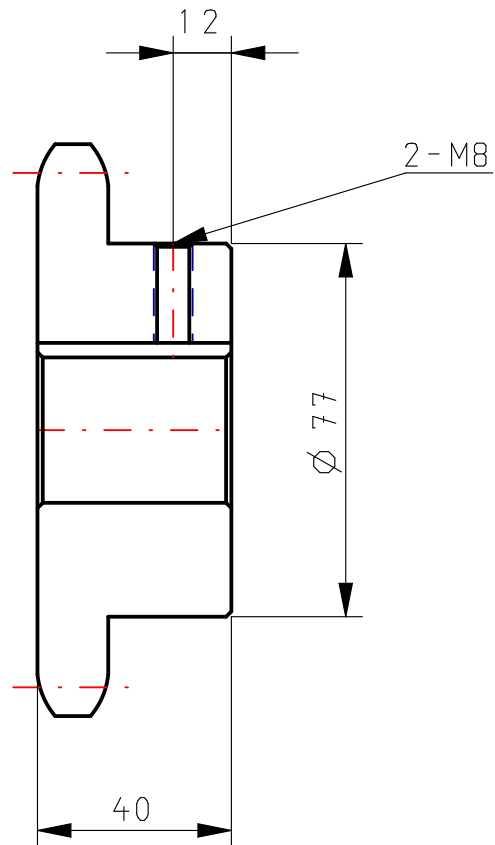

based on JIS B 1802

| | | | | |
|---------------------------------|---------------------------|-----------------------------------|--|-----------|
| Classification of Dimension | Middle Class ± 0.2 | Ordernumber FBK80B13D30 | | |
| More than 0.5 - 3 and fewer | | | | |
| More than 3 - 6 and fewer | | | | |
| More than 6 - 30 and fewer | ± 0.2 | Scale 1/Free | | |
| More than 30 - 120 and fewer | ± 0.3 | | | |
| More than 120 - 400 and fewer | ± 0.5 | | | |
| More than 400 - 1000 and fewer | ± 0.8 | 26/01/2022 18:35 | | 片山チエン株式会社 |
| More than 1000 - 2000 and fewer | ± 1.2 | | | |

FAX 06-6748-2464

Email: kanaonline@kana.co.jp [blank]

FBK80B

FBK80B13D30

| | |
|--|---|
| TYPE (Type) | FBK80B |
| NOT (Number of teeth) | 13 |
| DP (Pitch dia / mm) | 106.14 |
| DO (Outer dia / mm) | 118 |
| DC (Teeth bottom dia / mm) | 90.26 |
| DC2 (Caliper dia / mm) | 89.49 |
| T (Width of teeth / mm) | 14.6 |
| MAT (Hardeningtempering) | Induction hardening |
| MATC (Comments for hardeningtempering) | |
| SHAPE (Shape of sprocket) | C : Cutting type |
| SD (Bore diameter / mm) | 30 |
| M (Tapped hole size) | M8 |
| NOTHP (Number of tapped holes) | 2 |
| A (Position of Tapped hole / mm) | 12 |
| SURFT (Surface treatment) | No symbol : No |
| CAUTION (Caution) | The tooth profile in the CAD models differ from the actual shape. |