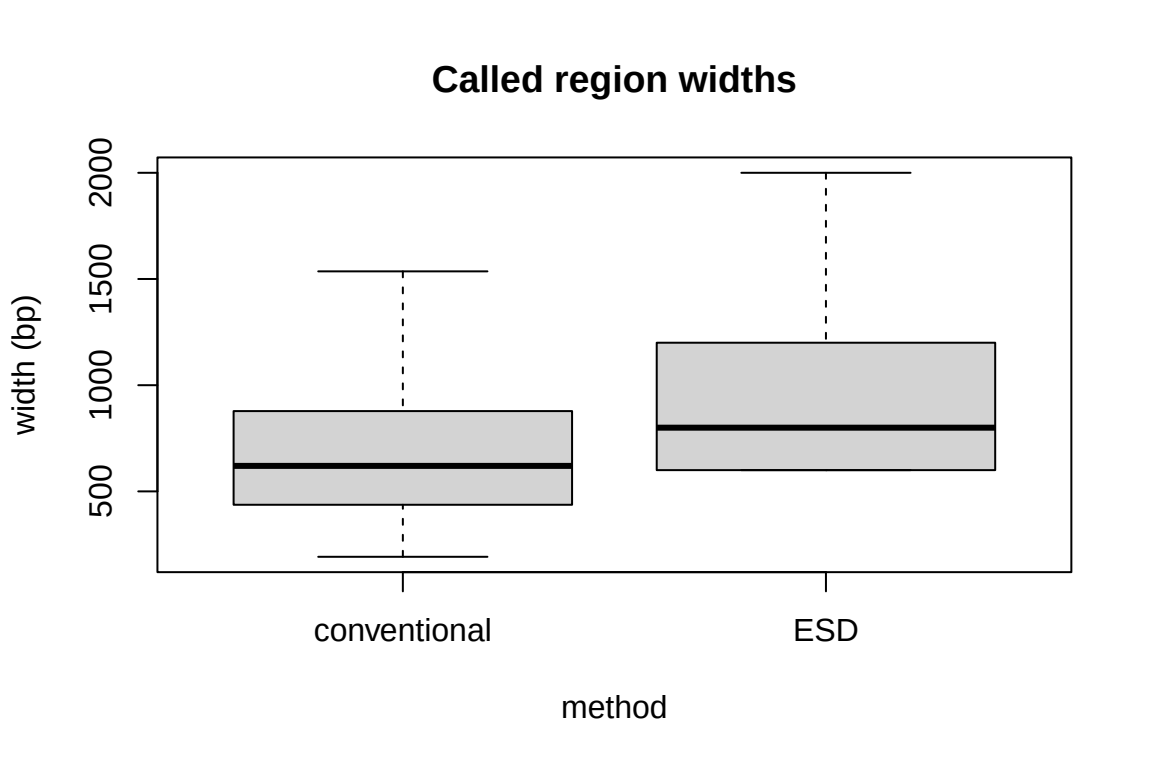
Called region widths
width (bp)
500
1000
1500
2000
conventional
ESD
method