

Config 9 (0.05|0.9|1|1|0.52|0.5| 0.7|simultaneous) [BINARY]

K (treatment arms) : 1

J (looks) : 1

p (target win-prob) : 0.52

p0 (null win-prob) : 0.5

method : simultaneous

true response rates : control $\pi_c = 0.700$

effect $\pi_t = 0.740$ ($= \pi_c + 2p-1$)

target alpha = 0.05 target power = 0.9

SIMULATED OPERATING CHARACTERISTICS (Bernoulli, stats.ptest)

Power (P reject ≥ 1 | H1) : 0.9012

FWER (P reject ≥ 1 | H0) : 0.0517


Max sample size (planned) : 4314

ESS under H1 : 4314.0

ESS under H0 : 4314.0

NB: design powered for the binary test (δ/σ), so achieved power should track the target; residual gap is small-sample discreteness, not misspecification.

Config 9 – sample size (H1) [binary]

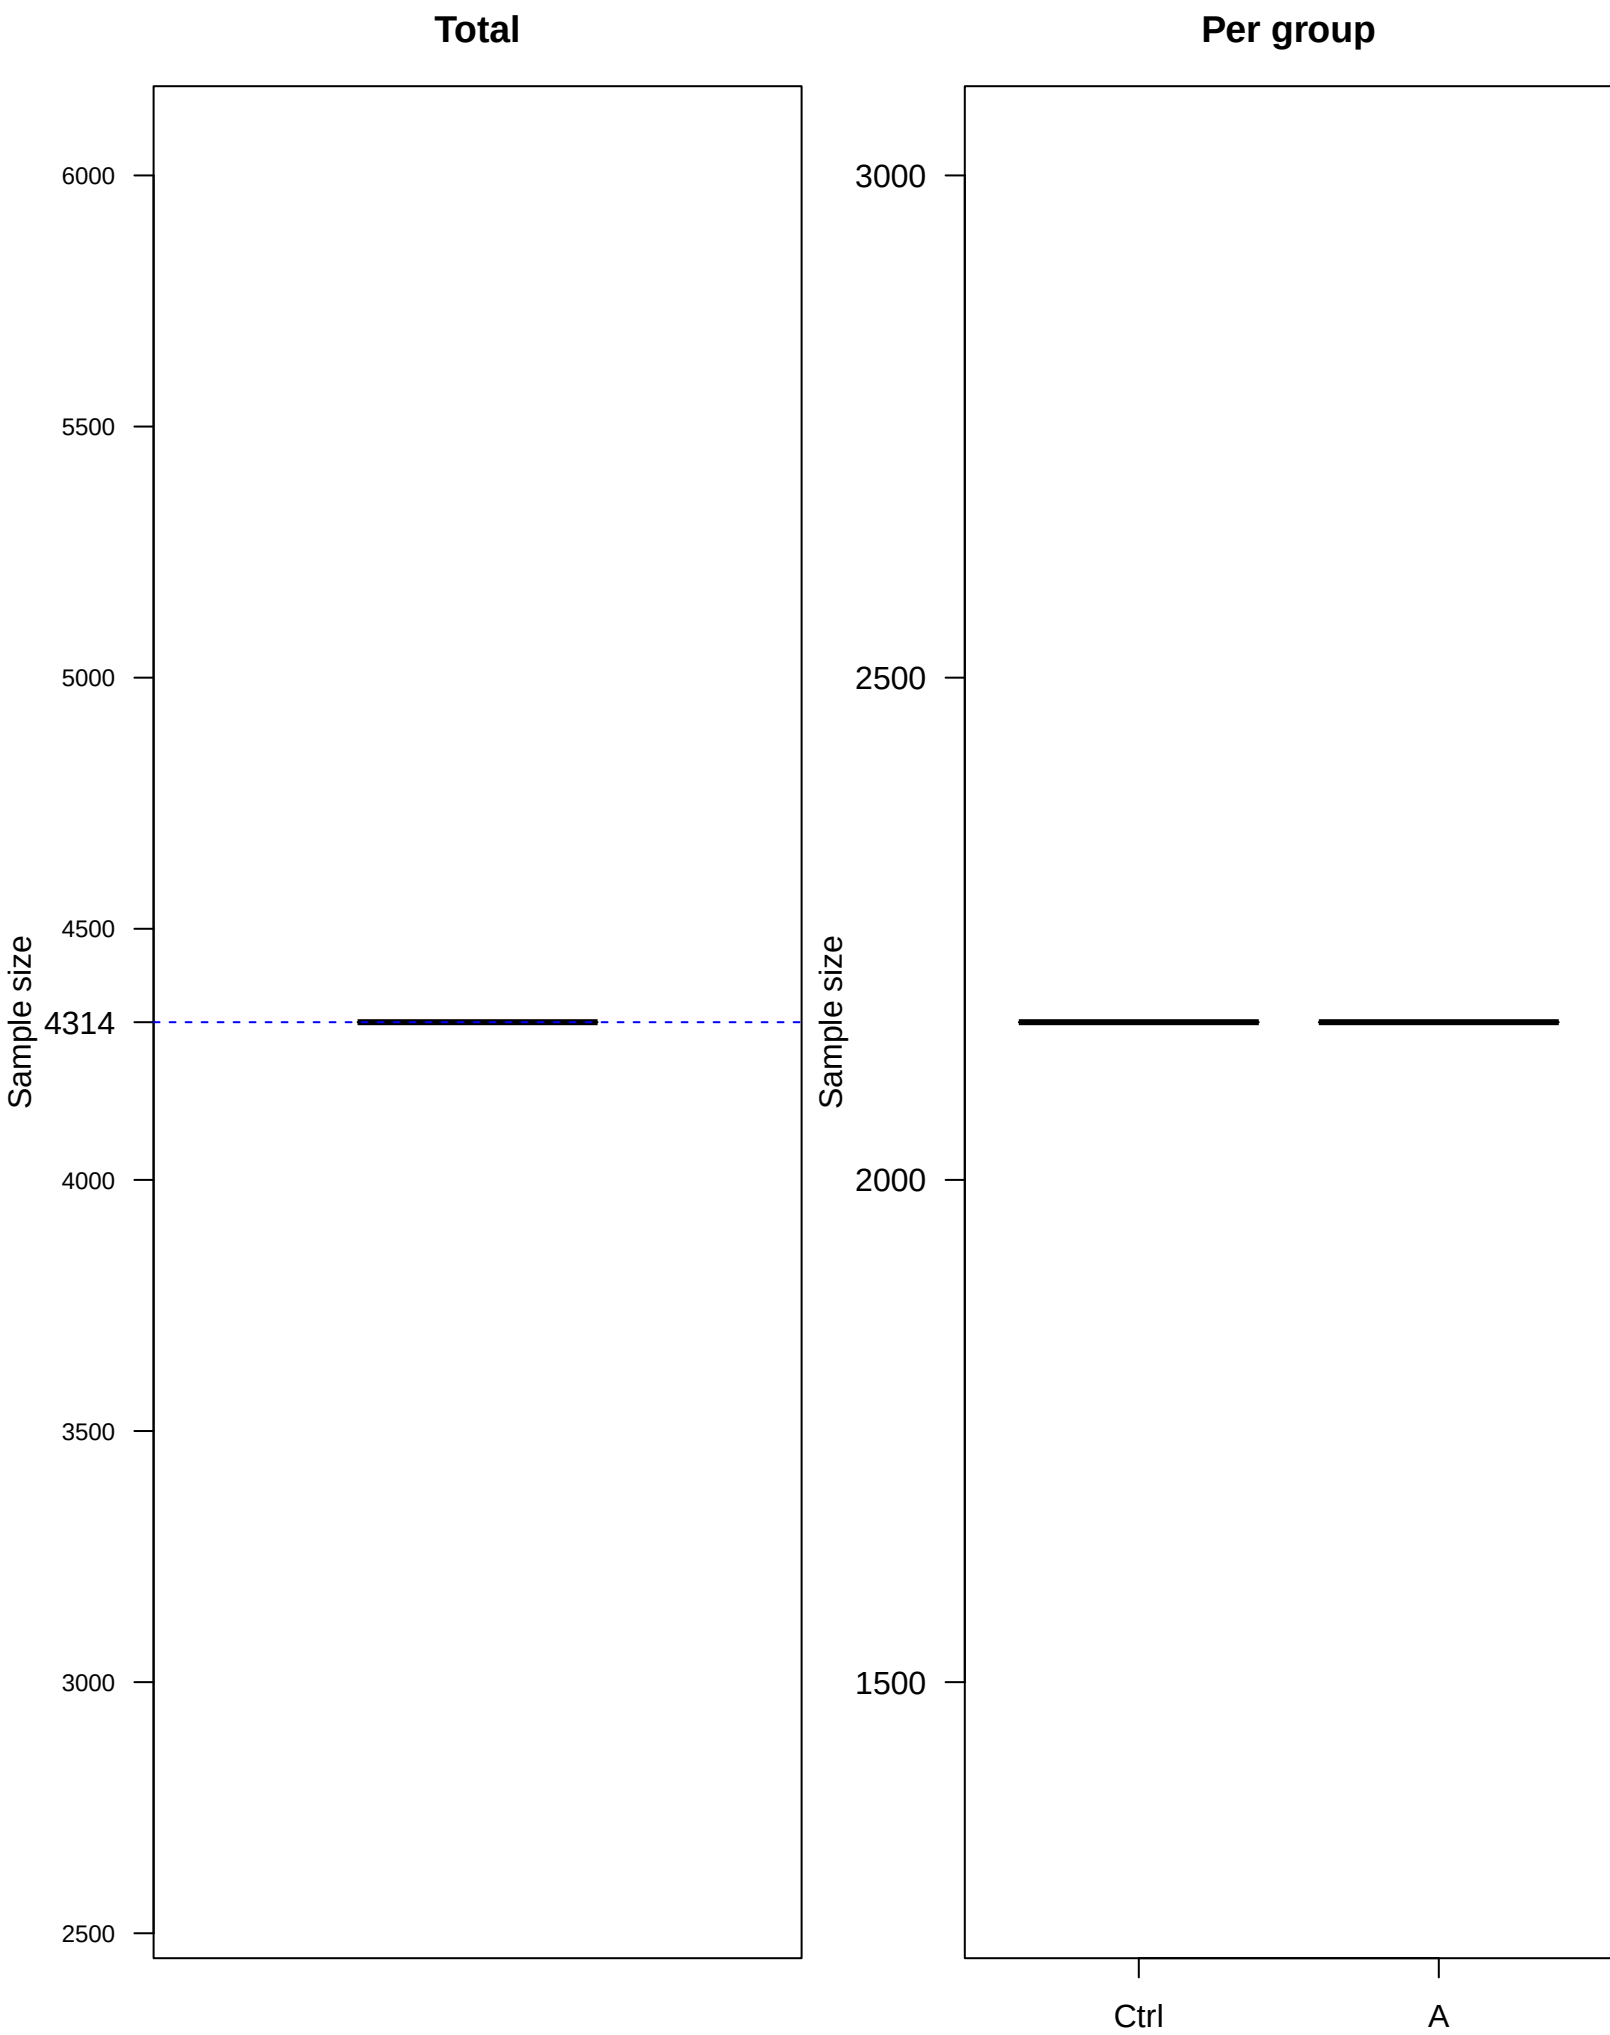

Config 11 (0.05|0.9|1|1|0.52|0.5| 0.9|simultaneous) [BINARY]

K (treatment arms) : 1

J (looks) : 1

p (target win-prob) : 0.52

p0 (null win-prob) : 0.5

method : simultaneous

true response rates : control $\pi_c = 0.900$

effect $\pi_t = 0.940$ (= $\pi_c + 2p-1$)

target alpha = 0.05 target power = 0.9

SIMULATED OPERATING CHARACTERISTICS (Bernoulli, stats.ptest)

Power (P reject ≥ 1 | H1) : 0.9048

FWER (P reject ≥ 1 | H0) : 0.0489

Max sample size (planned) : 1572

ESS under H1 : 1572.0

ESS under H0 : 1572.0


NB: design powered for the binary test (δ/σ), so achieved

power should track the target; residual gap is small-sample


discreteness, not misspecification.

Config 11 – sample size (H1) [binary]

Total

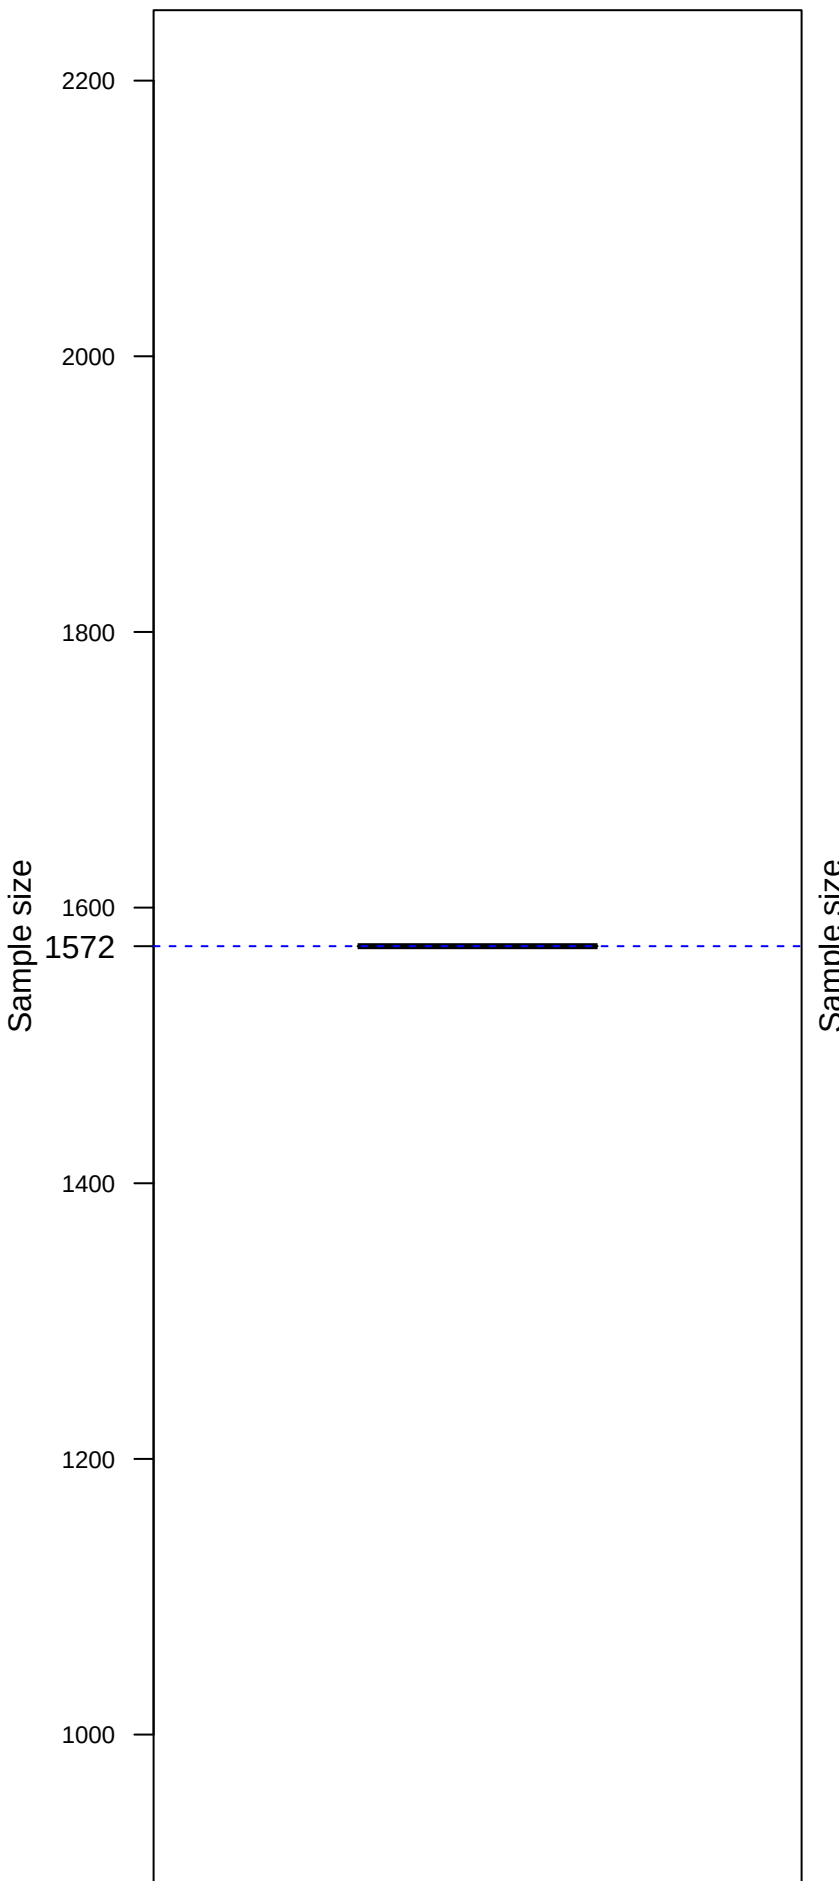

Per group

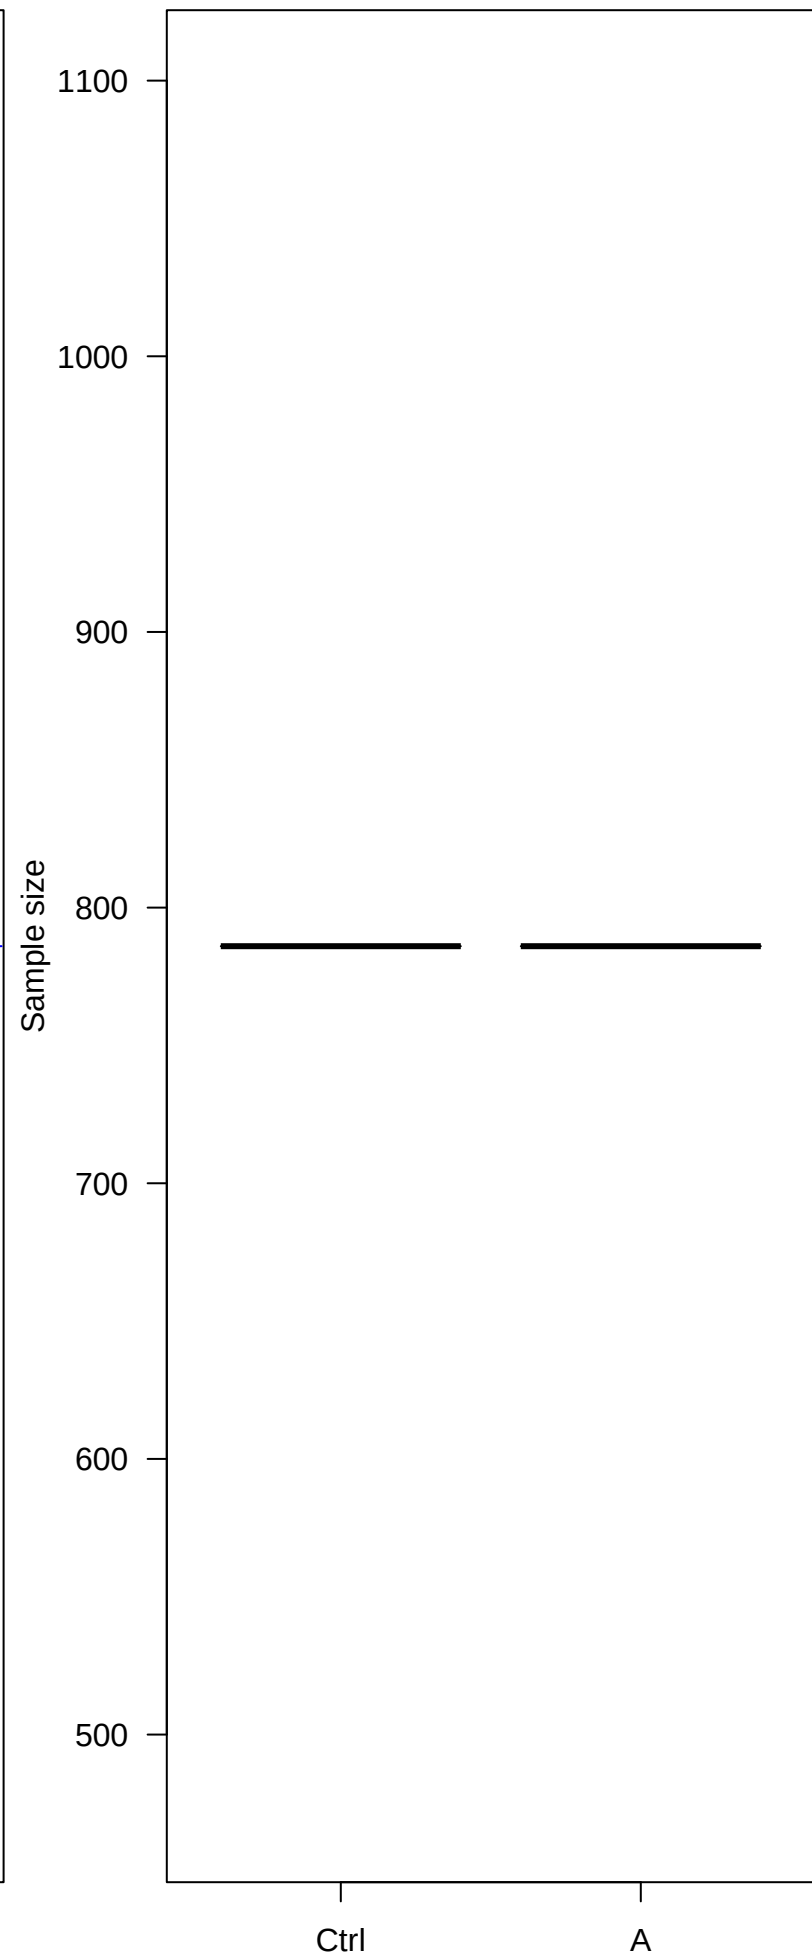

Config 19 (0.05|0.9|1|1|0.55|0.5| 0.5|simultaneous) [BINARY]

K (treatment arms) : 1

J (looks) : 1

p (target win-prob) : 0.55

p0 (null win-prob) : 0.5

method : simultaneous

true response rates : control $\pi_c = 0.500$

effect $\pi_t = 0.600$ (= $\pi_c + 2p-1$)

target alpha = 0.05 target power = 0.9

SIMULATED OPERATING CHARACTERISTICS (Bernoulli, stats.ptest)

Power (P reject ≥ 1 | H1) : 0.9023

FWER (P reject ≥ 1 | H0) : 0.0532

Max sample size (planned) : 846

ESS under H1 : 846.0


ESS under H0 : 846.0

NB: design powered for the binary test (δ/σ), so achieved

power should track the target; residual gap is small-sample

discreteness, not misspecification.

Config 19 – sample size (H1) [binary]

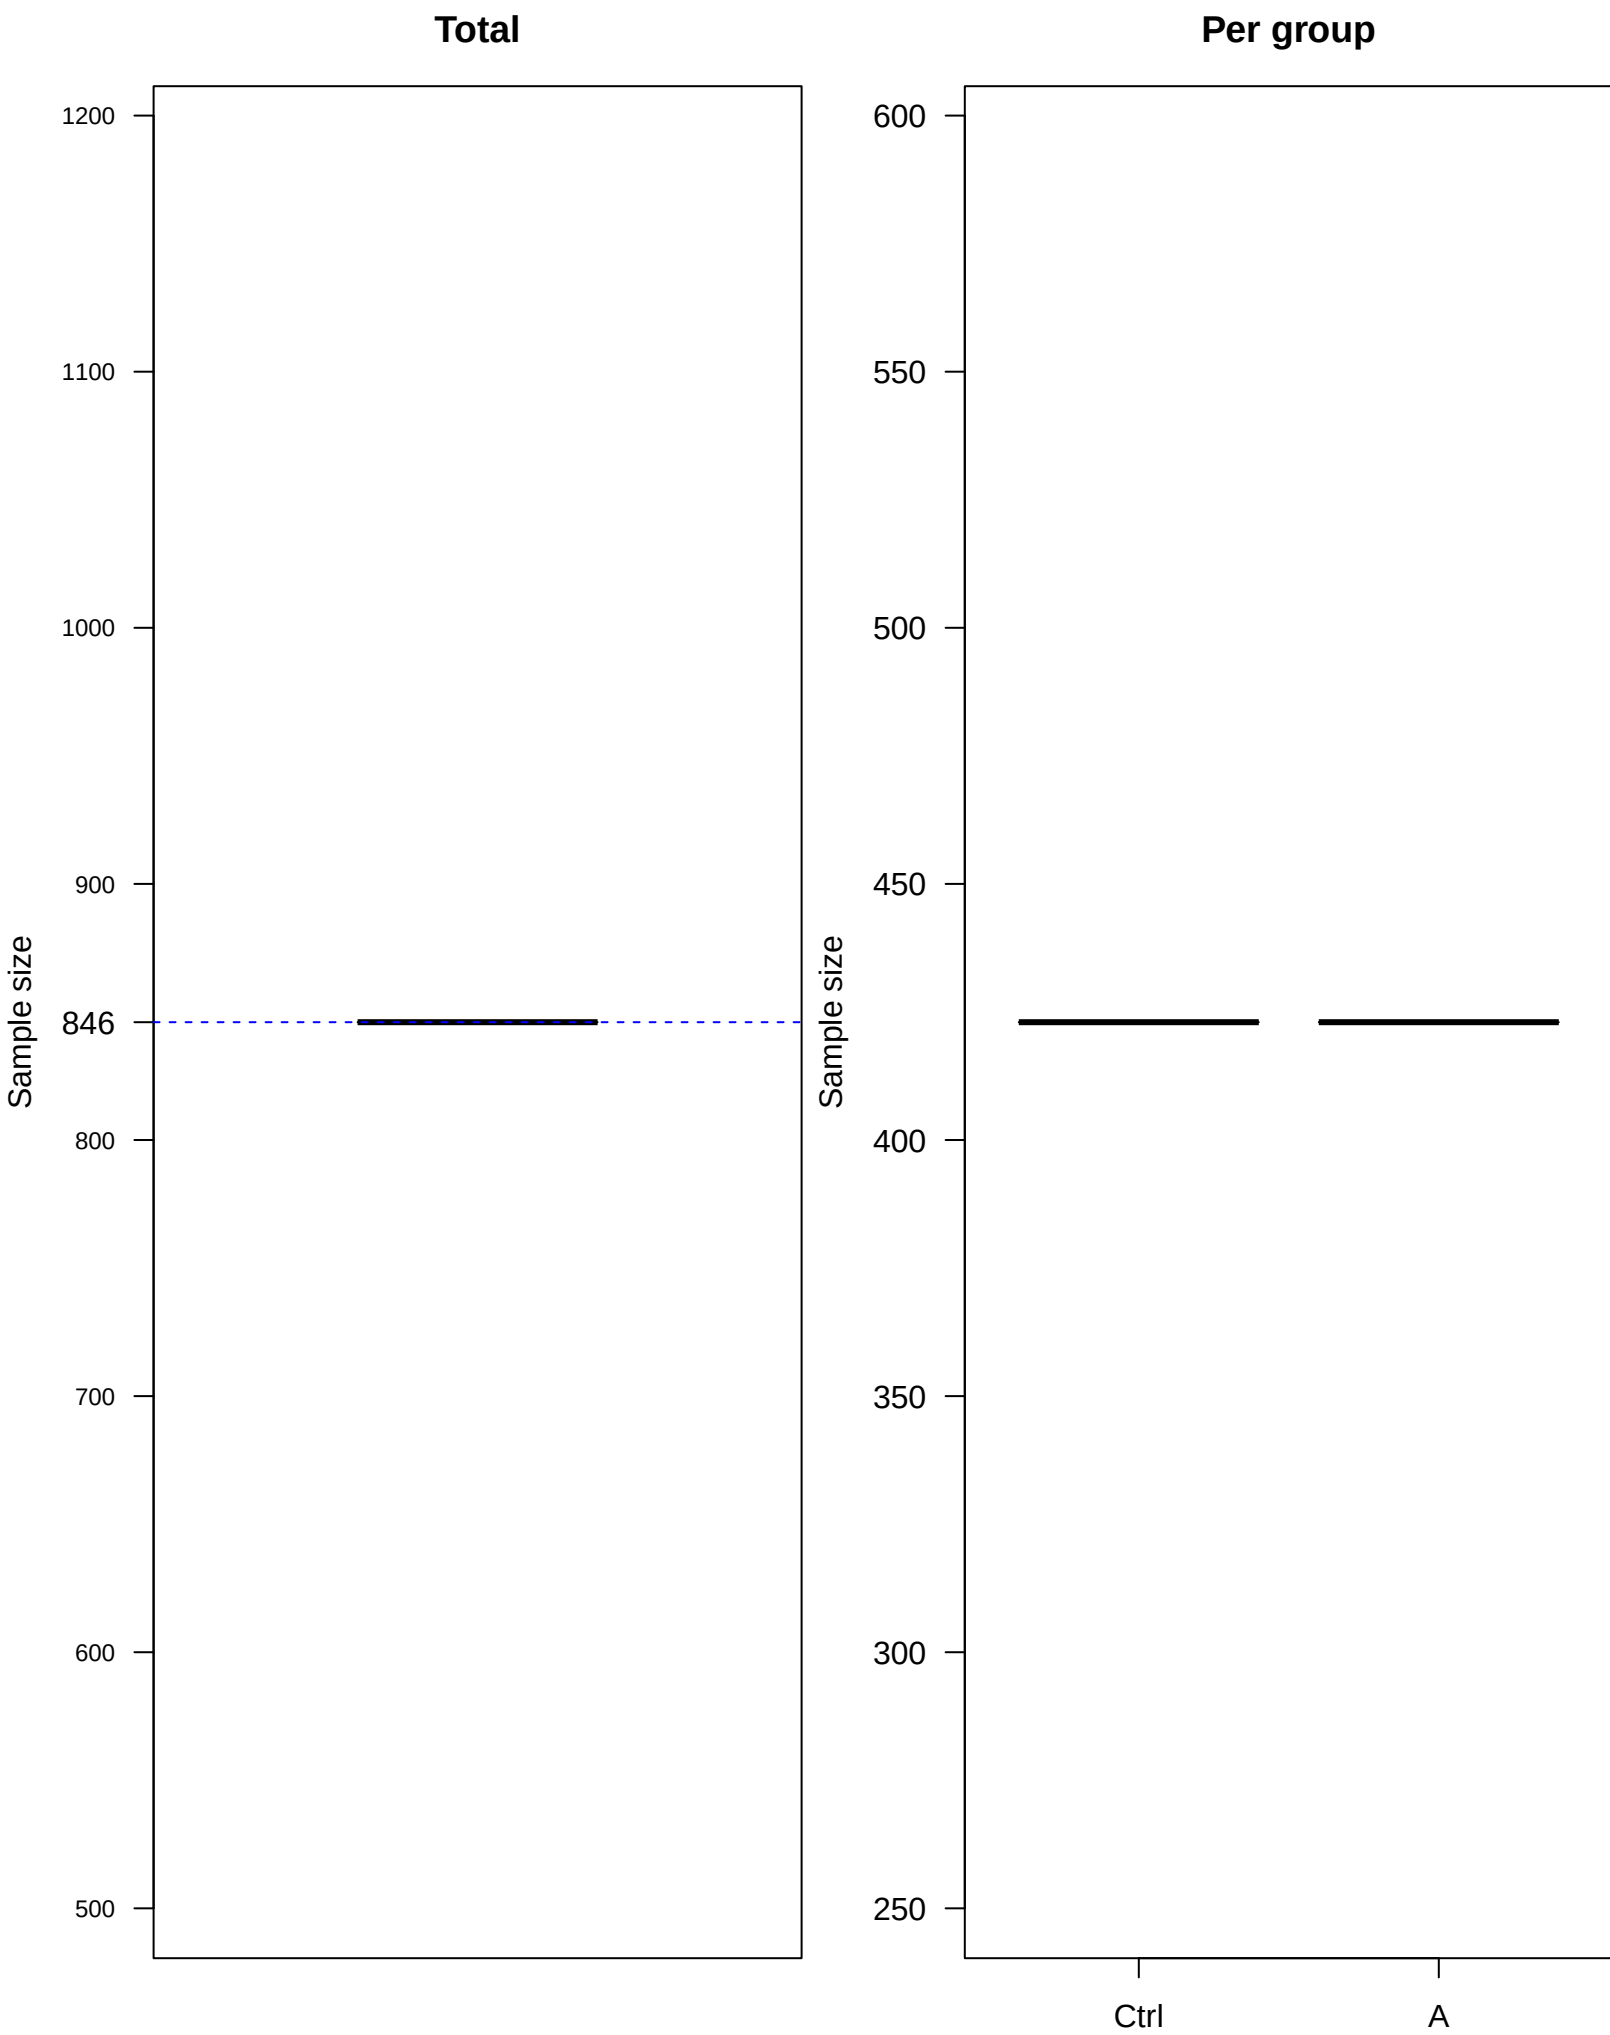

Config 33 (0.05|0.9|1|1| 0.6|0.5| 0.7|simultaneous) [BINARY]

K (treatment arms) : 1

J (looks) : 1

p (target win-prob) : 0.6

p0 (null win-prob) : 0.5

method : simultaneous

true response rates : control pi_c = 0.700

effect pi_t = 0.900 (= pc + 2p-1)

target alpha = 0.05 target power = 0.9

SIMULATED OPERATING CHARACTERISTICS (Bernoulli, stats.ptest)

Power (P reject ≥ 1 | H1) : 0.9126

FWER (P reject ≥ 1 | H0) : 0.0524

Max sample size (planned) : 134

ESS under H1 : 134.0

ESS under H0 : 134.0


NB: design powered for the binary test (delta/sd), so achieved

power should track the target; residual gap is small-sample


discreteness, not misspecification.

Config 33 – sample size (H1) [binary]

Total

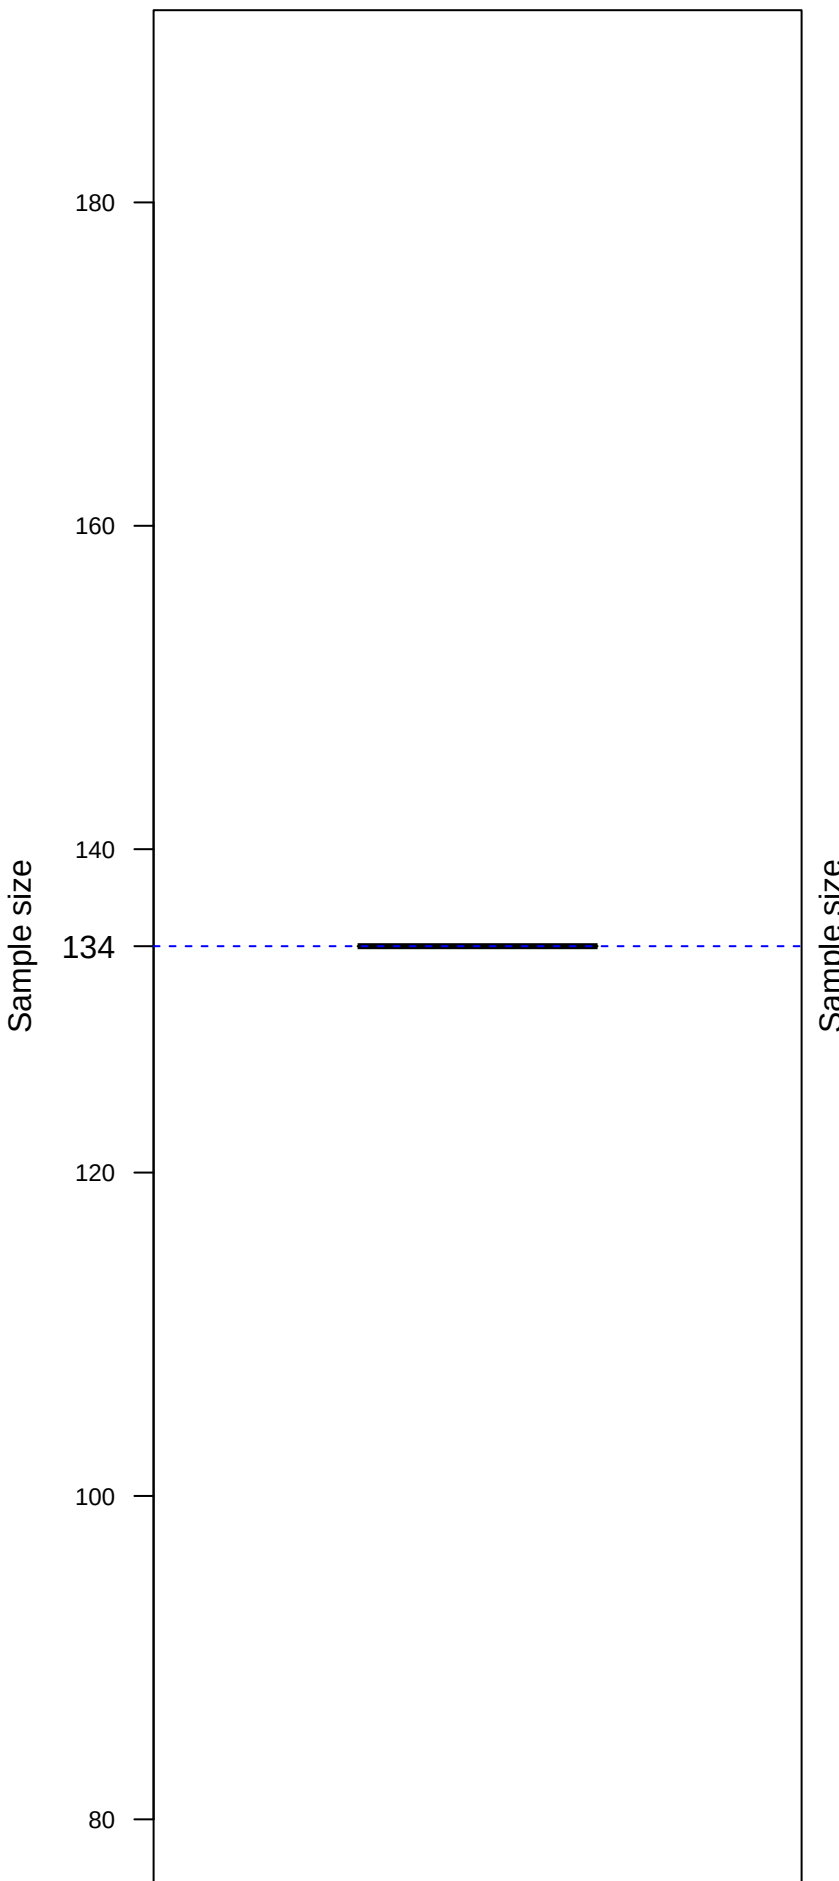

Per group

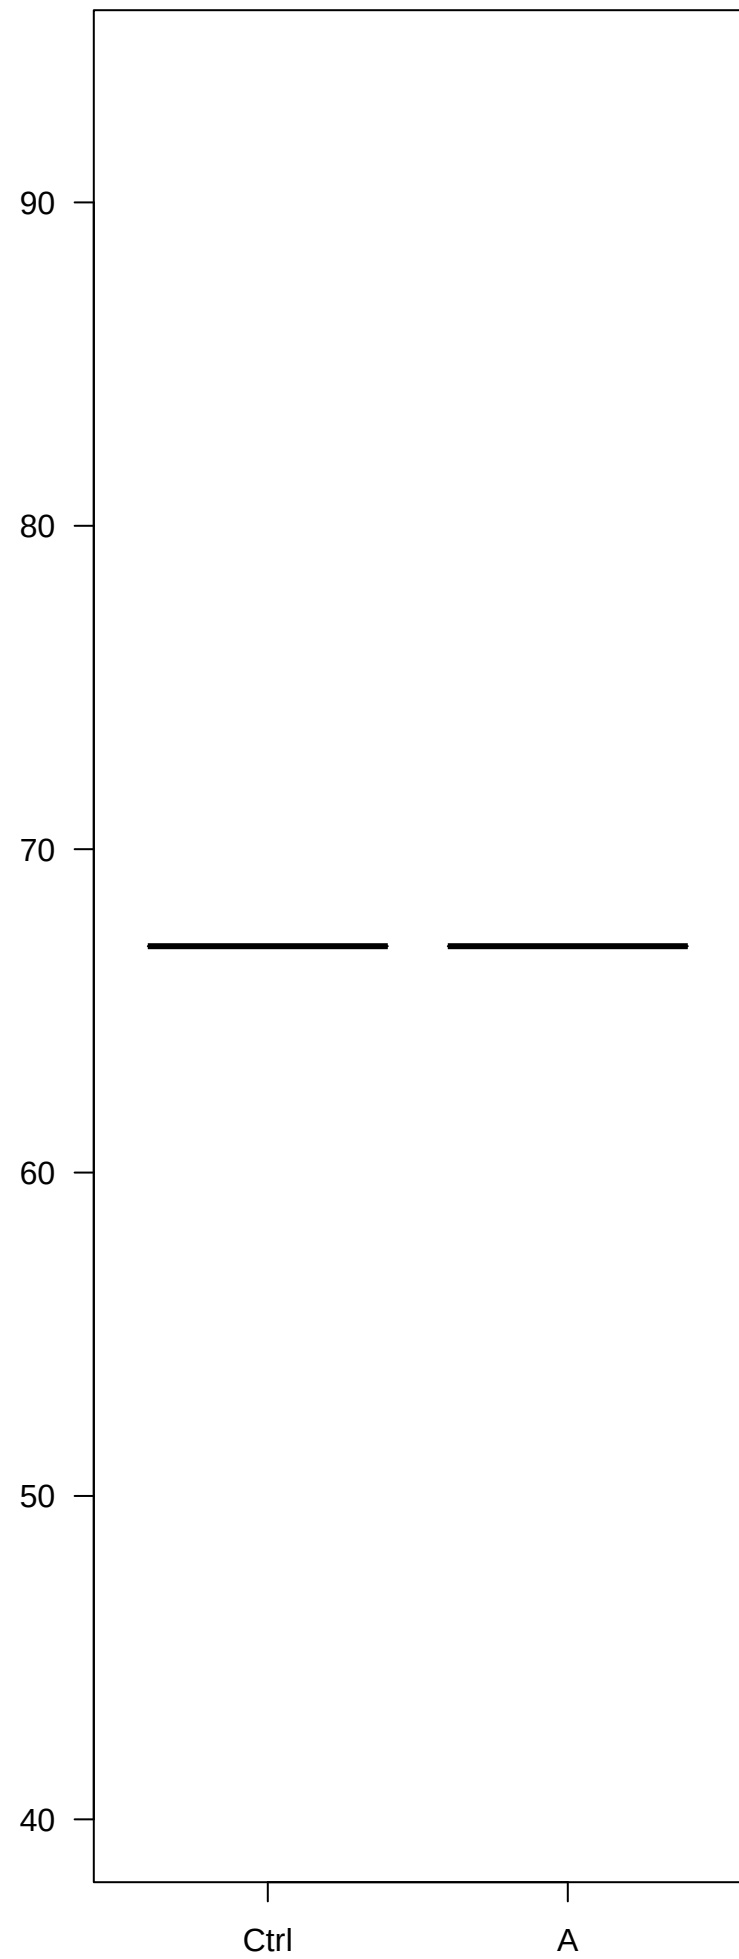

Config 37 (0.05|0.9|1|1|0.65|0.5|0.05|simultaneous) [BINARY]

K (treatment arms) : 1

J (looks) : 1

p (target win-prob) : 0.65

p0 (null win-prob) : 0.5

method : simultaneous

true response rates : control $\pi_c = 0.050$

effect $\pi_t = 0.350$ (= $\pi_c + 2p-1$)

target alpha = 0.05 target power = 0.9

SIMULATED OPERATING CHARACTERISTICS (Bernoulli, stats.ptest)

Power (P reject ≥ 1 | H1) : 0.9314

FWER (P reject ≥ 1 | H0) : 0.0450

Max sample size (planned) : 58

ESS under H1 : 58.0

ESS under H0 : 58.0


NB: design powered for the binary test (δ/σ), so achieved

power should track the target; residual gap is small-sample


discreteness, not misspecification.

Config 37 – sample size (H1) [binary]

Total

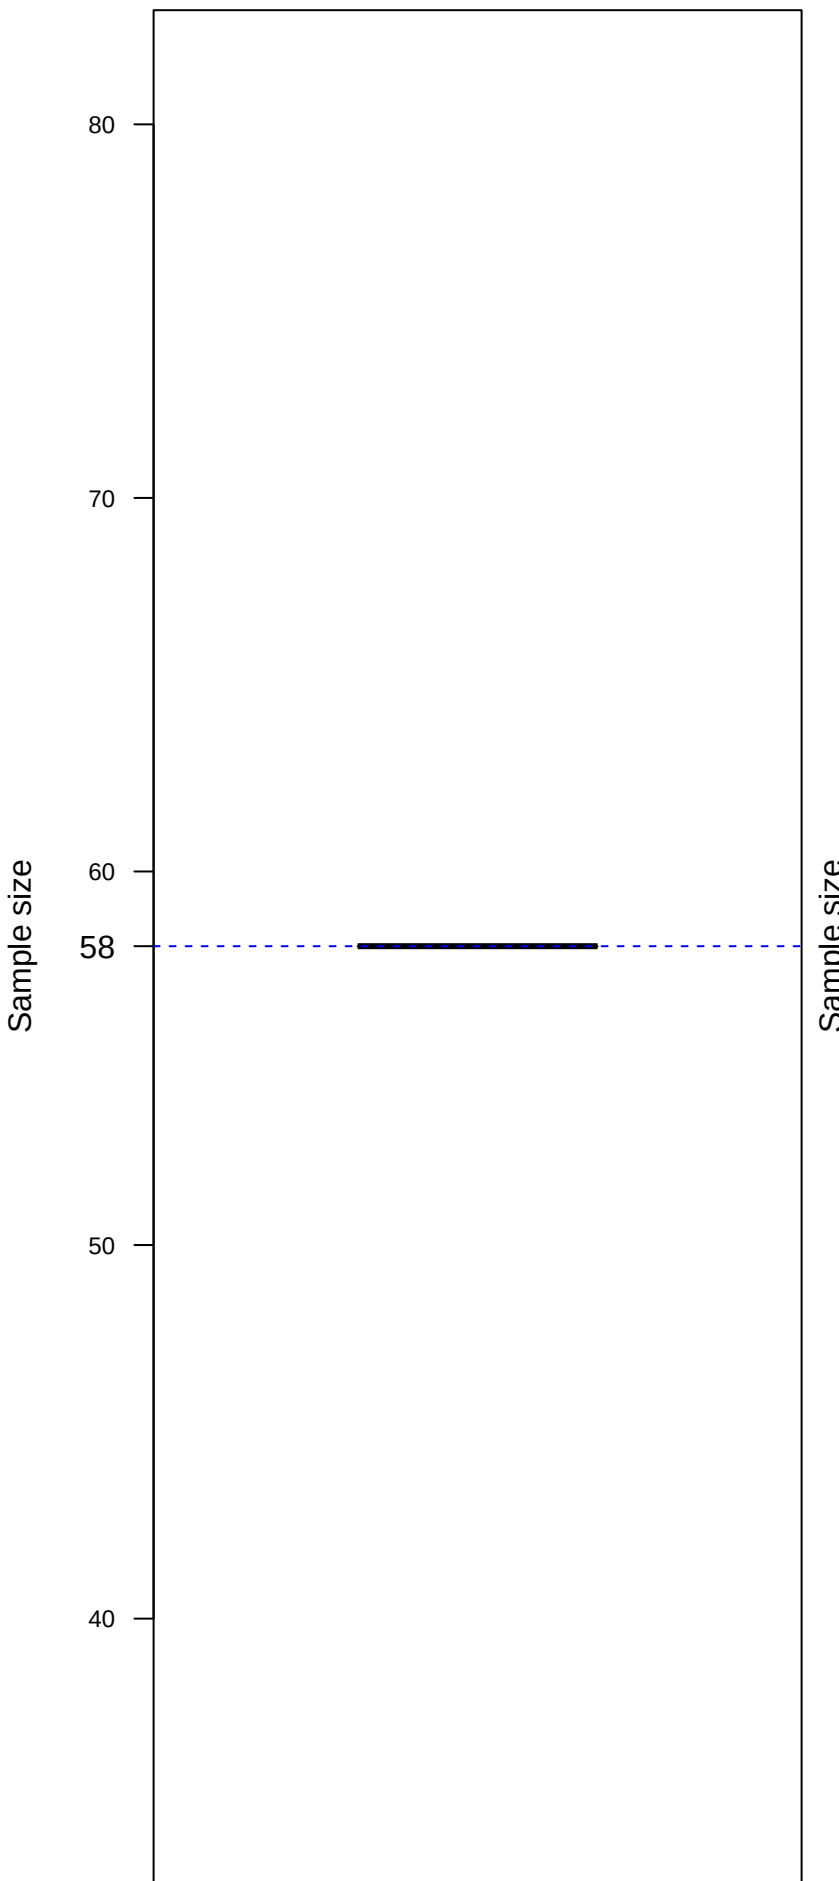

Per group

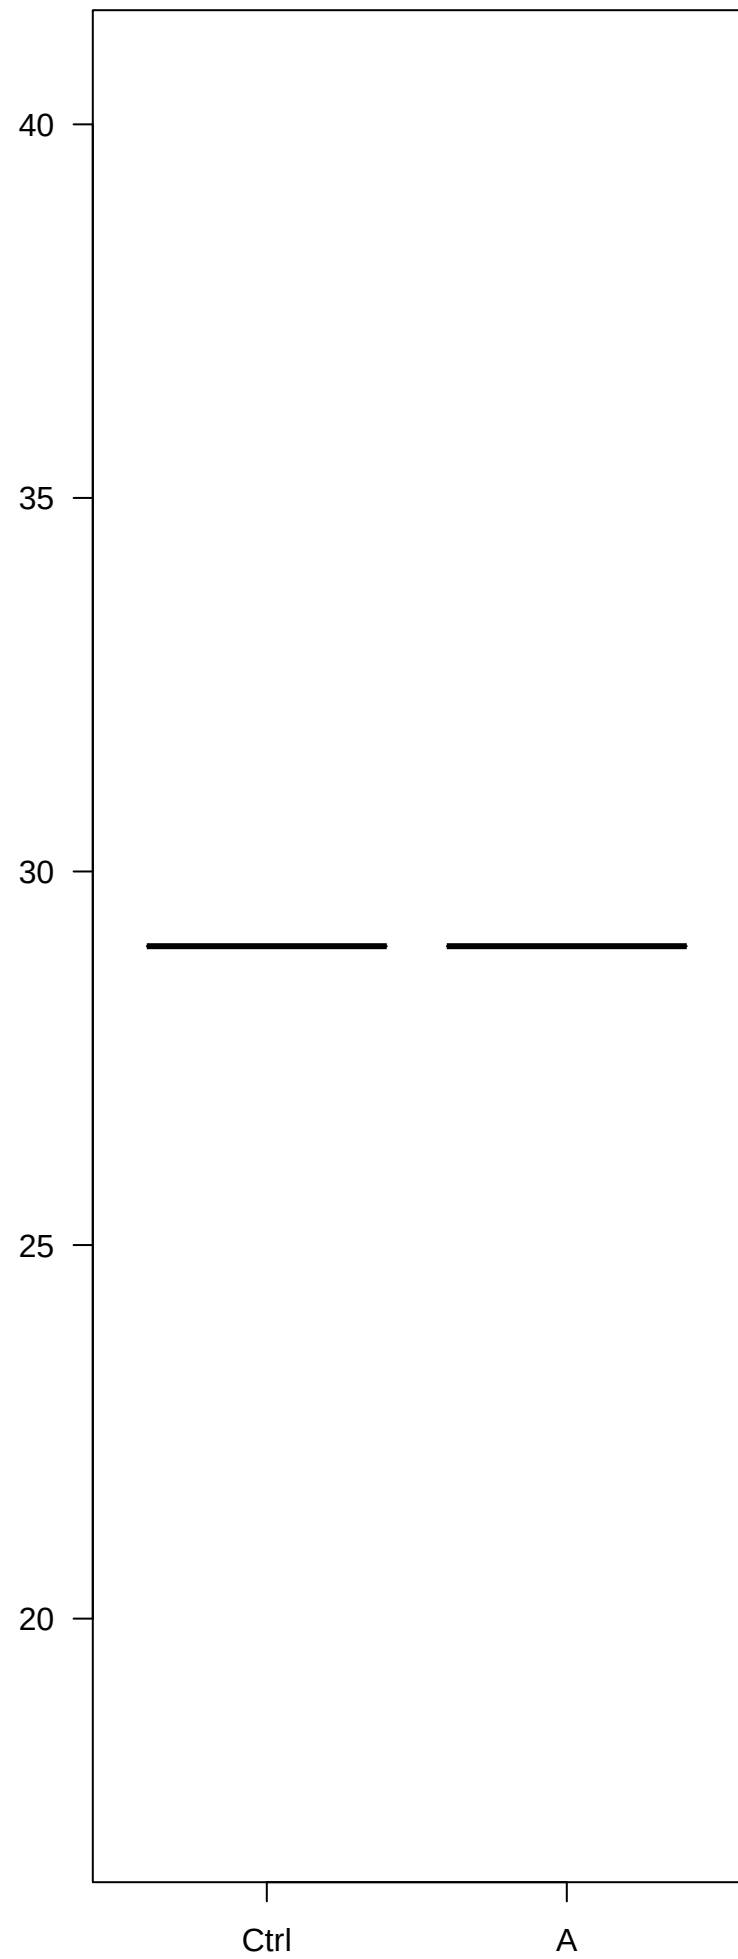

Config 41 (0.05|0.9|1|1|0.65|0.5| 0.3|simultaneous) [BINARY]

K (treatment arms) : 1

J (looks) : 1

p (target win-prob) : 0.65

p0 (null win-prob) : 0.5

method : simultaneous

true response rates : control $\pi_c = 0.300$

effect $\pi_t = 0.600$ (= $\pi_c + 2p-1$)

target alpha = 0.05 target power = 0.9

SIMULATED OPERATING CHARACTERISTICS (Bernoulli, stats.ptest)

Power (P reject ≥ 1 | H1) : 0.9157

FWER (P reject ≥ 1 | H0) : 0.0508

Max sample size (planned) : 92

ESS under H1 : 92.0

ESS under H0 : 92.0


NB: design powered for the binary test (δ/σ), so achieved

power should track the target; residual gap is small-sample


discreteness, not misspecification.

Config 41 – sample size (H1) [binary]

Total

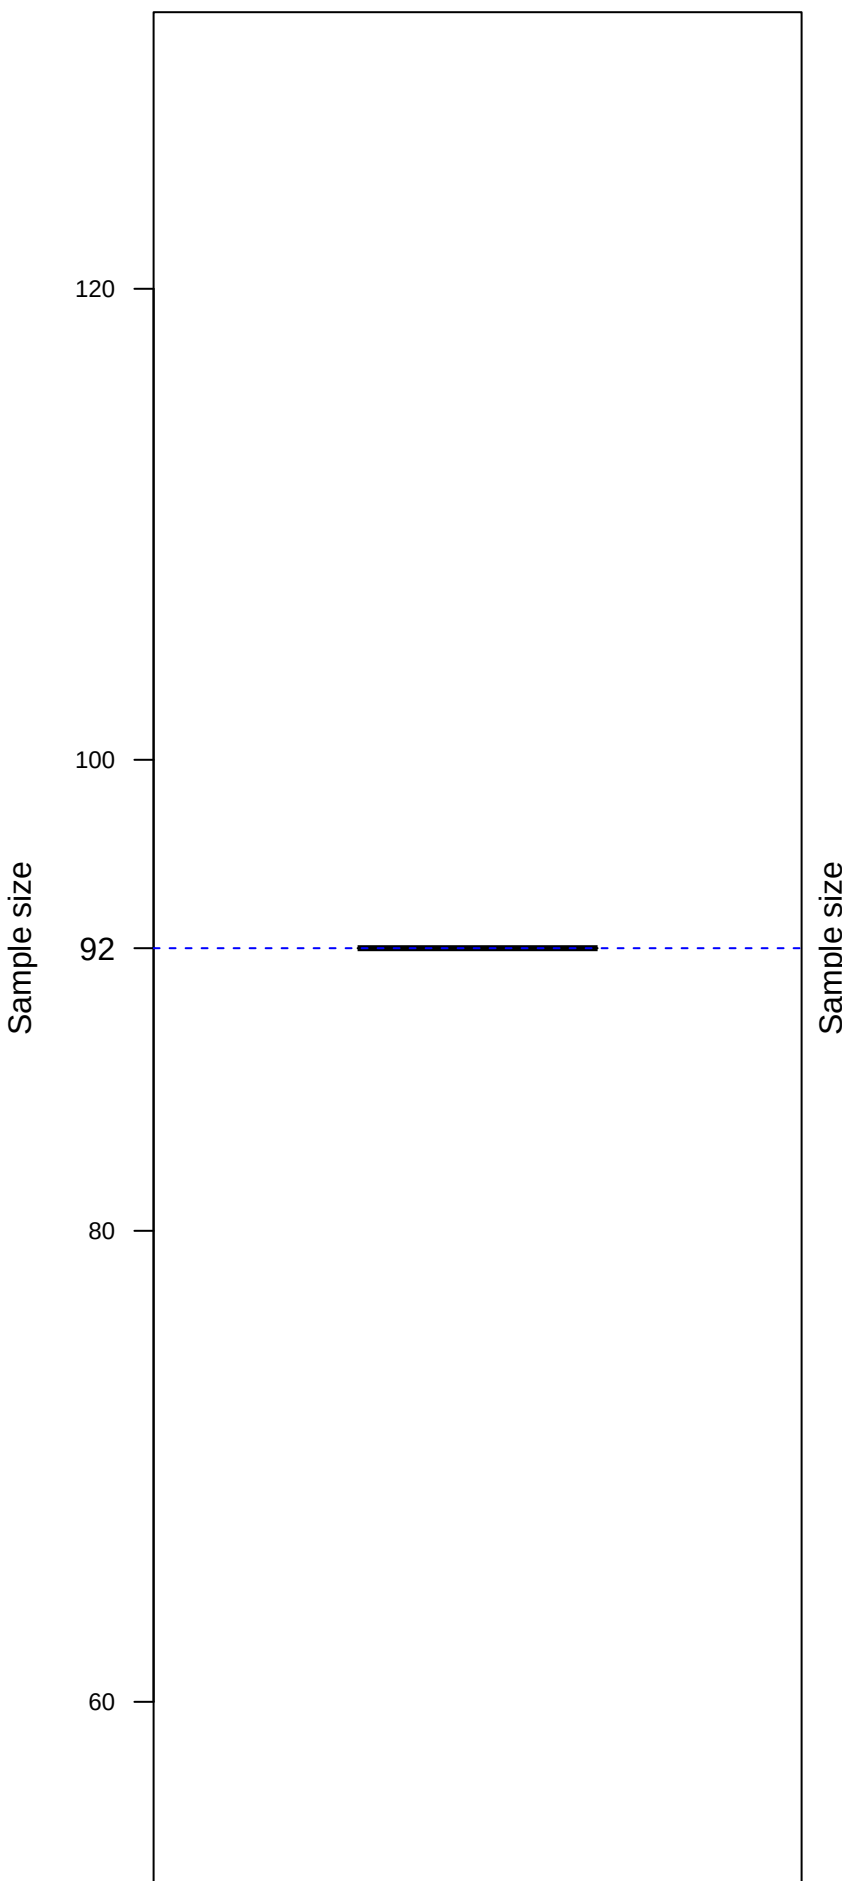

Per group

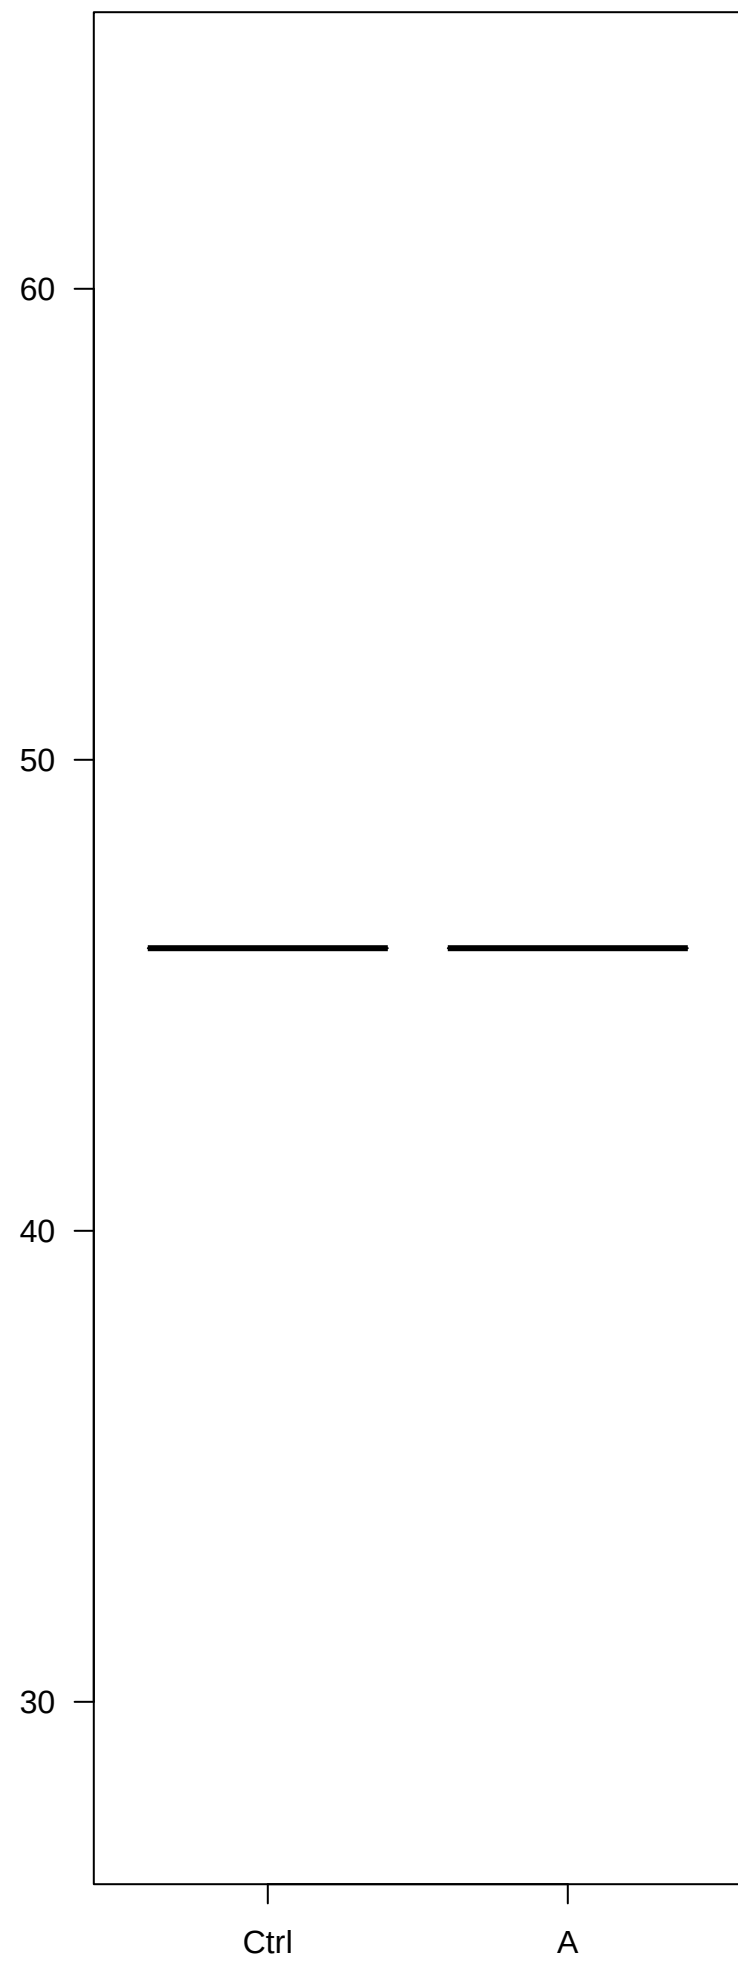

Config 43 (0.05|0.9|1|1|0.65|0.5| 0.5|simultaneous) [BINARY]

K (treatment arms) : 1

J (looks) : 1

p (target win-prob) : 0.65

p0 (null win-prob) : 0.5

method : simultaneous

true response rates : control $\pi_c = 0.500$

effect $\pi_t = 0.800$ (= $\pi_c + 2p-1$)

target alpha = 0.05 target power = 0.9

SIMULATED OPERATING CHARACTERISTICS (Bernoulli, stats.ptest)

Power (P reject ≥ 1 | H1) : 0.9026

FWER (P reject ≥ 1 | H0) : 0.0544

Max sample size (planned) : 84

ESS under H1 : 84.0


ESS under H0 : 84.0

NB: design powered for the binary test (δ/σ), so achieved

power should track the target; residual gap is small-sample

discreteness, not misspecification.

Config 43 – sample size (H1) [binary]

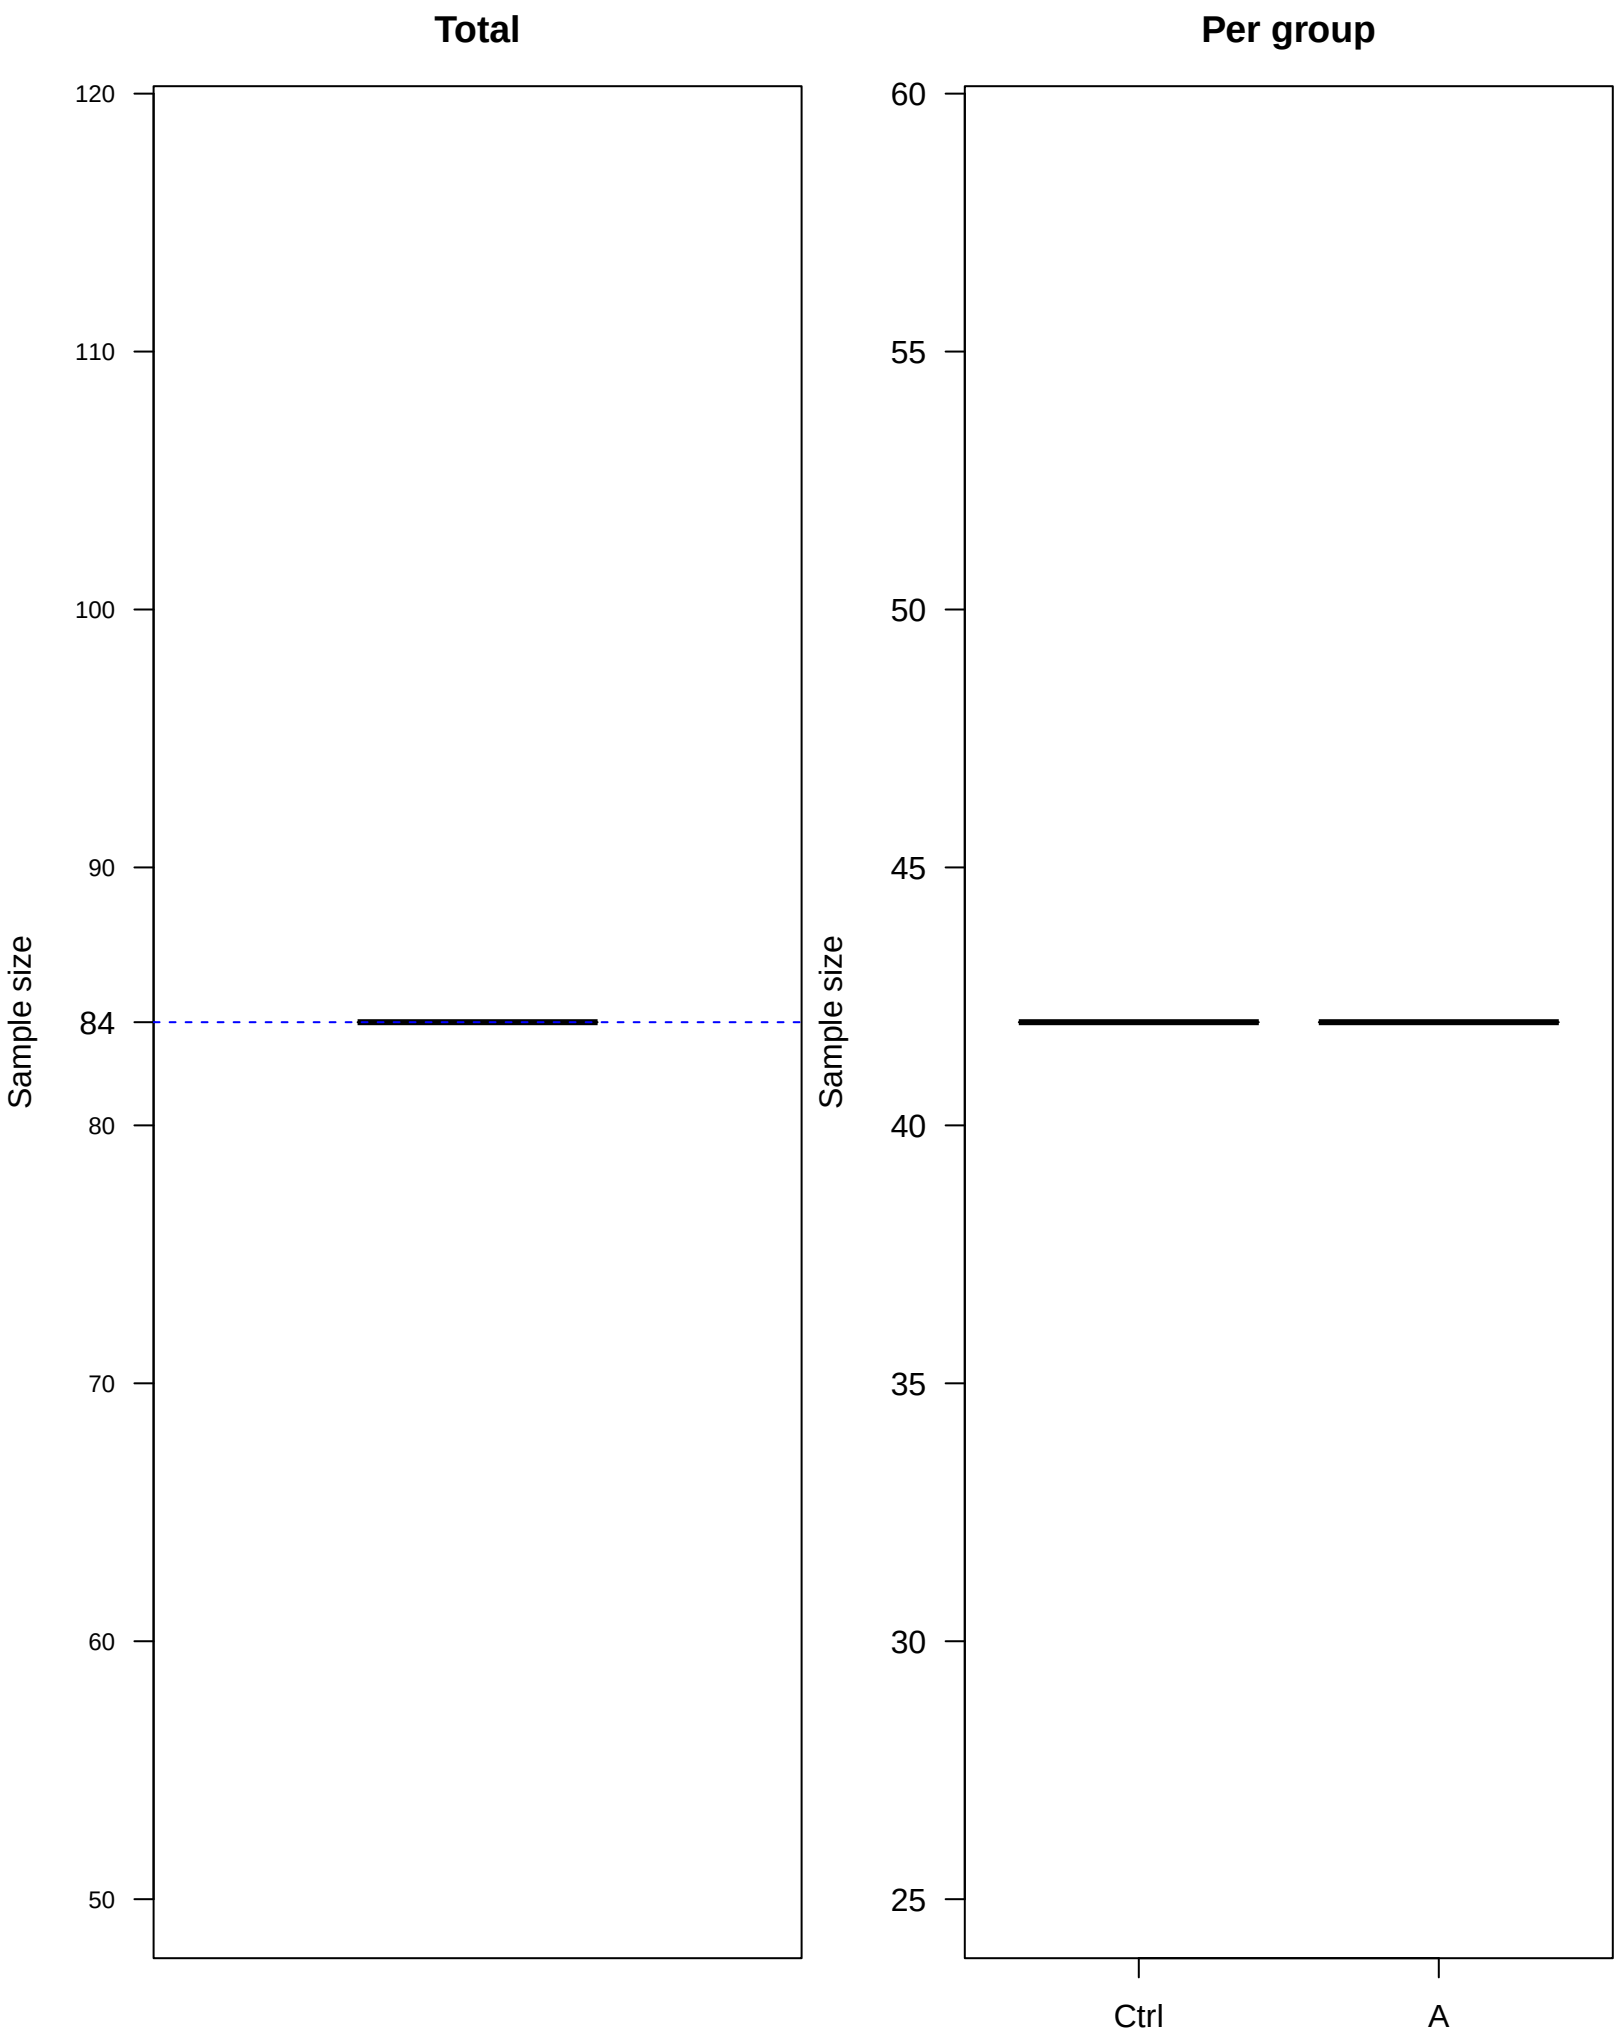

Config 53 (0.05|0.9|1|1|0.75|0.5| 0.3|simultaneous) [BINARY]

K (treatment arms) : 1

J (looks) : 1

p (target win-prob) : 0.75

p0 (null win-prob) : 0.5

method : simultaneous

true response rates : control $\pi_c = 0.300$

effect $\pi_t = 0.800$ (= $\pi_c + 2p-1$)

target alpha = 0.05 target power = 0.9

SIMULATED OPERATING CHARACTERISTICS (Bernoulli, stats.ptest)

Power (P reject ≥ 1 | H1) : 0.9195

FWER (P reject ≥ 1 | H0) : 0.0473

Max sample size (planned) : 32

ESS under H1 : 32.0

ESS under H0 : 32.0


NB: design powered for the binary test (δ/σ), so achieved

power should track the target; residual gap is small-sample


discreteness, not misspecification.

Config 53 – sample size (H1) [binary]

Total

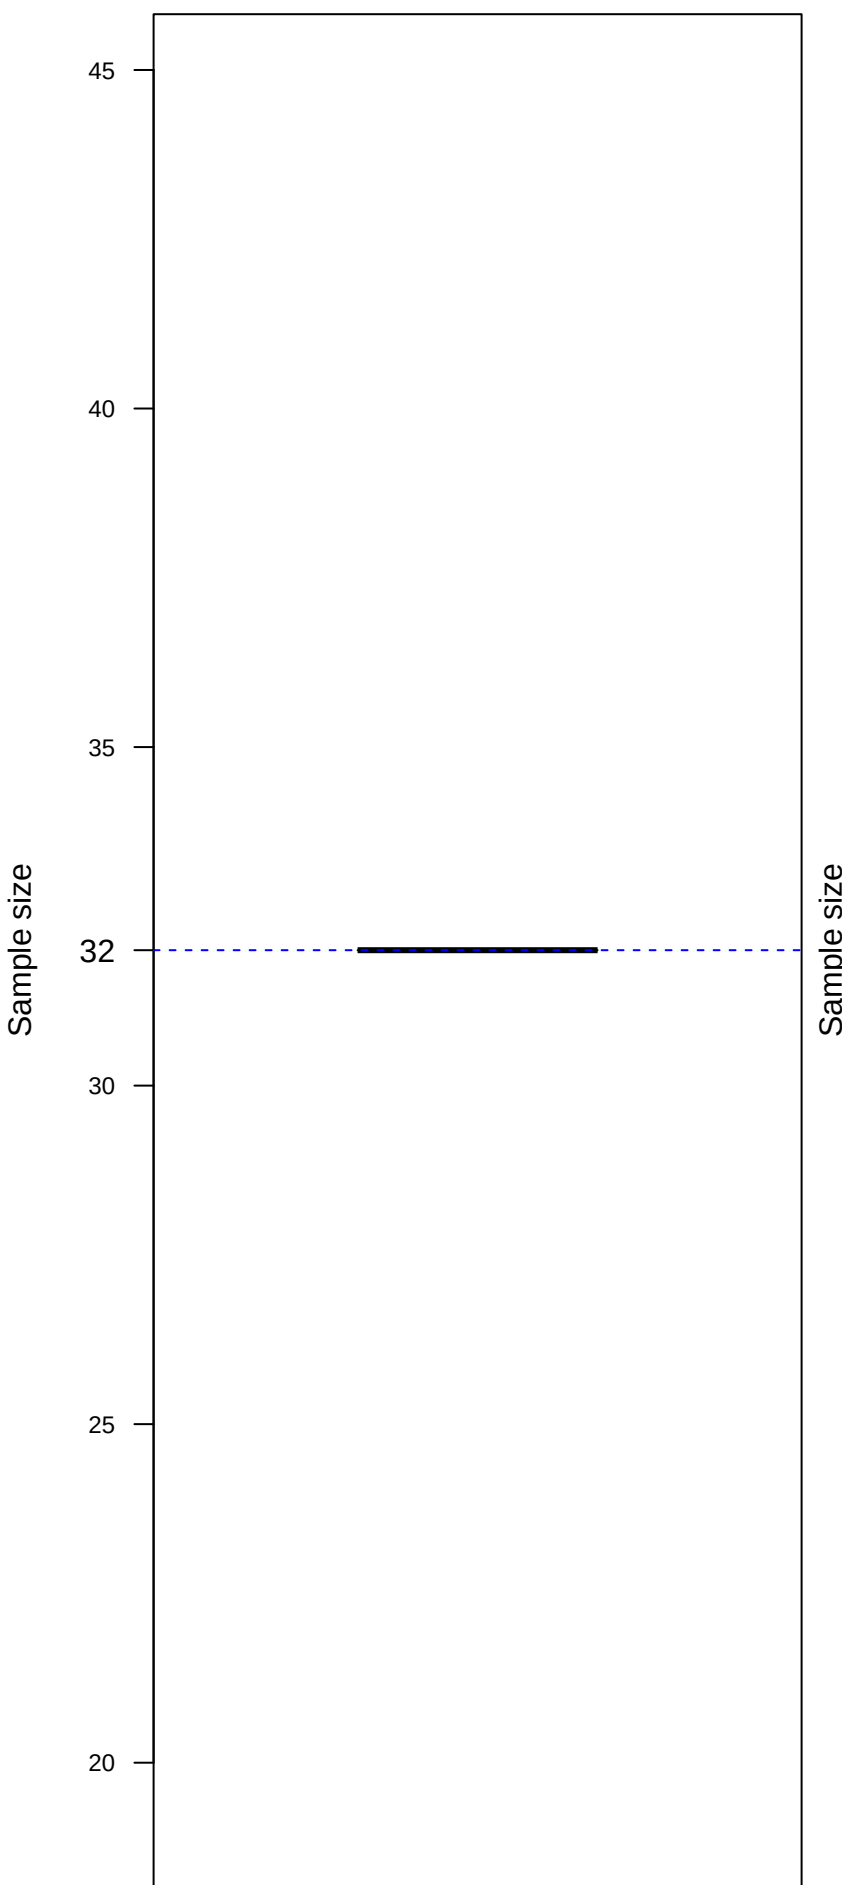

Per group

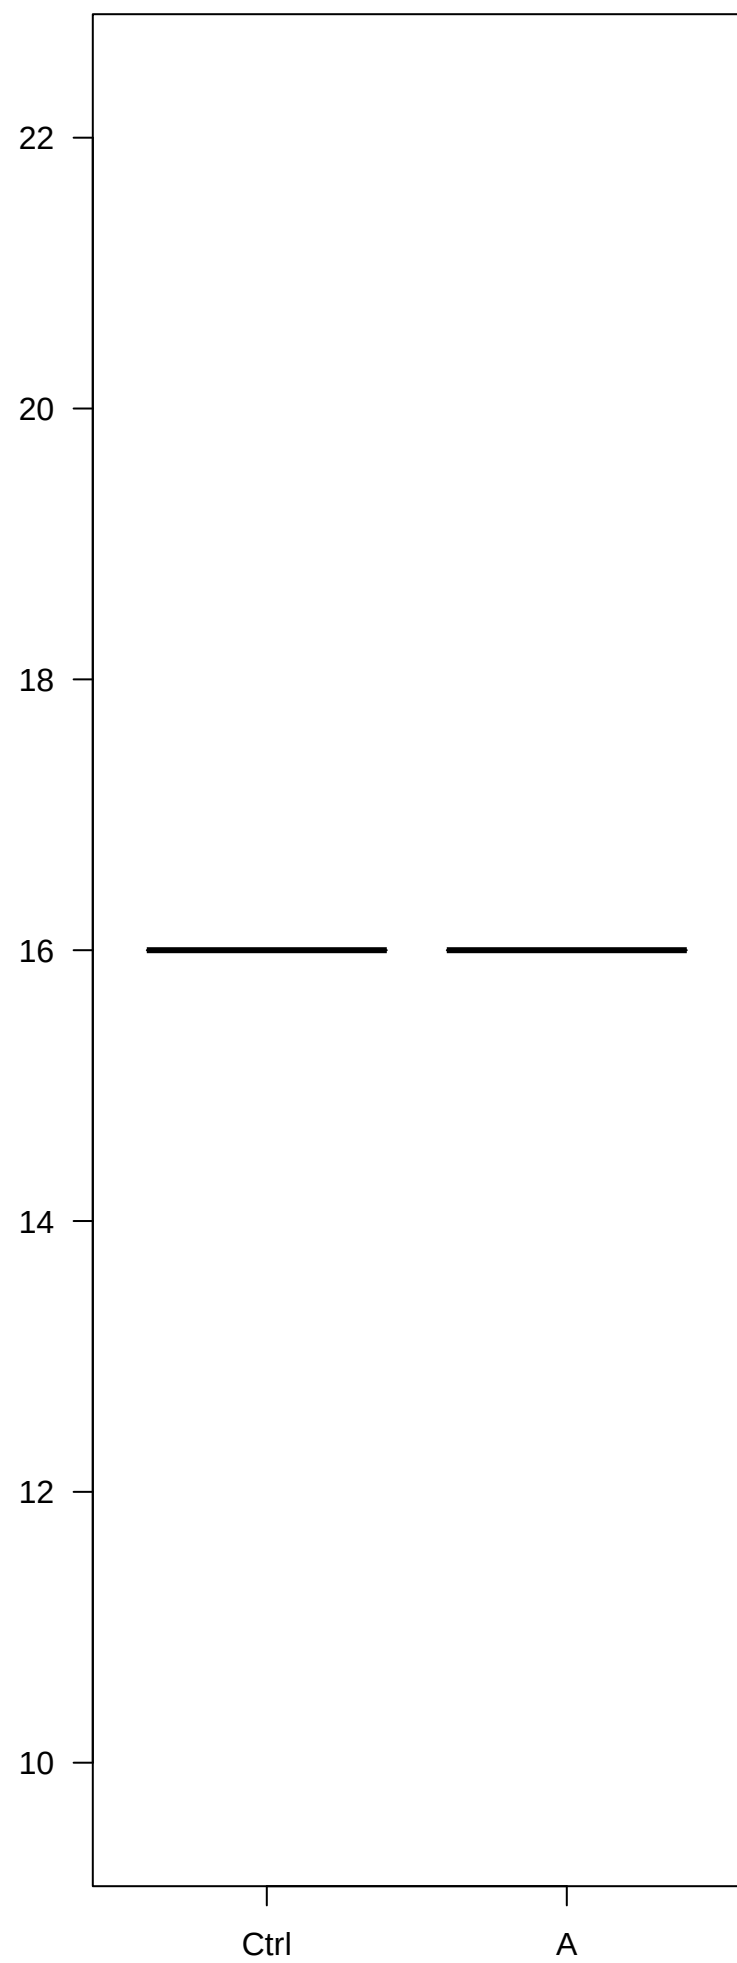

Config 63 (0.05|0.9|1|1|0.85|0.5| 0.1|simultaneous) [BINARY]

K (treatment arms) : 1

J (looks) : 1

p (target win-prob) : 0.85

p0 (null win-prob) : 0.5

method : simultaneous

true response rates : control $\pi_c = 0.100$

effect $\pi_t = 0.800$ (= $\pi_c + 2p-1$)

target alpha = 0.05 target power = 0.9

SIMULATED OPERATING CHARACTERISTICS (Bernoulli, stats.ptest)

Power (P reject ≥ 1 | H1) : 0.9230

FWER (P reject ≥ 1 | H0) : 0.0134

Max sample size (planned) : 14

ESS under H1 : 14.0


ESS under H0 : 14.0

NB: design powered for the binary test (δ/σ), so achieved

power should track the target; residual gap is small-sample

discreteness, not misspecification.

Config 63 – sample size (H1) [binary]

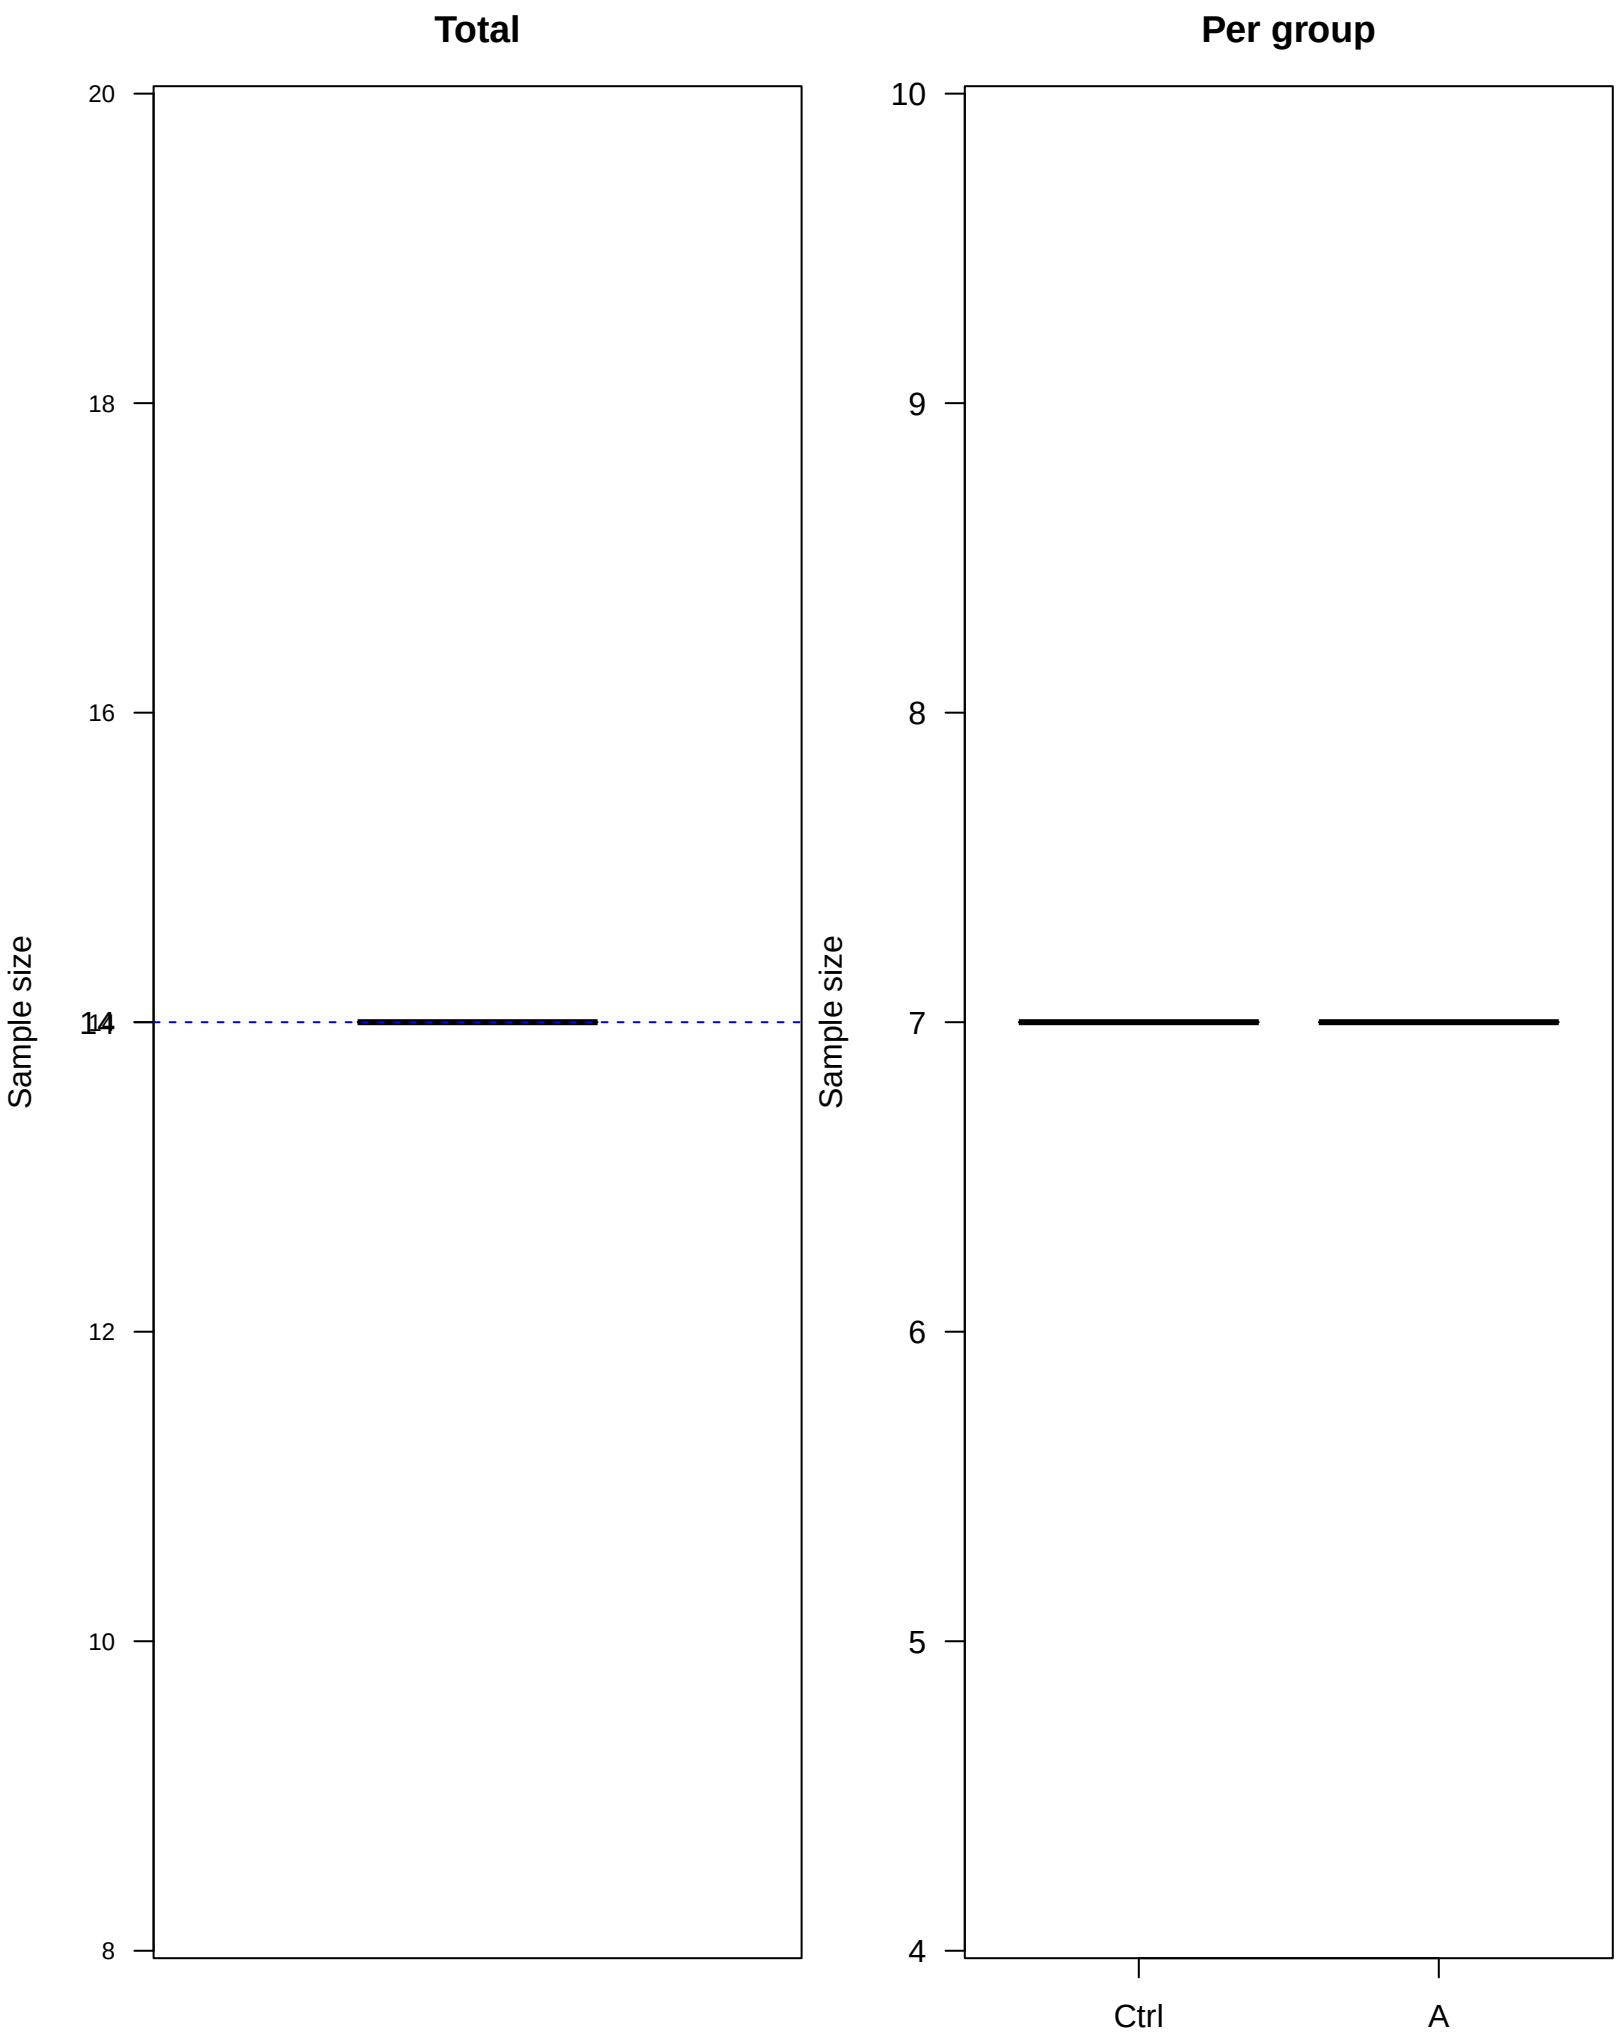

Config 73 (0.05|0.9|1|1|0.95|0.5|0.05|simultaneous) [BINARY]

K (treatment arms) : 1

J (looks) : 1

p (target win-prob) : 0.95

p0 (null win-prob) : 0.5

method : simultaneous

true response rates : control $\pi_c = 0.050$

effect $\pi_t = 0.950$ (= $\pi_c + 2p-1$)

target alpha = 0.05 target power = 0.9

SIMULATED OPERATING CHARACTERISTICS (Bernoulli, stats.ptest)

Power (P reject ≥ 1 | H1) : 0.9673

FWER (P reject ≥ 1 | H0) : 0.0064

Max sample size (planned) : 6

ESS under H1 : 6.0

ESS under H0 : 6.0


NB: design powered for the binary test (δ/σ), so achieved

power should track the target; residual gap is small-sample


discreteness, not misspecification.

Config 73 – sample size (H1) [binary]

Total

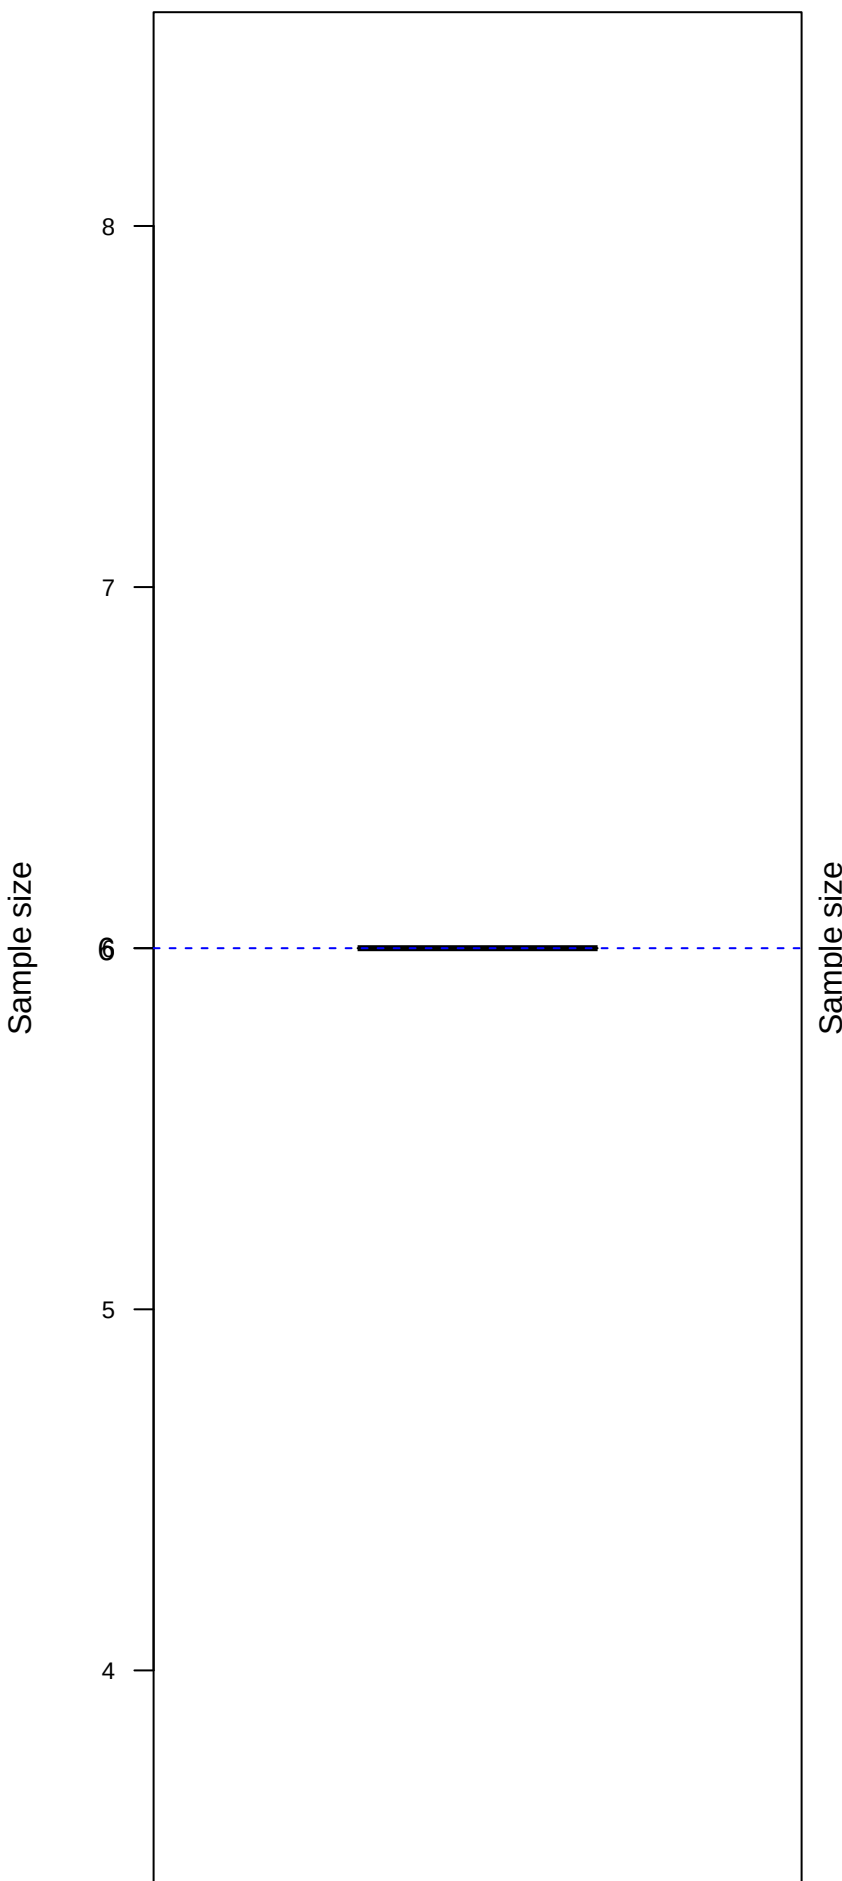

Per group

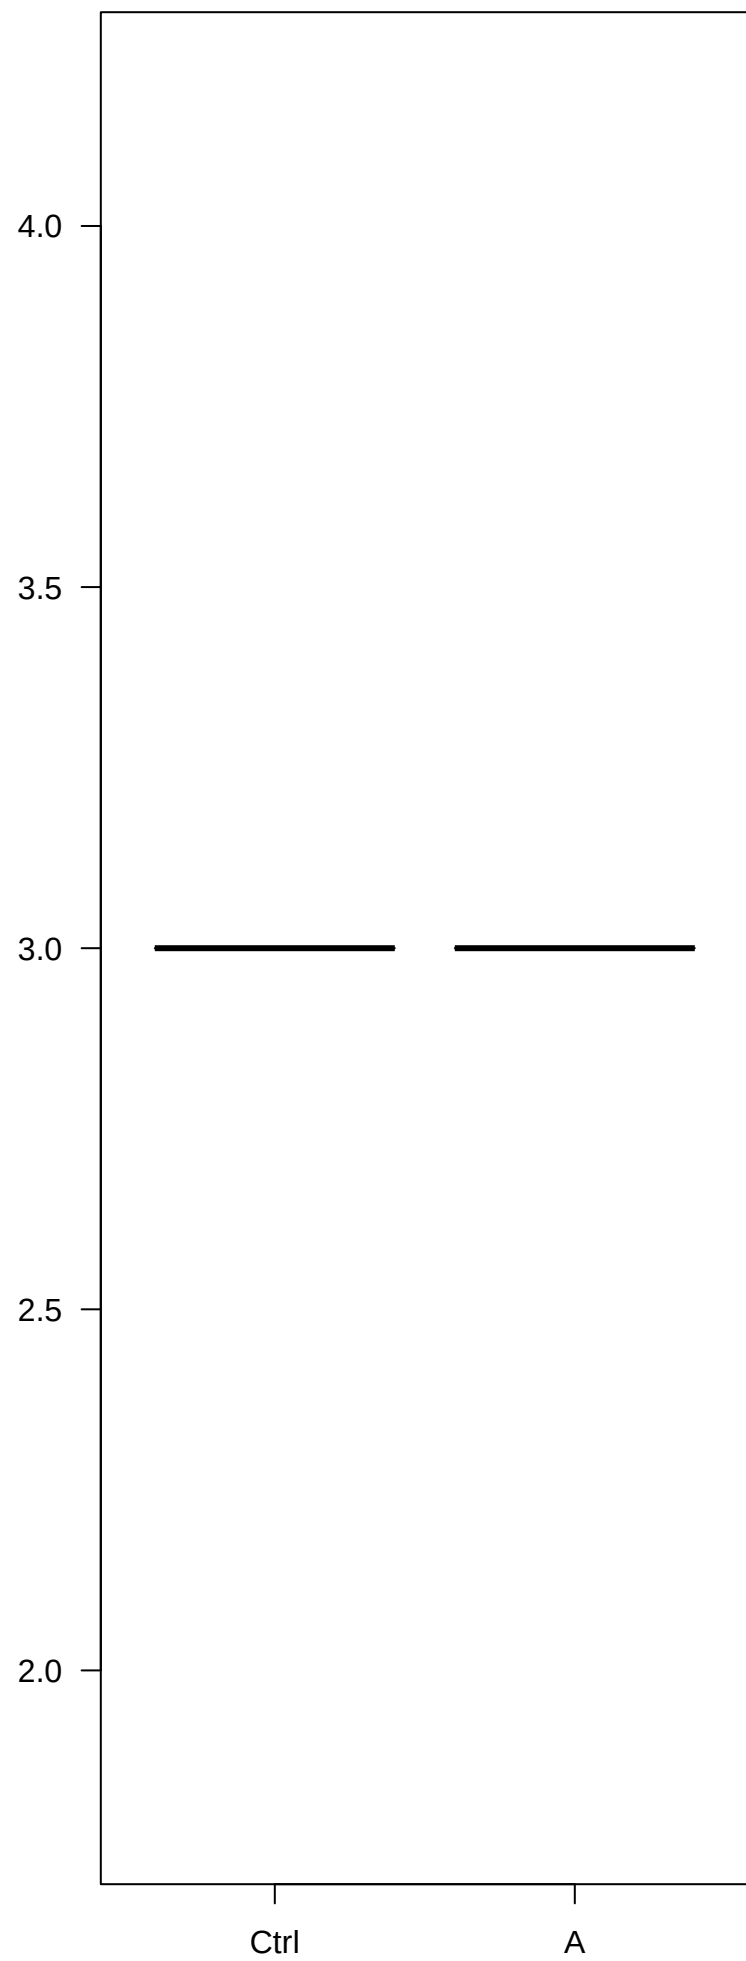

Config 93 (0.05|0.9|1|2|0.52|0.5| 0.7|simultaneous) [BINARY]

K (treatment arms) : 1

J (looks) : 2

p (target win-prob) : 0.52

p0 (null win-prob) : 0.5

method : simultaneous

true response rates : control $\pi_c = 0.700$

effect $\pi_t = 0.740$ (= $\pi_c + 2p-1$)

target alpha = 0.05 target power = 0.9

SIMULATED OPERATING CHARACTERISTICS (Bernoulli, stats.ptest)

Power (P reject ≥ 1 | H1) : 0.9006

FWER (P reject ≥ 1 | H0) : 0.0500

Max sample size (planned) : 4752

ESS under H1 : 3555.4

ESS under H0 : 3034.2


NB: design powered for the binary test (δ/σ), so achieved

power should track the target; residual gap is small-sample


discreteness, not misspecification.

Config 93 – sample size (H1) [binary]

Total

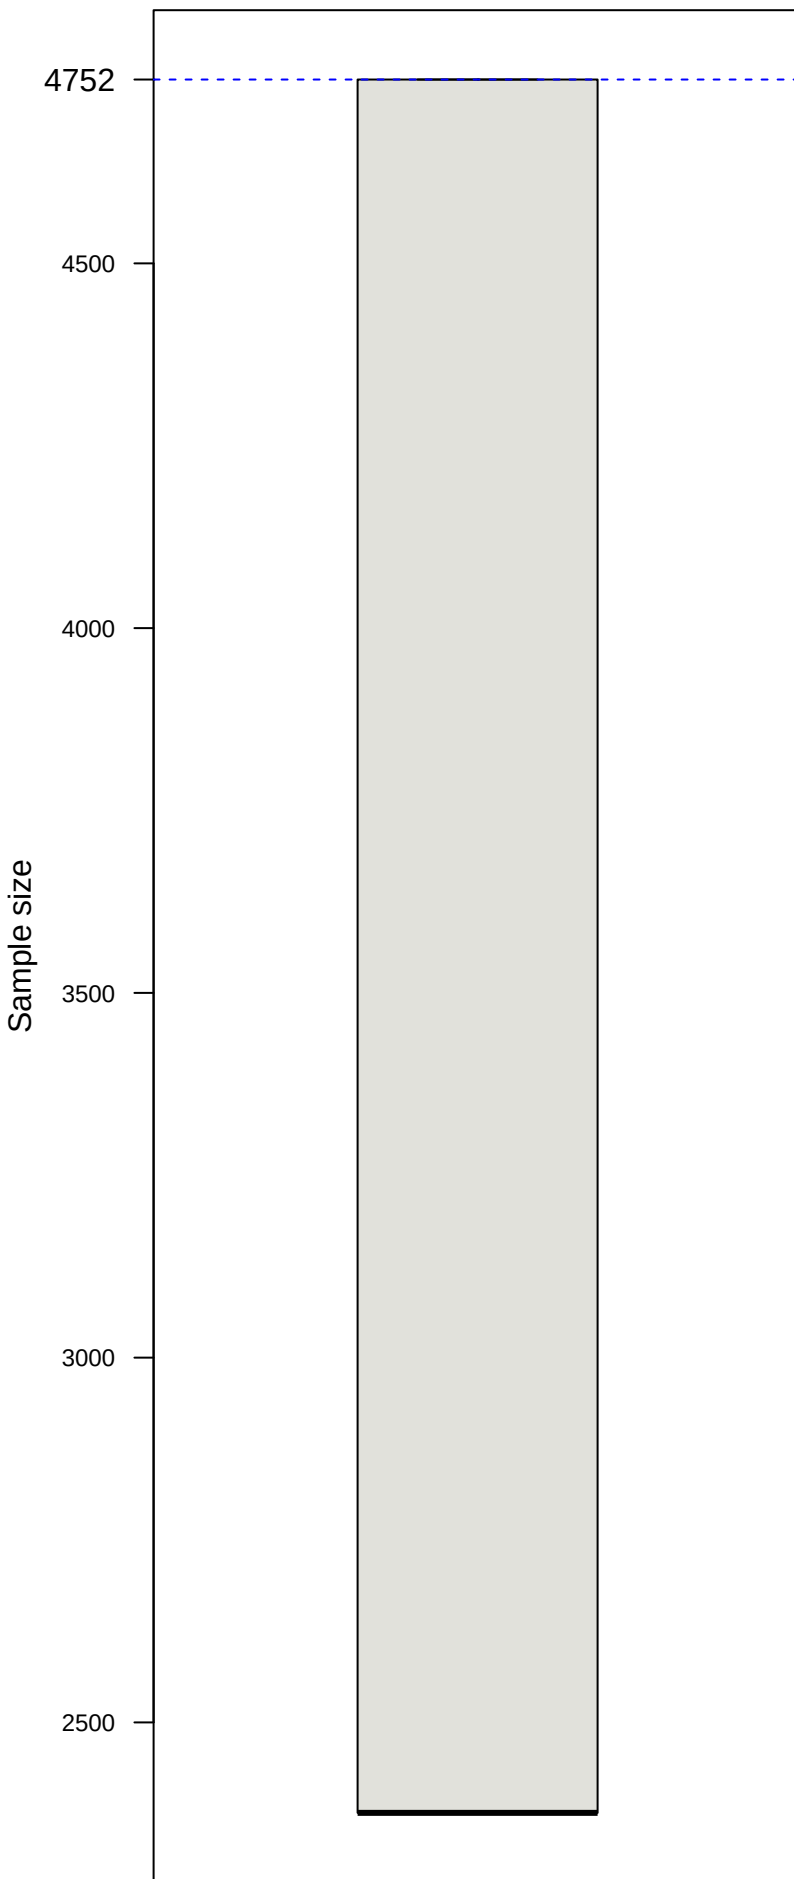

Per group

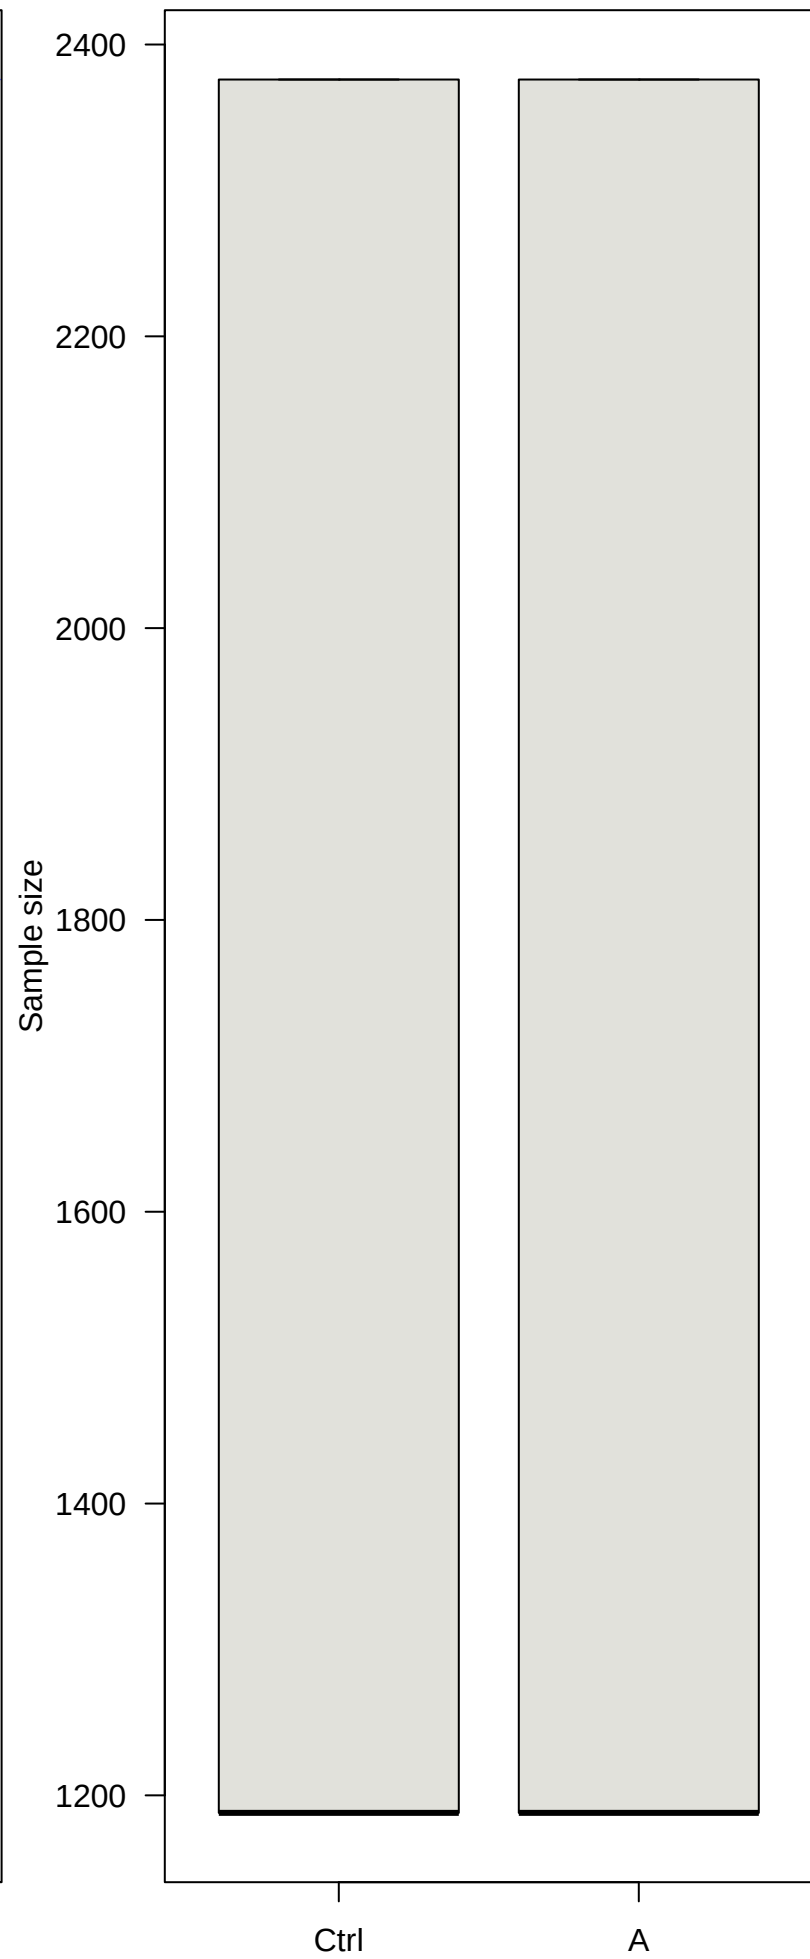

Config 95 (0.05|0.9|1|2|0.52|0.5| 0.9|simultaneous) [BINARY]

K (treatment arms) : 1

J (looks) : 2

p (target win-prob) : 0.52

p0 (null win-prob) : 0.5

method : simultaneous

true response rates : control $\pi_c = 0.900$

effect $\pi_t = 0.940$ (= $\pi_c + 2p-1$)

target alpha = 0.05 target power = 0.9

SIMULATED OPERATING CHARACTERISTICS (Bernoulli, stats.ptest)

Power (P reject ≥ 1 | H1) : 0.9016

FWER (P reject ≥ 1 | H0) : 0.0505

Max sample size (planned) : 1732

ESS under H1 : 1294.3

ESS under H0 : 1099.7


NB: design powered for the binary test (δ/σ), so achieved

power should track the target; residual gap is small-sample


discreteness, not misspecification.

Config 95 – sample size (H1) [binary]

Total

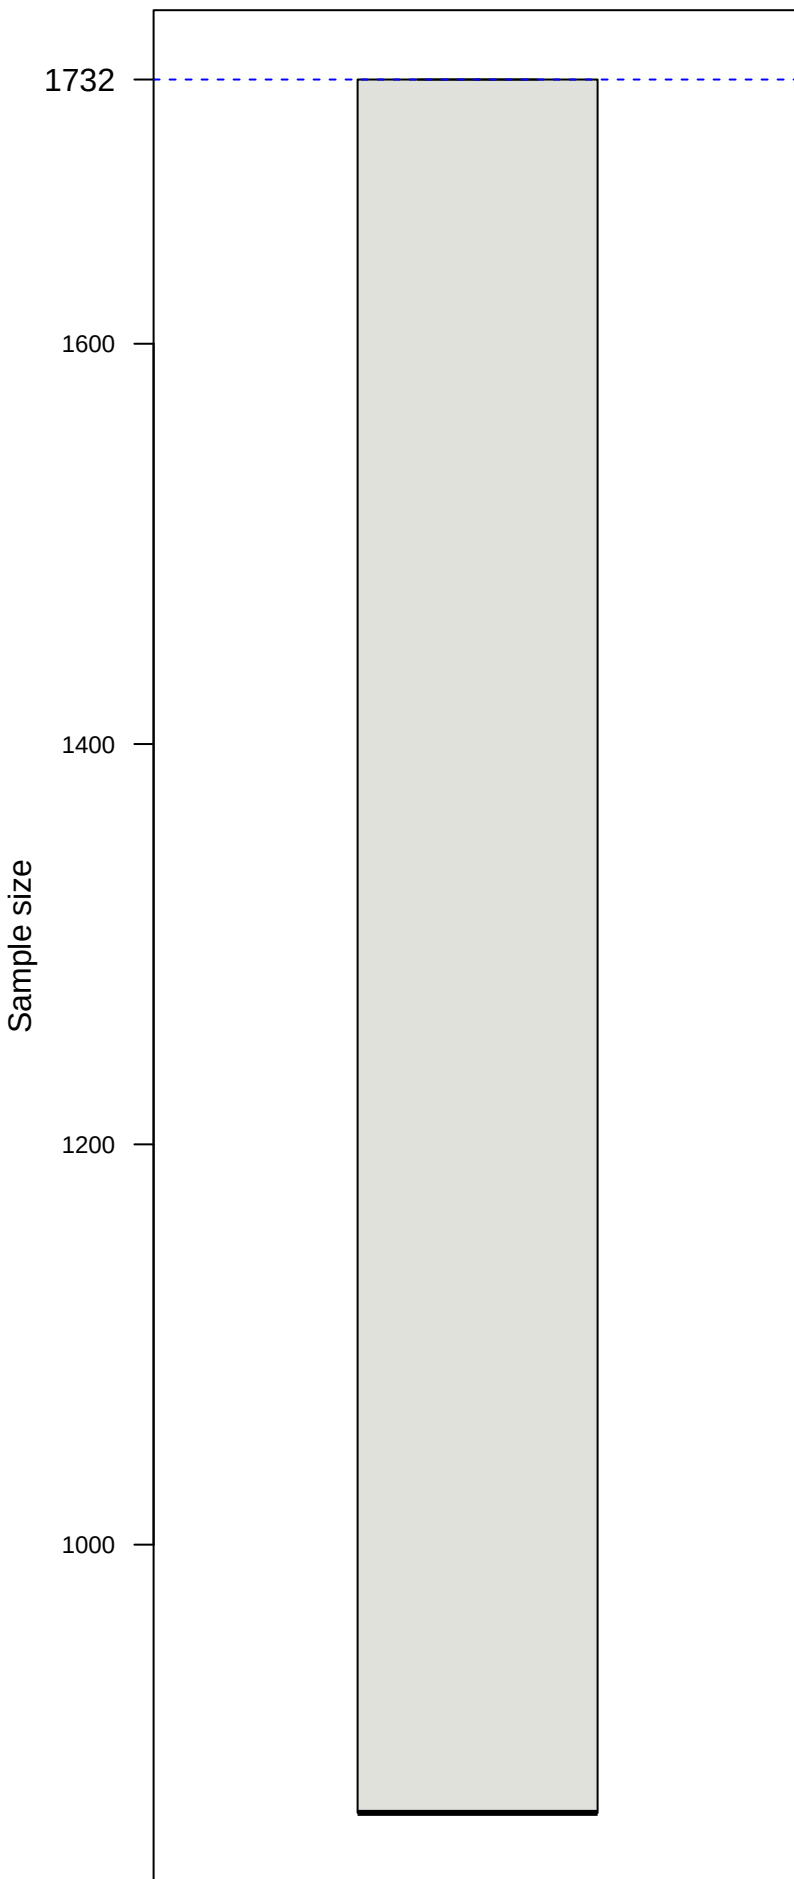

Per group

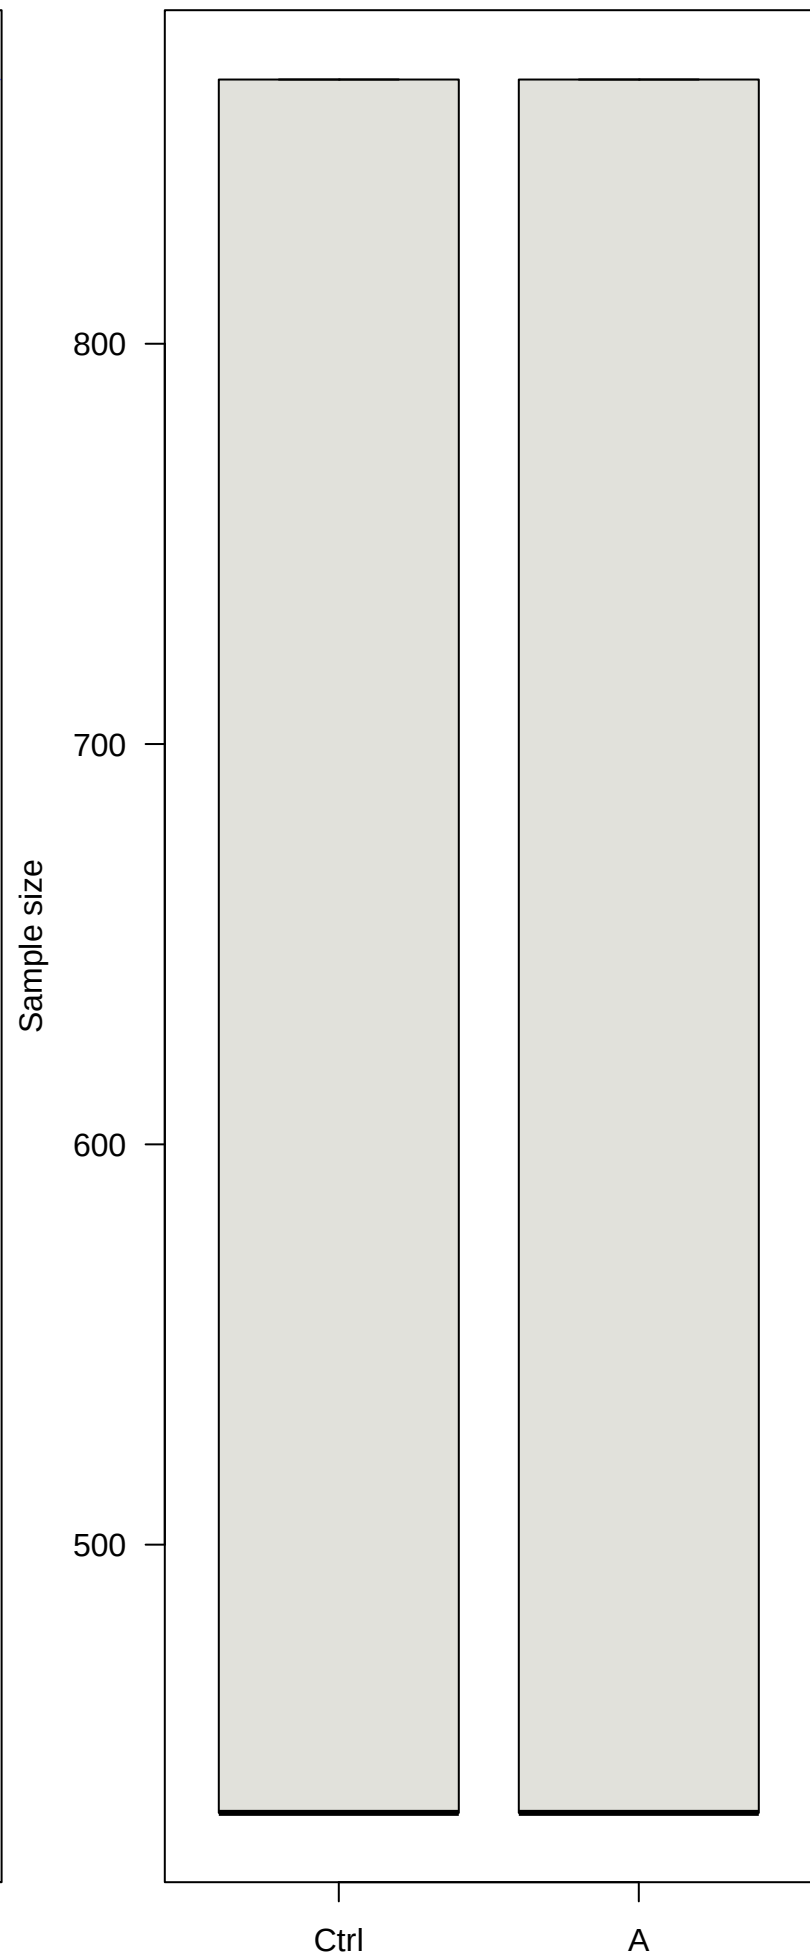

Config 103 (0.05|0.9|1|2|0.55|0.5| 0.5|simultaneous) [BINARY]

K (treatment arms) : 1

J (looks) : 2

p (target win-prob) : 0.55

p0 (null win-prob) : 0.5

method : simultaneous

true response rates : control $\pi_c = 0.500$

effect $\pi_t = 0.600$ (= $\pi_c + 2p-1$)

target alpha = 0.05 target power = 0.9

SIMULATED OPERATING CHARACTERISTICS (Bernoulli, stats.ptest)

Power (P reject ≥ 1 | H1) : 0.9008

FWER (P reject ≥ 1 | H0) : 0.0508

Max sample size (planned) : 932

ESS under H1 : 694.3

ESS under H0 : 587.6


NB: design powered for the binary test (δ/σ), so achieved

power should track the target; residual gap is small-sample


discreteness, not misspecification.

Config 103 – sample size (H1) [binary]

Total

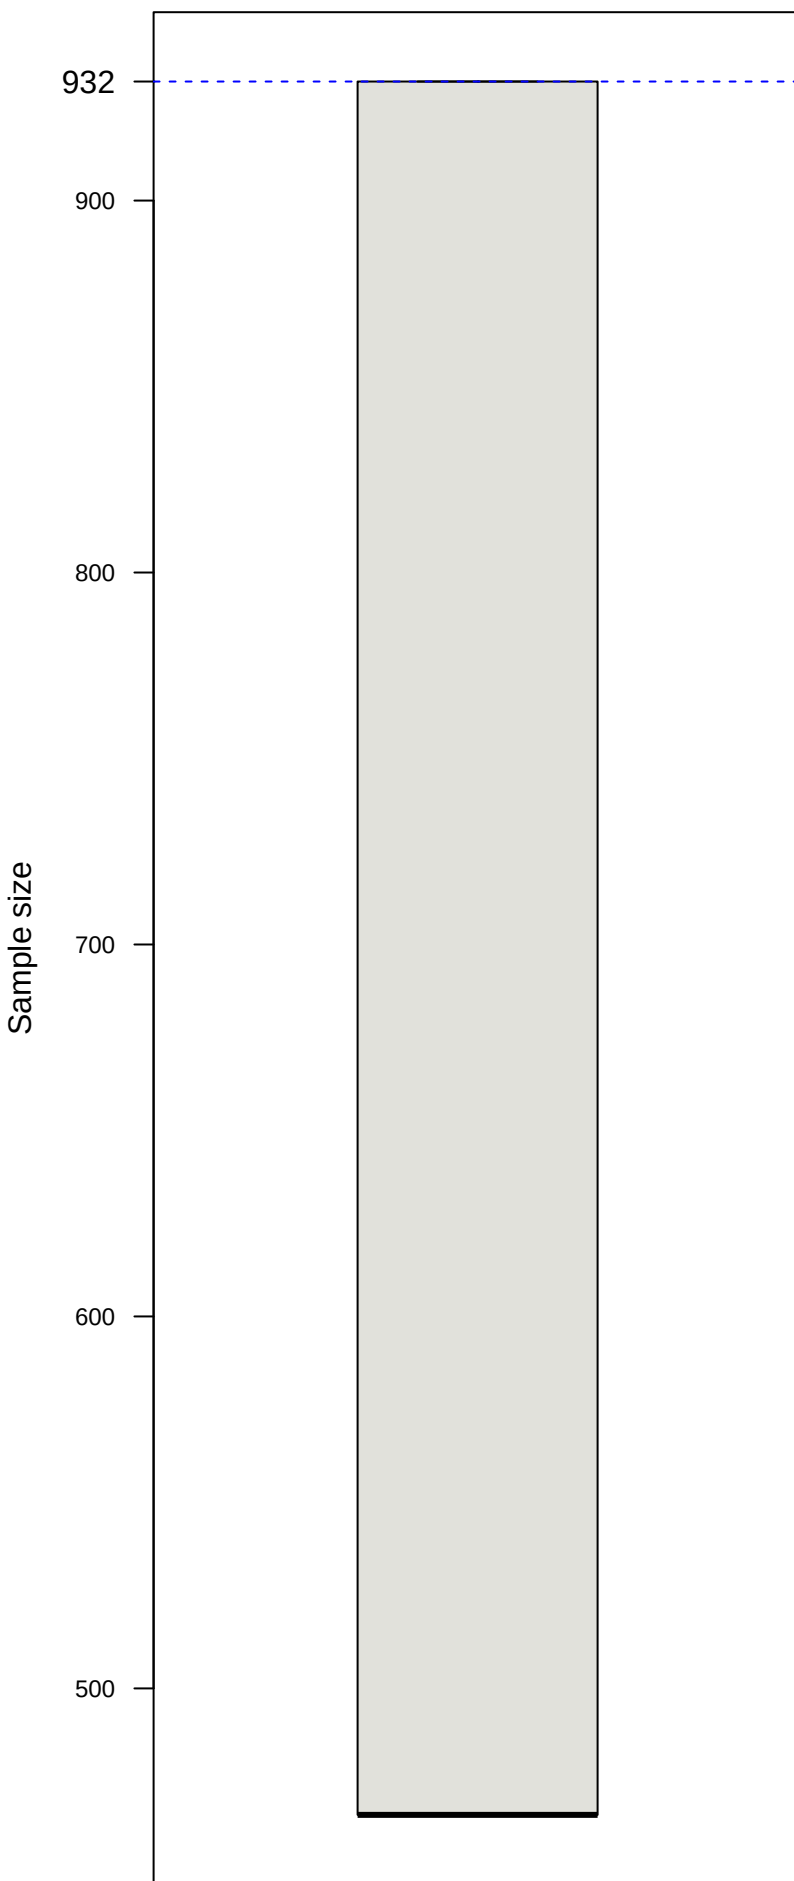

Per group

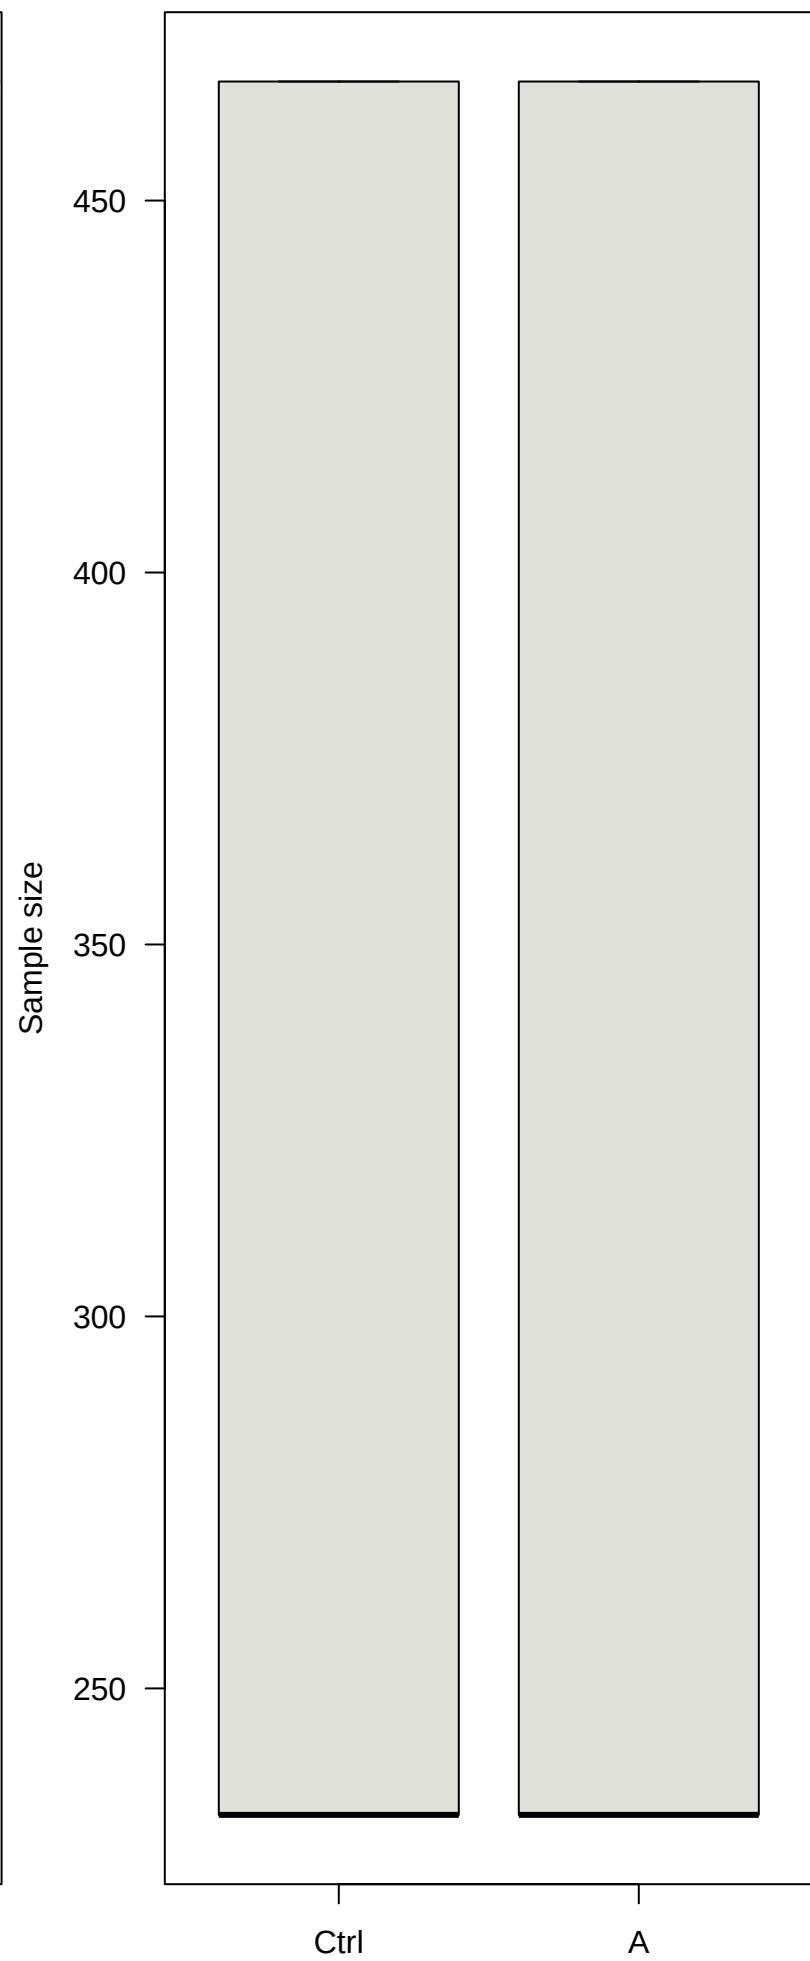

Config 117 (0.05|0.9|1|2| 0.6|0.5| 0.7|simultaneous) [BINARY]

K (treatment arms) : 1

J (looks) : 2

p (target win-prob) : 0.6

p0 (null win-prob) : 0.5

method : simultaneous

true response rates : control $\pi_c = 0.700$

effect $\pi_t = 0.900$ (= $\pi_c + 2p-1$)

target alpha = 0.05 target power = 0.9

SIMULATED OPERATING CHARACTERISTICS (Bernoulli, stats.ptest)

Power (P reject ≥ 1 | H1) : 0.9131

FWER (P reject ≥ 1 | H0) : 0.0501

Max sample size (planned) : 148

ESS under H1 : 112.1

ESS under H0 : 92.9


NB: design powered for the binary test (δ/σ), so achieved

power should track the target; residual gap is small-sample


discreteness, not misspecification.

Config 117 – sample size (H1) [binary]

Total

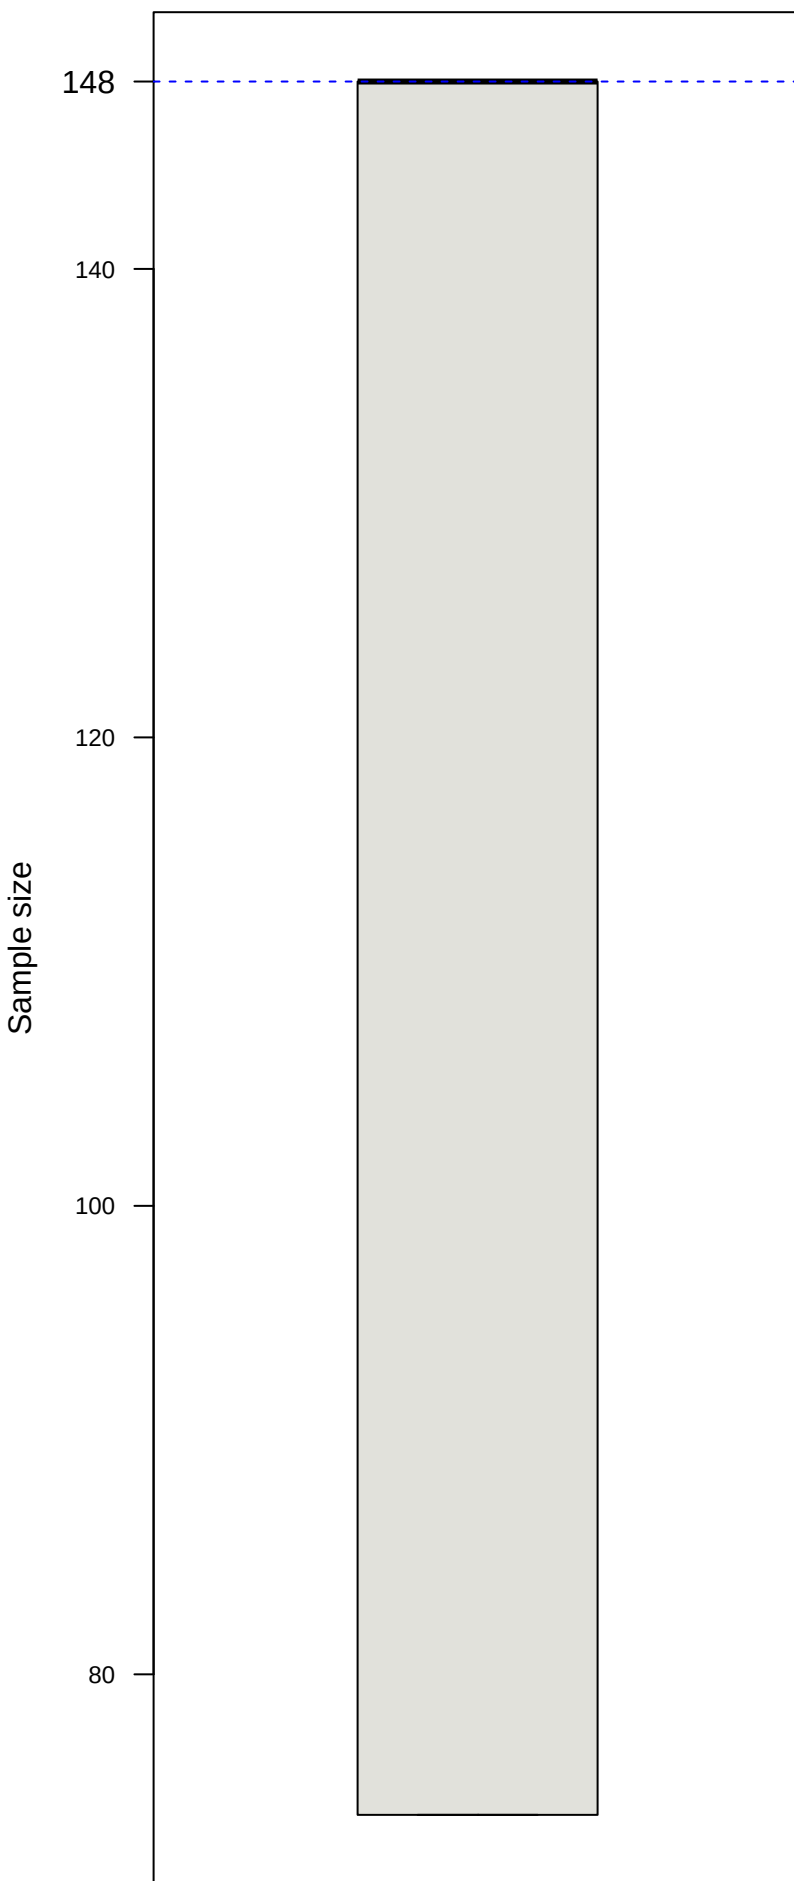

Per group

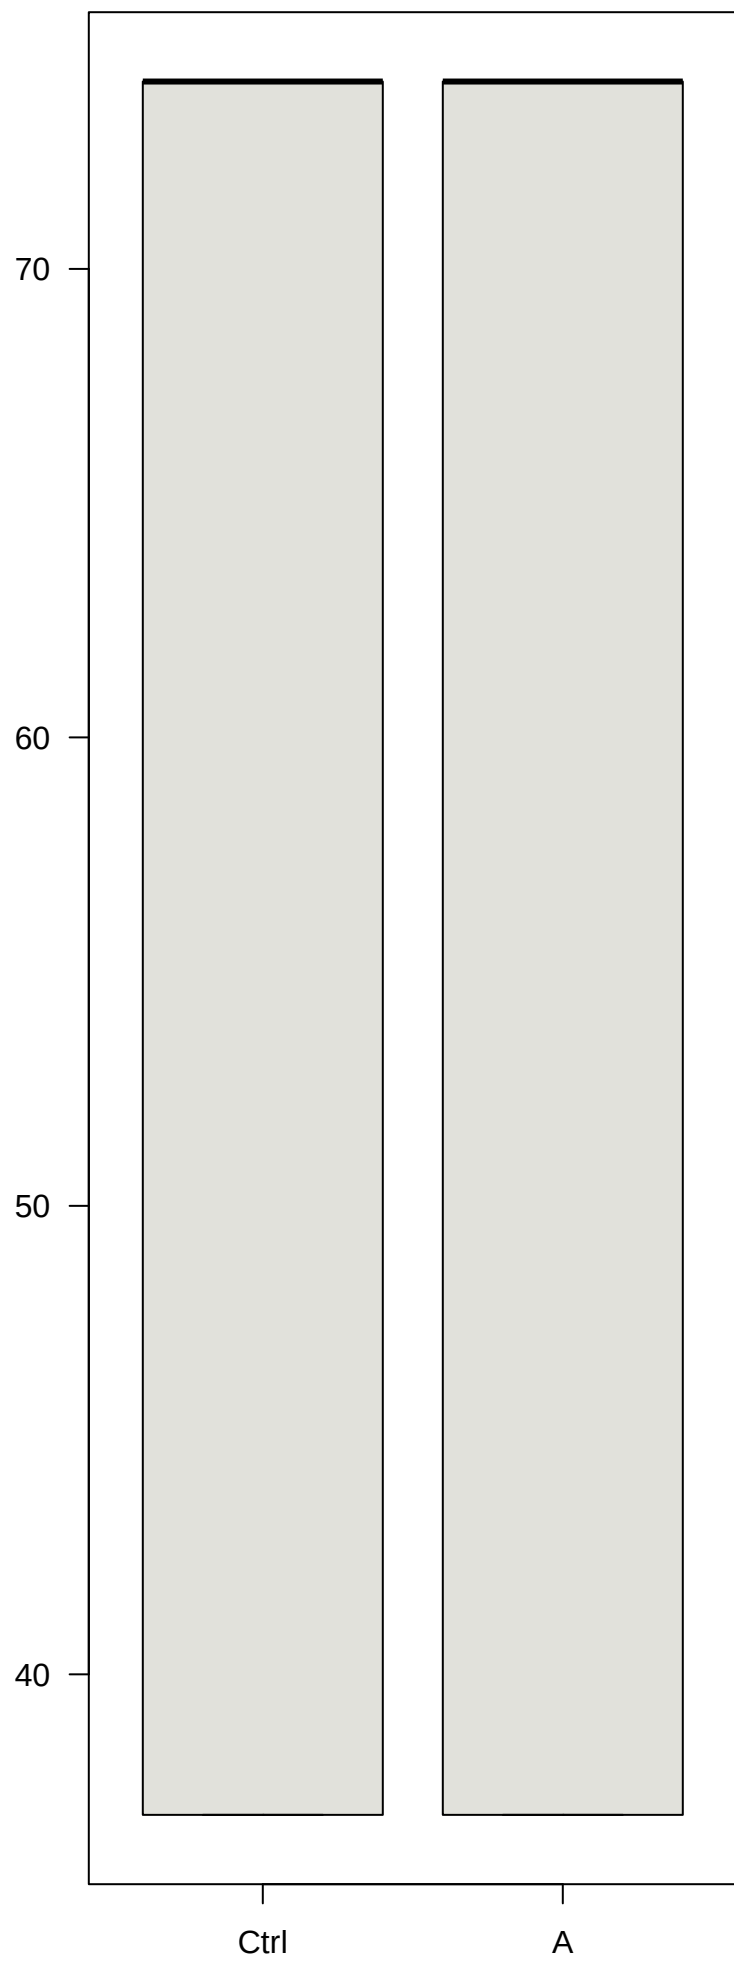

Config 121 (0.05|0.9|1|2|0.65|0.5|0.05|simultaneous) [BINARY]

K (treatment arms) : 1

J (looks) : 2

p (target win-prob) : 0.65

p0 (null win-prob) : 0.5

method : simultaneous

true response rates : control $\pi_c = 0.050$

effect $\pi_t = 0.350$ (= $\pi_c + 2p-1$)

target alpha = 0.05 target power = 0.9

SIMULATED OPERATING CHARACTERISTICS (Bernoulli, stats.ptest)

Power (P reject ≥ 1 | H1) : 0.9345

FWER (P reject ≥ 1 | H0) : 0.0458

Max sample size (planned) : 64

ESS under H1 : 48.9

ESS under H0 : 48.3


NB: design powered for the binary test (δ/σ), so achieved

power should track the target; residual gap is small-sample


discreteness, not misspecification.

Config 121 – sample size (H1) [binary]

Total

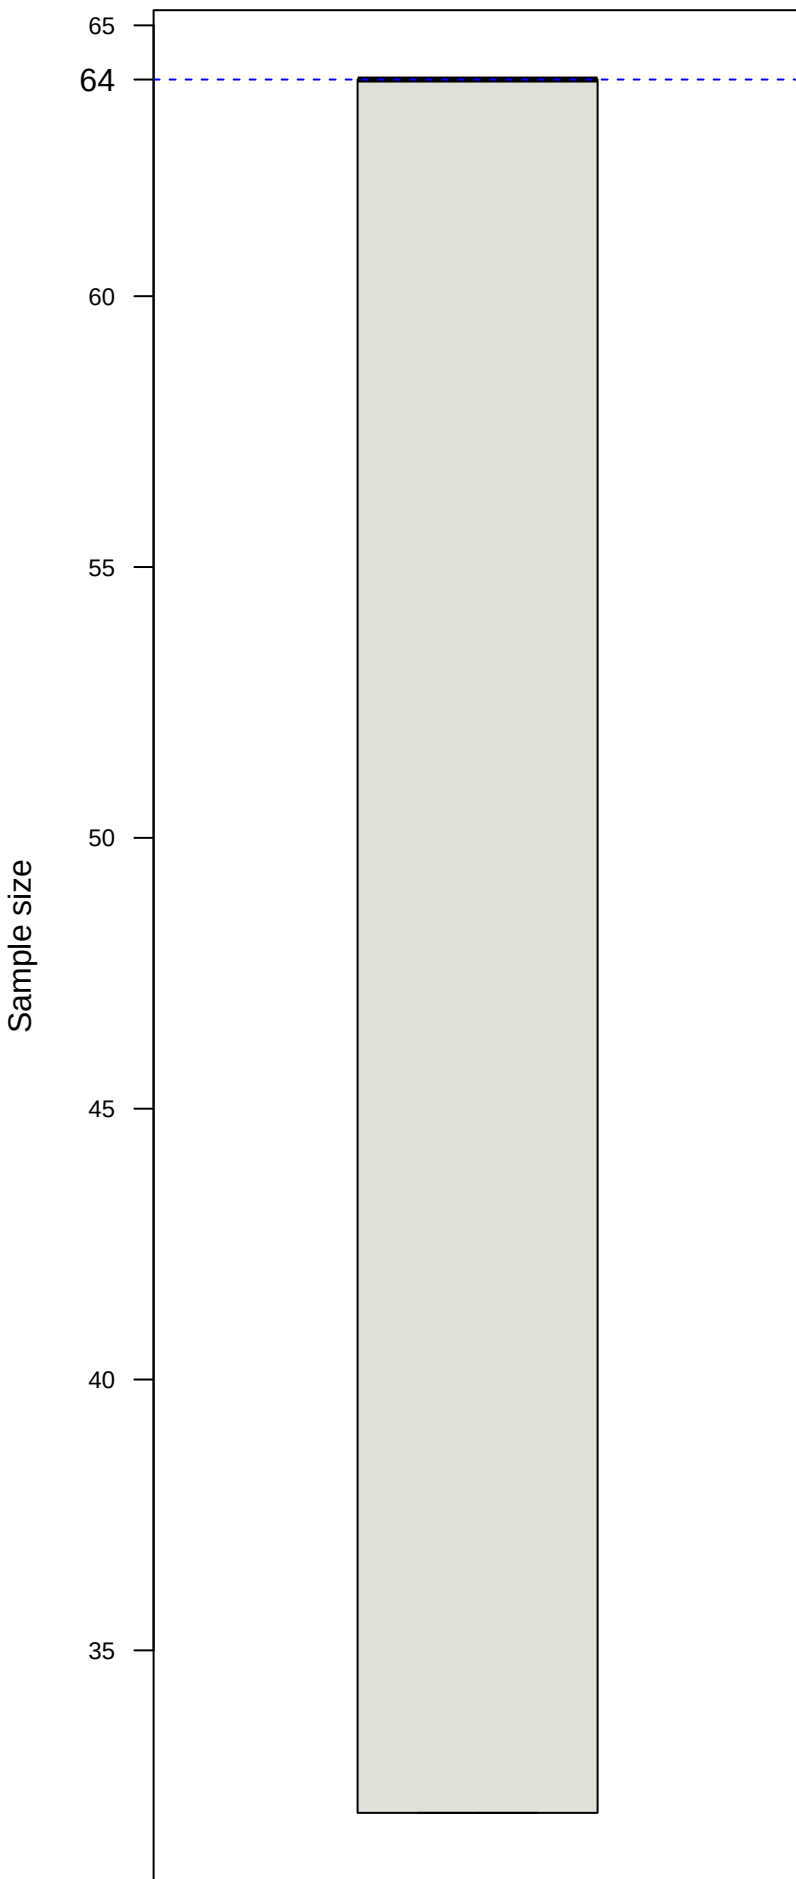

Per group

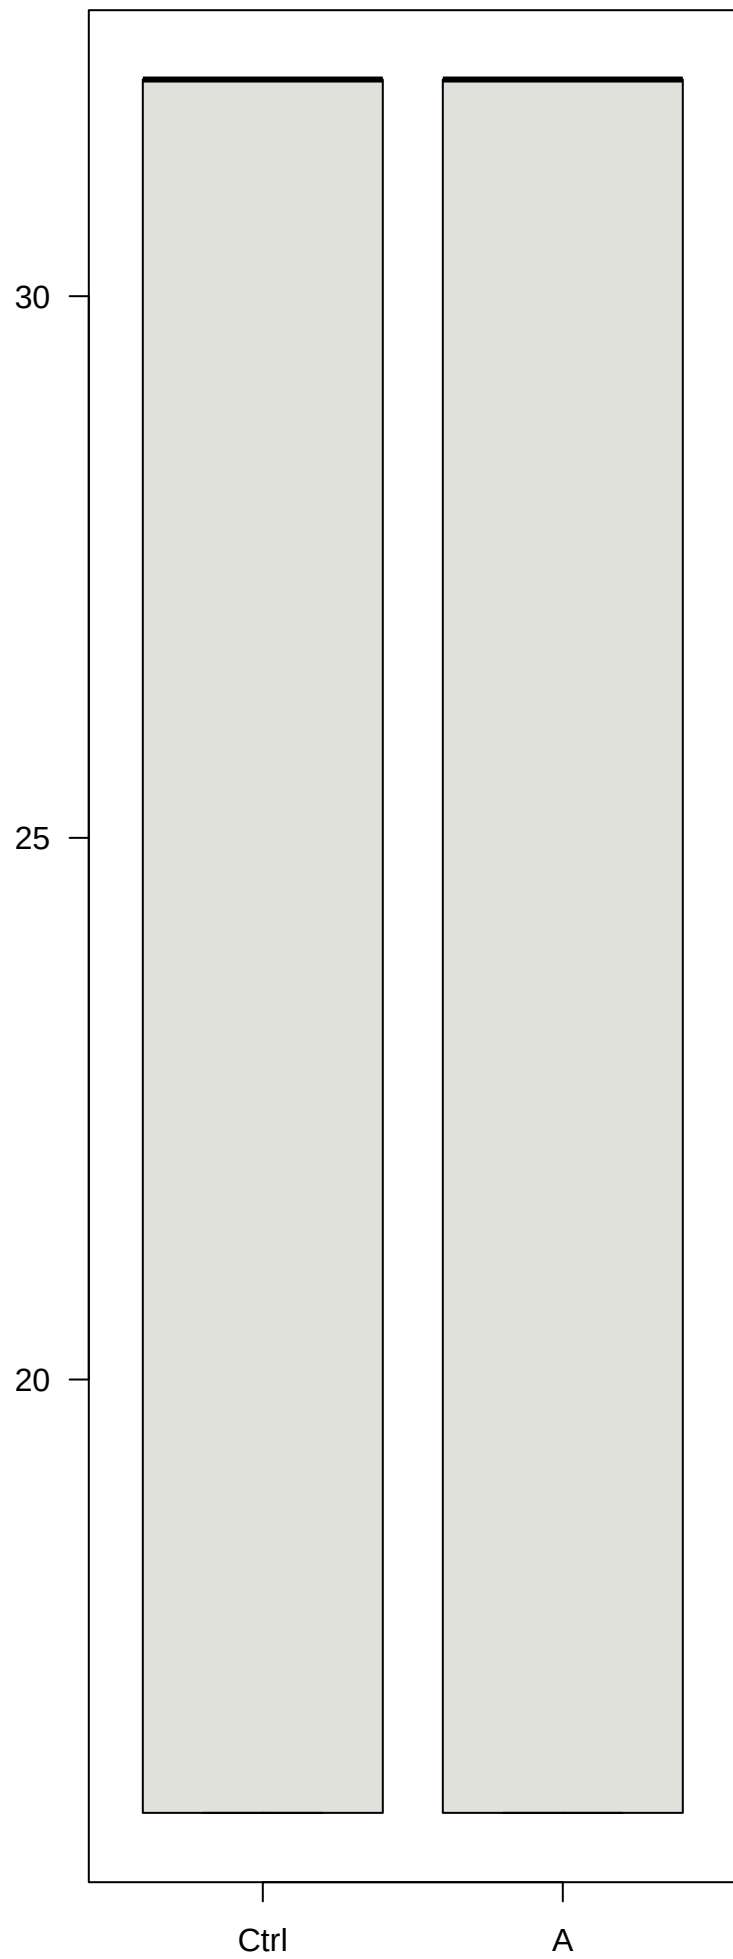

Config 125 (0.05|0.9|1|2|0.65|0.5| 0.3|simultaneous) [BINARY]

K (treatment arms) : 1

J (looks) : 2

p (target win-prob) : 0.65

p0 (null win-prob) : 0.5

method : simultaneous

true response rates : control $\pi_c = 0.300$

effect $\pi_t = 0.600$ (= $\pi_c + 2p-1$)

target alpha = 0.05 target power = 0.9

SIMULATED OPERATING CHARACTERISTICS (Bernoulli, stats.ptest)

Power (P reject ≥ 1 | H1) : 0.8912

FWER (P reject ≥ 1 | H0) : 0.0513

Max sample size (planned) : 100

ESS under H1 : 75.8

ESS under H0 : 65.3


NB: design powered for the binary test (δ/σ), so achieved

power should track the target; residual gap is small-sample


discreteness, not misspecification.

Config 125 – sample size (H1) [binary]

Total

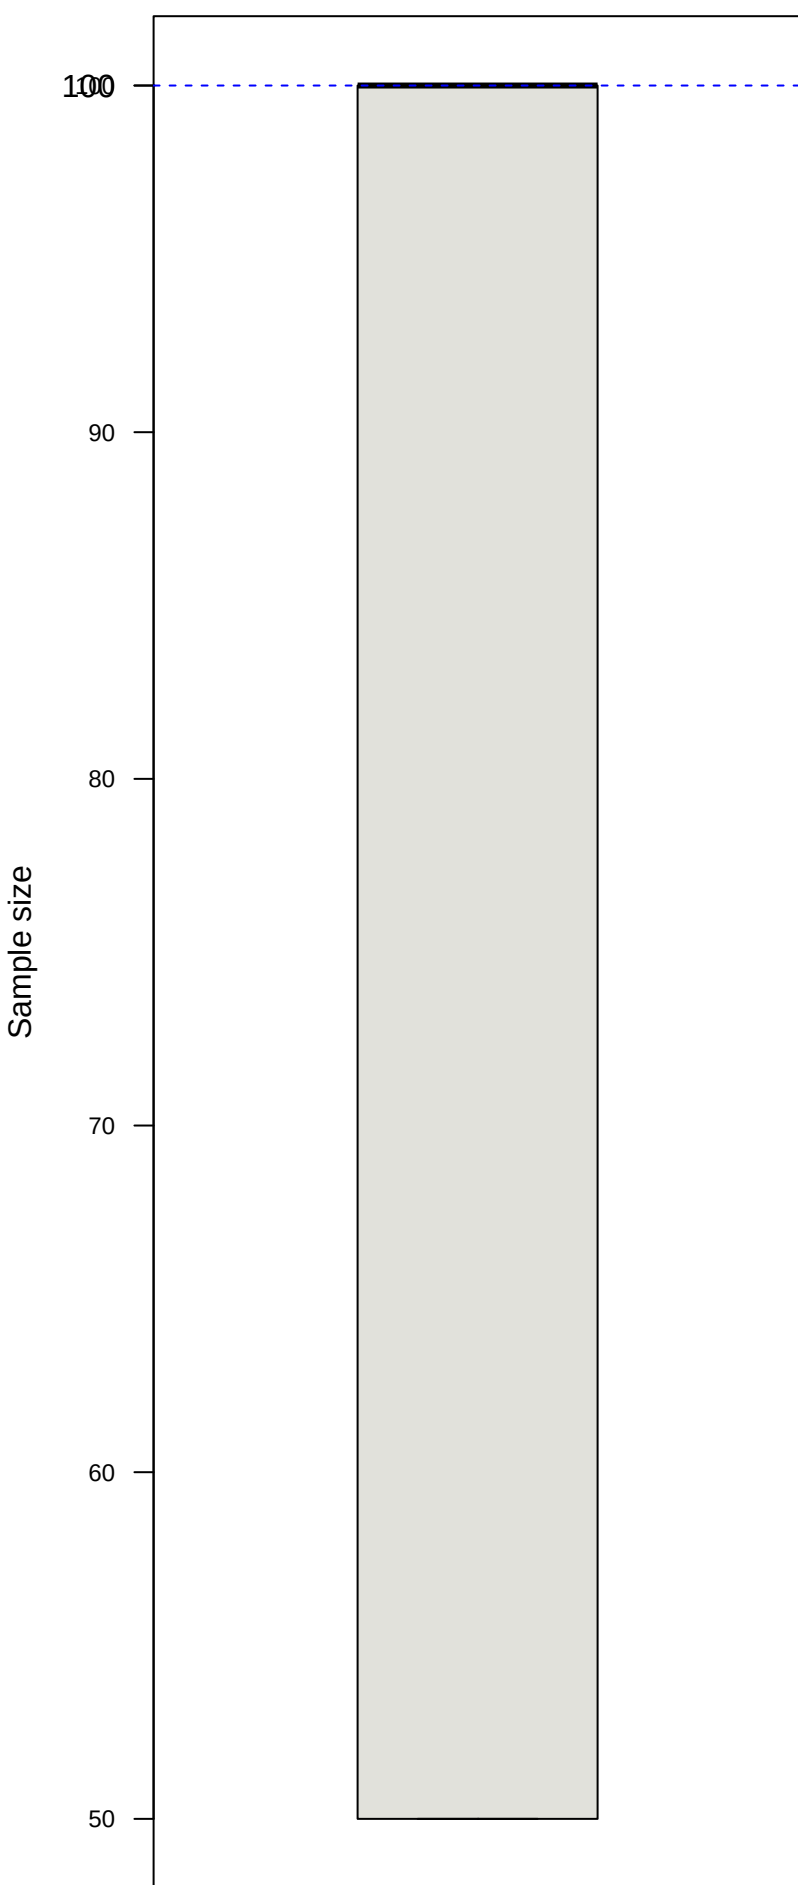

Per group

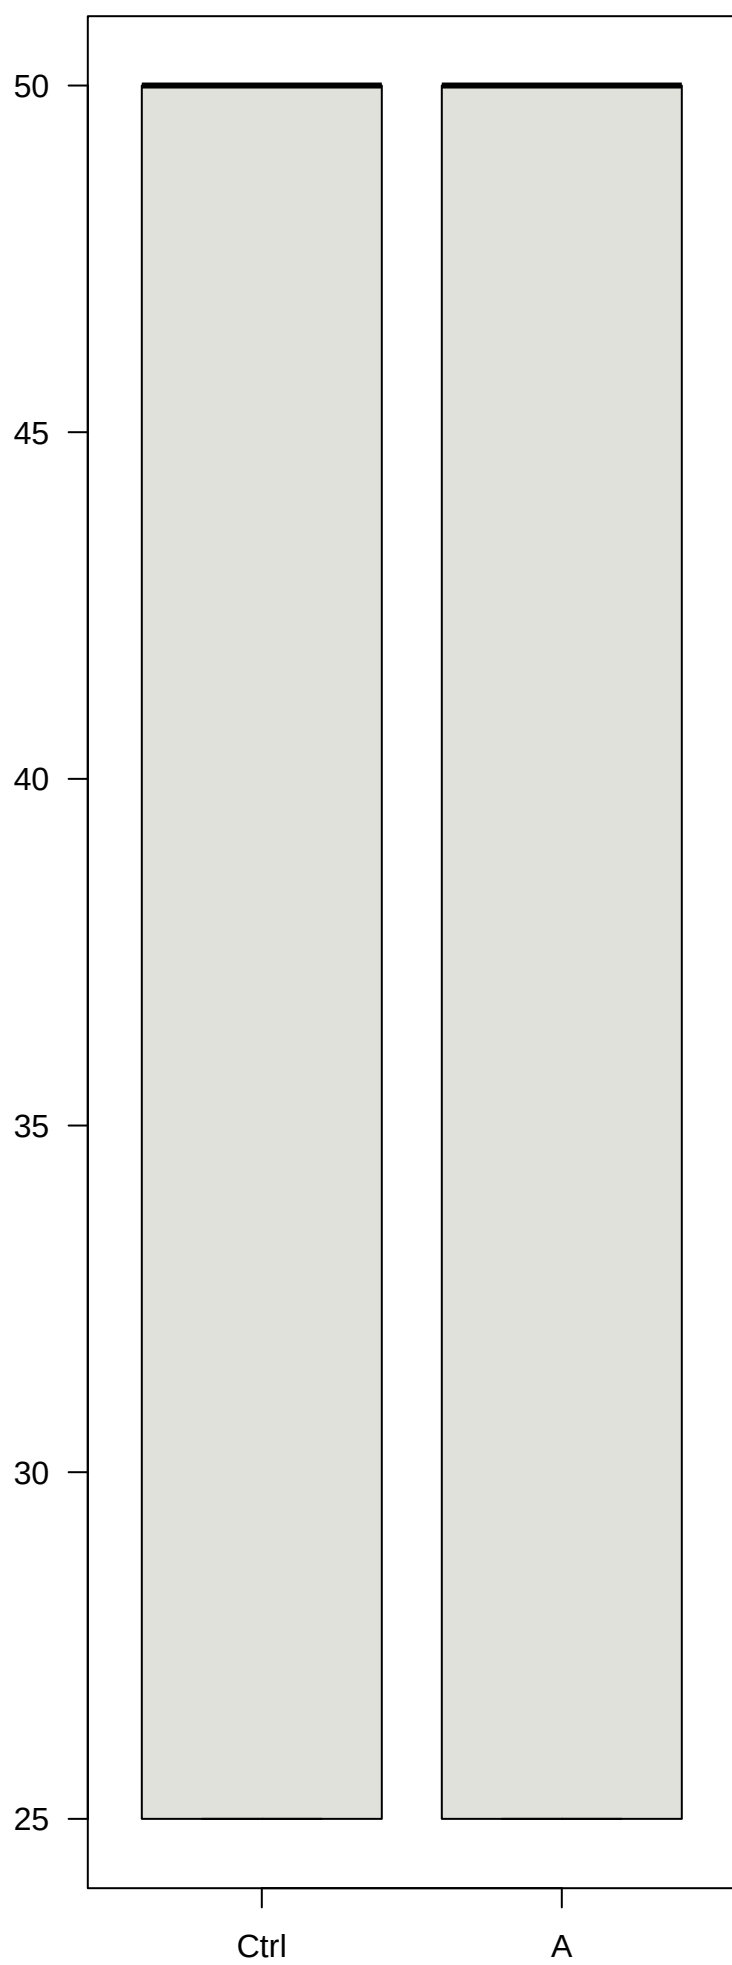

Config 127 (0.05|0.9|1|2|0.65|0.5| 0.5|simultaneous) [BINARY]

K (treatment arms) : 1

J (looks) : 2

p (target win-prob) : 0.65

p0 (null win-prob) : 0.5

method : simultaneous

true response rates : control $\pi_c = 0.500$

effect $\pi_t = 0.800$ (= $\pi_c + 2p-1$)

target alpha = 0.05 target power = 0.9

SIMULATED OPERATING CHARACTERISTICS (Bernoulli, stats.ptest)

Power (P reject ≥ 1 | H1) : 0.9104

FWER (P reject ≥ 1 | H0) : 0.0571

Max sample size (planned) : 92

ESS under H1 : 69.8

ESS under H0 : 60.5


NB: design powered for the binary test (δ/σ), so achieved

power should track the target; residual gap is small-sample


discreteness, not misspecification.

Config 127 – sample size (H1) [binary]

Total

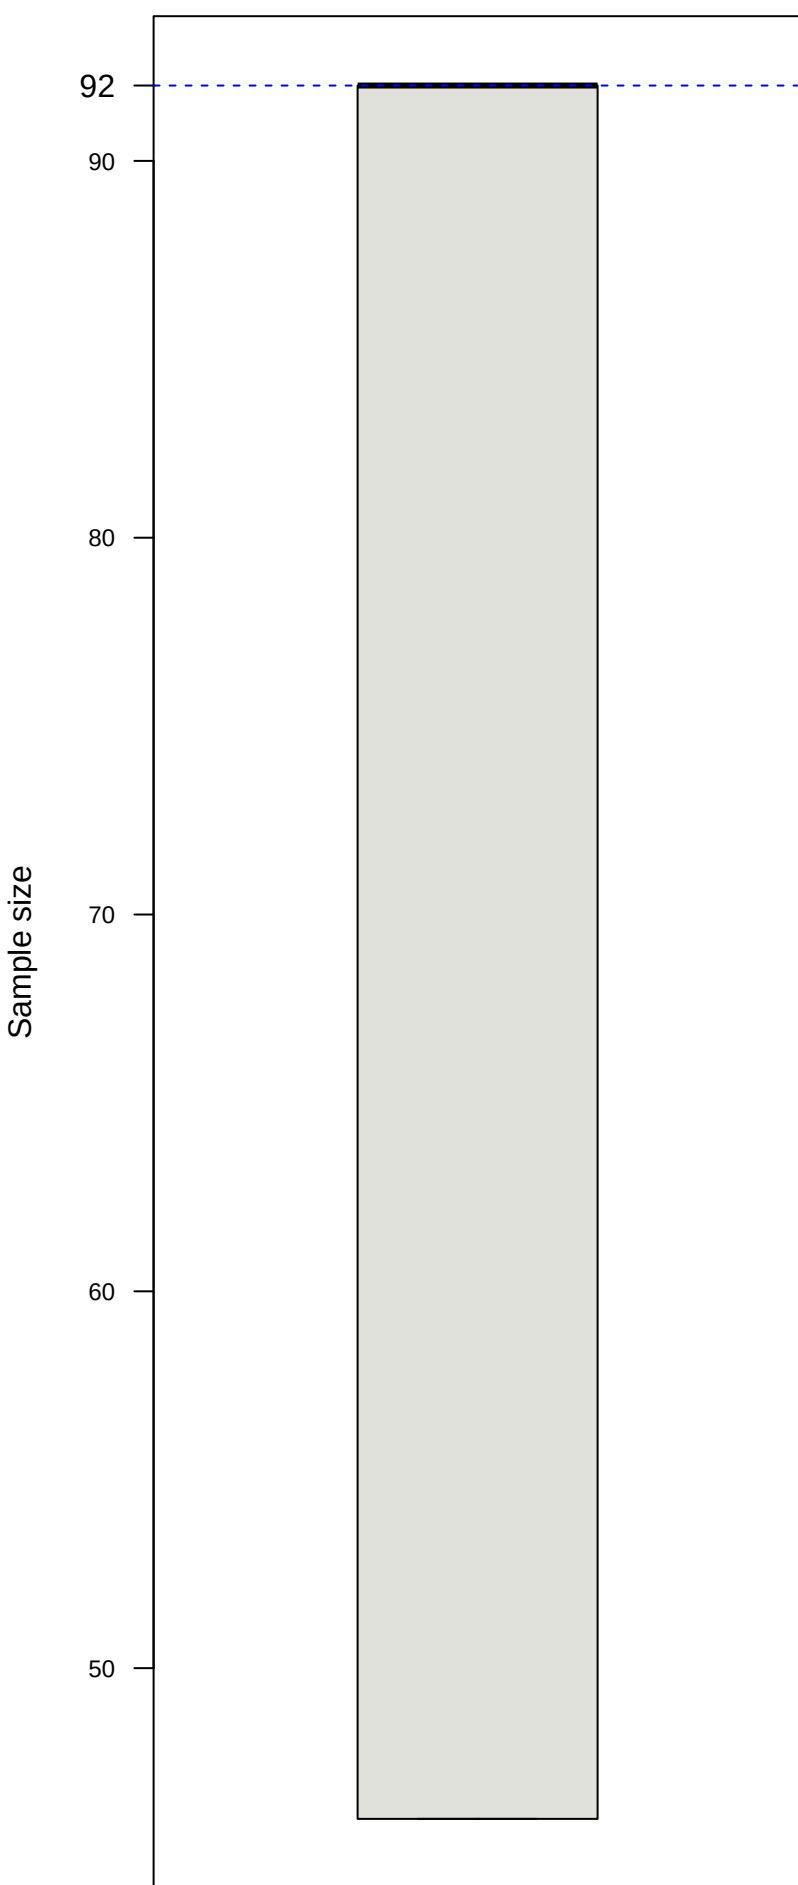

Per group

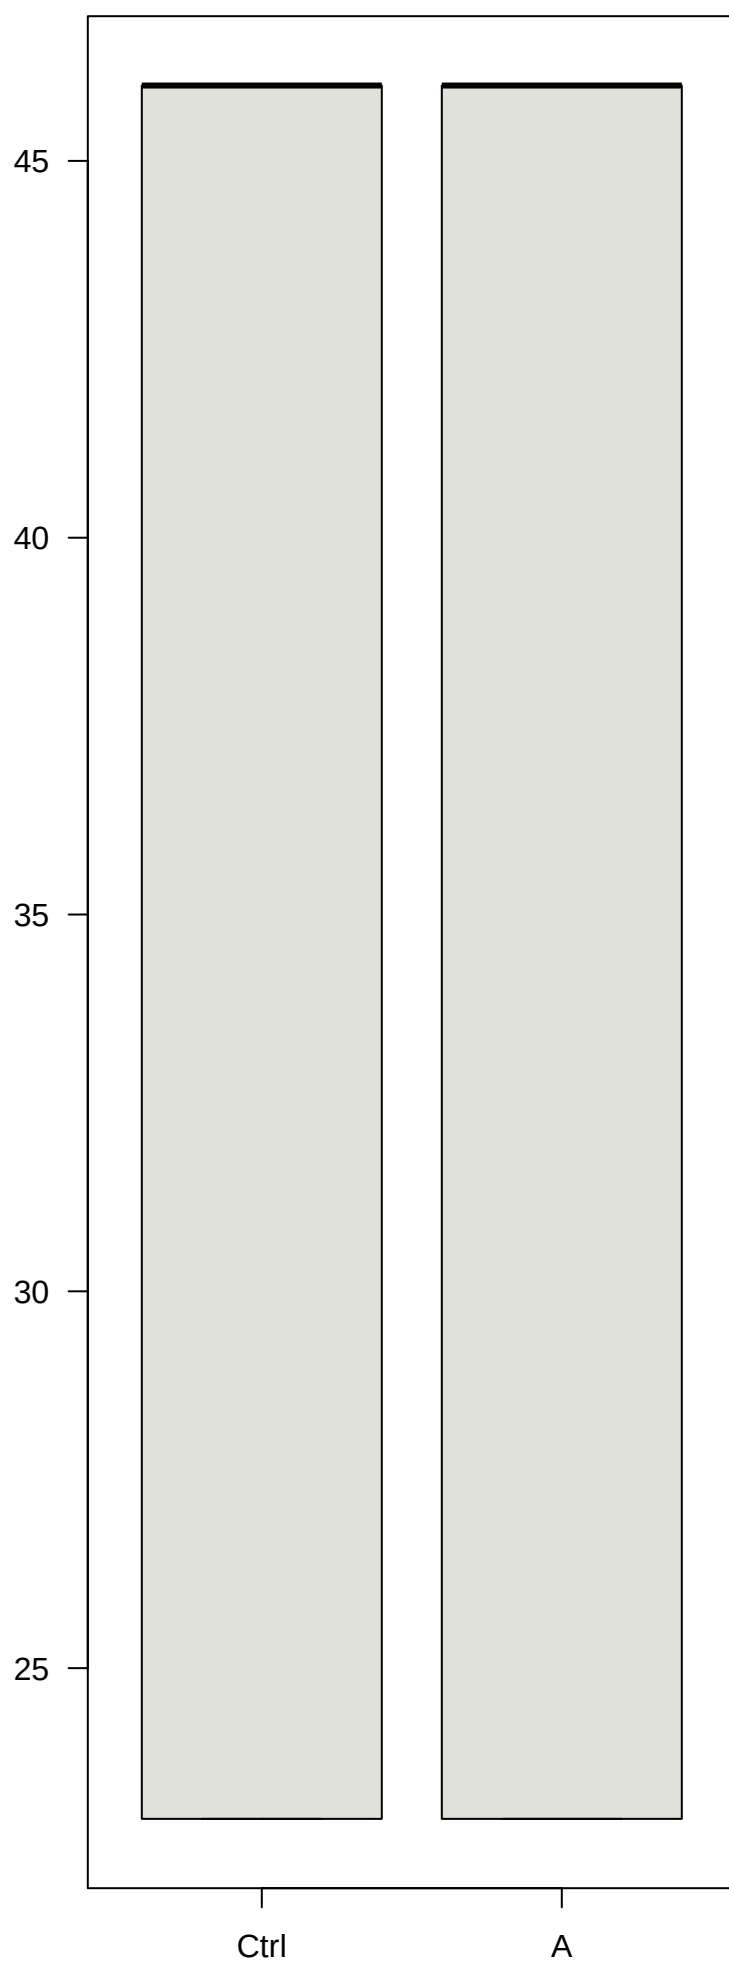

Config 137 (0.05|0.9|1|2|0.75|0.5| 0.3|simultaneous) [BINARY]

K (treatment arms) : 1

J (looks) : 2

p (target win-prob) : 0.75

p0 (null win-prob) : 0.5

method : simultaneous

true response rates : control $\pi_c = 0.300$

effect $\pi_t = 0.800$ (= $\pi_c + 2p-1$)

target alpha = 0.05 target power = 0.9

SIMULATED OPERATING CHARACTERISTICS (Bernoulli, stats.ptest)

Power (P reject ≥ 1 | H1) : 0.9248

FWER (P reject ≥ 1 | H0) : 0.0486

Max sample size (planned) : 36

ESS under H1 : 25.8

ESS under H0 : 22.6


NB: design powered for the binary test (δ/σ), so achieved

power should track the target; residual gap is small-sample


discreteness, not misspecification.

Config 137 – sample size (H1) [binary]

Total

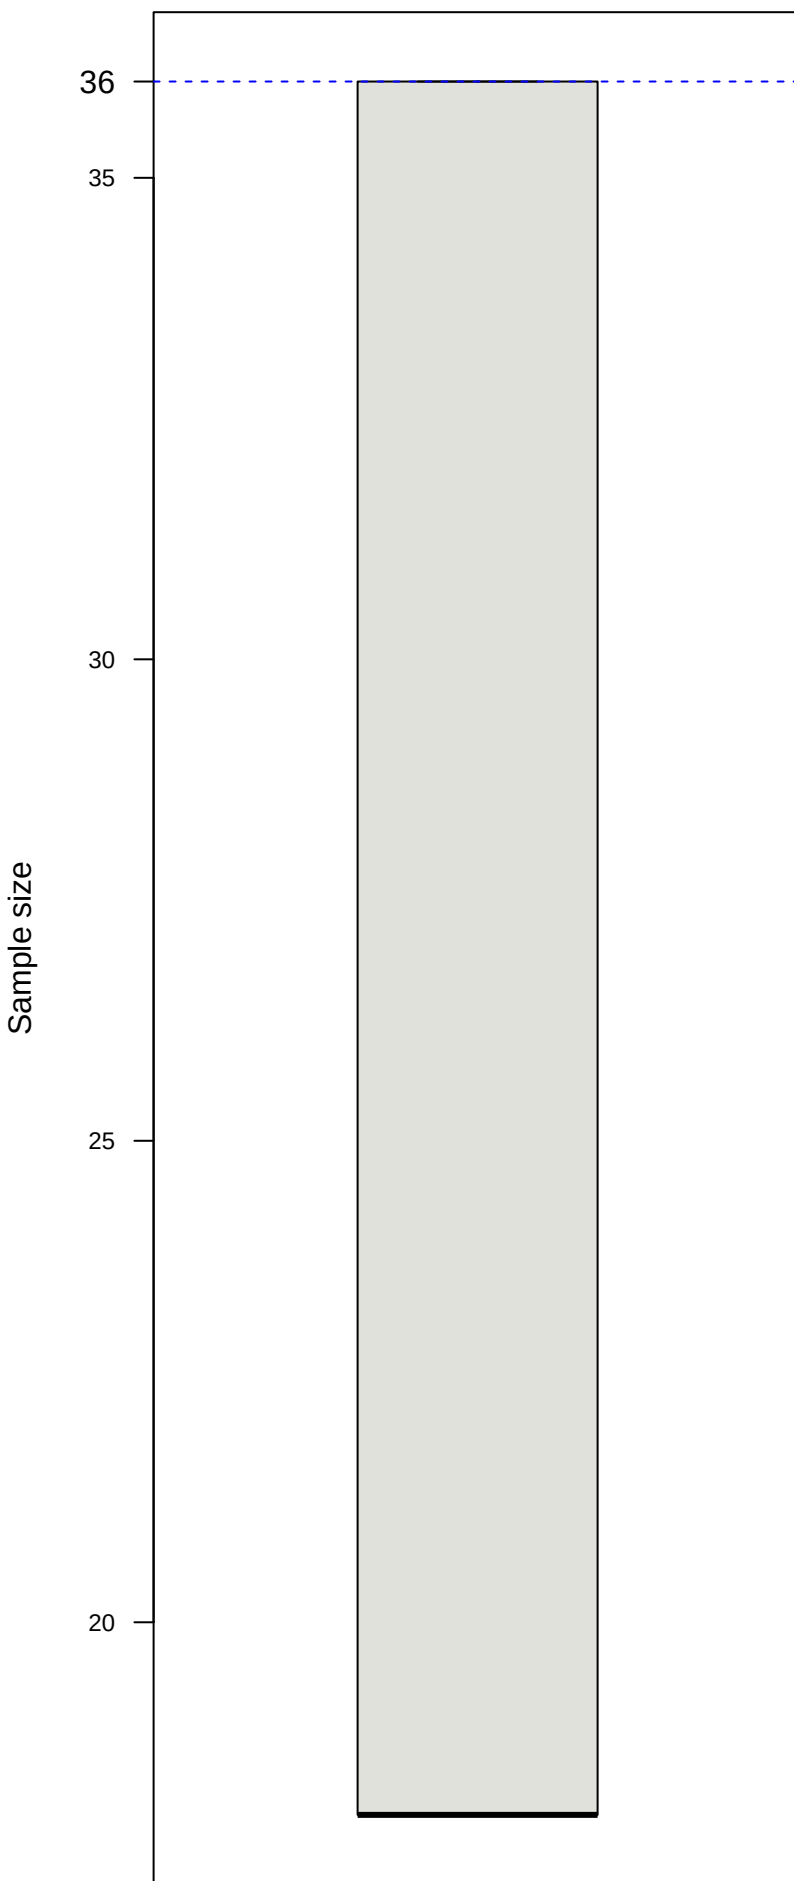

Per group

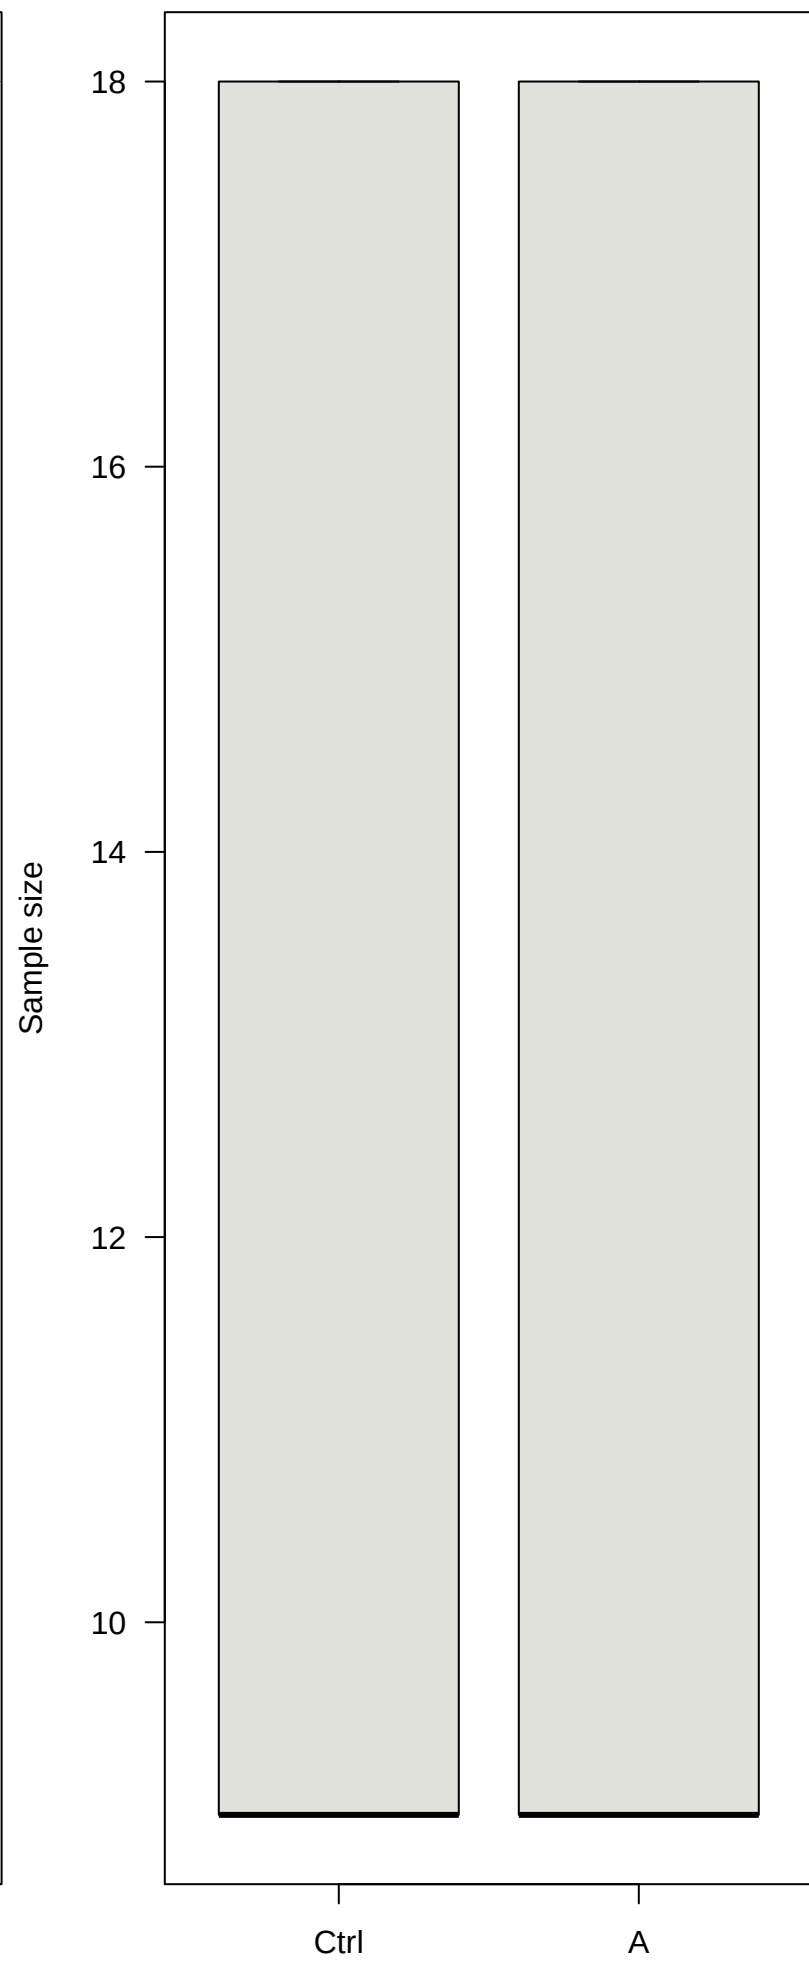

Config 147 (0.05|0.9|1|2|0.85|0.5| 0.1|simultaneous) [BINARY]

K (treatment arms) : 1

J (looks) : 2

p (target win-prob) : 0.85

p0 (null win-prob) : 0.5

method : simultaneous

true response rates : control $\pi_c = 0.100$

effect $\pi_t = 0.800$ (= $\pi_c + 2p-1$)

target alpha = 0.05 target power = 0.9

SIMULATED OPERATING CHARACTERISTICS (Bernoulli, stats.ptest)

Power (P reject ≥ 1 | H1) : 0.9194

FWER (P reject ≥ 1 | H0) : 0.0170

Max sample size (planned) : 16

ESS under H1 : 13.7

ESS under H0 : 13.4


NB: design powered for the binary test (δ/σ), so achieved

power should track the target; residual gap is small-sample


discreteness, not misspecification.

Config 147 – sample size (H1) [binary]

Total

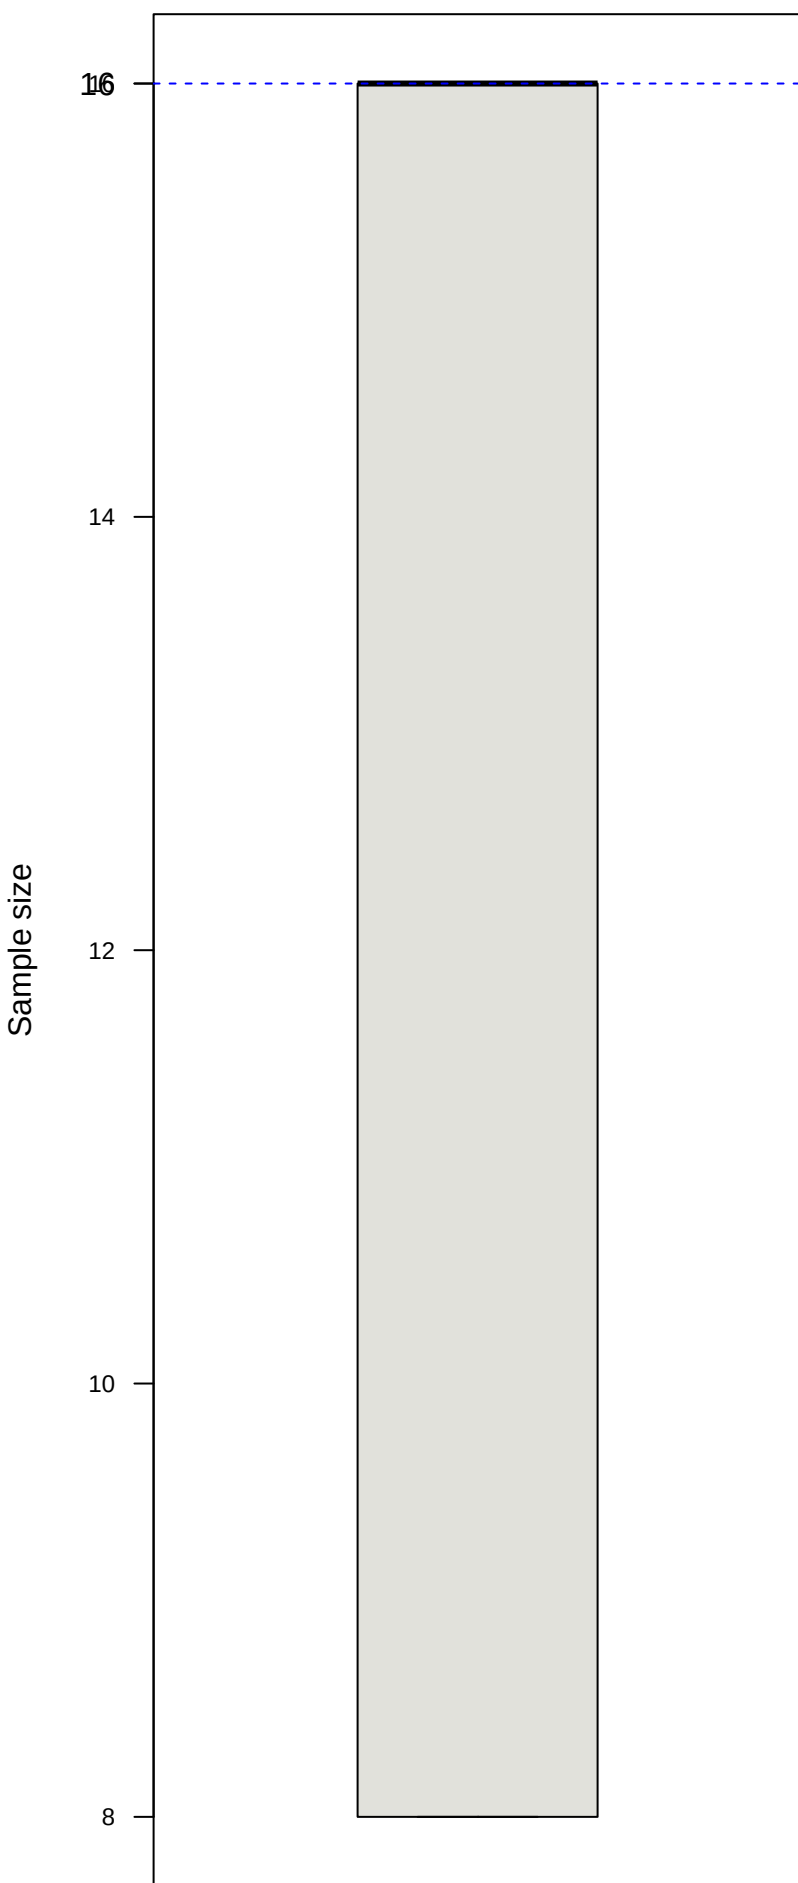

Per group

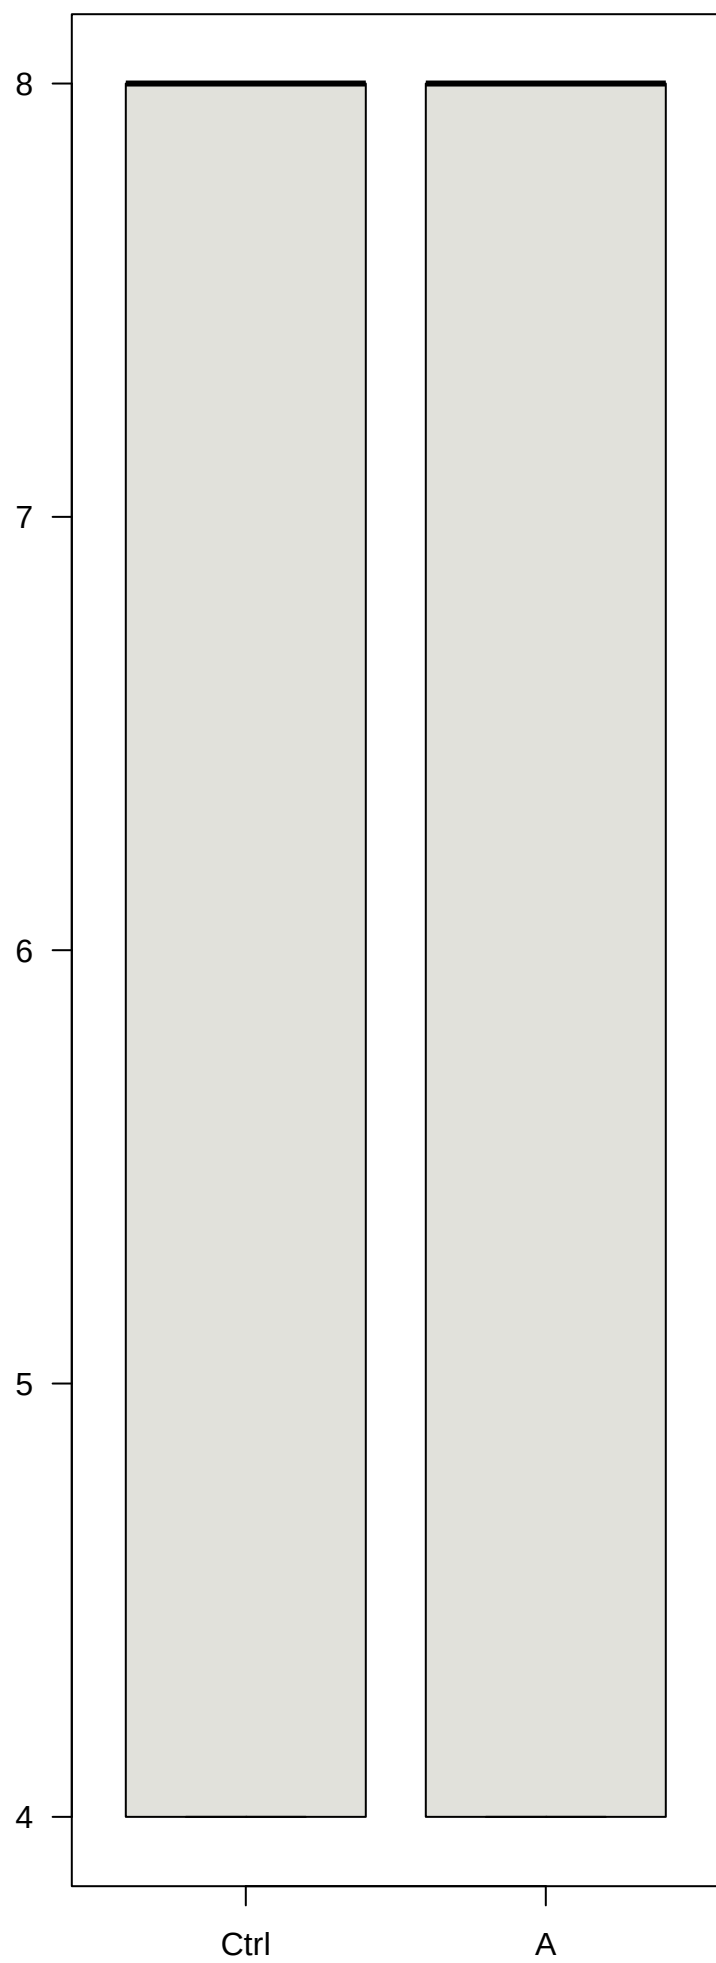

Config 157 (0.05|0.9|1|2|0.95|0.5|0.05|simultaneous) [BINARY]

K (treatment arms) : 1

J (looks) : 2

p (target win-prob) : 0.95

p0 (null win-prob) : 0.5

method : simultaneous

true response rates : control $\pi_c = 0.050$

effect $\pi_t = 0.950$ (= $\pi_c + 2p-1$)

target alpha = 0.05 target power = 0.9

SIMULATED OPERATING CHARACTERISTICS (Bernoulli, stats.ptest)

Power (P reject ≥ 1 | H1) : 0.9650

FWER (P reject ≥ 1 | H0) : 0.0104

Max sample size (planned) : 8

ESS under H1 : 8.0

ESS under H0 : 7.6

NB: design powered for the binary test (δ/σ), so achieved

power should track the target; residual gap is small-sample

discreteness, not misspecification.

Config 157 – sample size (H1) [binary]



Config 177 (0.05|0.9|4|1|0.52|0.5| 0.7|simultaneous) [BINARY]

K (treatment arms) : 4

J (looks) : 1

p (target win-prob) : 0.52

p0 (null win-prob) : 0.5

method : simultaneous

true response rates : control $\pi_c = 0.700$

effect $\pi_t = 0.740$ (= $\pi_c + 2p-1$)

target alpha = 0.05 target power = 0.9

SIMULATED OPERATING CHARACTERISTICS (Bernoulli, stats.ptest)

Power (P reject ≥ 1 | H1) : 0.8954

FWER (P reject ≥ 1 | H0) : 0.0508

Max sample size (planned) : 14920

ESS under H1 : 14920.0

ESS under H0 : 14920.0


NB: design powered for the binary test (δ/σ), so achieved

power should track the target; residual gap is small-sample


discreteness, not misspecification.

Config 177 – sample size (H1) [binary]

Total

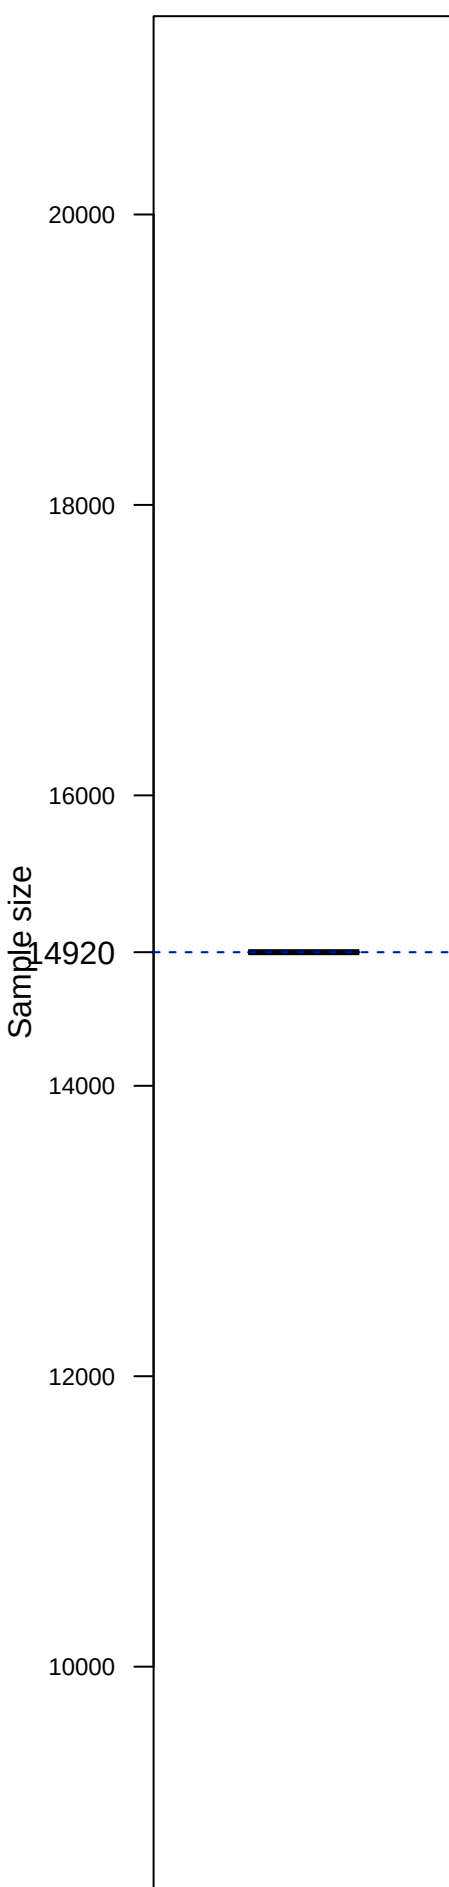

Per group

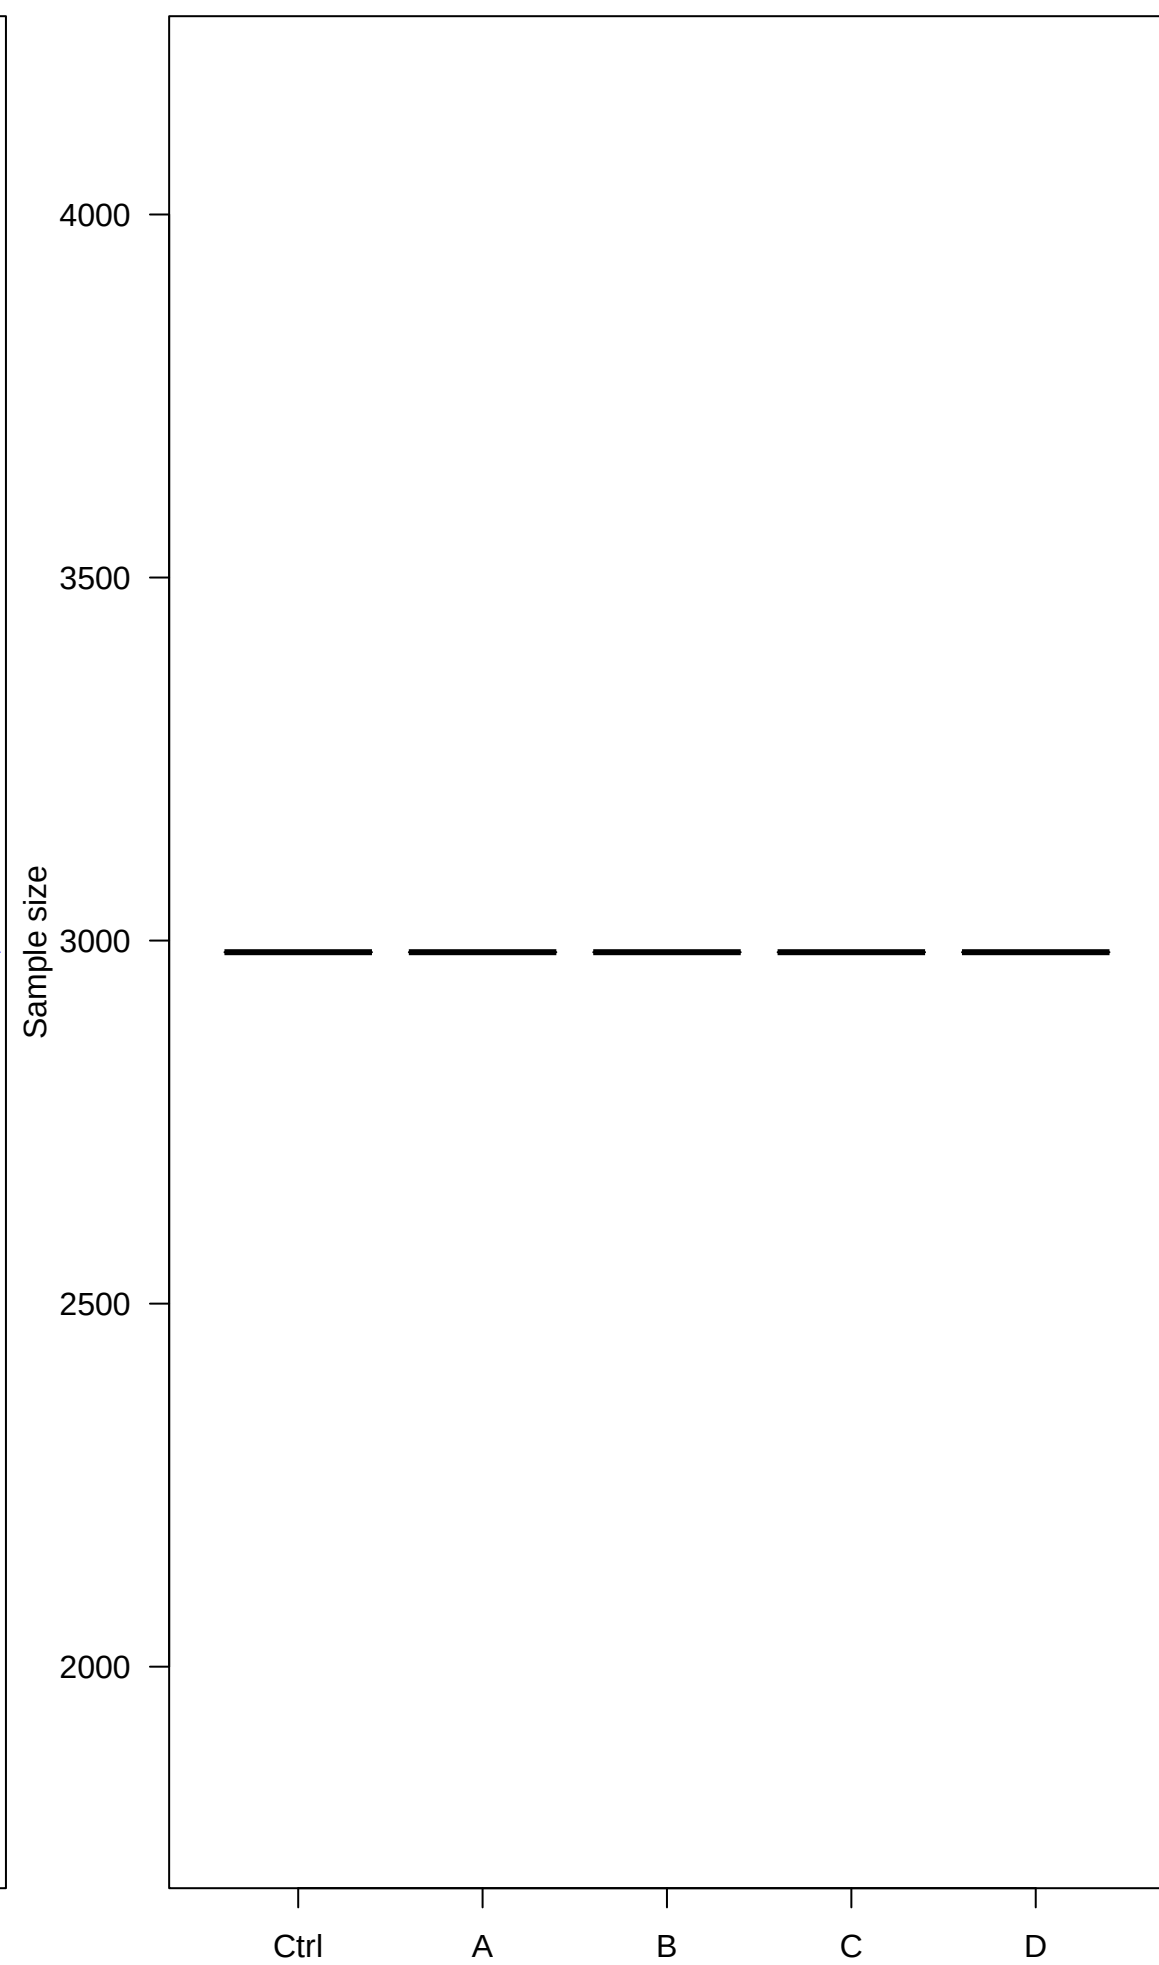

Config 179 (0.05|0.9|4|1|0.52|0.5| 0.9|simultaneous) [BINARY]

K (treatment arms) : 4

J (looks) : 1

p (target win-prob) : 0.52

p0 (null win-prob) : 0.5

method : simultaneous

true response rates : control $\pi_c = 0.900$

effect $\pi_t = 0.940$ (= $\pi_c + 2p-1$)

target alpha = 0.05 target power = 0.9

SIMULATED OPERATING CHARACTERISTICS (Bernoulli, stats.ptest)

Power (P reject ≥ 1 | H1) : 0.8767

FWER (P reject ≥ 1 | H0) : 0.0496

Max sample size (planned) : 5440

ESS under H1 : 5440.0


ESS under H0 : 5440.0

NB: design powered for the binary test (δ/σ), so achieved

power should track the target; residual gap is small-sample

discreteness, not misspecification.

Config 179 – sample size (H1) [binary]

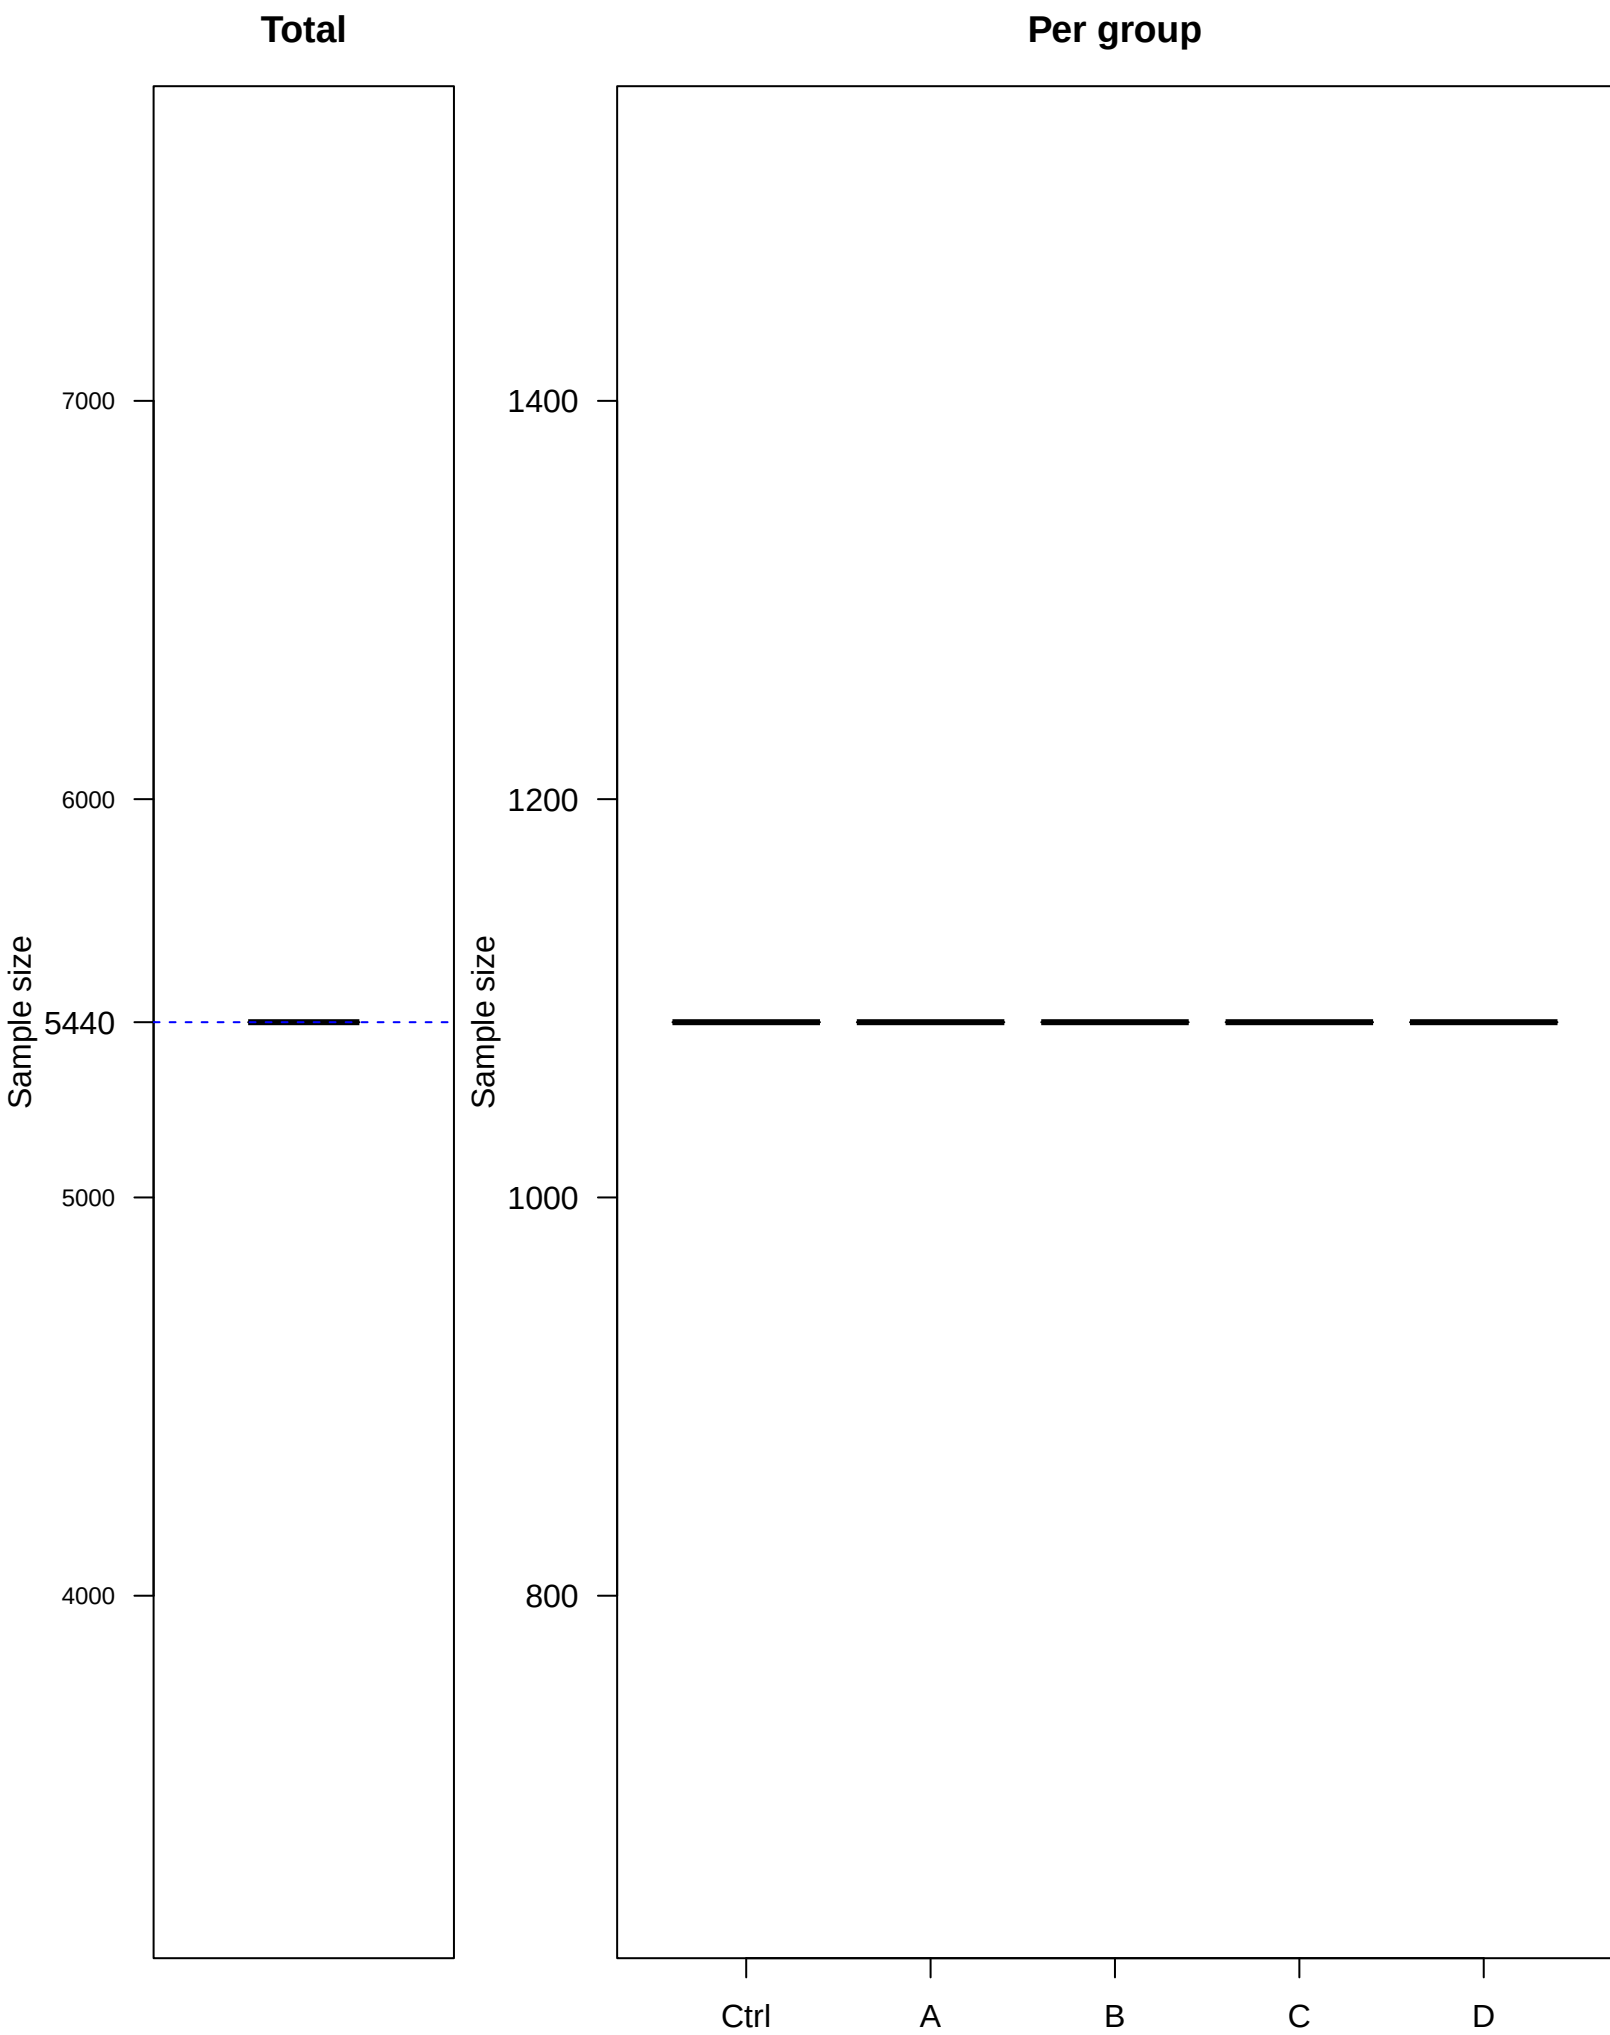

Config 187 (0.05|0.9|4|1|0.55|0.5| 0.5|simultaneous) [BINARY]

K (treatment arms) : 4

J (looks) : 1

p (target win-prob) : 0.55

p0 (null win-prob) : 0.5

method : simultaneous

true response rates : control $\pi_c = 0.500$

effect $\pi_t = 0.600$ (= $\pi_c + 2p-1$)

target alpha = 0.05 target power = 0.9

SIMULATED OPERATING CHARACTERISTICS (Bernoulli, stats.ptest)

Power (P reject ≥ 1 | H1) : 0.9016

FWER (P reject ≥ 1 | H0) : 0.0540

Max sample size (planned) : 2925

ESS under H1 : 2925.0


ESS under H0 : 2925.0

NB: design powered for the binary test (δ/σ), so achieved

power should track the target; residual gap is small-sample

discreteness, not misspecification.

Config 187 – sample size (H1) [binary]

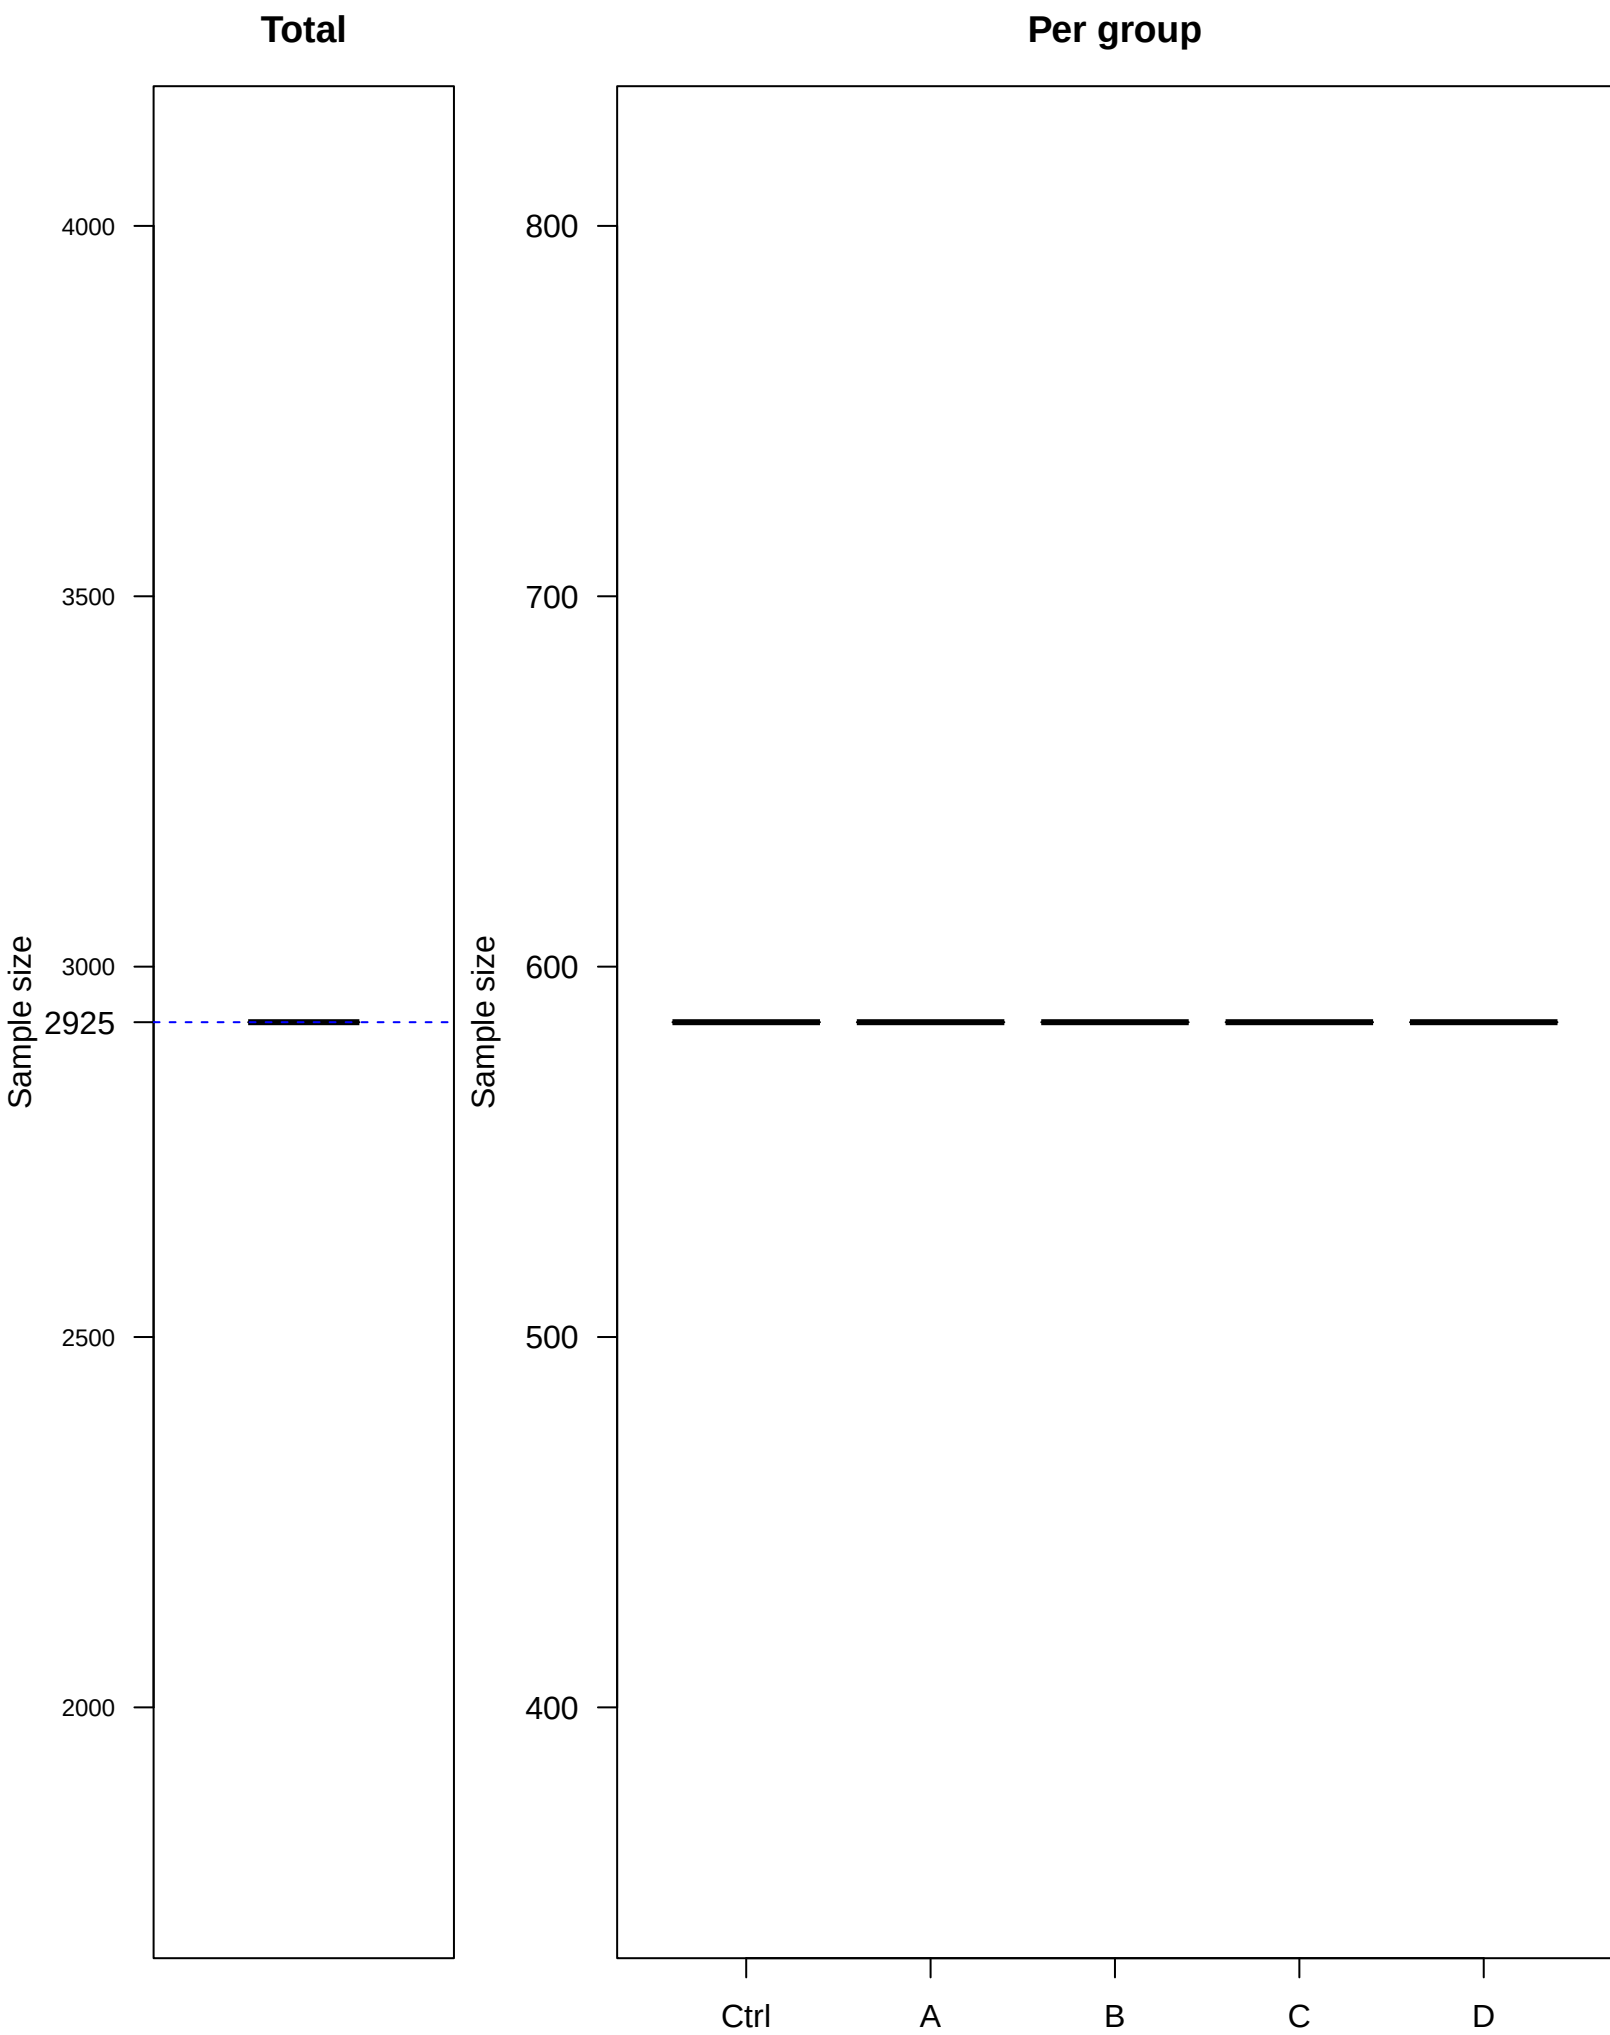

Config 201 (0.05|0.9|4|1| 0.6|0.5| 0.7|simultaneous) [BINARY]

K (treatment arms) : 4

J (looks) : 1

p (target win-prob) : 0.6

p0 (null win-prob) : 0.5

method : simultaneous

true response rates : control $\pi_c = 0.700$

effect $\pi_t = 0.900$ (= $\pi_c + 2p-1$)

target alpha = 0.05 target power = 0.9

SIMULATED OPERATING CHARACTERISTICS (Bernoulli, stats.ptest)

Power (P reject ≥ 1 | H1) : 0.8600

FWER (P reject ≥ 1 | H0) : 0.0478

Max sample size (planned) : 465

ESS under H1 : 465.0

ESS under H0 : 465.0


NB: design powered for the binary test (δ/σ), so achieved

power should track the target; residual gap is small-sample


discreteness, not misspecification.

Config 201 – sample size (H1) [binary]

Total

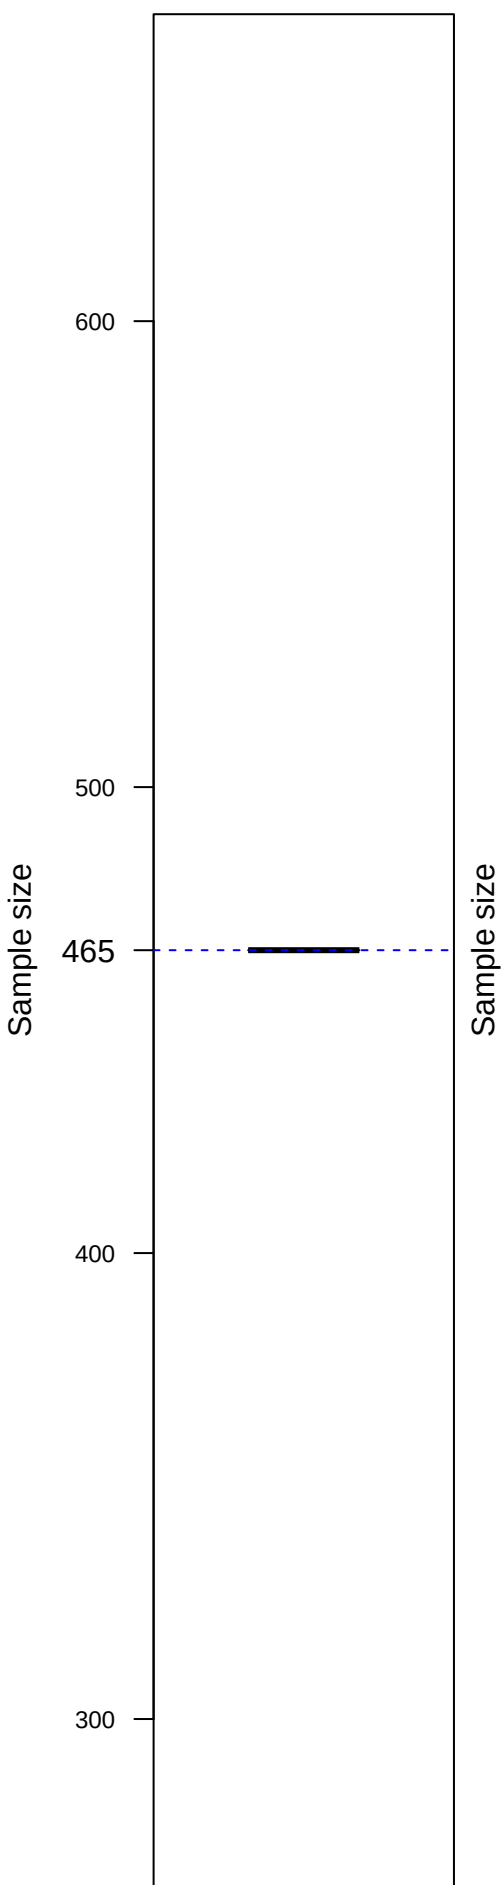

Per group

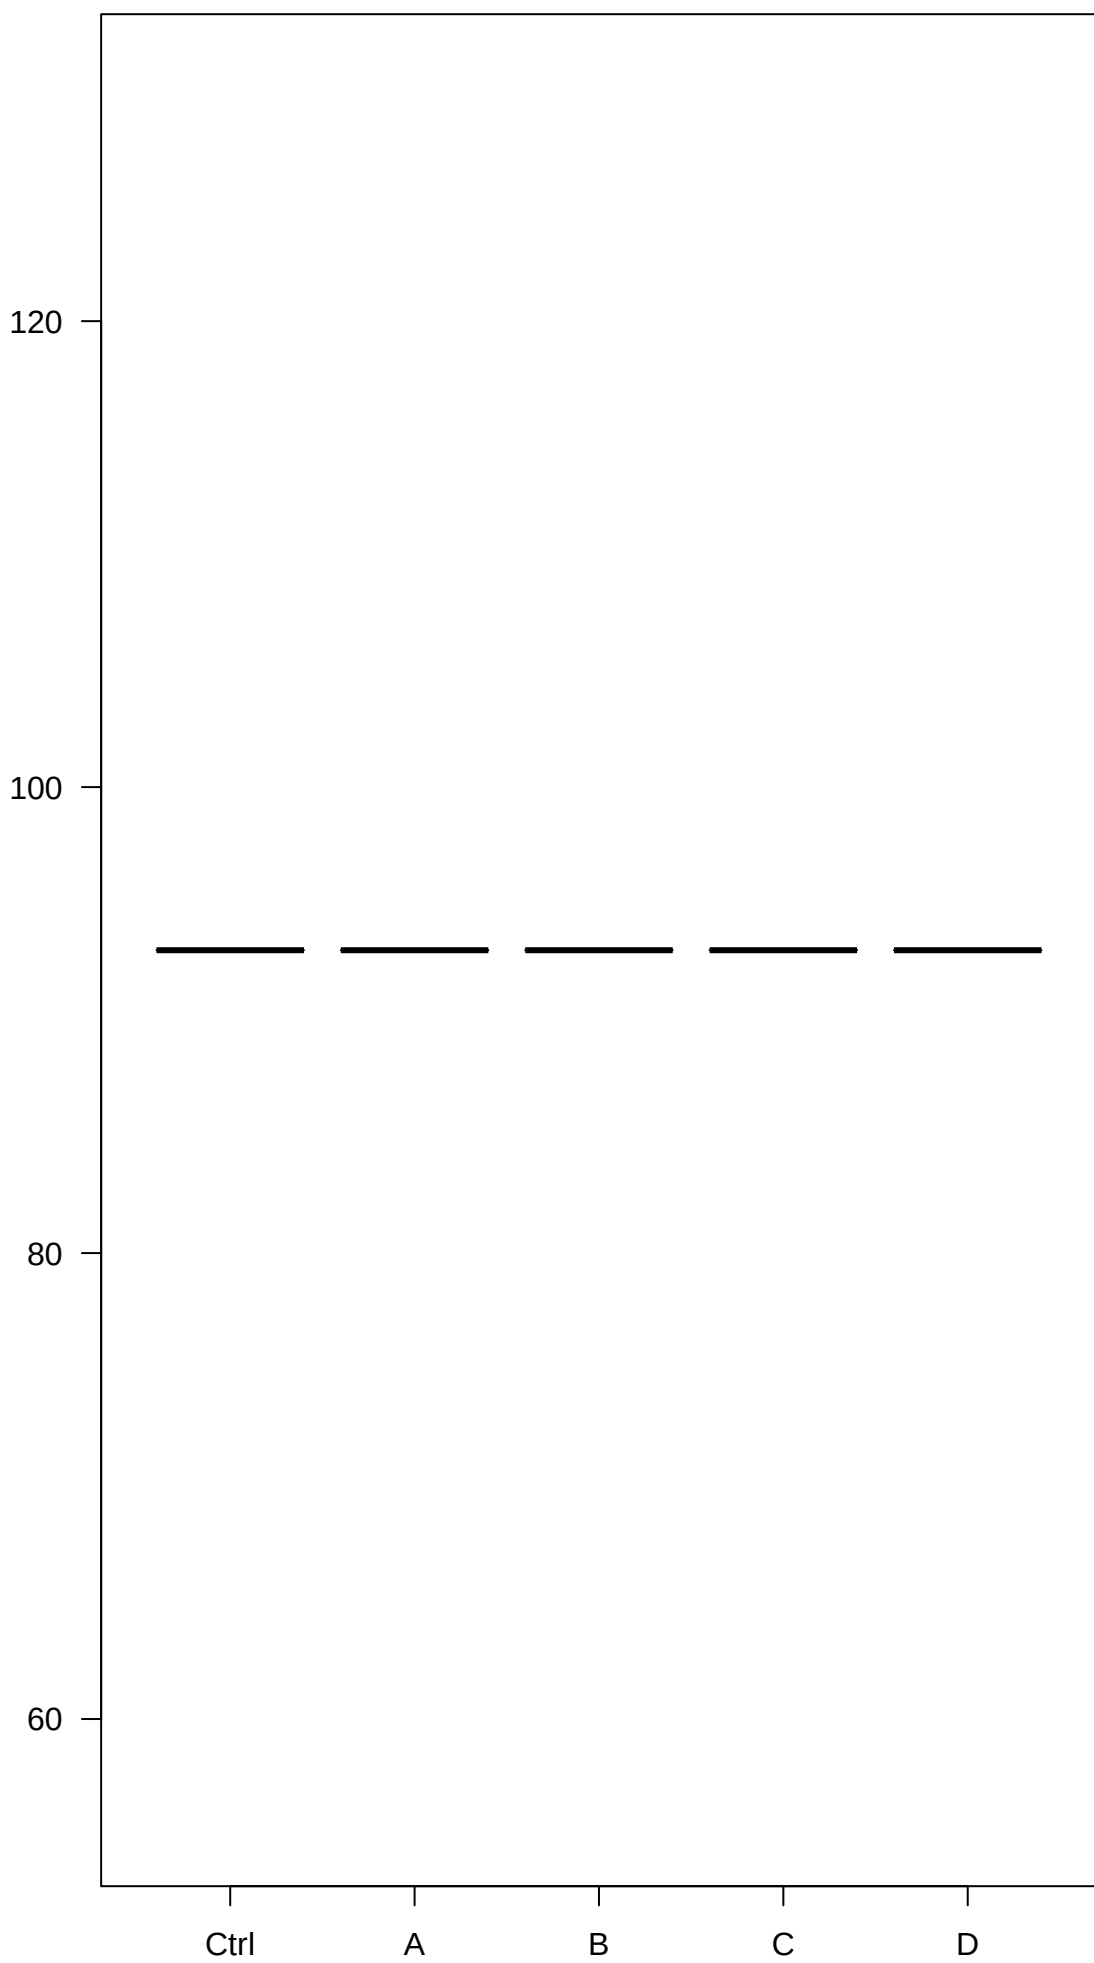

Config 205 (0.05|0.9|4|1|0.65|0.5|0.05|simultaneous) [BINARY]

K (treatment arms) : 4

J (looks) : 1

p (target win-prob) : 0.65

p0 (null win-prob) : 0.5

method : simultaneous

true response rates : control $\pi_c = 0.050$

effect $\pi_t = 0.350$ (= $\pi_c + 2p-1$)

target alpha = 0.05 target power = 0.9

SIMULATED OPERATING CHARACTERISTICS (Bernoulli, stats.ptest)

Power (P reject ≥ 1 | H1) : 0.9747

FWER (P reject ≥ 1 | H0) : 0.0528

Max sample size (planned) : 200

ESS under H1 : 200.0


ESS under H0 : 200.0

NB: design powered for the binary test (δ/σ), so achieved

power should track the target; residual gap is small-sample

discreteness, not misspecification.

Config 205 – sample size (H1) [binary]

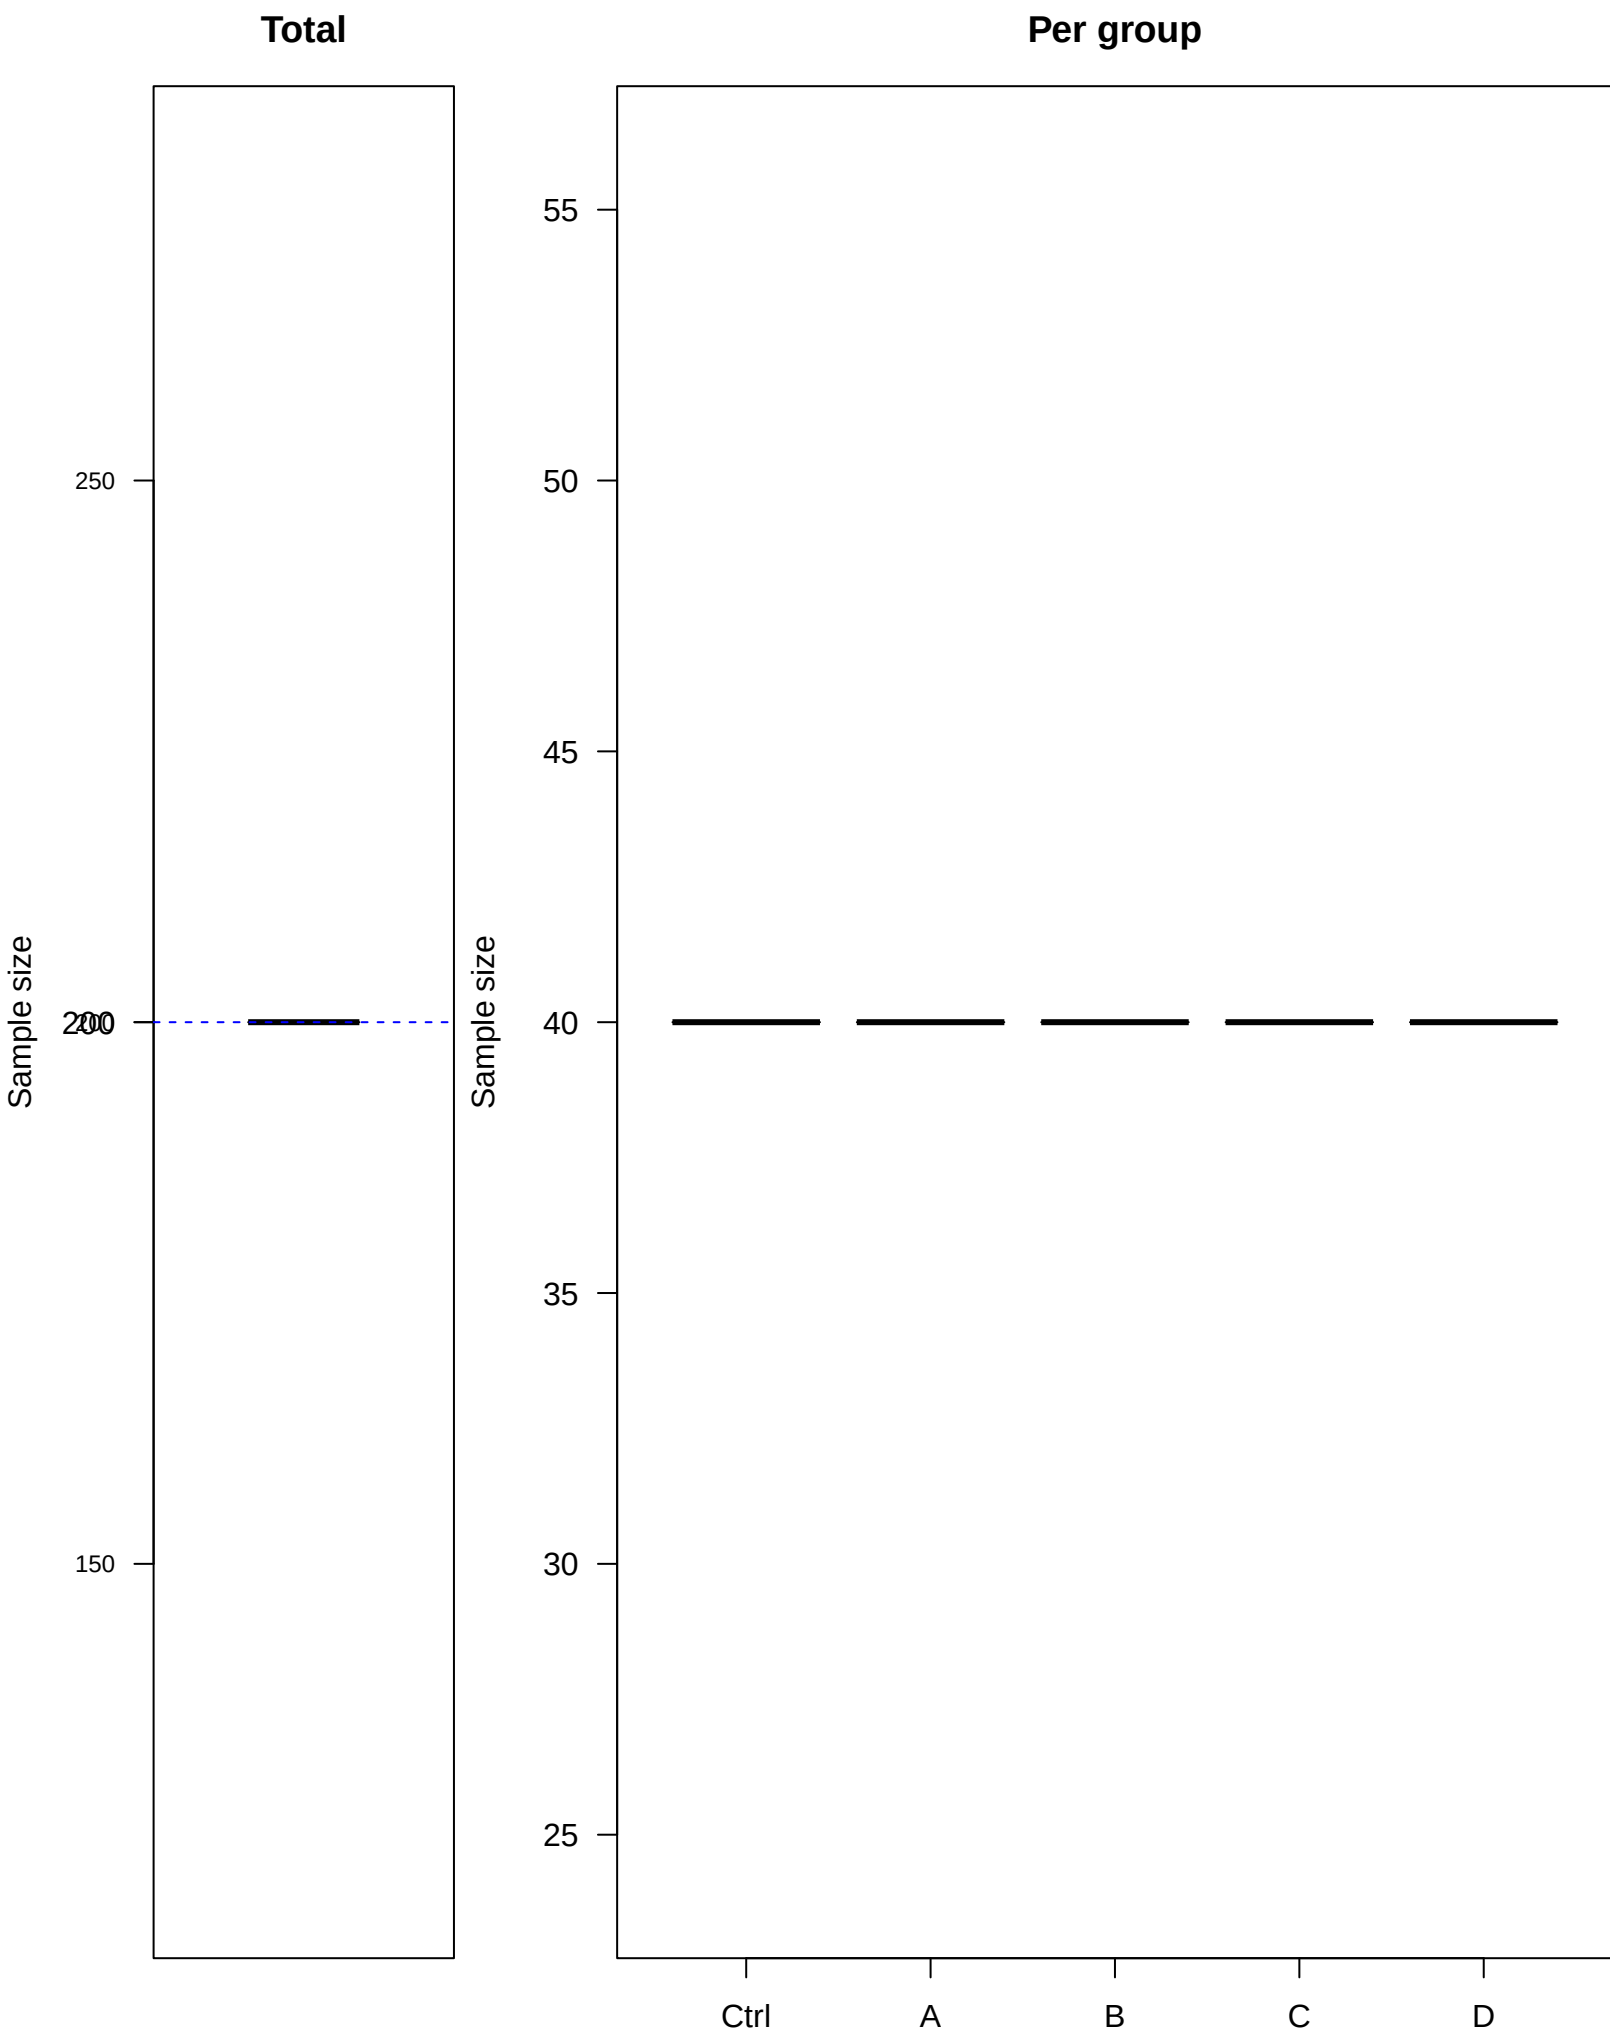

Config 209 (0.05|0.9|4|1|0.65|0.5| 0.3|simultaneous) [BINARY]

K (treatment arms) : 4

J (looks) : 1

p (target win-prob) : 0.65

p0 (null win-prob) : 0.5

method : simultaneous

true response rates : control $\pi_c = 0.300$

effect $\pi_t = 0.600$ (= $\pi_c + 2p-1$)

target alpha = 0.05 target power = 0.9

SIMULATED OPERATING CHARACTERISTICS (Bernoulli, stats.ptest)

Power (P reject ≥ 1 | H1) : 0.9155

FWER (P reject ≥ 1 | H0) : 0.0496

Max sample size (planned) : 315

ESS under H1 : 315.0


ESS under H0 : 315.0

NB: design powered for the binary test (δ/σ), so achieved

power should track the target; residual gap is small-sample

discreteness, not misspecification.

Config 209 – sample size (H1) [binary]

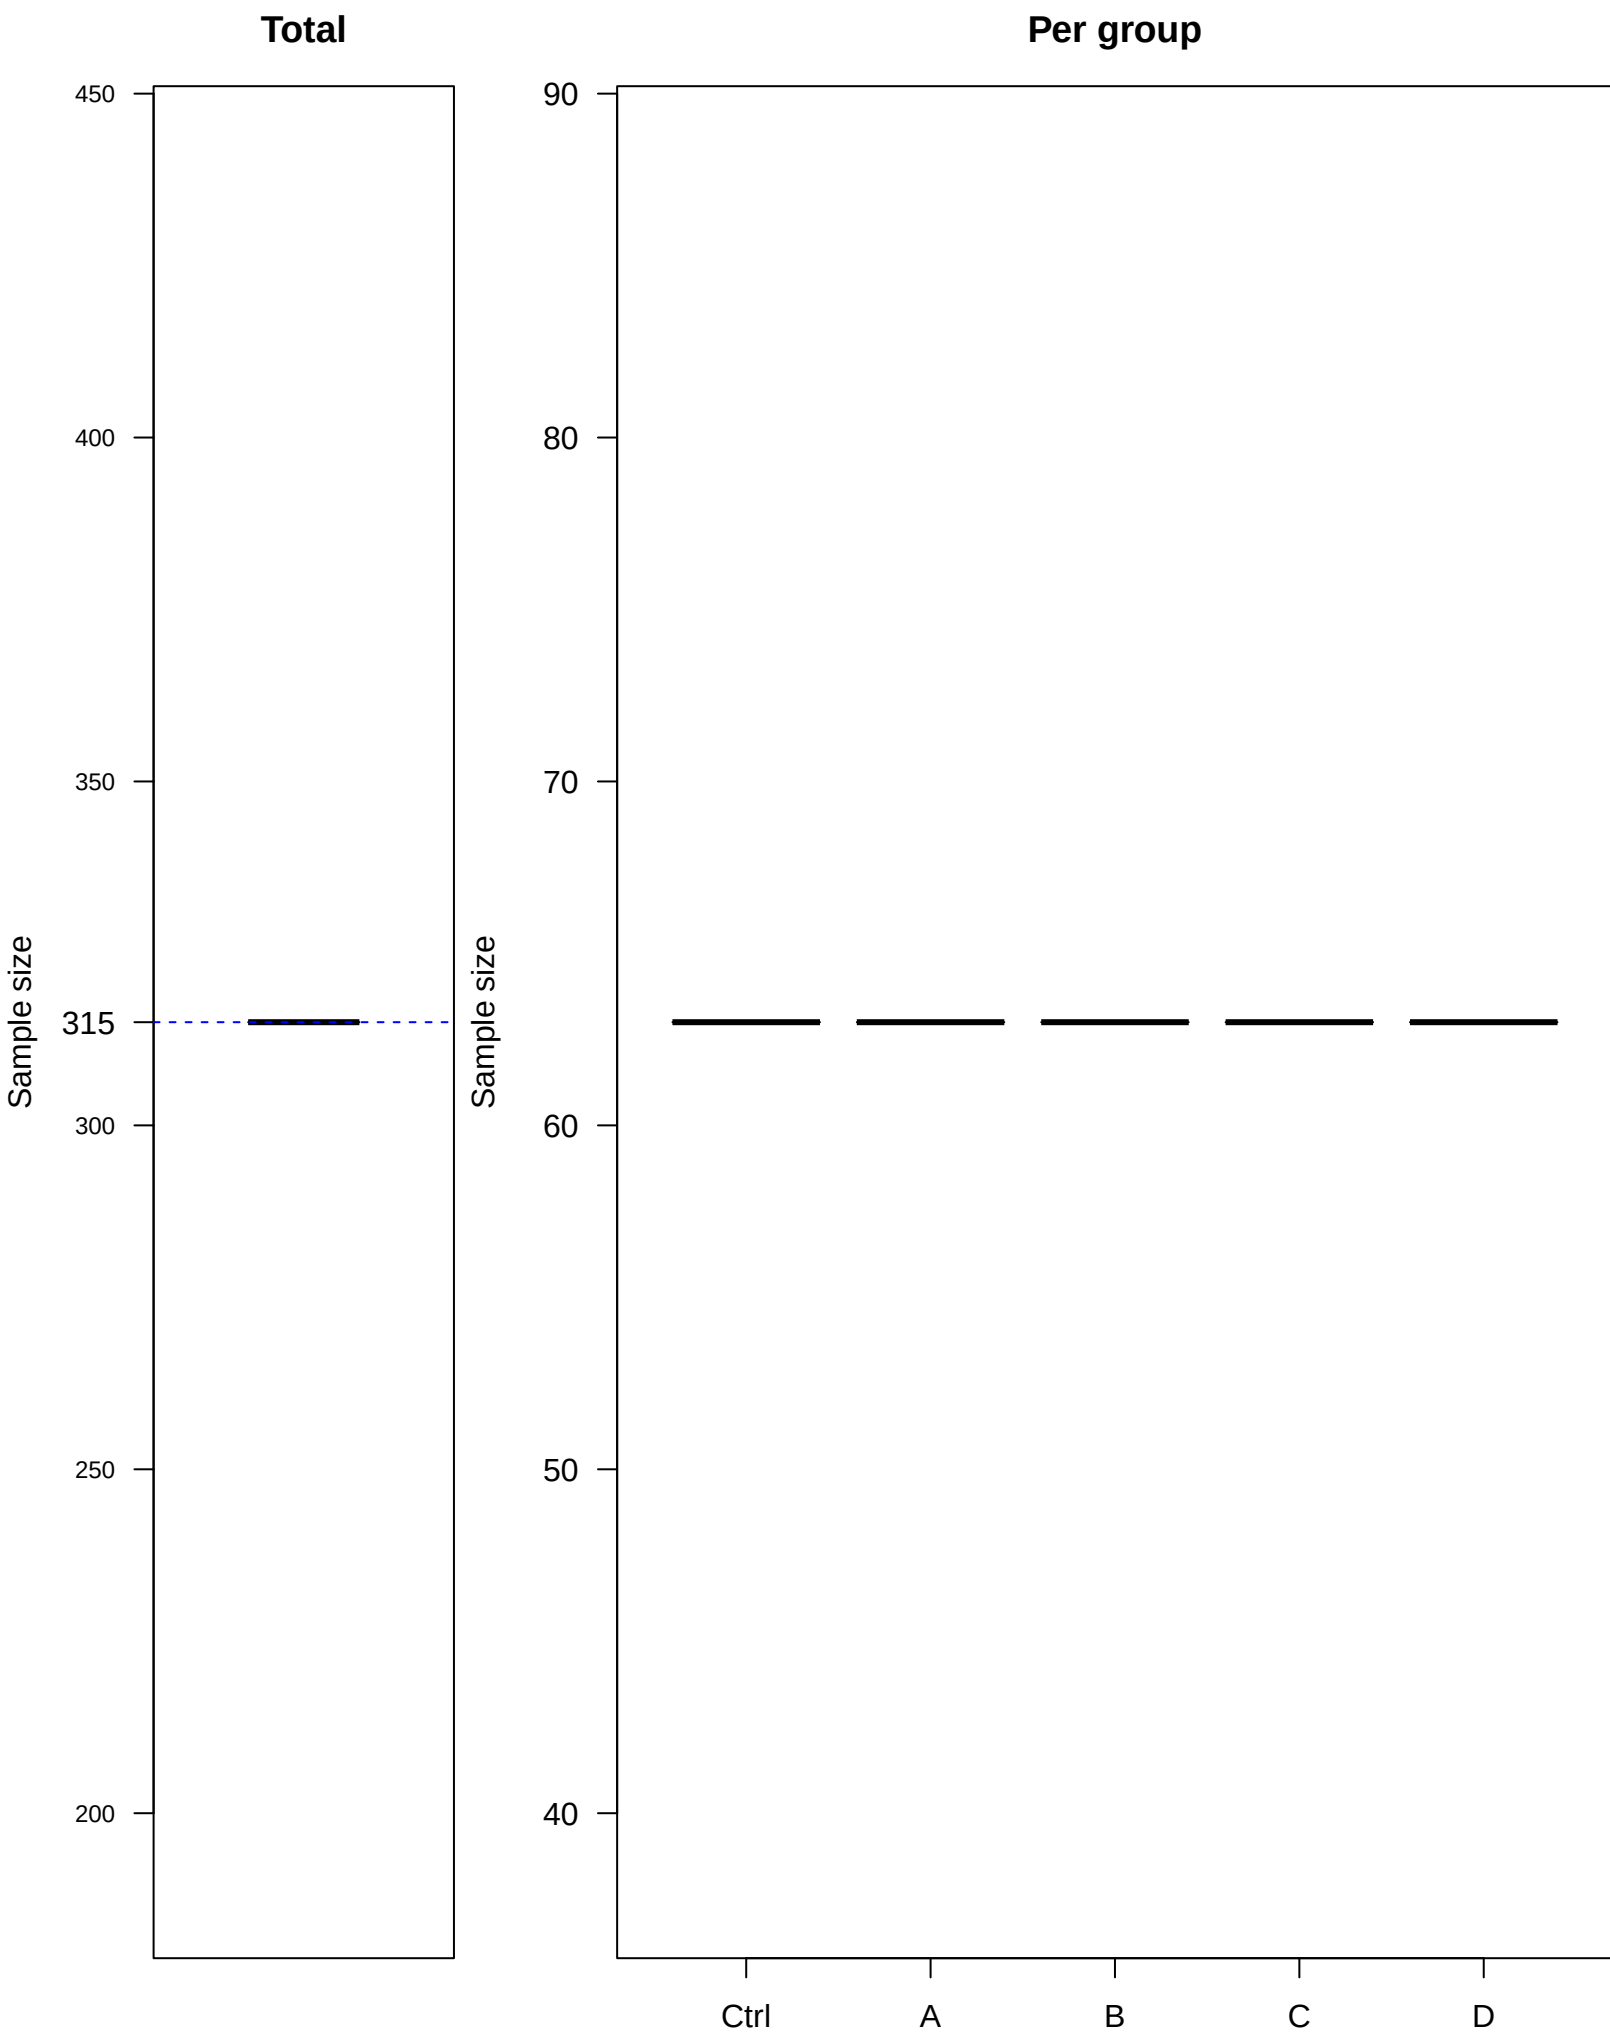

Config 211 (0.05|0.9|4|1|0.65|0.5| 0.5|simultaneous) [BINARY]

K (treatment arms) : 4

J (looks) : 1

p (target win-prob) : 0.65

p0 (null win-prob) : 0.5

method : simultaneous

true response rates : control $\pi_c = 0.500$

effect $\pi_t = 0.800$ (= $\pi_c + 2p-1$)

target alpha = 0.05 target power = 0.9

SIMULATED OPERATING CHARACTERISTICS (Bernoulli, stats.ptest)

Power (P reject ≥ 1 | H1) : 0.8868

FWER (P reject ≥ 1 | H0) : 0.0509

Max sample size (planned) : 290

ESS under H1 : 290.0


ESS under H0 : 290.0

NB: design powered for the binary test (δ/σ), so achieved

power should track the target; residual gap is small-sample

discreteness, not misspecification.

Config 211 – sample size (H1) [binary]

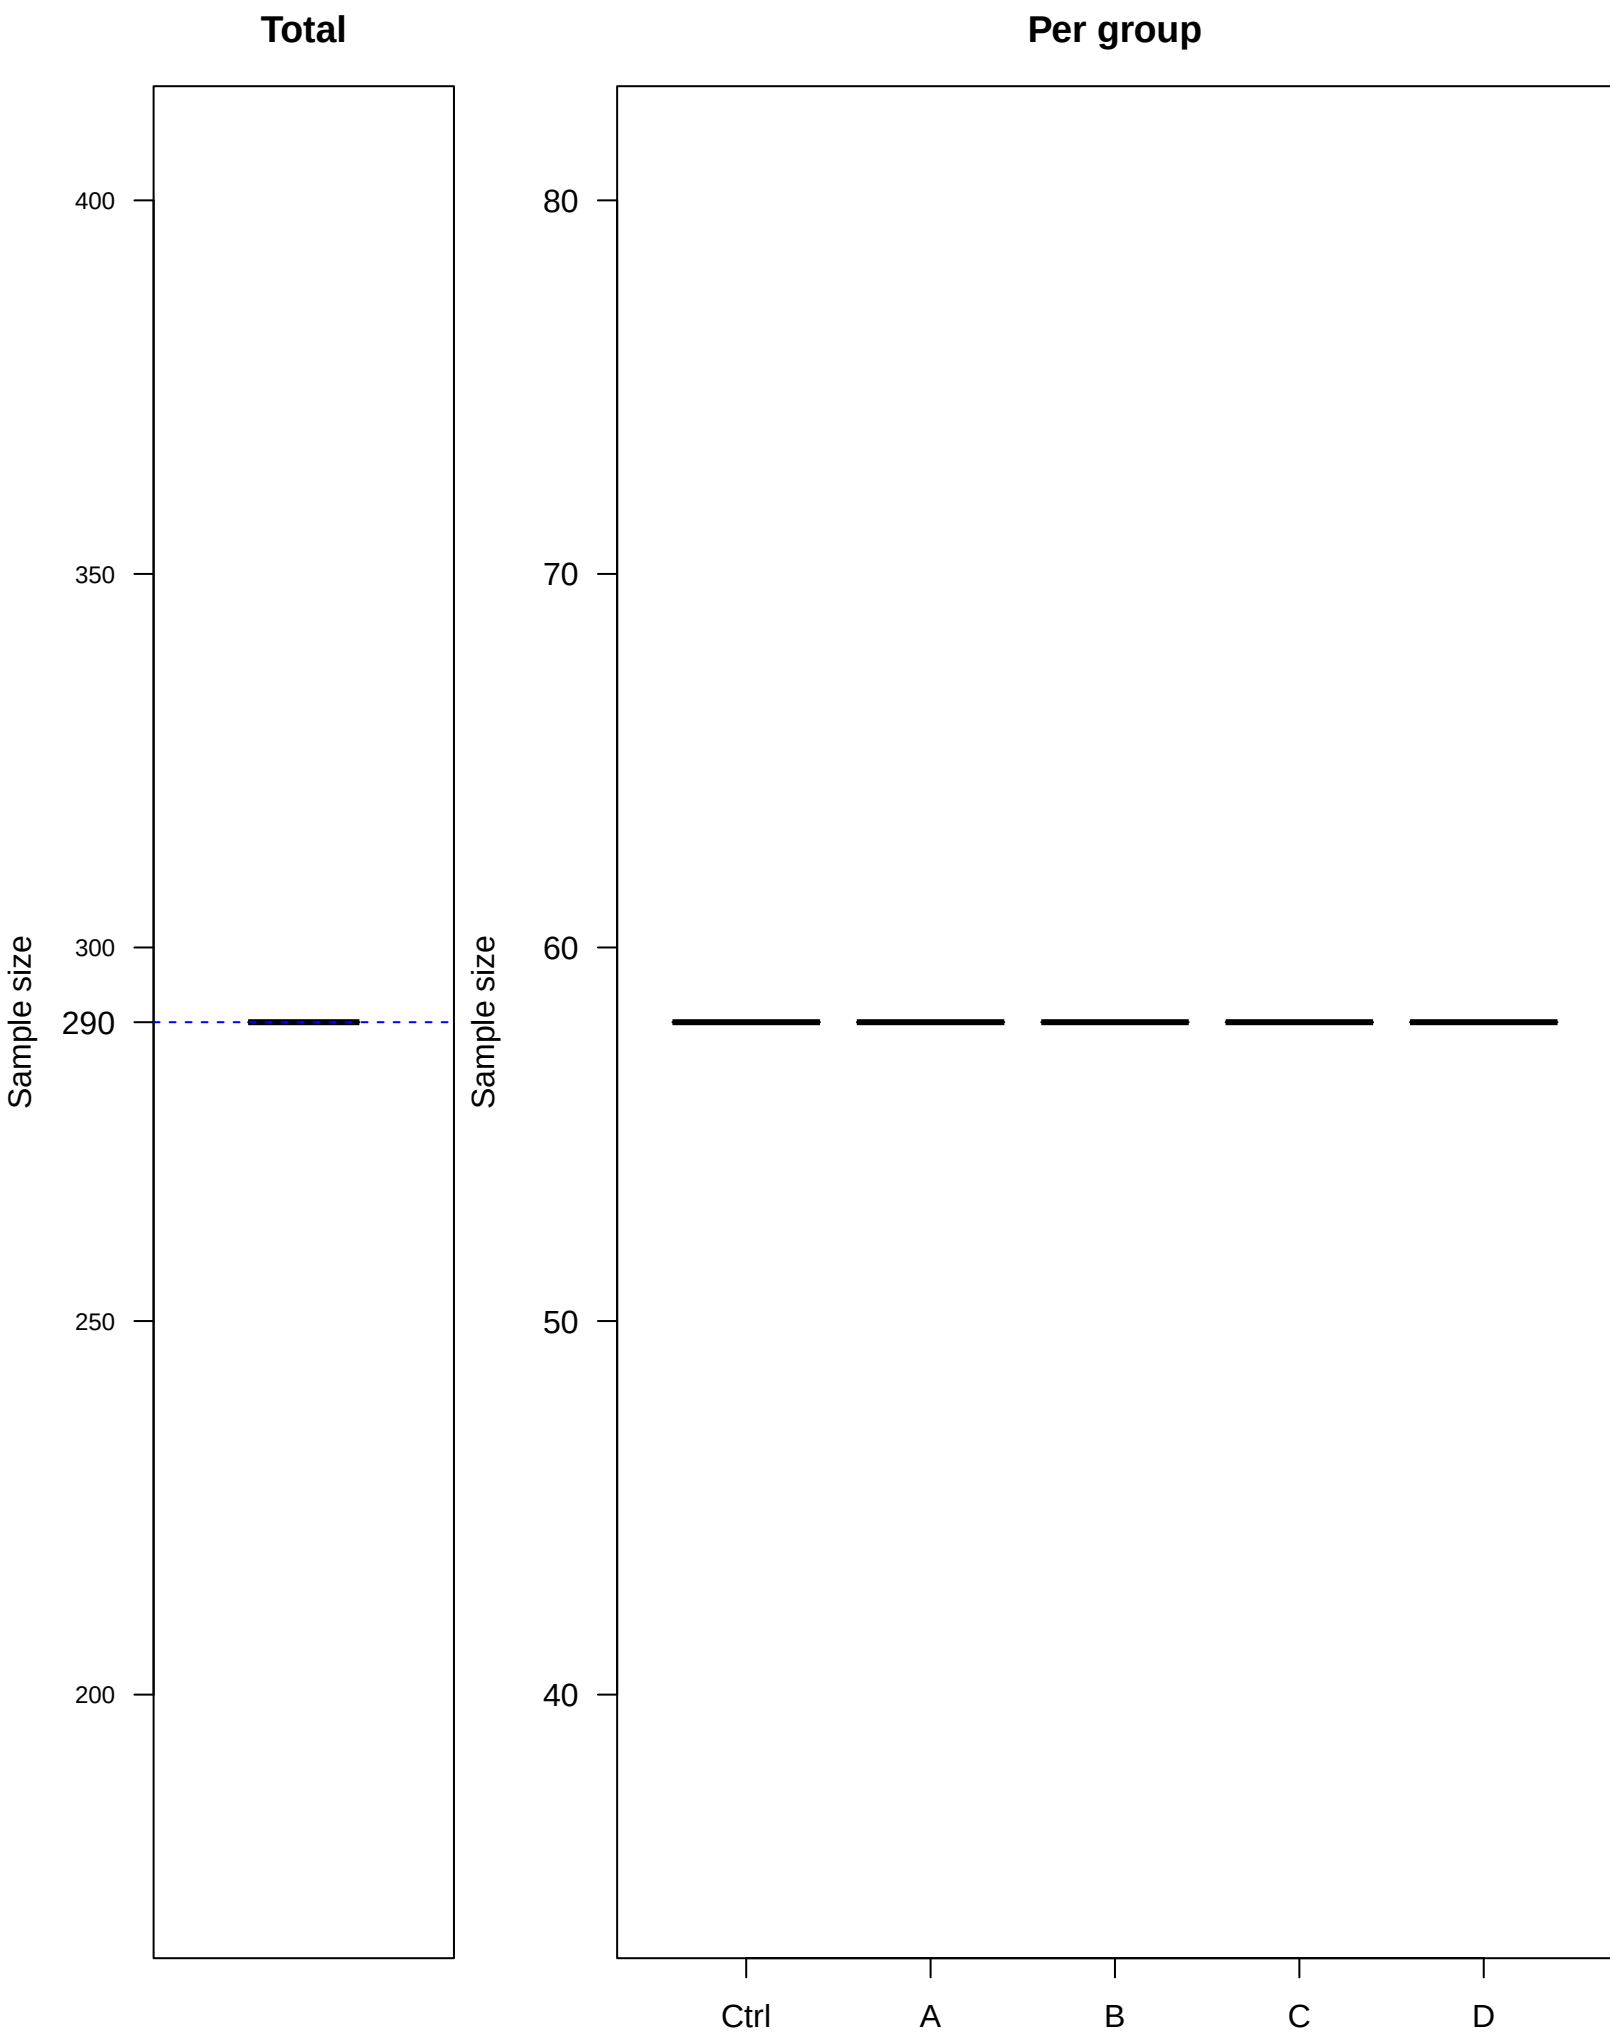

Config 221 (0.05|0.9|4|1|0.75|0.5| 0.3|simultaneous) [BINARY]

K (treatment arms) : 4

J (looks) : 1

p (target win-prob) : 0.75

p0 (null win-prob) : 0.5

method : simultaneous

true response rates : control $\pi_c = 0.300$

effect $\pi_t = 0.800$ (= $\pi_c + 2p-1$)

target alpha = 0.05 target power = 0.9

SIMULATED OPERATING CHARACTERISTICS (Bernoulli, stats.ptest)

Power (P reject ≥ 1 | H1) : 0.9054

FWER (P reject ≥ 1 | H0) : 0.0562

Max sample size (planned) : 110

ESS under H1 : 110.0


ESS under H0 : 110.0

NB: design powered for the binary test (δ/σ), so achieved

power should track the target; residual gap is small-sample

discreteness, not misspecification.

Config 221 – sample size (H1) [binary]

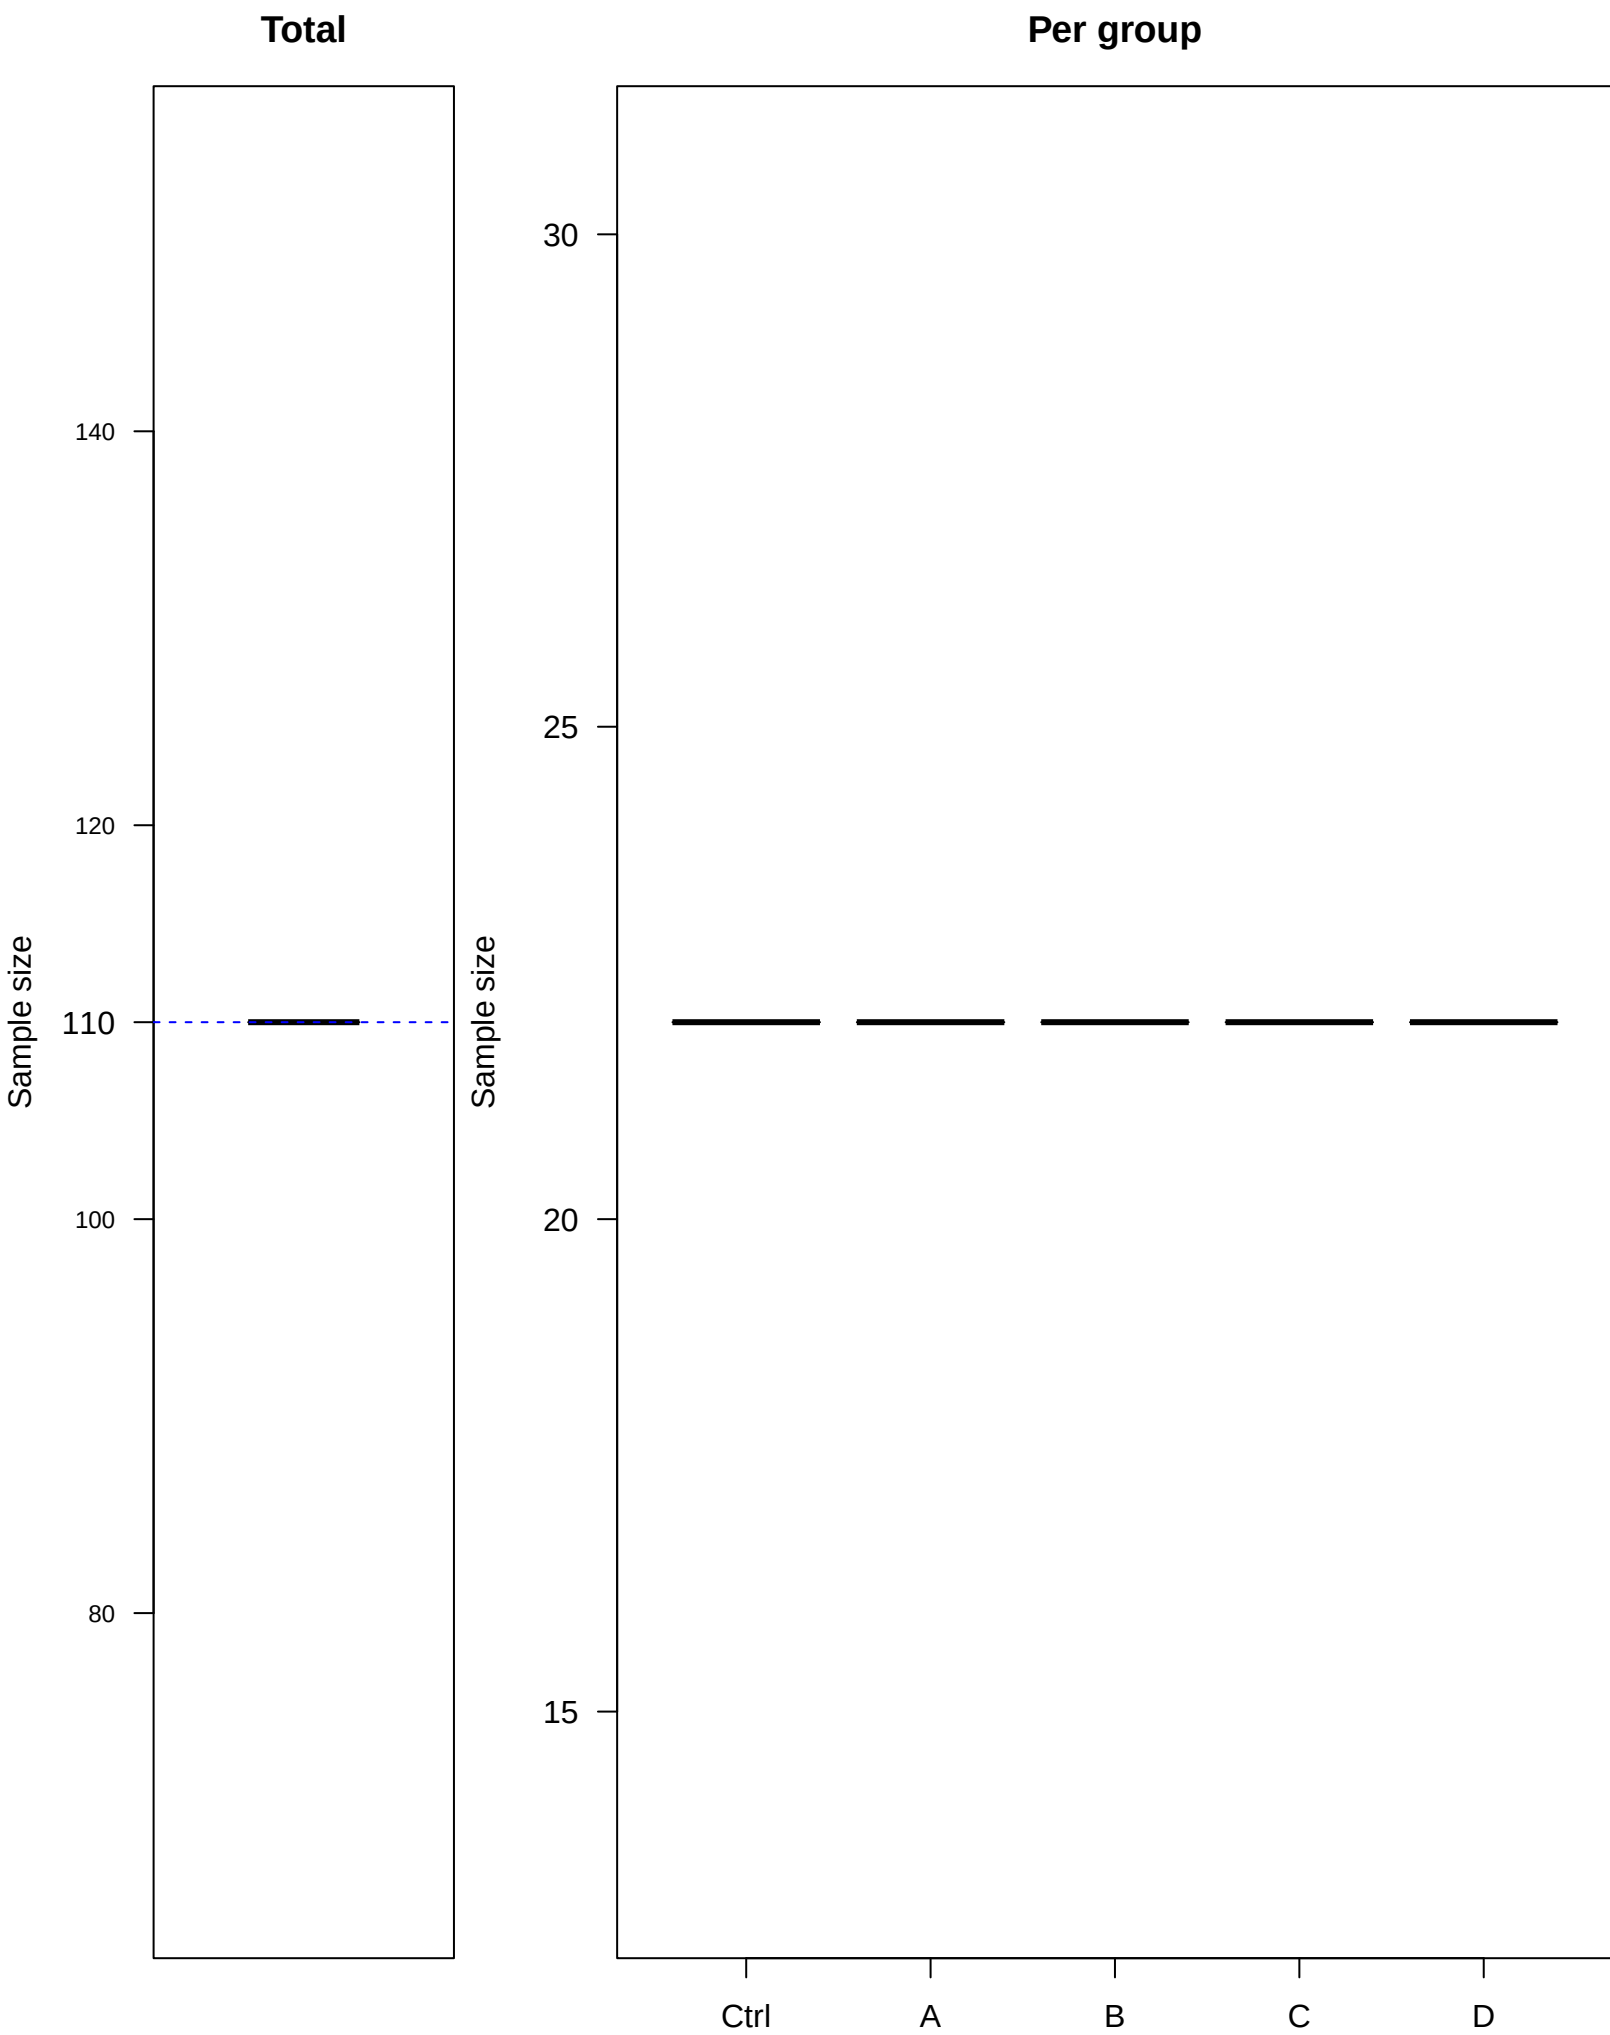

Config 231 (0.05|0.9|4|1|0.85|0.5| 0.1|simultaneous) [BINARY]

K (treatment arms) : 4

J (looks) : 1

p (target win-prob) : 0.85

p0 (null win-prob) : 0.5

method : simultaneous

true response rates : control $\pi_c = 0.100$

effect $\pi_t = 0.800$ (= $\pi_c + 2p-1$)

target alpha = 0.05 target power = 0.9

SIMULATED OPERATING CHARACTERISTICS (Bernoulli, stats.ptest)

Power (P reject ≥ 1 | H1) : 0.9524

FWER (P reject ≥ 1 | H0) : 0.0652

Max sample size (planned) : 50

ESS under H1 : 50.0


ESS under H0 : 50.0

NB: design powered for the binary test (δ/σ), so achieved

power should track the target; residual gap is small-sample

discreteness, not misspecification.

Config 231 – sample size (H1) [binary]

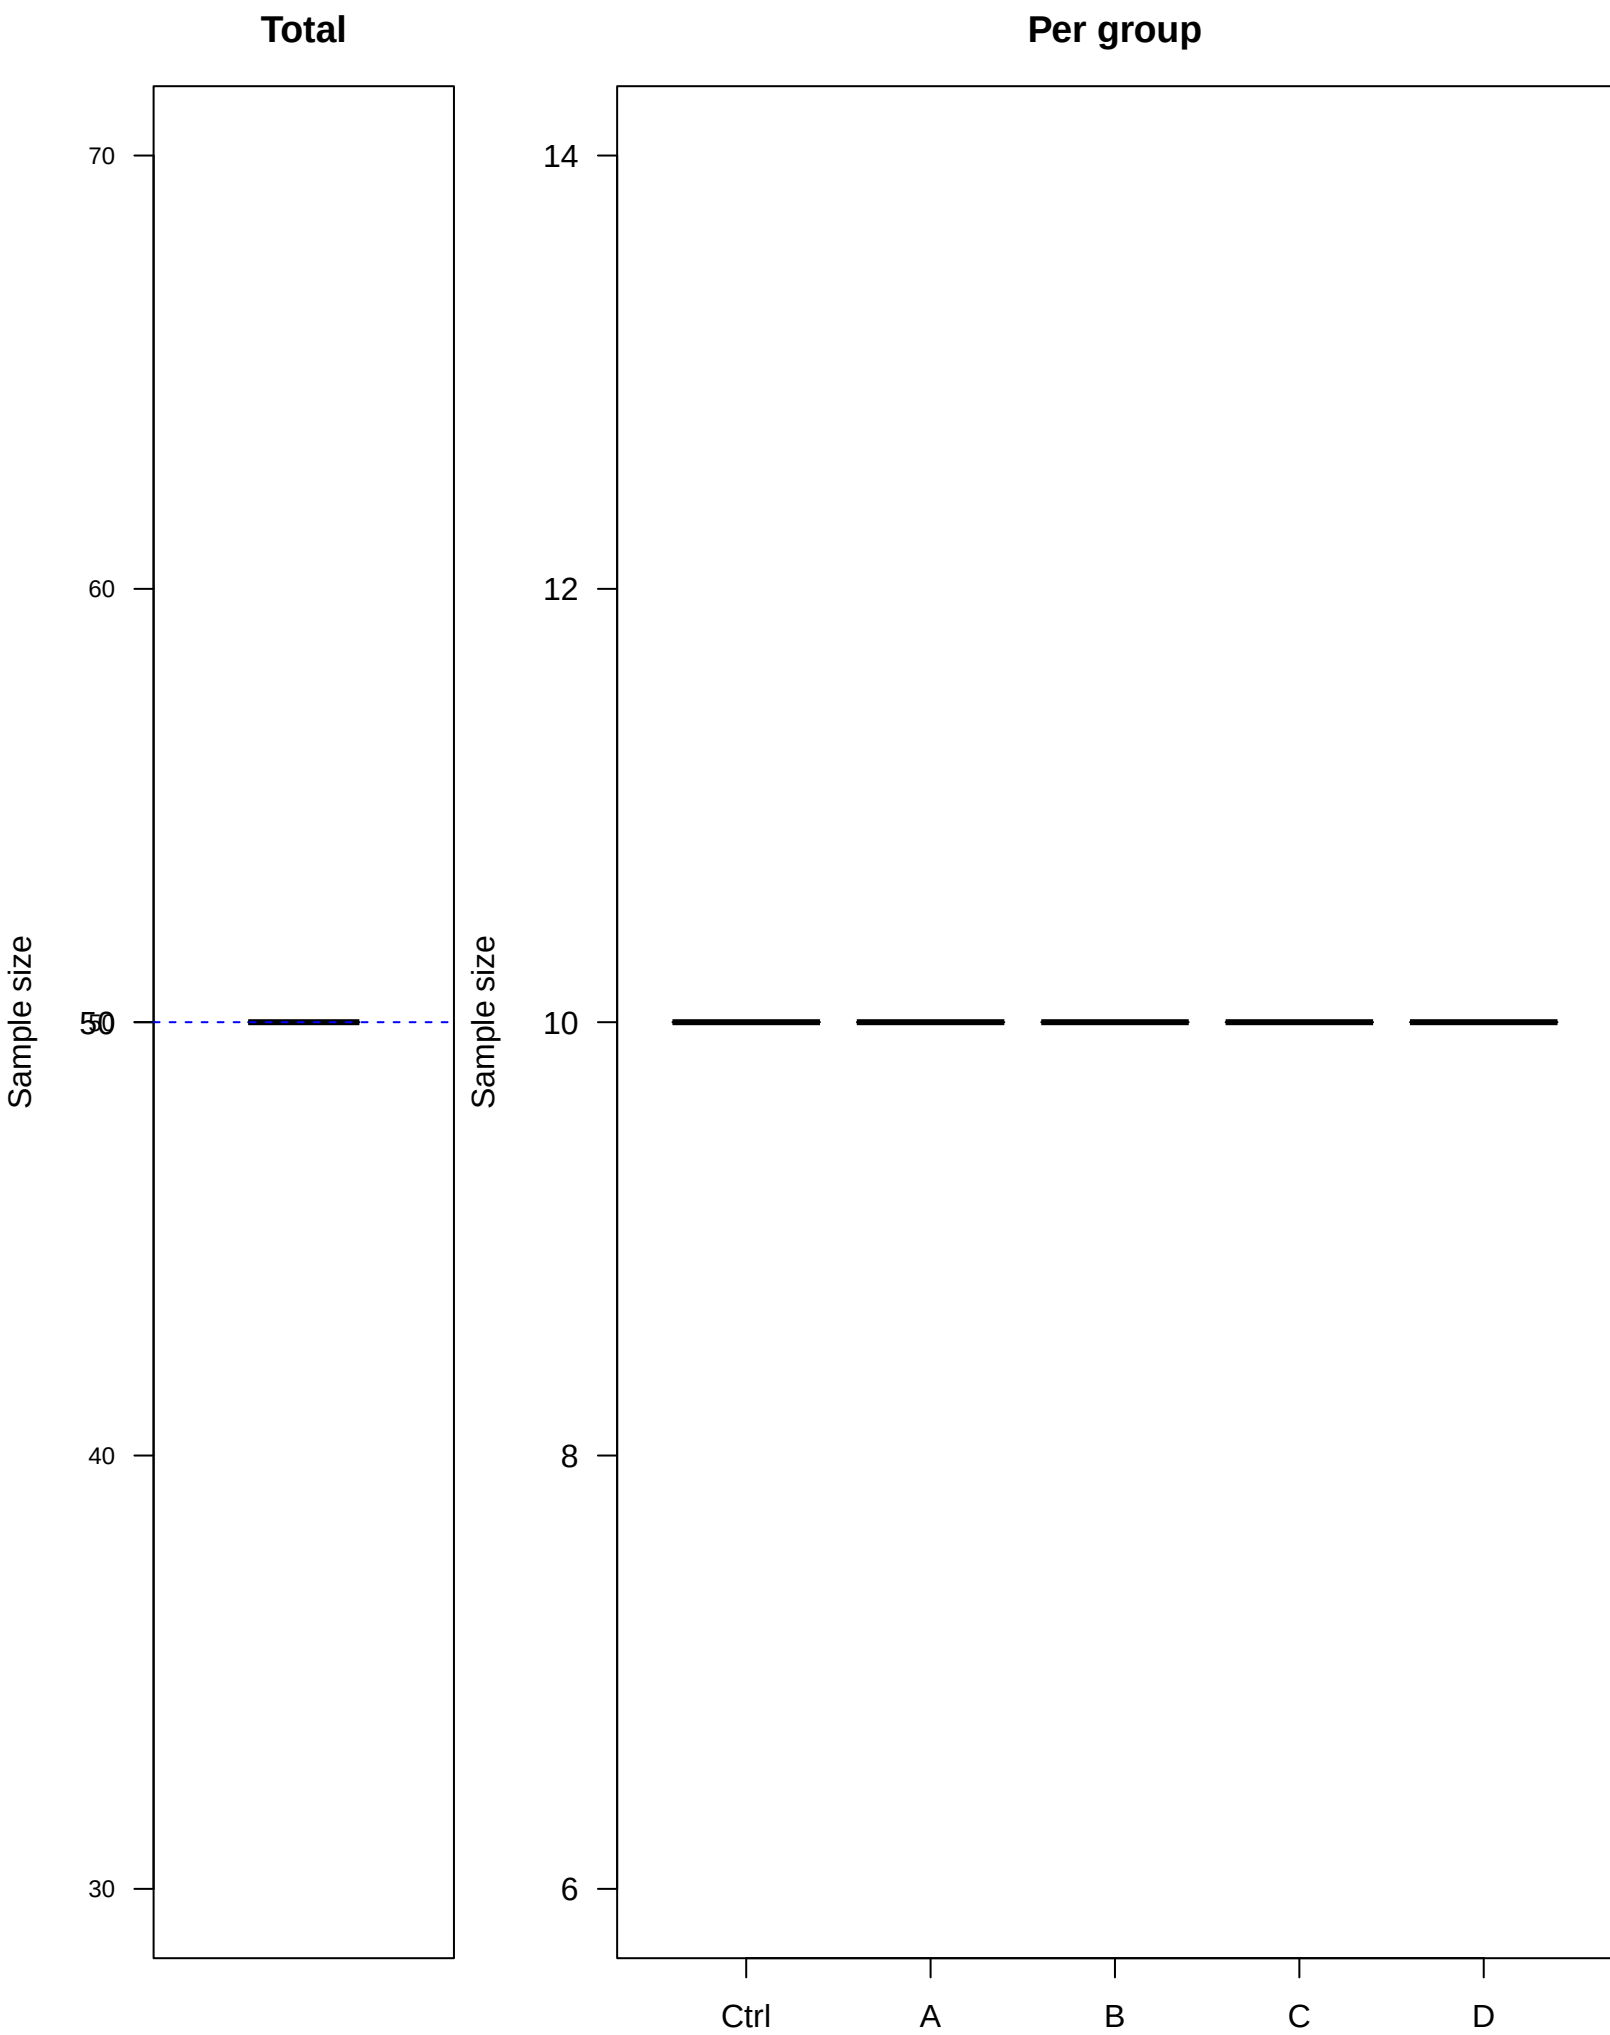

Config 241 (0.05|0.9|4|1|0.95|0.5|0.05|simultaneous) [BINARY]

K (treatment arms) : 4

J (looks) : 1

p (target win-prob) : 0.95

p0 (null win-prob) : 0.5

method : simultaneous

true response rates : control $\pi_c = 0.050$

effect $\pi_t = 0.950$ (= $\pi_c + 2p-1$)

target alpha = 0.05 target power = 0.9

SIMULATED OPERATING CHARACTERISTICS (Bernoulli, stats.ptest)

Power (P reject ≥ 1 | H1) : 0.9643

FWER (P reject ≥ 1 | H0) : 0.0345

Max sample size (planned) : 25

ESS under H1 : 25.0

ESS under H0 : 25.0

NB: design powered for the binary test (δ/σ), so achieved

power should track the target; residual gap is small-sample

discreteness, not misspecification.

Config 241 – sample size (H1) [binary]



Config 261 (0.05|0.9|4|2|0.52|0.5| 0.7|simultaneous) [BINARY]

K (treatment arms) : 4

J (looks) : 2

p (target win-prob) : 0.52

p0 (null win-prob) : 0.5

method : simultaneous

true response rates : control $\pi_c = 0.700$

effect $\pi_t = 0.740$ (= $\pi_c + 2p-1$)

target alpha = 0.05 target power = 0.9

SIMULATED OPERATING CHARACTERISTICS (Bernoulli, stats.ptest)

Power (P reject ≥ 1 | H1) : 0.8982

FWER (P reject ≥ 1 | H0) : 0.0516

Max sample size (planned) : 15660

ESS under H1 : 10399.3

ESS under H0 : 9955.2


NB: design powered for the binary test (δ/σ), so achieved

power should track the target; residual gap is small-sample


discreteness, not misspecification.

Config 261 – sample size (H1) [binary]

Total

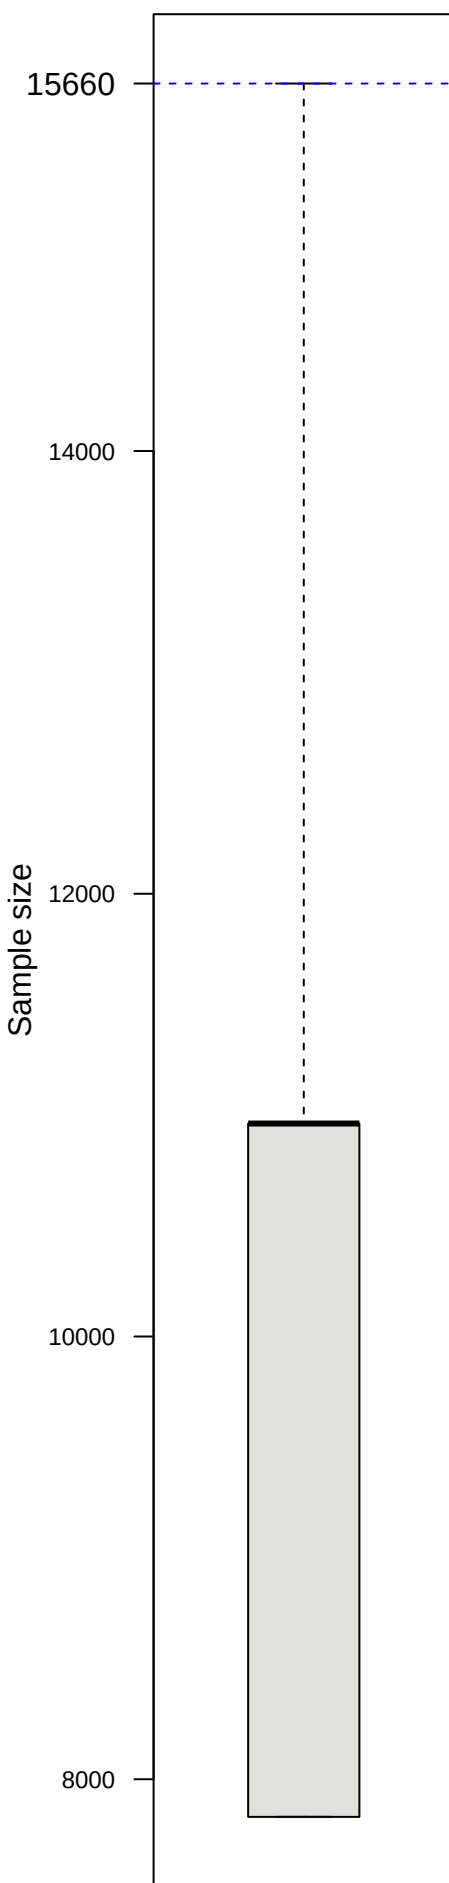

Per group

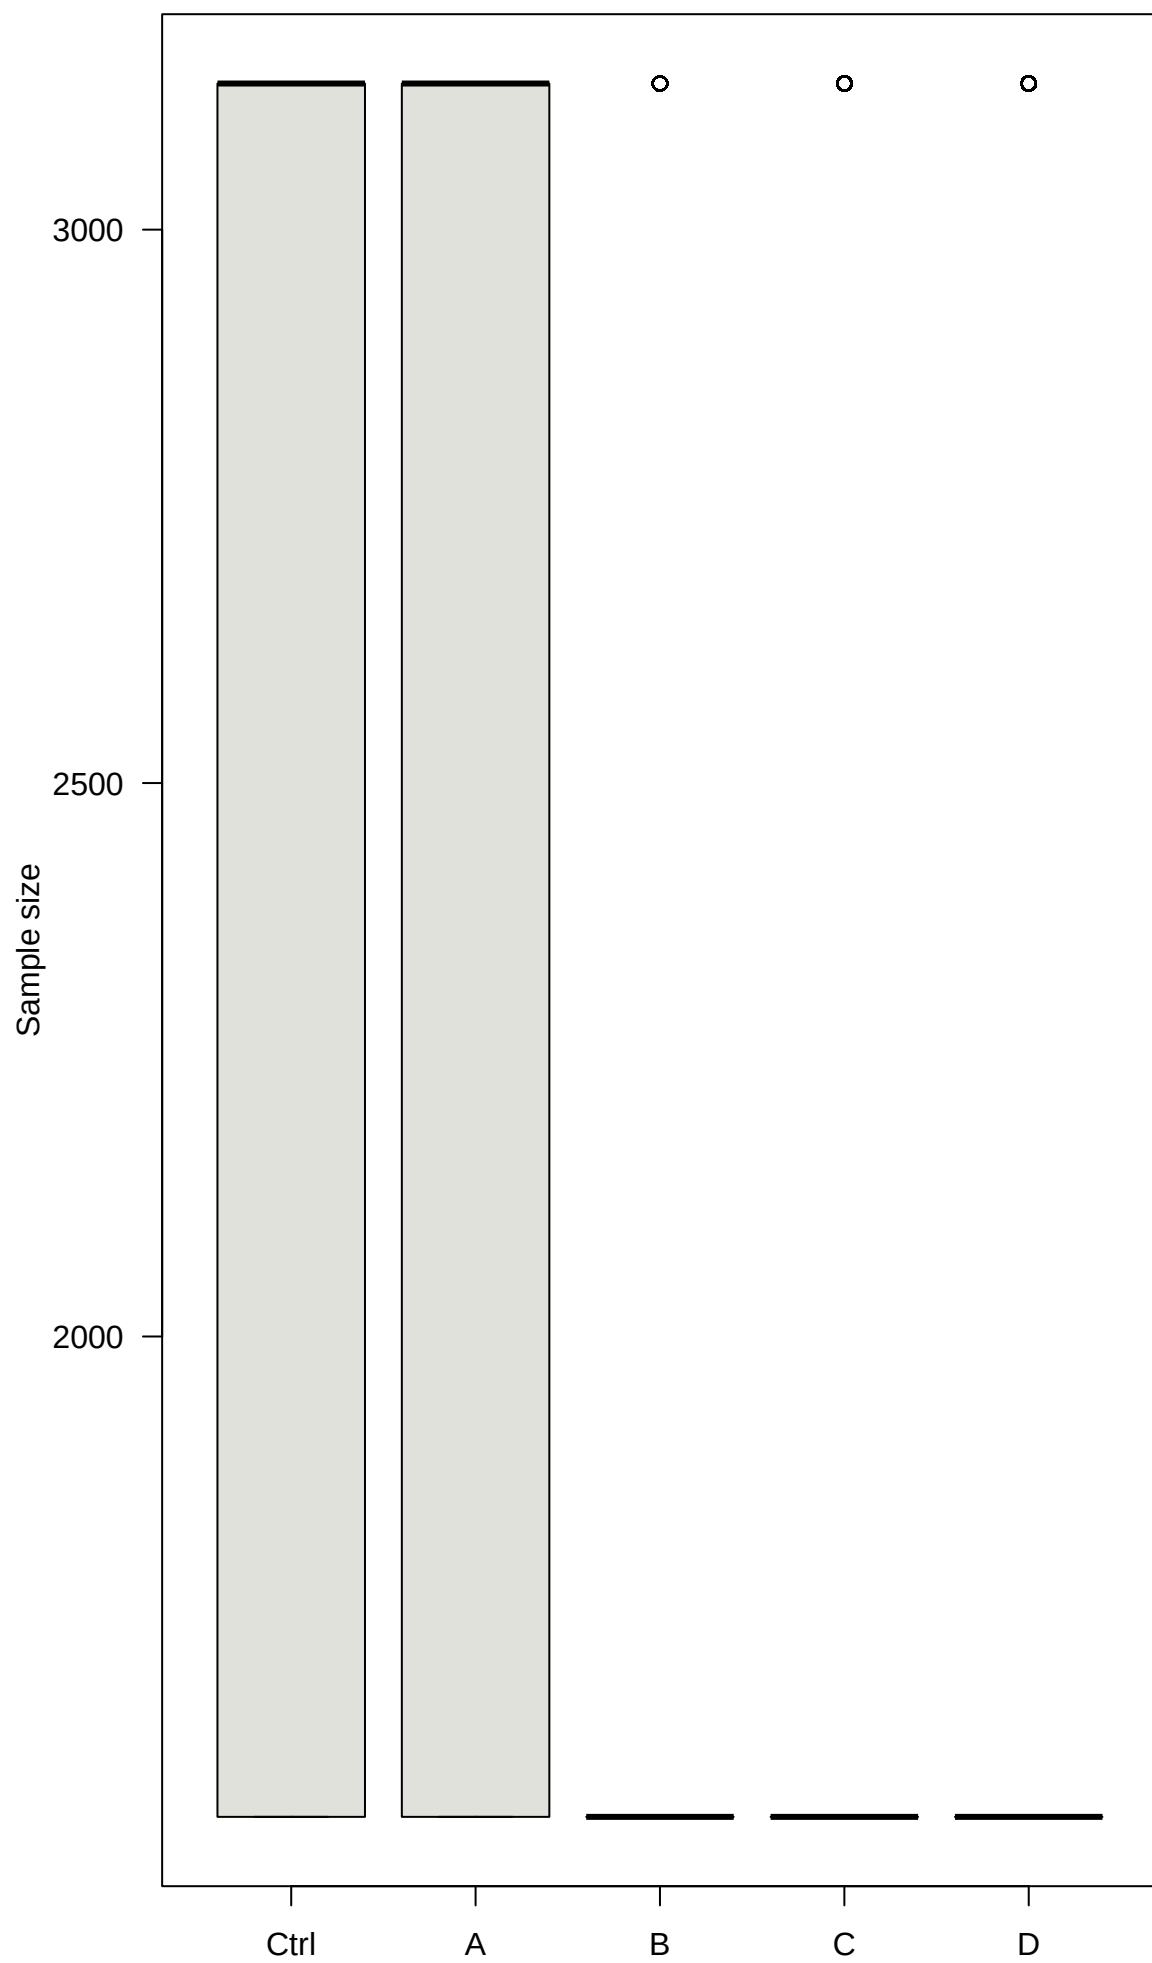

Config 263 (0.05|0.9|4|2|0.52|0.5| 0.9|simultaneous) [BINARY]

K (treatment arms) : 4

J (looks) : 2

p (target win-prob) : 0.52

p0 (null win-prob) : 0.5

method : simultaneous

true response rates : control $\pi_c = 0.900$

effect $\pi_t = 0.940$ (= $\pi_c + 2p-1$)

target alpha = 0.05 target power = 0.9

SIMULATED OPERATING CHARACTERISTICS (Bernoulli, stats.ptest)

Power (P reject ≥ 1 | H1) : 0.8831

FWER (P reject ≥ 1 | H0) : 0.0484

Max sample size (planned) : 5710

ESS under H1 : 3872.2

ESS under H0 : 3644.1


NB: design powered for the binary test (δ/σ), so achieved

power should track the target; residual gap is small-sample


discreteness, not misspecification.

Config 263 – sample size (H1) [binary]

Total

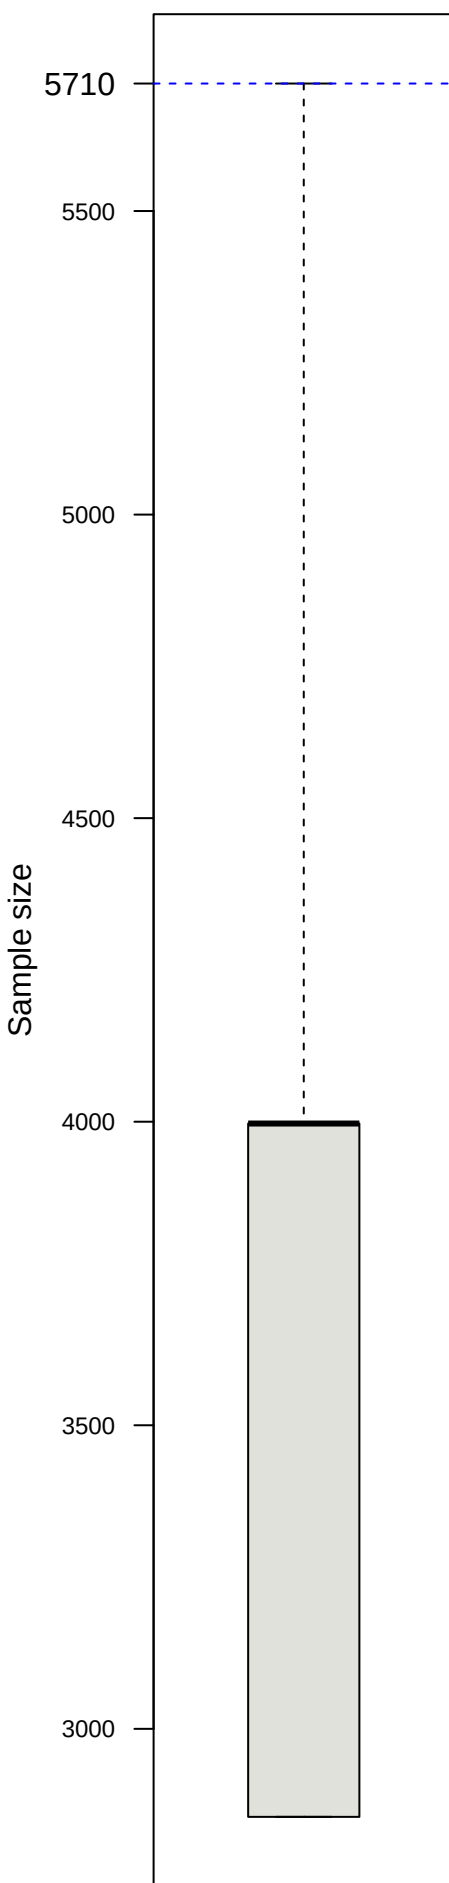

Per group

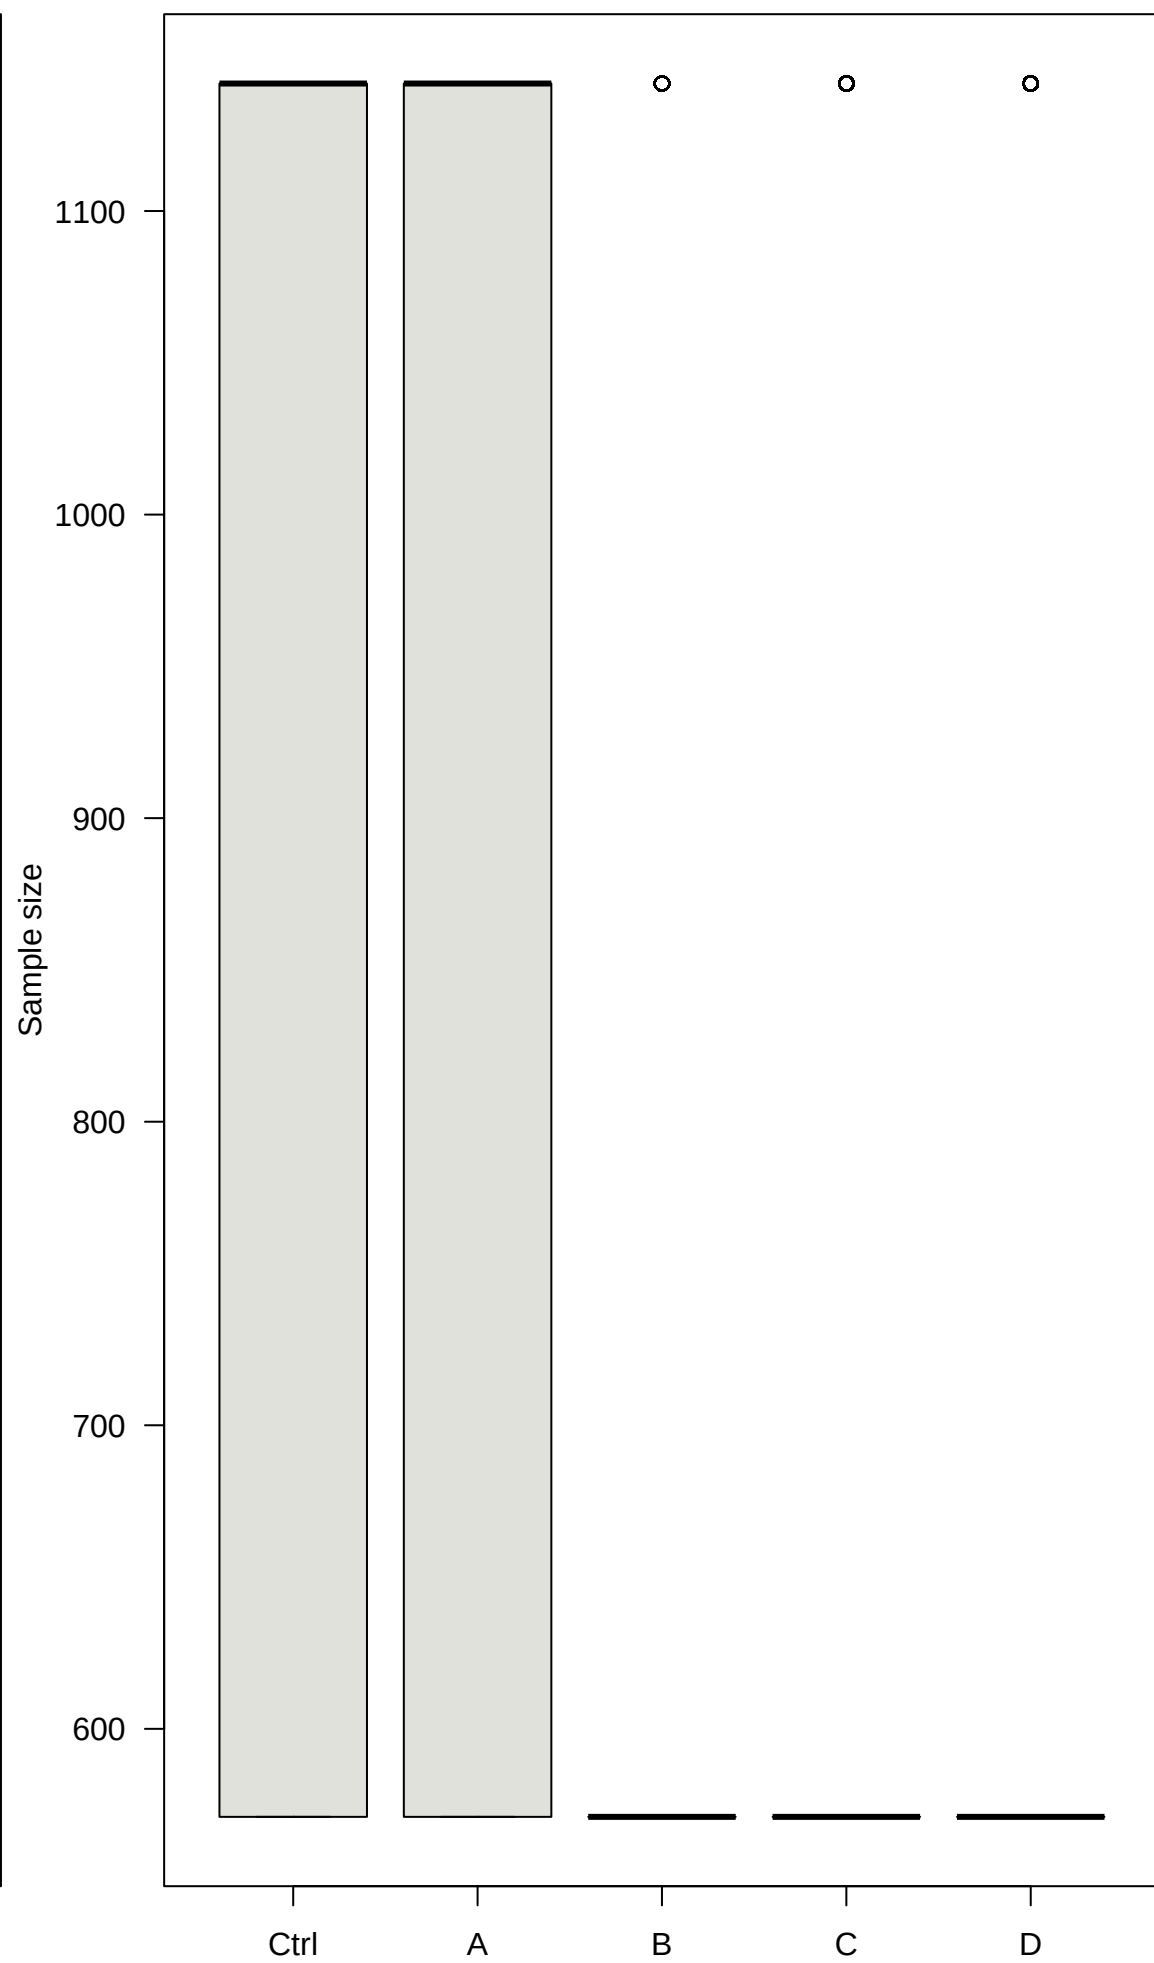

Config 271 (0.05|0.9|4|2|0.55|0.5| 0.5|simultaneous) [BINARY]

K (treatment arms) : 4

J (looks) : 2

p (target win-prob) : 0.55

p0 (null win-prob) : 0.5

method : simultaneous

true response rates : control $\pi_c = 0.500$

effect $\pi_t = 0.600$ (= $\pi_c + 2p-1$)

target alpha = 0.05 target power = 0.9

SIMULATED OPERATING CHARACTERISTICS (Bernoulli, stats.ptest)

Power (P reject ≥ 1 | H1) : 0.9006

FWER (P reject ≥ 1 | H0) : 0.0508

Max sample size (planned) : 3070

ESS under H1 : 2039.4

ESS under H0 : 1946.7


NB: design powered for the binary test (δ/σ), so achieved

power should track the target; residual gap is small-sample


discreteness, not misspecification.

Config 271 – sample size (H1) [binary]

Total

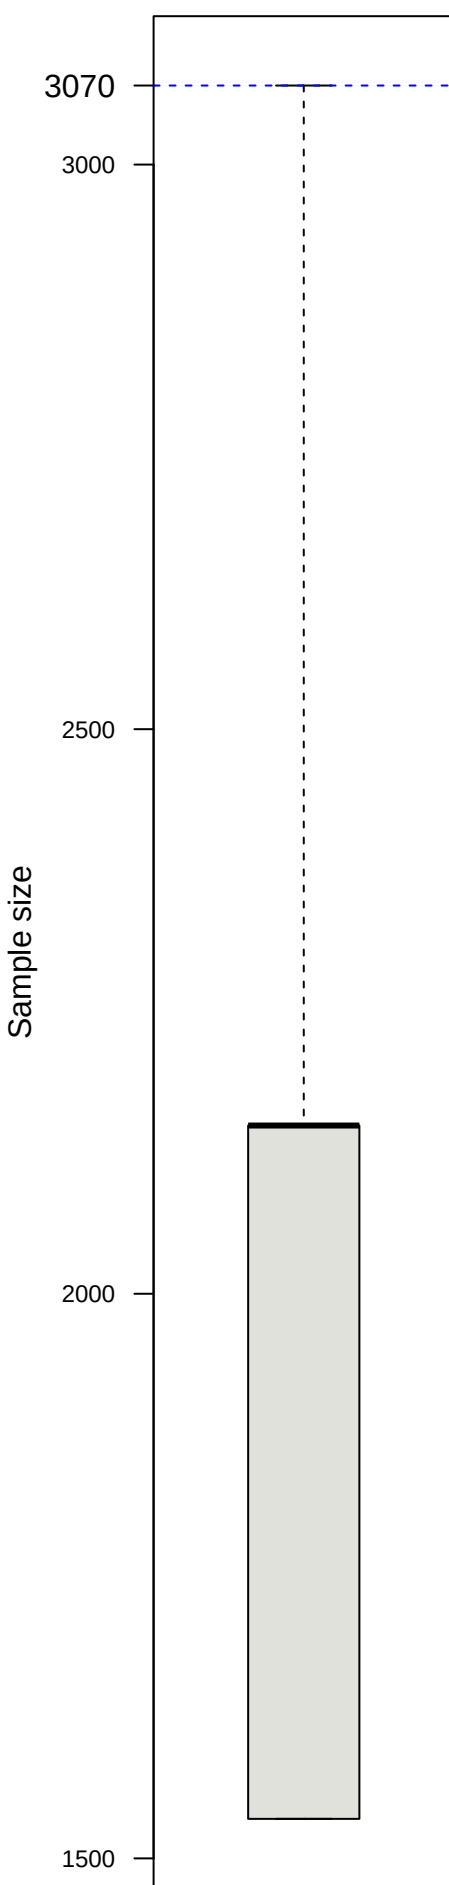

Per group

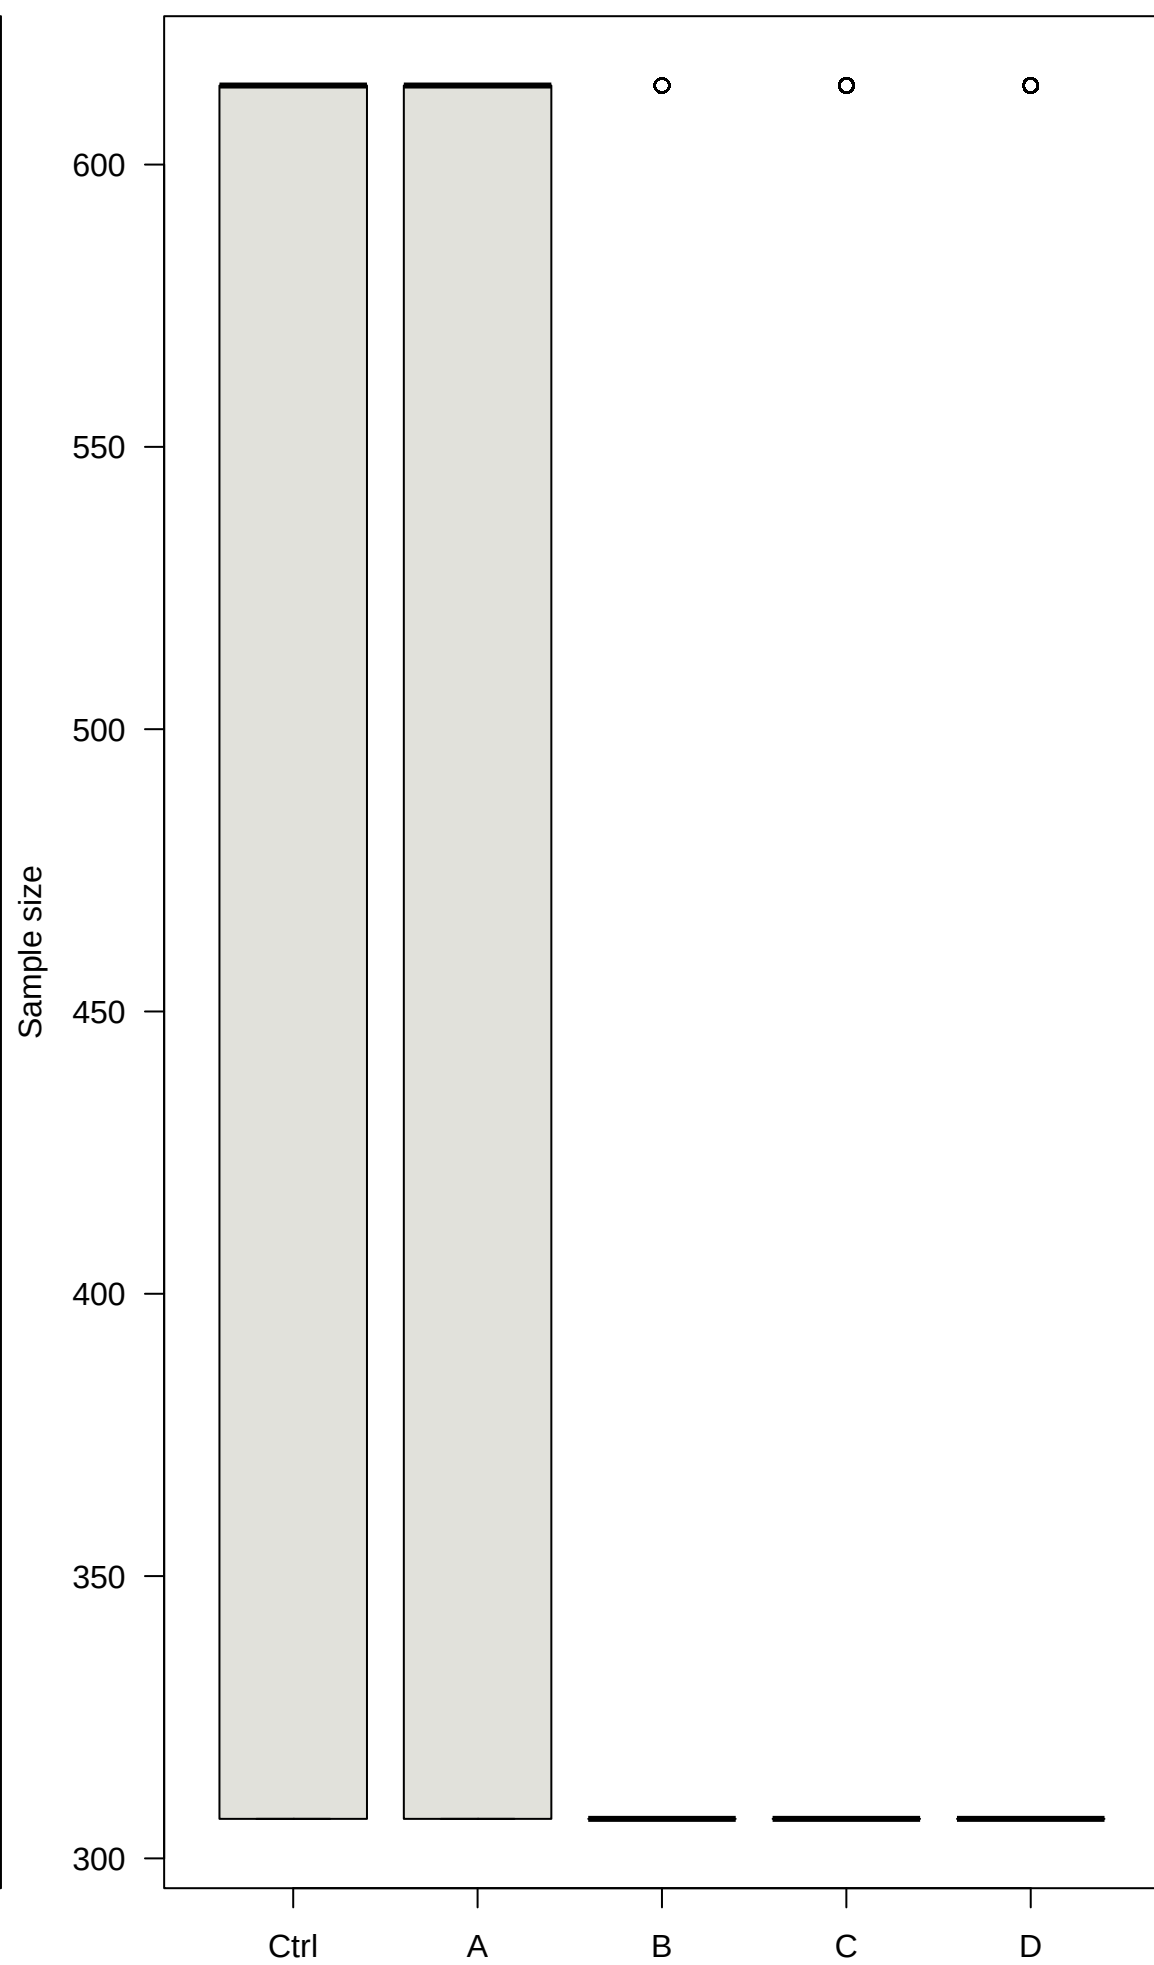

Config 285 (0.05|0.9|4|2| 0.6|0.5| 0.7|simultaneous) [BINARY]

K (treatment arms) : 4

J (looks) : 2

p (target win-prob) : 0.6

p0 (null win-prob) : 0.5

method : simultaneous

true response rates : control $\pi_c = 0.700$

effect $\pi_t = 0.900$ (= $\pi_c + 2p-1$)

target alpha = 0.05 target power = 0.9

SIMULATED OPERATING CHARACTERISTICS (Bernoulli, stats.ptest)

Power (P reject ≥ 1 | H1) : 0.8804

FWER (P reject ≥ 1 | H0) : 0.0515

Max sample size (planned) : 490

ESS under H1 : 336.0


ESS under H0 : 311.0

NB: design powered for the binary test (δ/σ), so achieved

power should track the target; residual gap is small-sample

discreteness, not misspecification.

Config 285 – sample size (H1) [binary]

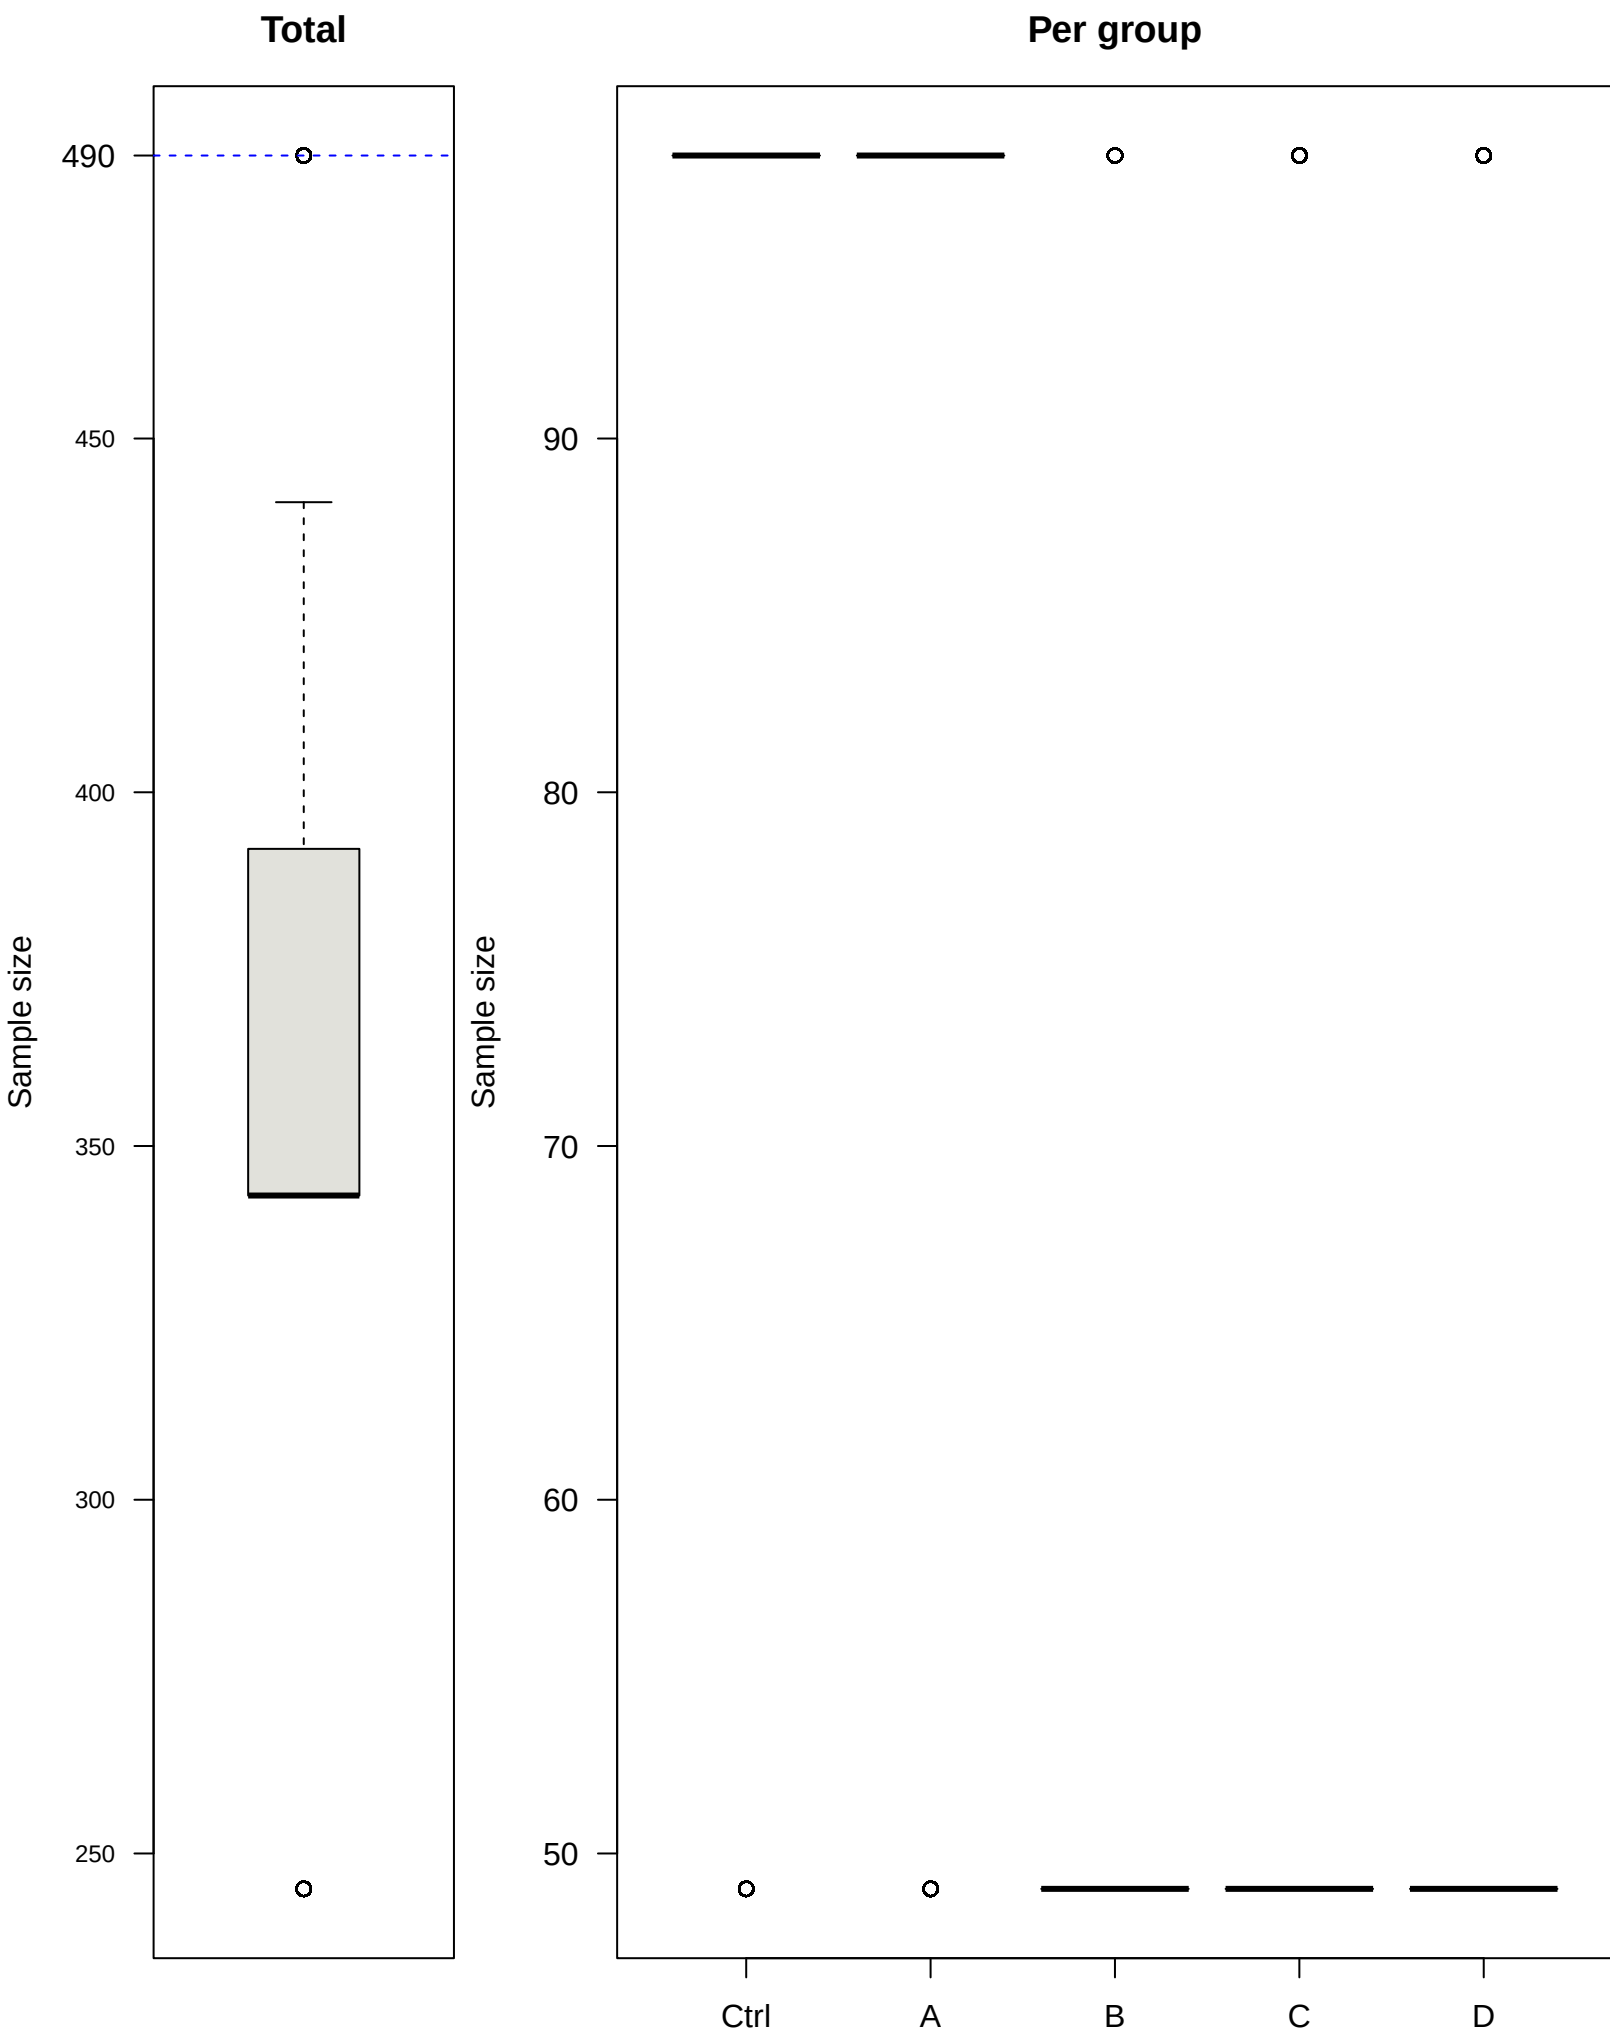

Config 289 (0.05|0.9|4|2|0.65|0.5|0.05|simultaneous) [BINARY]

K (treatment arms) : 4

J (looks) : 2

p (target win-prob) : 0.65

p0 (null win-prob) : 0.5

method : simultaneous

true response rates : control $\pi_c = 0.050$

effect $\pi_t = 0.350$ (= $\pi_c + 2p-1$)

target alpha = 0.05 target power = 0.9

SIMULATED OPERATING CHARACTERISTICS (Bernoulli, stats.ptest)

Power (P reject ≥ 1 | H1) : 0.9602

FWER (P reject ≥ 1 | H0) : 0.0598

Max sample size (planned) : 210

ESS under H1 : 126.7

ESS under H0 : 134.9


NB: design powered for the binary test (δ/σ), so achieved

power should track the target; residual gap is small-sample


discreteness, not misspecification.

Config 289 – sample size (H1) [binary]

Total

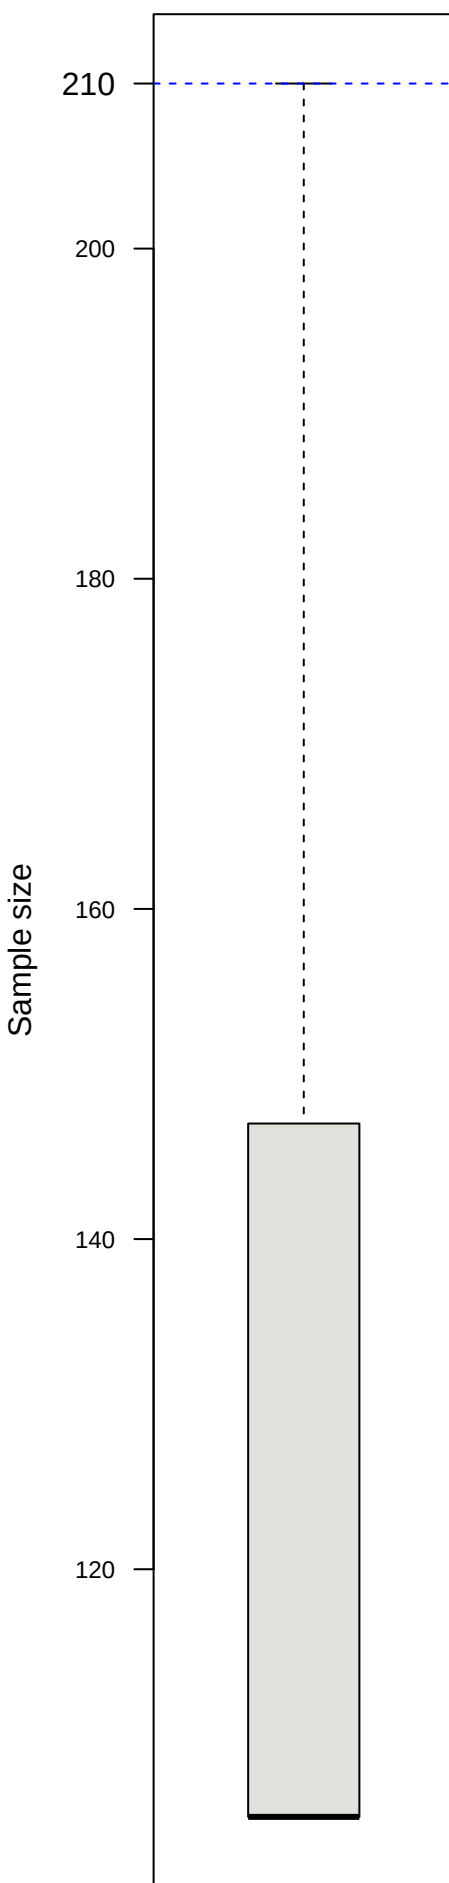

Per group

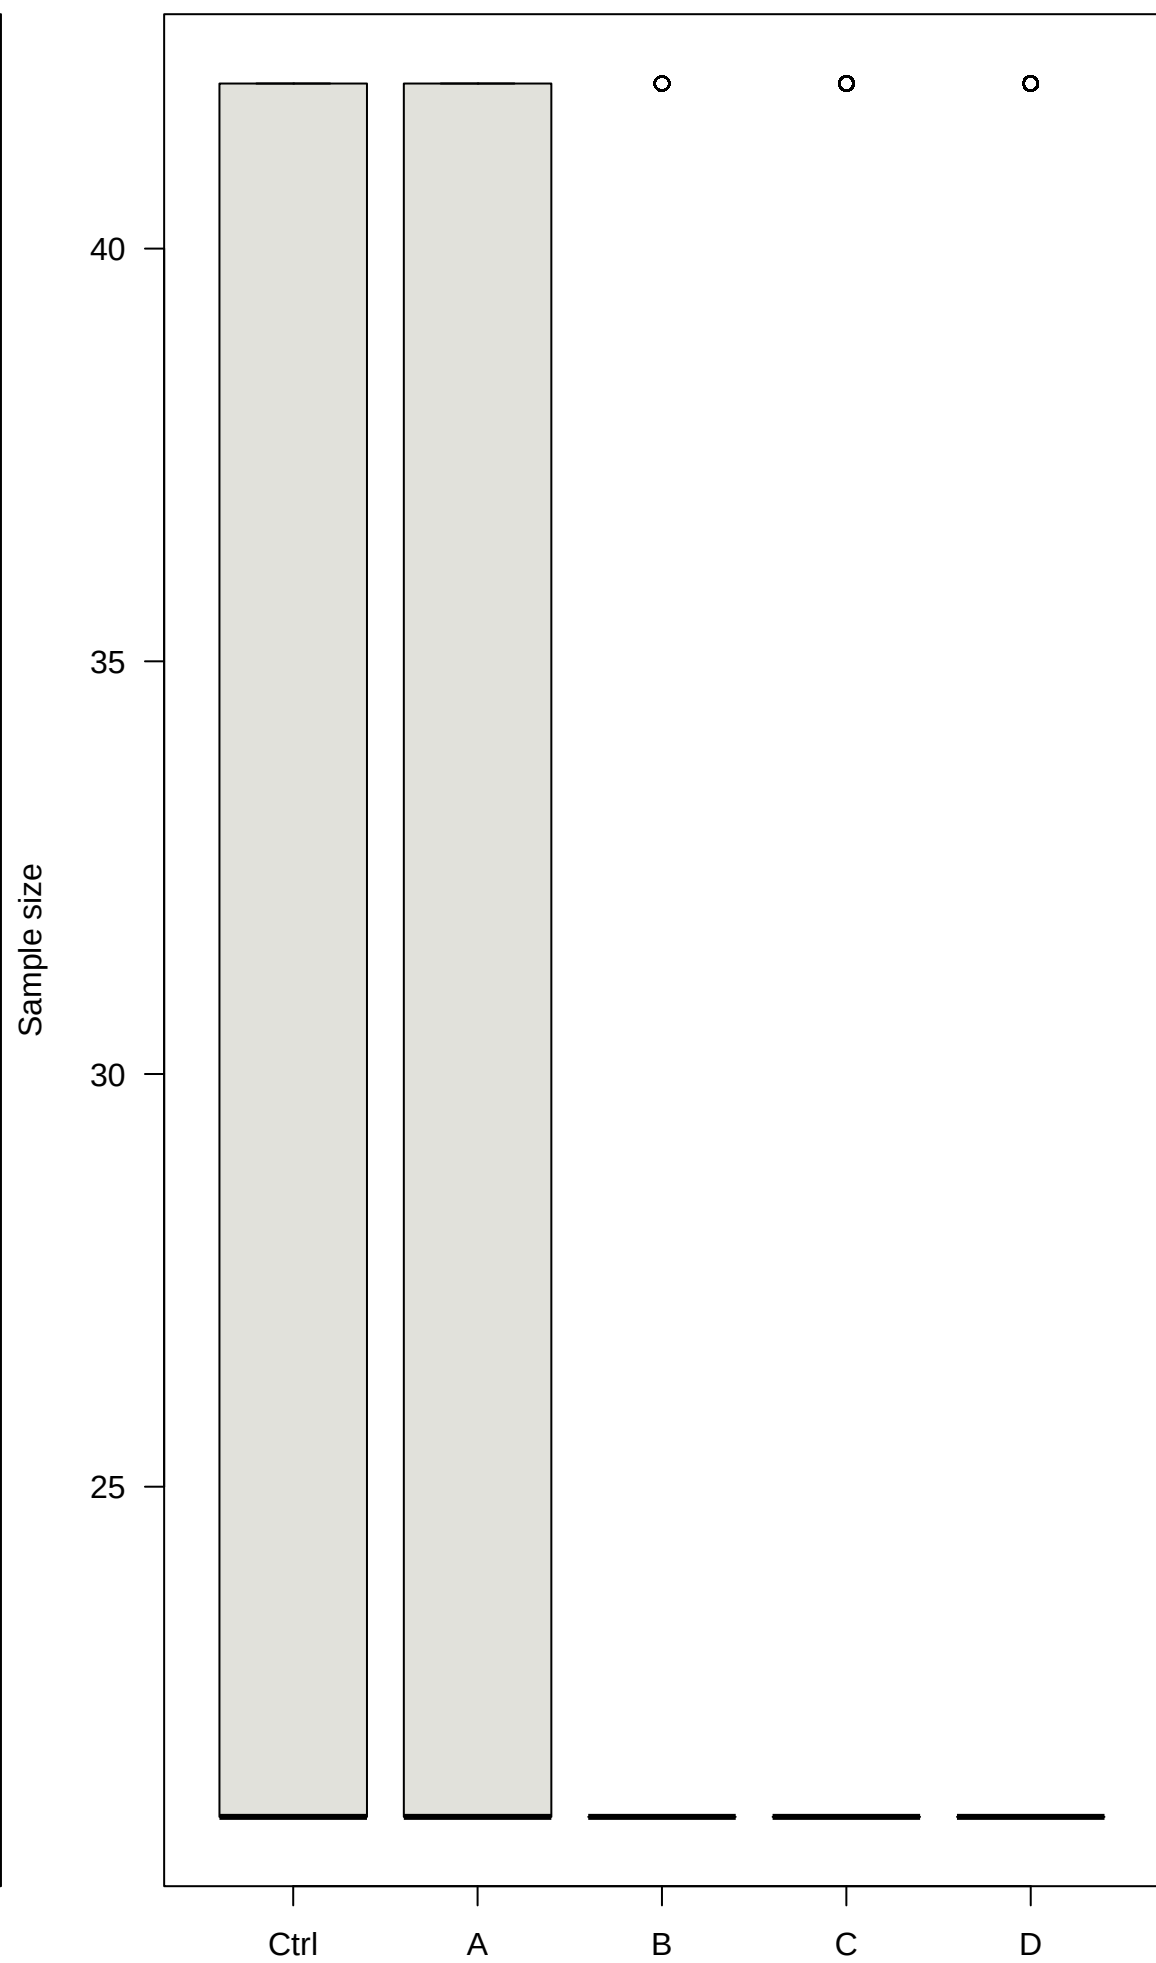

Config 293 (0.05|0.9|4|2|0.65|0.5| 0.3|simultaneous) [BINARY]

K (treatment arms) : 4

J (looks) : 2

p (target win-prob) : 0.65

p0 (null win-prob) : 0.5

method : simultaneous

true response rates : control $\pi_c = 0.300$

effect $\pi_t = 0.600$ (= $\pi_c + 2p-1$)

target alpha = 0.05 target power = 0.9

SIMULATED OPERATING CHARACTERISTICS (Bernoulli, stats.ptest)

Power (P reject ≥ 1 | H1) : 0.9108

FWER (P reject ≥ 1 | H0) : 0.0510

Max sample size (planned) : 330

ESS under H1 : 217.8

ESS under H0 : 214.7


NB: design powered for the binary test (δ/σ), so achieved

power should track the target; residual gap is small-sample


discreteness, not misspecification.

Config 293 – sample size (H1) [binary]

Total

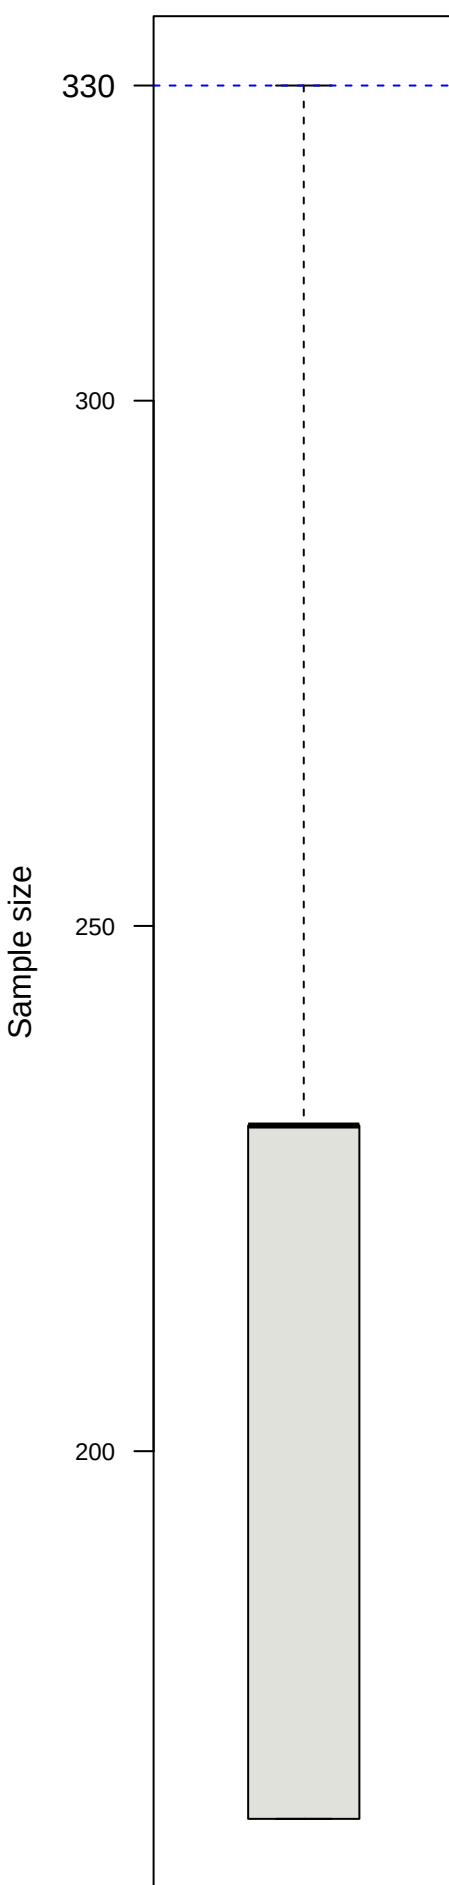

Per group

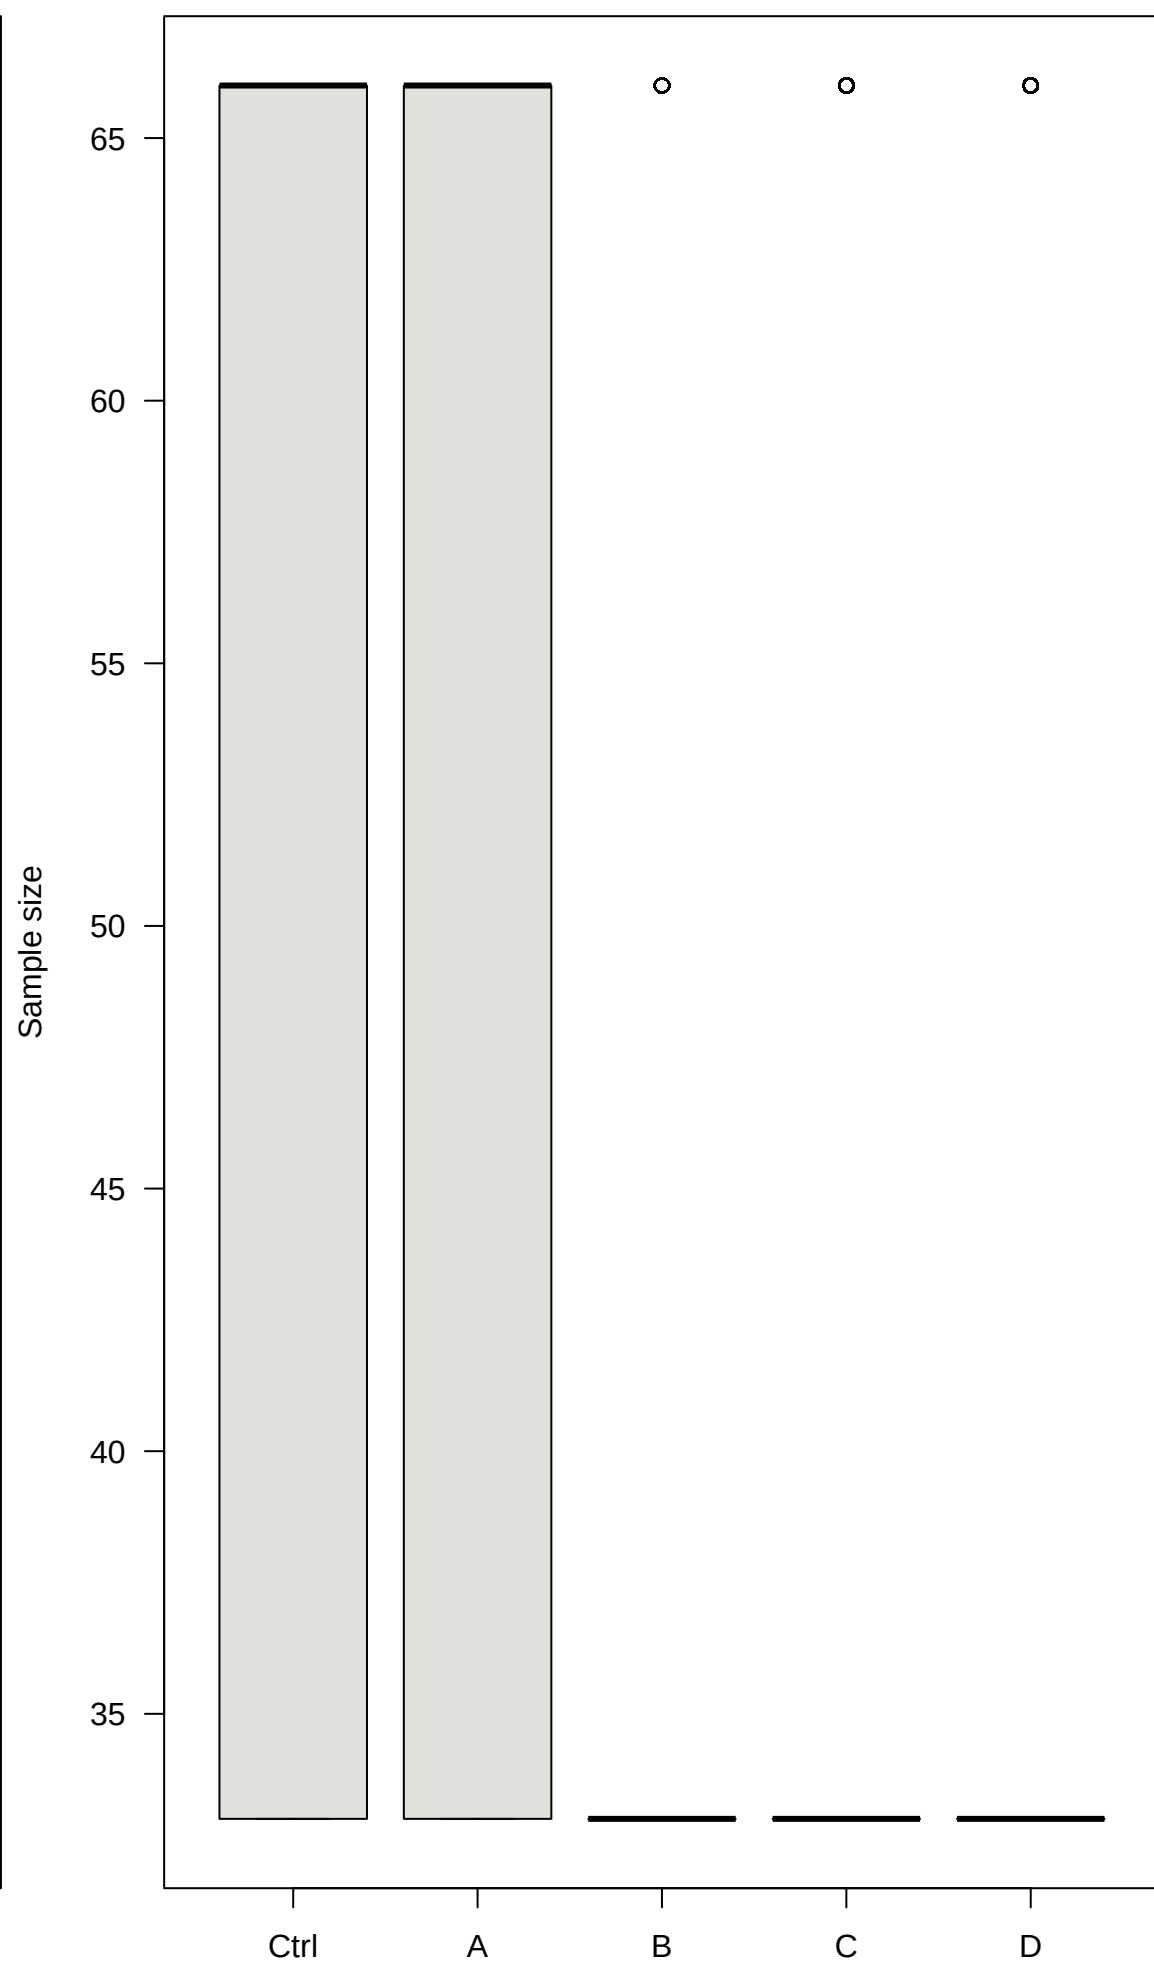

Config 295 (0.05|0.9|4|2|0.65|0.5| 0.5|simultaneous) [BINARY]

K (treatment arms) : 4

J (looks) : 2

p (target win-prob) : 0.65

p0 (null win-prob) : 0.5

method : simultaneous

true response rates : control $\pi_c = 0.500$

effect $\pi_t = 0.800$ (= $\pi_c + 2p-1$)

target alpha = 0.05 target power = 0.9

SIMULATED OPERATING CHARACTERISTICS (Bernoulli, stats.ptest)

Power (P reject ≥ 1 | H1) : 0.9073

FWER (P reject ≥ 1 | H0) : 0.0598

Max sample size (planned) : 310

ESS under H1 : 209.8


ESS under H0 : 204.1

NB: design powered for the binary test (δ/σ), so achieved

power should track the target; residual gap is small-sample

discreteness, not misspecification.

Config 295 – sample size (H1) [binary]

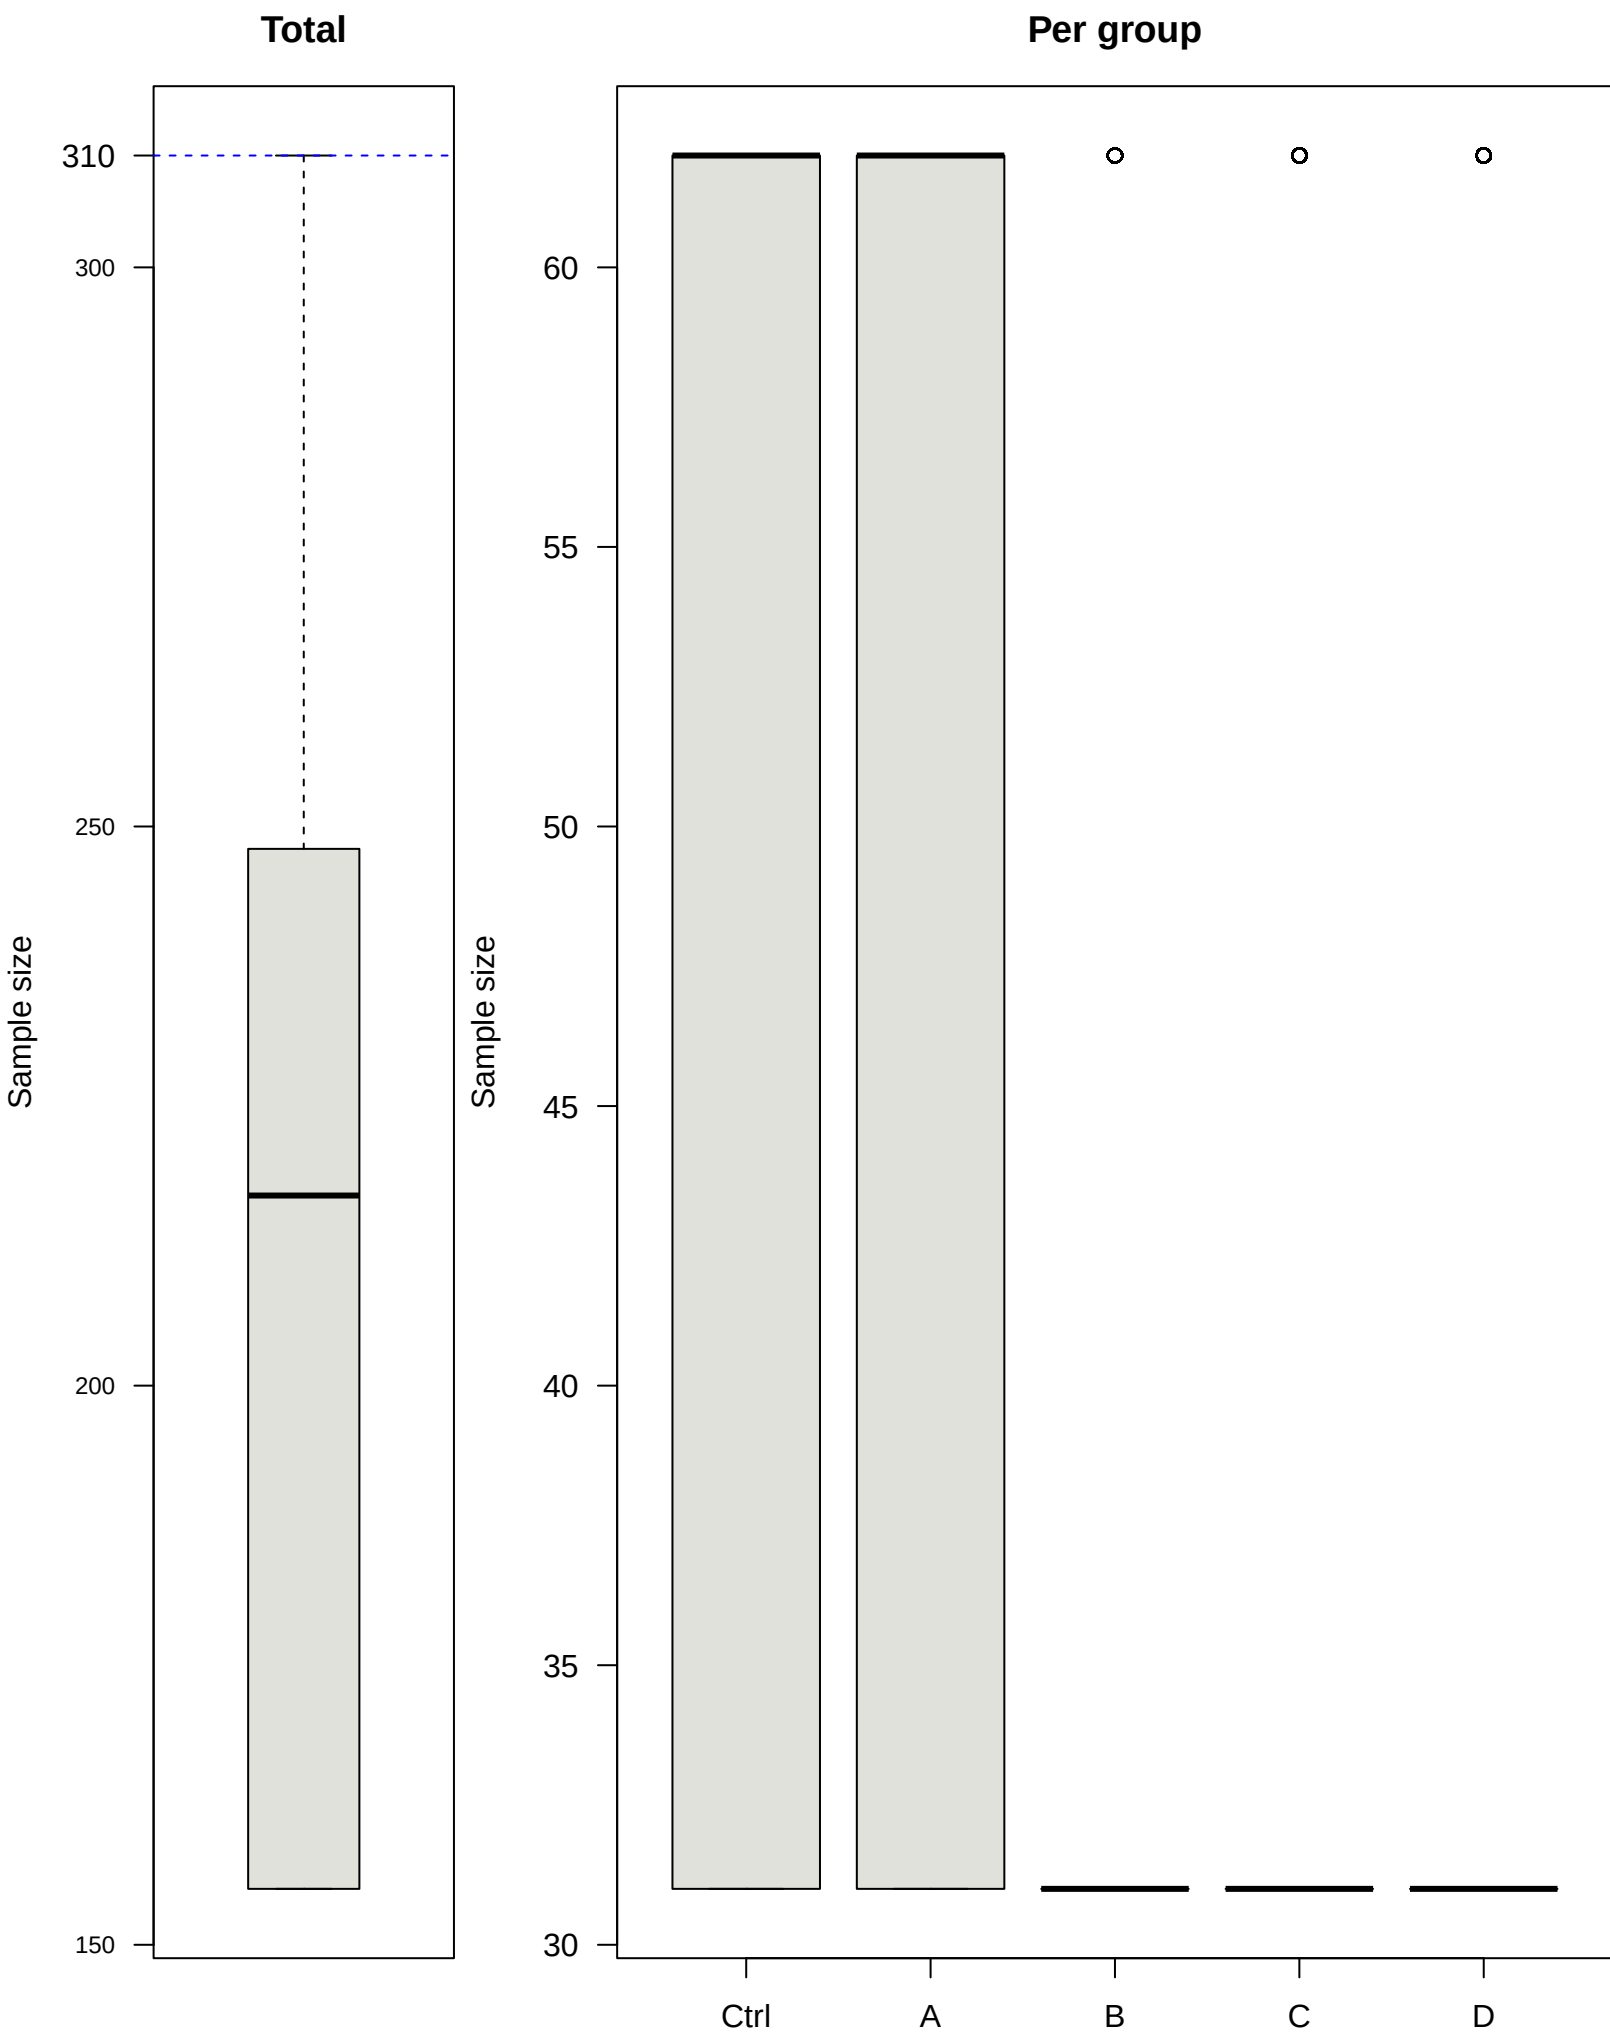

Config 305 (0.05|0.9|4|2|0.75|0.5| 0.3|simultaneous) [BINARY]

K (treatment arms) : 4

J (looks) : 2

p (target win-prob) : 0.75

p0 (null win-prob) : 0.5

method : simultaneous

true response rates : control $\pi_c = 0.300$

effect $\pi_t = 0.800$ (= $\pi_c + 2p-1$)

target alpha = 0.05 target power = 0.9

SIMULATED OPERATING CHARACTERISTICS (Bernoulli, stats.ptest)

Power (P reject ≥ 1 | H1) : 0.8983

FWER (P reject ≥ 1 | H0) : 0.0521

Max sample size (planned) : 110

ESS under H1 : 74.3


ESS under H0 : 71.1

NB: design powered for the binary test (δ/σ), so achieved

power should track the target; residual gap is small-sample

discreteness, not misspecification.

Config 305 – sample size (H1) [binary]

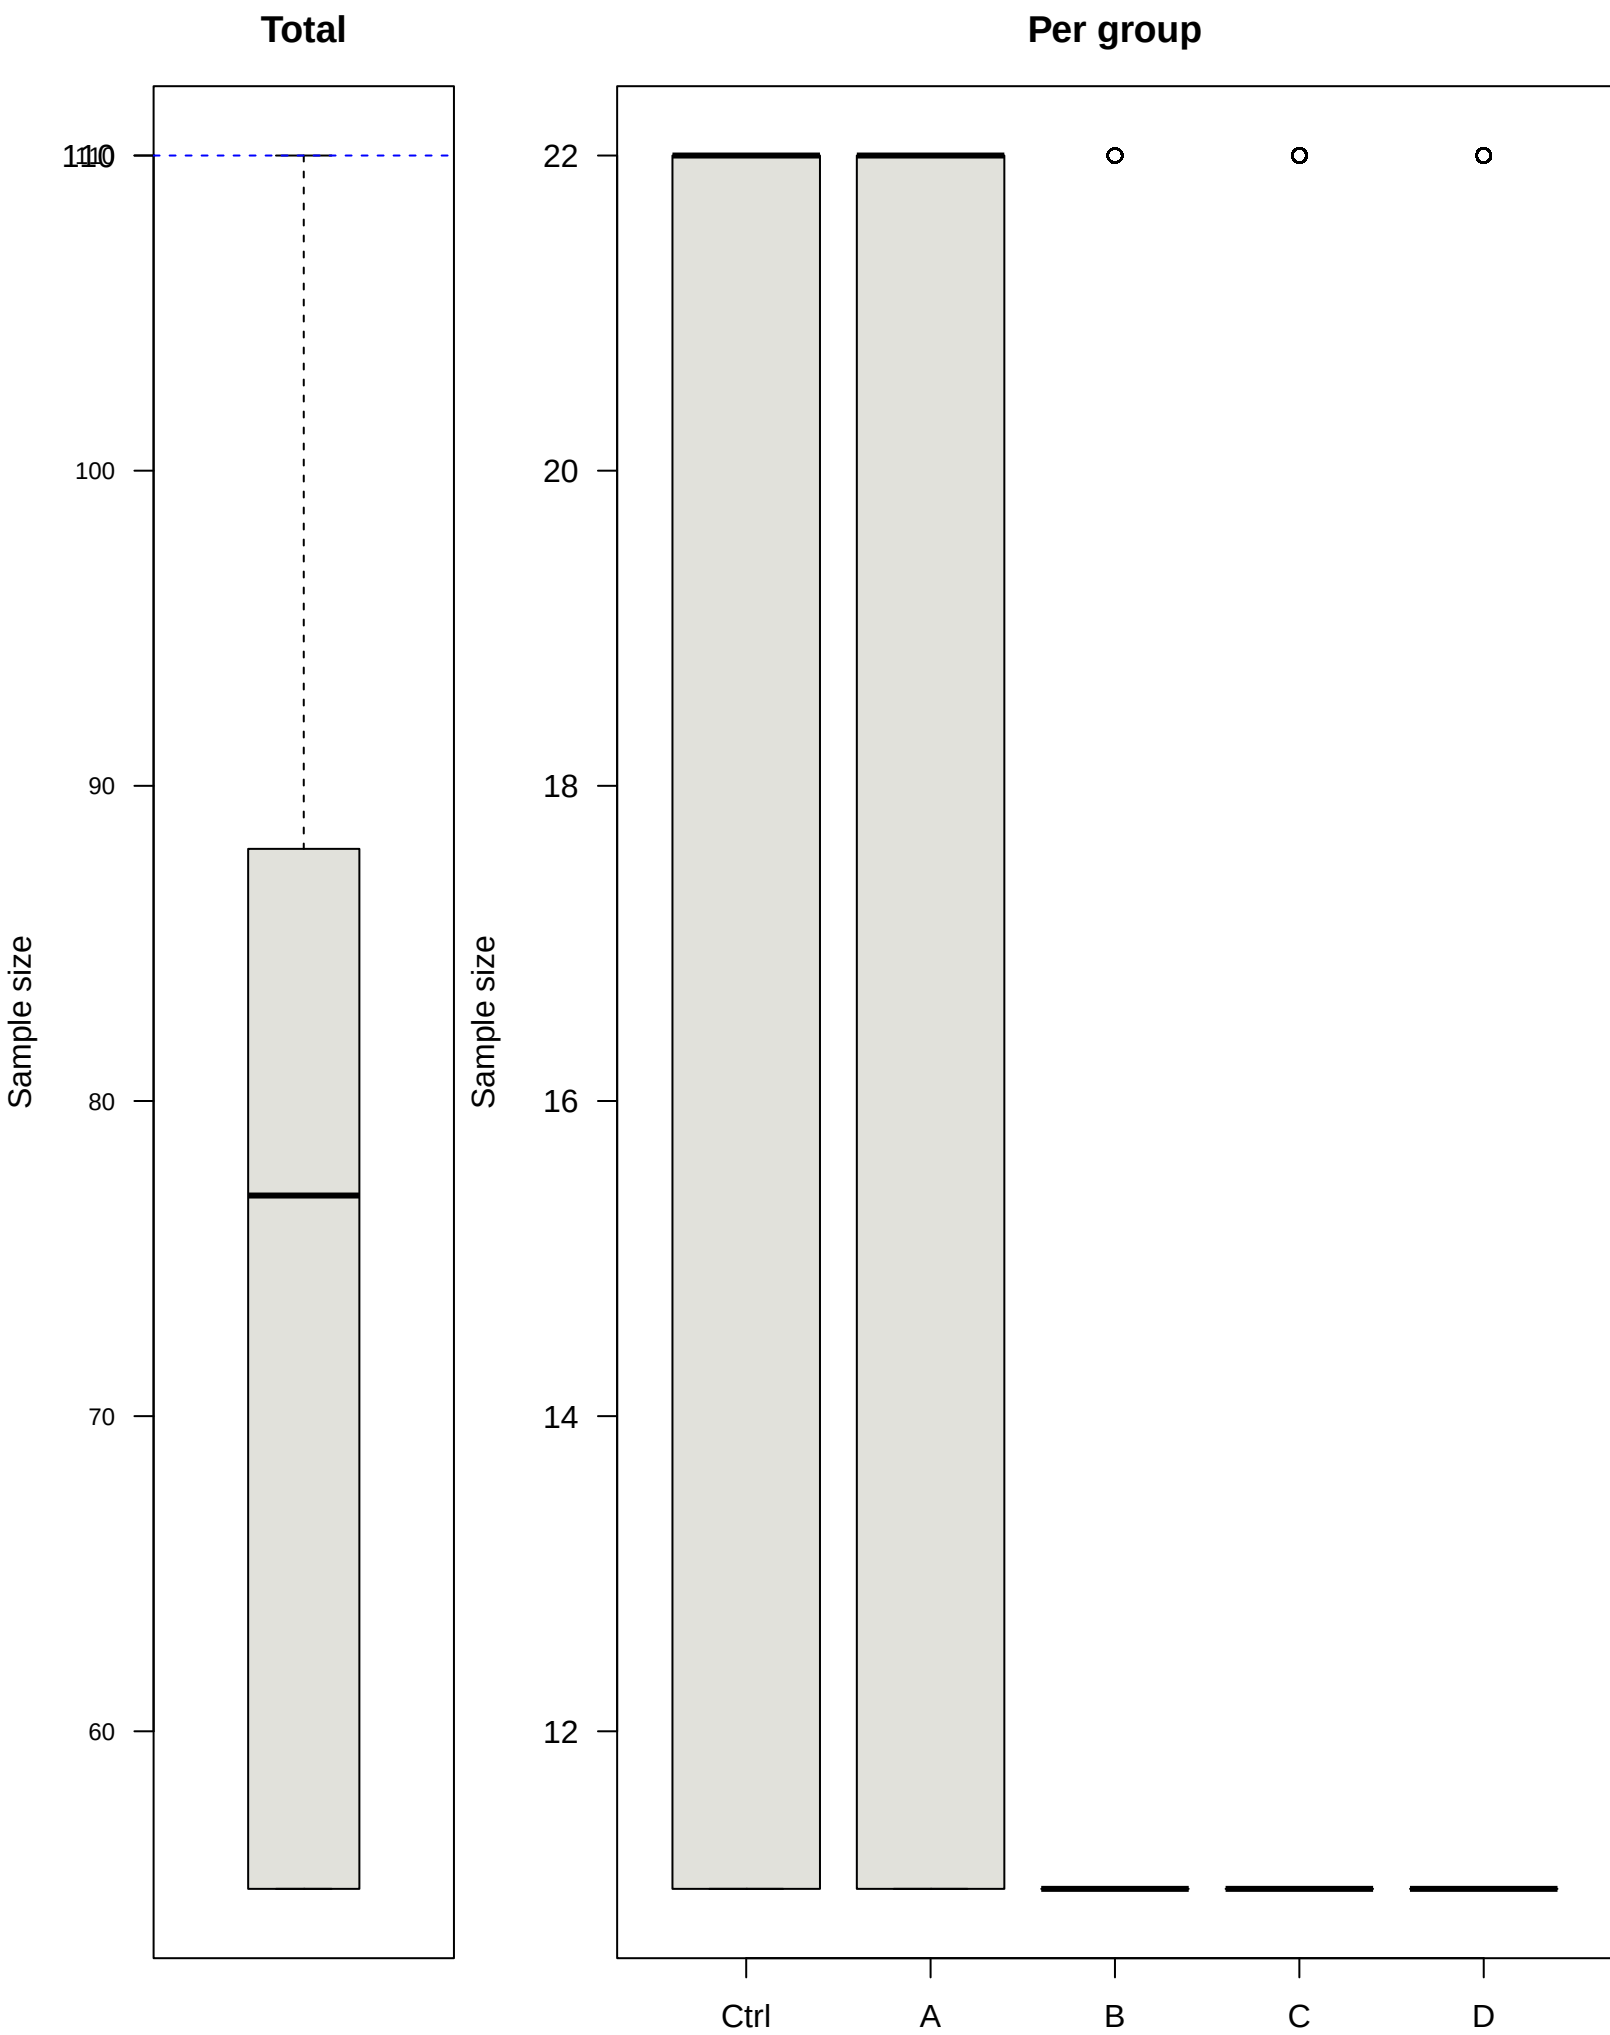

Config 315 (0.05|0.9|4|2|0.85|0.5| 0.1|simultaneous) [BINARY]

K (treatment arms) : 4

J (looks) : 2

p (target win-prob) : 0.85

p0 (null win-prob) : 0.5

method : simultaneous

true response rates : control $\pi_c = 0.100$

effect $\pi_t = 0.800$ (= $\pi_c + 2p-1$)

target alpha = 0.05 target power = 0.9

SIMULATED OPERATING CHARACTERISTICS (Bernoulli, stats.ptest)

Power (P reject ≥ 1 | H1) : 0.9349

FWER (P reject ≥ 1 | H0) : 0.0531

Max sample size (planned) : 50

ESS under H1 : 32.7

ESS under H0 : 35.0


NB: design powered for the binary test (δ/σ), so achieved

power should track the target; residual gap is small-sample

discreteness, not misspecification.

Config 315 – sample size (H1) [binary]

Total

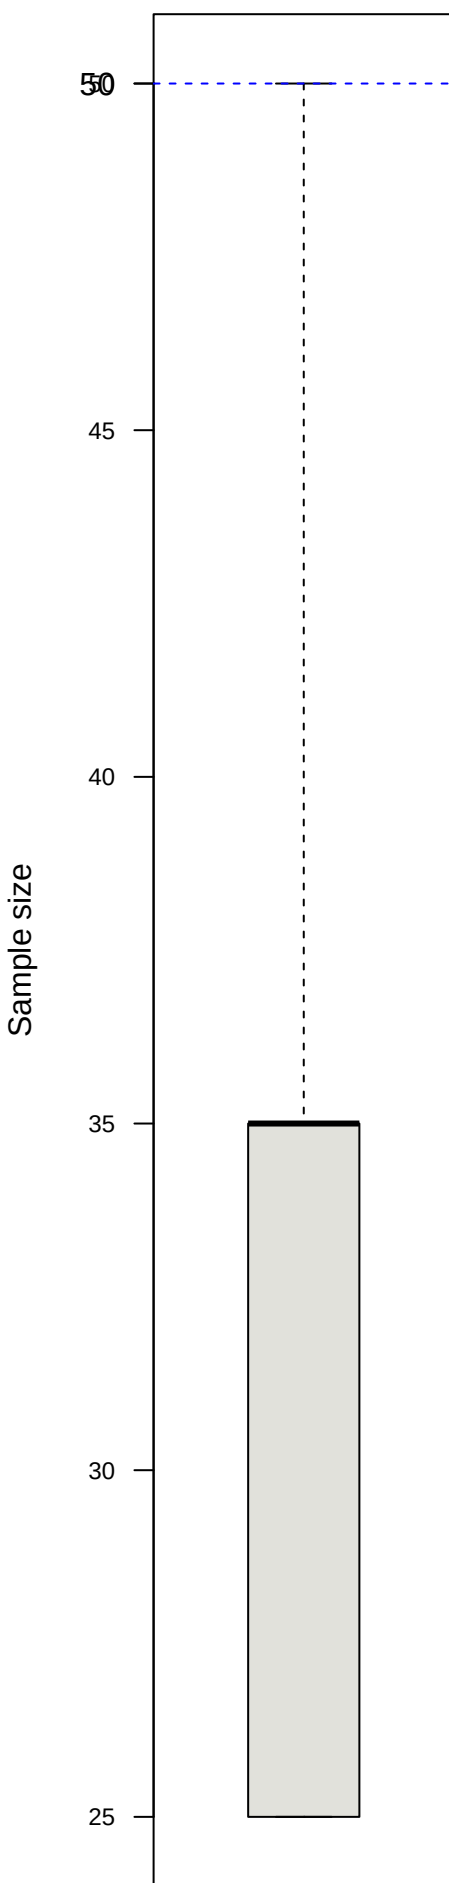

Per group



Config 325 (0.05|0.9|4|2|0.95|0.5|0.05|simultaneous) [BINARY]

K (treatment arms) : 4

J (looks) : 2

p (target win-prob) : 0.95

p0 (null win-prob) : 0.5

method : simultaneous

true response rates : control $\pi_c = 0.050$

effect $\pi_t = 0.950$ (= $\pi_c + 2p-1$)

target alpha = 0.05 target power = 0.9

SIMULATED OPERATING CHARACTERISTICS (Bernoulli, stats.ptest)

Power (P reject ≥ 1 | H1) : 0.9829

FWER (P reject ≥ 1 | H0) : 0.0141

Max sample size (planned) : 30

ESS under H1 : 19.3

ESS under H0 : 24.6


NB: design powered for the binary test (δ/σ), so achieved

power should track the target; residual gap is small-sample

discreteness, not misspecification.

Config 325 – sample size (H1) [binary]

Total

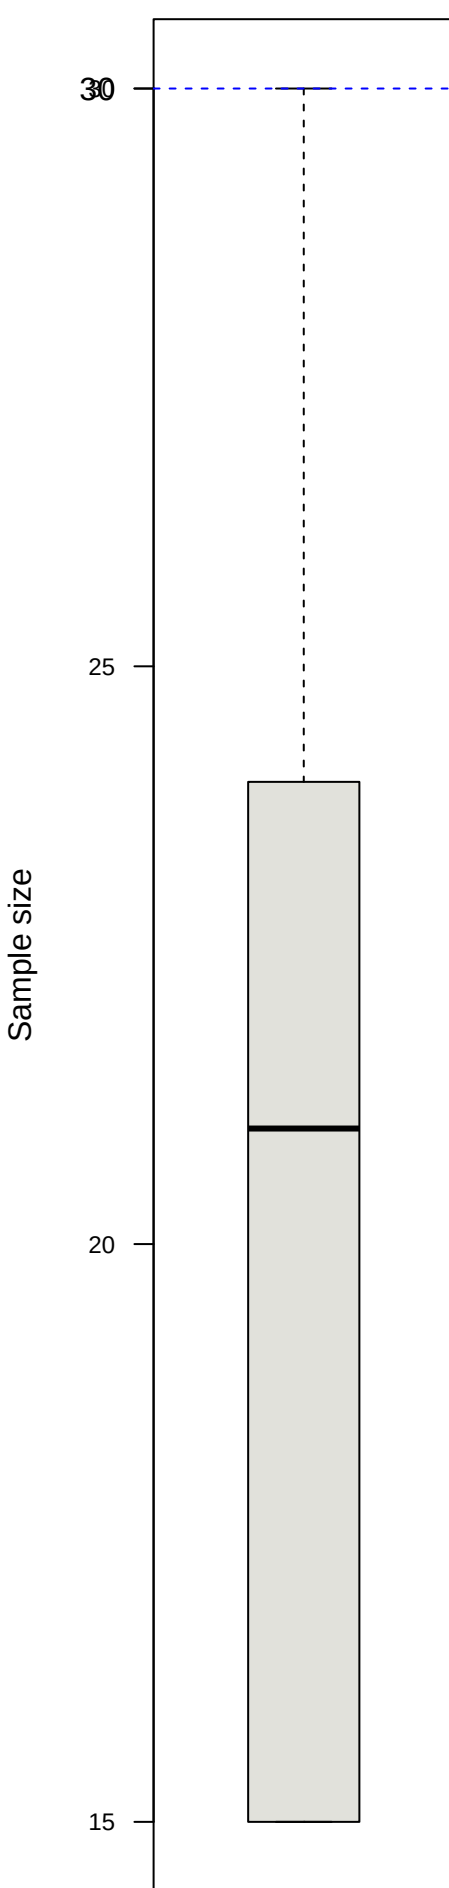

Per group

