

Shenzhen Sunwoald Electronics Co., LTD


F/5,Building C,No.3 industrial estate,Hourui,Xixiang Street,Baoan District, Shenzhen, Guangdong,China

Http://www.sunwoald.com Http://sunwoald.cn.alibaba.com

Tel: +86-755-27517755 Fax: +86-755-27517757 PC.518128

Email: info@sunwoald.com sale@sunwoald.com LLL3683@163.com


[Outline Dimensions]

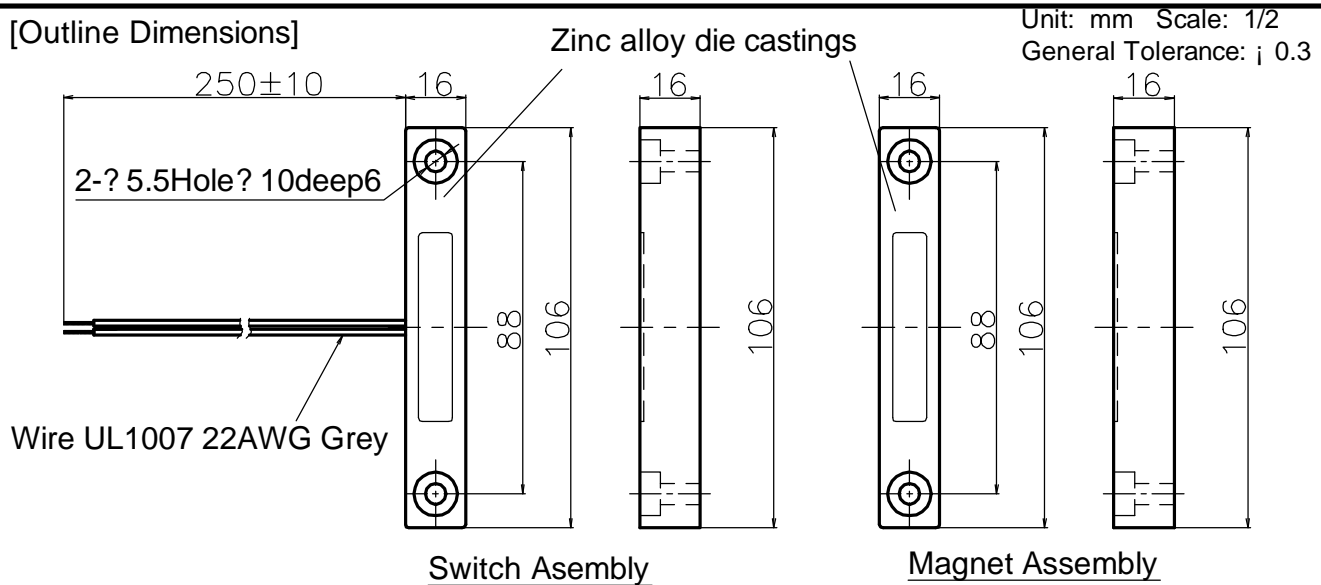

[Characteristics]

Switch Assembly

Magnet Assembly

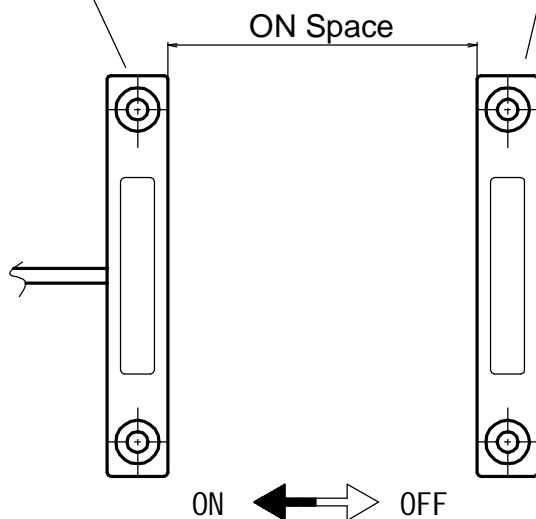

Test Condition:
Room Temperature(25 \pm 5 $^{\circ}$ C)

Operating Spaces (mm)

ON	50~70mm

Switch Characteristic		Physical Characteristic	
1 Contact form	A(Normally Open)	1 Min Shock:	30G
2 Max Contact Rating	10 W	2 Min Vibration:	30G(10~50Hz)
3 Max Switch Voltage	100V	3 Temp.Rating:	-30~+60 $^{\circ}$ C
4 Max Switch Current	0.5 A	4 Heat Shock:	-40~+70 $^{\circ}$ C
5 Max Contact Resistance	100m Ohm		
6 Min Insulation Resistance	100M Ohm		
7 Electrical Life	1X10 ⁵ (5Vdc,10mA)		

Remark:

RoHS

Designed by

XM Zhou

TITLE

Checked by

Door Contact

Approved by

Lorin Lee

P/N

Date

5th,May,2008

DC-10516



Scale: 1:2

Page: 1/1