


INNER HOLE TOOL / S型压紧



STUPR/L-P 93°

径向切削时，切削量应小于等于刀尖角半径

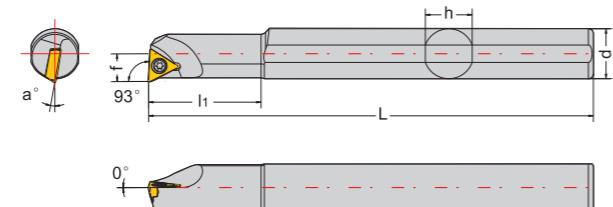

型号	刀片	尺寸						刀片螺丝	扳手
		最小加工径	Φd	f	L	l1	h		
S08K-STUPR/L09-12P	TP..0902..	Φ11	12	7	125	21	11	10°	SC250660
S08K-STUPR/L09-16P		Φ11	16	9	125	21	15	10°	
S10K-STUPR/L09-12P		Φ13	12	7	125	26	11	8°	
S10K-STUPR/L09-16P		Φ13	16	9	125	26	15	8°	
S10K-STUPR/L11-12P	TP..1103..	Φ13	12	7	125	26	11	12°	SC300660
S12M-STUPR/L11-16P		Φ16	16	9	150	31	15	10°	
S14N-STUPR/L11-16P		Φ16	16	9	160	36	15	10°	SC300760

车削刀具—内孔车刀

外圆车削

内孔车削

螺纹车削


槽刀

阻尼减振系列

铣削



STWCR/L 60°

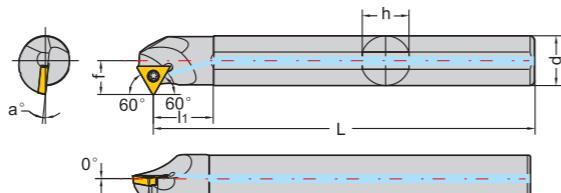


型号	刀片	尺寸						刀片螺丝	扳手
		最小加工径	Φd	f	L	l1	h		
A08K-STWCR/L09	TC..0902..	Φ11	8	5.5	125	14	7	12°	SC220660
A10K-STWCR/L09		Φ14	10	8	125	17	9	10°	
A12M-STWCR/L11		Φ16	12	9	150	20	11	8°	
A14N-STWCR/L11		Φ19	14	10	160	24	13	8°	
A16N-STWCR/L11	TC..1102..	Φ20	16	11	160	27	15	6°	SC250660
A20Q-STWCR/L11		Φ25	20	13	180	34	18	4°	
A25R-STWCR/L16	TC..16T3..	Φ32	25	17	200	43	23	6°	SC351060

备忘录

INNER HOLE TOOL / S型压紧



STWCR/L 60°

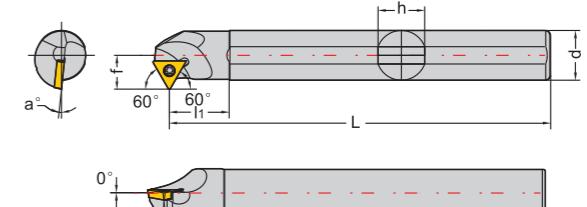


型号	刀片	尺寸						刀片螺丝	扳手
		最小加工径	Φd	f	L	l1	h		
S08K-STWCR/L09	TC..0902..	Φ11	8	5.5	125	14	7	12°	SC220660
S08K-STWCR/L09-A16		Φ11	16	5.5	125	21	15	12°	
S10K-STWCR/L09		Φ14	10	8	125	17	9	10°	
S12M-STWCR/L09		Φ16	12	9	150	20	11	8°	
S10K-STWCR/L11	TC..1102..	Φ14	10	8	125	17	9	10°	T6
S10K-STWCR/L11-A16		Φ14	16	8	125	26	15	10°	
S12M-STWCR/L11	TC..1102..	Φ16	12	9	150	20	11	8°	
S12M-STWCR/L11-A16		Φ16	16	9	150	31	15	8°	
S14N-STWCR/L11	TC..1102..	Φ19	14	10	160	24	13	8°	SC250660
S14N-STWCR/L11-A16		Φ19	16	10	160	31	15	8°	
S16N-STWCR/L11	TC..1102..	Φ20	16	11	160	27	15	6°	
S20Q-STWCR/L11		Φ25	20	13	180	34	18	4°	
S25R-STWCR/L11	TC..16T3..	Φ31	25	15	200	43	23	2°	
S32S-STWCR/L11		Φ39	32	19	250	54	30	0°	
S20Q-STWCR/L16	TC..16T3..	Φ25	20	14.5	180	34	18	8°	T15
S25R-STWCR/L16		Φ32	25	17	200	43	23	6°	
S32S-STWCR/L16	TC..16T3..	Φ39	32	20	250	54	30	4°	SC351060
S40T-STWCR/L16	TC..16T3..	Φ50	40	24	300	68	37	0°	T6
S50U-STWCR/L16		Φ60	50	29	350	85	47	0°	
H08K-STWCR/L09	TC..0902..	Φ11	8	5.5	125	16	7	12°	SC220660
H10K-STWCR/L11	TC..1102..	Φ14	10	8	125	20	9	10°	T8
H12M-STWCR/L11		Φ16	12	9	150	24	11	8°	
H16N-STWCR/L11		Φ20	16	11	160	32	15	6°	
H20Q-STWCR/L11		Φ25	20	13	180	40	18	4°	

备忘录

INNER HOLE TOOL / S型压紧





STWCR/L-P 60°

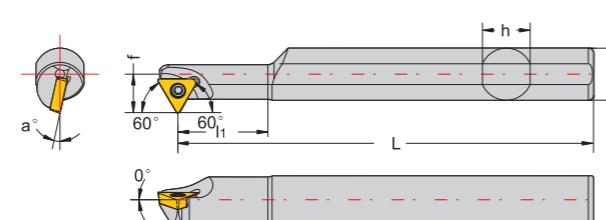

型号	刀片	尺寸						刀片螺丝	扳手	
		最小加工径	Φd	f	L	l1	h	a°		
S08K-STWCR/L09-12P	TC..0902..	Φ11	12	9	125	21	11	12°	SC220660	T6
S10K-STWCR/L09-12P		Φ14	12	9	125	26	11	10°		
S10K-STWCR/L11-12P	TC..1102..	Φ14	12	9	125	26	11	10°	SC250660	T8
S12N-STWCR/L11-16P		Φ16	16	11	160	31	15	8°		
S14N-STWCR/L11-16P		Φ19	16	11	160	36	15	8°	SC250660	T8
S16N-STWCR/L11-20P		Φ20	20	13	160	41	18	6°		



SVQ·R/L 117.5°

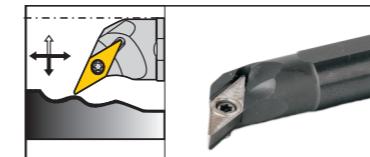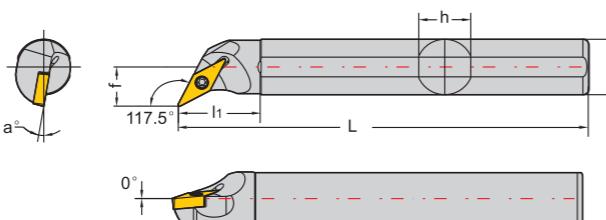

SVQ·R/L 117.5°

型号	刀片	尺寸						刀片螺丝	扳手	
		最小加工径	Φd	f	L	l1	h	a°		
A12M-SVQBR/L11	VB..1103..	Φ17	12	10	150	20	11	10°	SC250660	T8
A14N-SVQBR/L11		Φ20	14	11	160	24	13	10°		
A16N-SVQBR/L11	VC..1103..	Φ22	16	11.5	160	27	15	10°	SC250660	T8
A20Q-SVQBR/L11		Φ27	20	14	180	34	18	8°		
A25R-SVQBR/L16	VB..1604..	Φ32	25	16.5	200	43	23	8°	SC351060	T15
A16N-SVQCR/L11	VC..1103..	Φ22	16	11.5	160	27	15	8°	SC250660	T8
A20Q-SVQCR/L11		Φ27	20	14	180	34	18	6°		
A25R-SVQCR/L16	VC..1604..	Φ32	25	16.5	200	43	23	6°	SC351060	T15



SVU·R/L 93°

径向切削时，切削量应小于等于刀尖角半径


型号	刀片	尺寸						刀片螺丝	扳手	
		最小加工径	Φd	f	L	l1	h	a°		
S16N-SVUBR/L11	VB..1103..	Φ22	16	11.5	160	27	15	10°	SC250660	T8
S20Q-SVUBR/L11		Φ27	20	14	180	34	18	8°		
S20Q-SVUBR/L16	VB..1604..	Φ31	20	19	180	34	18	8°	SC351060	T15
S25R-SVUBR/L16		Φ35	25	20	200	43	23	6°		
S32S-SVUBR/L16	VB..1604..	Φ42	32	22.5	250	54	30	8°	SC351060	T15
S40T-SVUBR/L16		Φ51	40	27	300	68	37	8°		
S50U-SVUBR/L16	VB..1103..	Φ60	50	32	350	85	47	4°	SC220660	T6
S12M-SVUCR/L08		Φ16	12	11	150	20	11	8°		
S16N-SVUCR/L11	VC..1103..	Φ22	16	11.5	160	27	15	10°	SC250660	T8
S20Q-SVUCR/L11		Φ27	20	14	180	34	18	8°		
S25R-SVUCR/L11	VC..1604..	Φ32	25	17	200	43	23	4°	SC351060	T15
S20Q-SVUCR/L16		Φ31	20	19	180	34	18	8°		
S25R-SVUCR/L16	VC..1604..	Φ35	25	20	200	43	23	6°	SC351060	T15
S32S-SVUCR/L16		Φ42	32	22.5	250	54	30	8°		
S40T-SVUCR/L16	VC..1604..	Φ51	40	27	300	68	37	6°	SC220660	T8
S50U-SVUCR/L16		Φ60	50	32	350	85	47	4°		
H16N-SVUBR/L11	VB..1103..	Φ22	16	11.5	160	32	15	10°	SC250660	T8
H16N-SVUCR/L11	VC..1103..	Φ22	16	11.5	160	32	15	8°		

INNER HOLE TOOL / S型压紧

INNER HOLE TOOL / S型压紧



SVU·R/L

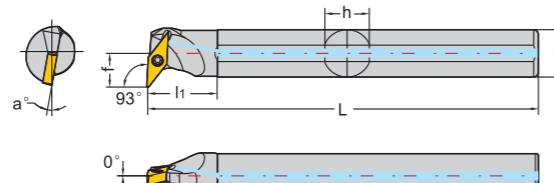


93°

径向切削时，切削量应小于等于刀尖角半径

型号	刀片	尺寸							刀片螺丝	扳手
		最小加工径	Φd	f	L	l1	h	a°		
A16N-SVUBR/L11	VB..1103..	Φ22	16	11.5	160	27	15	10°	SC250660	T8
A20Q-SVUBR/L11		Φ27	20	14	180	34	18	8°		
A25R-SVUBR/L16	VB..1604..	Φ35	25	20	200	43	23	6°	SC351060	T15
A12M-SVUCR/L08	VC..0802..	Φ16	12	11	150	20	11	8°	SC220660	T6
A16N-SVUCR/L11	VC..1103..	Φ22	16	11.5	160	27	15	10°	SC250660	T8
A20Q-SVUCR/L11		Φ27	20	14	180	34	18	8°		
A25R-SVUCR/L16	VC..1604..	Φ35	25	20	200	43	23	6°	SC351060	T15



SVZ·R/L

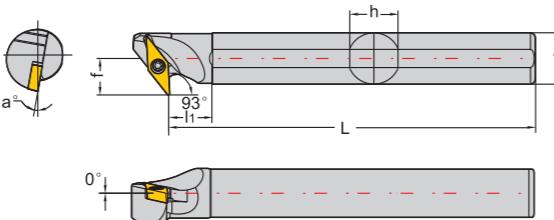

93°


径向切削时，切削量应小于等于刀尖角半径

型号	刀片	尺寸							刀片螺丝	扳手
		最小加工径	Φd	f	L	l1	h	a°		
S16N-SVZBR/L11	VB..1103..	Φ22	16	11.5	160	27	15	10°	SC250660	T8
S20Q-SVZBR/L11		Φ27	20	14	180	34	18	8°		
S25R-SVZBR/L16	VB..1604..	Φ34	25	19.5	200	43	23	8°	SC351060	T15
S32S-SVZBR/L16		Φ42	32	23.5	250	54	30	8°		
S40T-SVZBR/L16	VC..1103..	Φ50	40	27	300	68	37	8°	SC250660	T8
S50U-SVZBR/L16		Φ60	50	31.5	350	85	47	4°		
S16N-SVZCR/L11	VC..1103..	Φ22	16	11.5	160	27	15	10°	SC250660	T8
S20Q-SVZCR/L11		Φ27	20	14	180	34	18	8°		
S25R-SVZCR/L16	VC..1604..	Φ34	25	19.5	200	43	23	6°	SC351060	T15
S32S-SVZCR/L16		Φ42	32	23.5	250	54	30	8°		
S40T-SVZCR/L16	VC..1604..	Φ50	40	27	300	68	37	8°		
S50U-SVZCR/L16		Φ60	50	31.5	350	85	47	4°		
H16N-SVZBR/L11	VB..1103..	Φ22	16	11.5	160	32	15	10°	SC250660	T8
H16N-SVZCR/L11	VC..1103..	Φ22	16	11.5	160	32	15	10°		

INNER HOLE TOOL / S型压紧



SVZ·R/L

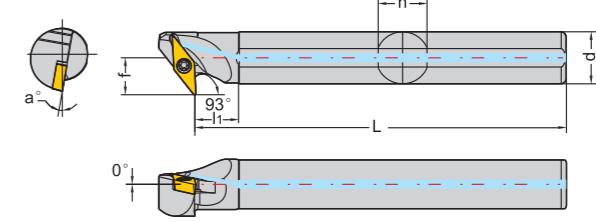


93°

径向切削时，切削量应小于等于刀尖角半径

型号	刀片	尺寸							刀片螺丝	扳手
		最小加工径	Φd	f	L	l1	h	a°		
A16N-SVZBR/L11	VB..1103..	Φ22	16	11.5	160	27	15	10°	SC250660	T8
A20Q-SVZBR/L11		Φ27	20	14	180	34	18	8°		
A25R-SVZBR/L16	VB..1604..	Φ34	25	19.5	200	43	23	6°	SC351060	T15
A16N-SVZCR/L11	VC..1103..	Φ22	16	11.5	160	27	15	10°	SC250660	T8
A20Q-SVZCR/L11		Φ27	20	14	180	34	18	8°		
A25R-SVZCR/L16	VC..1604..	Φ34	25	19.5	200	43	23	5°	SC351060	T15
S32S-SVZCR/L16		Φ45	32	26	250	54	30	5°		
S16N-SVWBR/L11	VB..1103..	Φ25	16	15	160	27	15	5°	SC250660	T8
S20Q-SVWBR/L11		Φ29	20	18	180	34	18	5°		
S25R-SVWBR/L11	VB..1604..	Φ34	25	21	200	43	23	5°	SC351060	T15
S25R-SVWBR/L16		Φ38	25	23	200	43	23	5°		
S32S-SVWBR/L16	VC..1604..	Φ45	32	26	250	54	30	5°	SC351060	T15
S16N-SVWCR/L11	VC..1103..	Φ25	16	15	160	27	15	5°		
S20Q-SVWCR/L11		Φ29	20	18	180	34	18	5°		
S25R-SVWCR/L11	VC..1604..	Φ34	25	21	200	43	23	5°	SC351060	T15
S25R-SVWCR/L16		Φ38	25	23	200	43	23	5°		
S32S-SVWCR/L16	VC..1604..	Φ45	32	26	250	54	30	5°	SC351060	T15



SVW·R/L

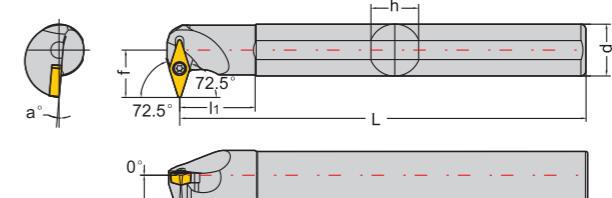


72.5°

备忘录

INNER HOLE TOOL / S型压紧



SVX-R/L 96°

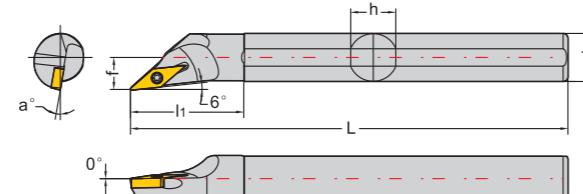

轴向切削时，切削量应小于等于刀尖角半径

型号	刀片	尺寸						刀片螺丝	扳手
		最小加工径	Φd	f	L	l1	h		
S10K-SVXBR/L11-G6	VB..1103..	Φ14	10	7.5	125	17	9	10°	SC250660
S12M-SVXBR/L11-G6		Φ16	12	8.5	150	20	11	12°	
S14N-SVXBR/L11-G6		Φ18	14	9.5	160	24	13	10°	
S16N-SVXBR/L11-G6		Φ22	16	11	160	27	15	10°	
S20Q-SVXBR/L11-G6		Φ27	20	13.5	180	34	18	8°	
S16N-SVXBR/L16-G6		Φ22	16	11.5	160	27	15	12°	
S20Q-SVXBR/L16-G6	VB..1604..	Φ27	20	13.5	180	34	18	10°	SC351060
S25R-SVXBR/L16-G6		Φ32	25	16	200	43	23	8°	
S32S-SVXBR/L16-G6		Φ40	32	19.5	250	54	30	10°	
S40T-SVXBR/L16-G6		Φ50	40	23.5	300	68	37	8°	
S50U-SVXBR/L16-G6		Φ60	50	28.5	350	85	47	6°	
S10K-SVXCR/L11-G6	VC..1103..	Φ14	10	7.5	125	17	9	12°	SC250660
S12M-SVXCR/L11-G6		Φ16	12	8.5	150	20	11	10°	
S14N-SVXCR/L11-G6		Φ18	14	9.5	160	24	13	10°	
S16N-SVXCR/L11-G6		Φ22	16	11	160	27	15	8°	
S20Q-SVXCR/L11-G6		Φ27	20	13.5	180	34	18	6°	
S16N-SVXCR/L16-G6		Φ22	16	11.5	160	27	15	10°	
S20Q-SVXCR/L16-G6	VC..1604..	Φ27	20	13.5	180	34	18	8°	SC351060
S25R-SVXCR/L16-G6		Φ32	25	16	200	43	23	6°	
S32S-SVXCR/L16-G6		Φ40	32	19.5	250	54	30	8°	
S40T-SVXCR/L16-G6		Φ50	40	23.5	300	68	37	6°	
S50U-SVXCR/L16-G6		Φ60	50	28.5	350	85	47	4°	
H10K-SVXBR/L11-G6	VB..1103..	Φ14	10	7.5	125	20	9	15°	SC250660
H12M-SVXBR/L11-G6		Φ16	12	8.5	150	24	11	12°	
H16N-SVXBR/L11-G6		Φ22	16	11	160	32	15	10°	
H16N-SVXBR/L16-G6	VB..1604..	Φ22	16	11.5	160	32	15	12°	SC351060
H10K-SVXCR/L11-G6	VC..1103..	Φ14	10	7.5	125	20	9	12°	SC250660
H12M-SVXCR/L11-G6		Φ16	12	8.5	150	24	11	10°	
H16N-SVXCR/L11-G6		Φ22	16	11	160	32	15	8°	
H16N-SVXCR/L16-G6	VC..1604..	Φ22	16	11.5	160	32	15	10°	SC351060


INNER HOLE TOOL / S型压紧




SWLCR/L 95°

型号	刀片	尺寸						刀片螺丝	扳手
		最小加工径	Φd	f	L	l1	h		
S08K-SWLCLR/L04	WC..0402..	Φ10	8	5	125	14	7	13°	SC250660
S10K-SWLCLR/L04		Φ13	10	6.5	125	17	9	10°	
S12M-SWLCLR/L06	WC..06T3..	Φ16	12	7.5	150	20	11	13°	SC350860
S14N-SWLCLR/L06		Φ18	14	8.5	160	24	13	12°	
S16N-SWLCLR/L06	WC..06T3..	Φ20	16	9.5	160	27	15	10°	SC351060
S20Q-SWLCLR/L06		Φ25	20	11.5	180	34	18	8°	
S25R-SWLCLR/L06	WC..0402..	Φ31	25	14	200	43	23	6°	SC250660
H08K-SWLCLR/L04		Φ10	8	5	125	16	7	13°	
H10K-SWLCLR/L04	WC..06T3..	Φ13	10	6.5	125	20	9	10°	T8
H12M-SWLCLR/L06		Φ16	12	7.5	150	24	11	13°	
H14N-SWLCLR/L06	WC..06T3..	Φ18	14	8.5	160	28	13	12°	SC350860
H16N-SWLCLR/L06		Φ20	16	9.5	160	32	15	10°	

INNER HOLE TOOL / S型压紧

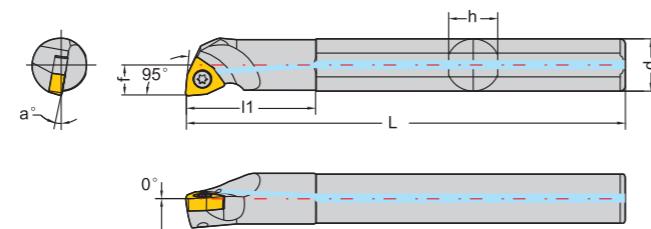


型号	刀片	尺寸						刀片螺丝	扳手	
		最小加工径	Φd	f	L	l1	h	a°		
A08K-SWLCR/L04	WC..0402...	Φ10	8	5	125	14	7	13°	SC250660	T8
A10K-SWLCR/L04		Φ13	10	10	125	17	9	10°		
A12M-SWLCR/L06		Φ16	12	6.5	150	20	11	13°		
A14N-SWLCR/L06		Φ18	14	9.5	160	24	13	10°	SC350860	T15
A16N-SWLCR/L06	WC..06T3...	Φ20	16	7.5	160	27	15	10°		
A20Q-SWLCR/L06		Φ25	20	9.5	180	34	18	8°	SC351060	

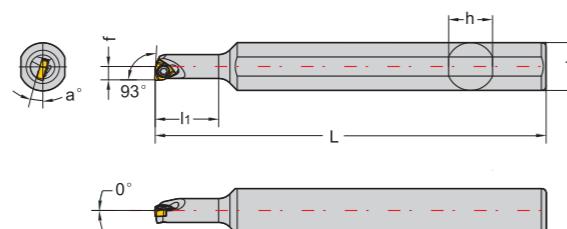


型号	刀片	尺寸						刀片螺丝	扳手	
		最小加工径	Φd	f	L	l1	h	a°		
S05H-SWUBR/L06-A08	WBGT060104L-W11	Φ6	8	3.1	100	13.5	7	12°		
S05H-SWUBR/L06-A12		Φ6	12	3.1	100	13.5	11	12°		
S06H-SWUBR/L06-A12		Φ7	12	3.6	100	16	11	15°		
S07H-SWUBR/L06-A12		Φ8	12	4.0	100	18	11	15°		
H05H-SWUBR/L06-A08		Φ6	8	3.1	100	17.5	7	12°		
H05H-SWUBR/L06-A12		Φ6	12	3.1	100	17.5	11	12°		
H06H-SWUBR/L06-A12		Φ7	12	3.6	100	21	11	15°		
H07H-SWUBR/L06-A12		Φ8	12	4.0	100	24.5	11	15°		

备忘录

INNER HOLE TOOL / S型压紧

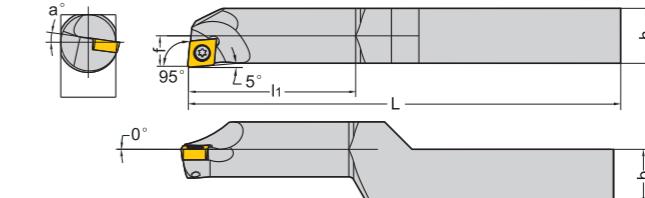

型号	刀片	尺寸							刀片螺丝	扳手
		最小加工径	Φd	b	f	L	l1	h		
S08M-SCLCR/L06-S20	CCMT06204	Φ10	8	20	5	150	25	20	13°	
S10M-SCLCR/L06-S20		Φ13	10	20	6	150	31	20	12°	SC250660
S12M-SCLCR/L06-S20		Φ16	12	20	7	150	37	20	10°	T8
S12P-SCLCR/L06-S20		Φ16	12	20	7	170	37	20	10°	
S16P-SCLCR/L09-S20	CCMT09T308	Φ20	16	20	9.5	170	49	20	10°	SC351060
S16Q-SCLCR/L09-S20		Φ20	16	20	9.5	180	49	20	10°	T15
S08M-SCLCR/L06-S25	CCMT060204	Φ10	8	25	5	150	25	25	13°	
S10M-SCLCR/L06-S25		Φ13	10	25	6	150	31	25	12°	
S10N-SCLCR/L06-S25		Φ13	10	25	6	160	31	25	12°	SC250660
S12N-SCLCR/L06-S25		Φ16	12	25	7	160	37	25	10°	T8
S12P-SCLCR/L06-S25		Φ16	12	25	7	170	37	25	10°	
S20R-SCLCR/L06-S25	CCMT09T308	Φ25	20	25	11.5	200	61	25	8°	SC250860
S16Q-SCLCR/L09-S25		Φ20	16	25	9.5	180	49	25	10°	SC350860
S20Q-SCLCR/L09-S25		Φ25	20	25	11.5	200	61	25	8°	SC351060

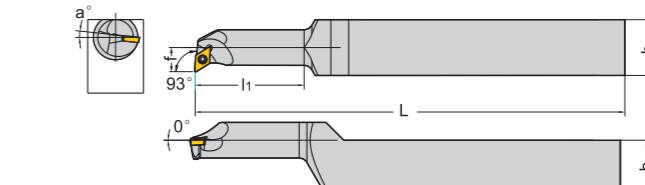

型号	刀片	尺寸							刀片螺丝	扳手
		最小加工径	Φd	b	f	L	l1	h		
S10M-SDUCR07-S20	DCMT070204	Φ15	10	20	8	150	31	20	10°	
S12M-SDUCR/L07-S20		Φ17	12	20	9	150	37	20	8°	SC250660
S12P-SDUCR07-S20		Φ17	12	20	9	170	37	20	8°	
S16P-SDUCR/L07-S20		Φ22	16	20	11	170	49	20	6°	SC250860
S16Q-SDUCR07-S20		Φ22	16	20	11	180	49	20	6°	
S10M-SDUCR07-S25		Φ15	10	25	8	150	31	25	10°	
S10N-SDUCR/L07-S25		Φ15	10	25	8	160	31	25	10°	SC250660
S12N-SDUCR/L07-S25		Φ17	12	25	9	160	37	25	8°	T8
S12P-SDUCR07-S25		Φ17	12	25	9	170	37	25	8°	
S16Q-SDUCR07-S25		Φ22	16	25	11	180	49	25	6°	SC250860
S20R-SDUCR11-S25	DC11T308	Φ25	20	25	13	200	61	25	6°	SC351060

INNER HOLE TOOL / S型压紧



径向切削时，切削量应小于等于刀尖角半径


型号	刀片	尺寸								刀片螺丝	扳手
		最小加工径	Φd	b	f	L	l1	h	a°		
S08M-STFCR09-S20		Φ11	8	20	5.4	150	25	20	15°		
S10M-STFCR09-S20		Φ13	10	20	6	150	31	20	13°	SC220660	T6
S12P-STFCR09-S20	TC090204	Φ16	12	20	7	170	37	20	10°		
S12M-STFCR/L09-S20		Φ16	12	20	7	150	37	20	10°		
S12M-STFCR/L11-S20		Φ14	12	20	7	150	37	20	10°	SC250660	
S12P-STFCR11-S20	TC110204	Φ14	12	20	7	170	37	20	10°		T8
S16Q-STFCR11-S20		Φ20	16	20	9	180	49	20	8°	SC250860	
S16P-STFCR/L11-S20		Φ20	16	20	9	170	49	20	8°		
S08M-STFCR09-S25		Φ11	8	25	5.4	150	25	25	15°		
S10M-STFCR09-S25		Φ13	10	25	6	150	31	25	13°		
S10N-STFCR/L09-S25	TC090204	Φ13	10	25	6	160	31	25	13°	SC220660	T6
S12N-STFCR/L09-S25		Φ16	12	25	7	160	37	25	10°		
S12P-STFCR/L09-S25		Φ16	12	25	7	170	37	25	10°		
S16Q-STFCR11-S25	TC110204	Φ20	16	25	9	180	41	25	8°	SC250860	T8
S20R-STFCR11-S25		Φ25	20	25	11	200	61	25	6°		

螺纹刀杆





备忘录

SL 螺纹车削 (螺钉压紧)

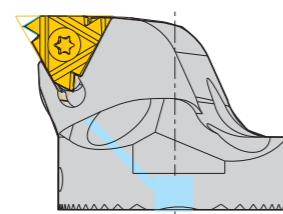

SIR/L




主要用途	型号	刀片	尺寸					刀垫	压紧螺丝	侧螺丝	扳手		
			Dm (Min)	d	f	L	a						
	SL16-SIR/L11		11IR/L..	20	16	12	20						
	SL20-SIR/L11			25	20	14	20						
	SL25-SIR/L16		16IR/L..	32	25	17	25						
	SL32-SIR/L16			40	32	22	32						
	SL40-SIR/L16			50	40	27	32						
	SL32-SIR/L22		22IR/L..	40	32	22	32						
	SL40-SIR/L22			50	40	27	32						
	SL40-SIR/L27		27IR/L..	50	40	27	36						

• 适配减振杆需单独订购, 请参照: E1-E12页。




SIR/L-JL

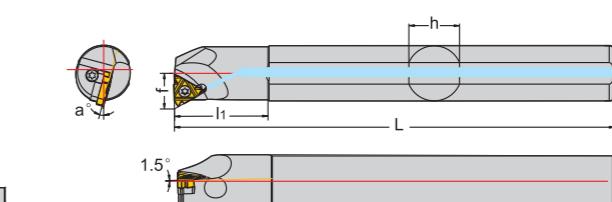


SER-U

型号	刀片	尺寸					刀垫	压紧螺丝	侧螺丝	扳手
		最小加工径	Φd	f	L	l1				
SIR/L	0005K06-A12JL	06IR/L..	Φ6	12	4.3	125	13.5	11		
	0006K06-A12JL		Φ7.5	12	4.8	125	16	11		
	0007K08-4/5JL	08IR/L..	Φ10	8	5.3	125	12	7		
	0008K08-4/5JL		Φ11	8	5.7	125	14	7		
	0008K11JL	11IR/L..	Φ11	8	5.7	125	14	7		
	0010K11JL		Φ12	10	7.4	125	17	9		
	0012K11JL		Φ15	12	8.4	125	25	15		
	0013M16JL	16IR/L..	Φ16	16	10.2	150	22	15		
	0016M16JL		Φ19	16	11.7	150	27	15		
	0020Q16JL		Φ24	20	13.7	180	34	18		
	0025R16JL	16IR/L..	Φ29	25	16.2	200	43	23		
	0032S16JL		Φ36	32	19.7	250	54	30		
	0040T16JL		Φ44	40	23.7	300	68	37		
	0020Q22JL	22IR/L..	Φ24	20	15.6	180	34	18		
	0025R22JL		Φ29	25	18.1	200	43	23		
	0032S22JL		Φ38	32	21.6	250	54	30		

R型刀片对应L型刀垫,L型刀片对应R型刀垫

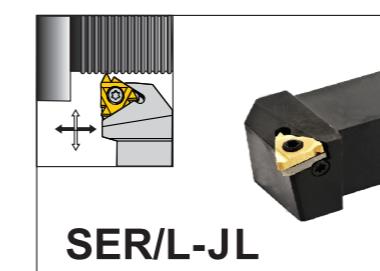

SER/L-JL

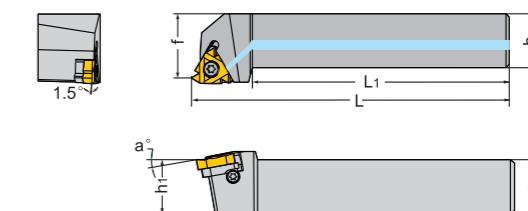


SER

SER-U

SER-V

型号	刀片	尺寸					刀垫	压紧螺丝	侧螺丝	扳手
		h	b	h1	f	L				
SER/L	1616H16JL	16ER/L..	16	16	16	20	100	80		
	2020K16JL		20	20	20	25	125	100		
	2525M16JL		25	25	25	32	150	120		

THREADING TURNING TOOL

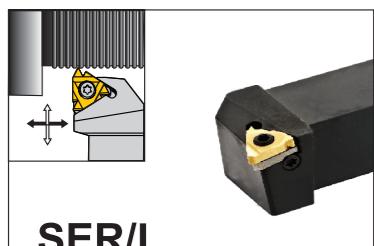

SER/L

型号	刀片	尺寸						刀垫	压紧螺丝	侧螺丝	扳手			
		h	b	h1	f	L	L1							
SER/L	1010H11	11ER/L..	10	10	10	12	100	80	SC250744	T8				
	1212H16	16ER/L..	12	12	12	16	100	80						
	1616H16		16	16	16	20	100	80	SC350756	T15				
	2020K16	22ER/L..	20	20	20	25	125	100						
	2525M16		25	25	25	32	150	120	YE16(R) YI16(L)	SC351260				
	3232P16		32	32	32	40	170	135						
	2020K22		20	20	20	25	125	100	YE22(R) YI22(L)	SC401460				
	2525M22		25	25	25	32	150	120						
	3232P22		32	32	32	40	170	135	SA3007	T15,T10				
	2020K27	27ER/L..	20	20	20	25	125	100						
	2020M27		20	20	20	25	150	120	YE27(R) YI27(L)	SC501660				
	2525M27		25	25	25	32	150	120						
	3232P27		32	32	32	40	170	135	T15,T10	SC401460				
	2525M22U	22UER/L..	25	25	25	25	150	120	YE22U(R) YI22U(L)	SC501660				
	3232P22U		32	32	32	32	170	135						
	2525M27U	27UER/L..	25	25	25	25	150	120	YE27U(R) YI27U(L)	SC501660				
	3232P27U		32	32	32	32	170	135						
阻尼减振系列	2020K16V	16VER..	20	20	20	25	125	100	SC350956	T15,T10				
	2525M16V		25	25	25	32	150	120						
	3232P16V	22VER..	32	32	32	40	170	135	SC400956	T15,T10				
	2020K22V		20	20	20	25	125	100						
	2525M22V		25	25	25	32	150	120	SC400956	T15,T10				
	3232P22V		32	32	32	40	170	135						
	SER/L-G	16ER/L..	尺寸						刀垫	压紧螺丝	侧螺丝	扳手		
			h	b	h1	f	L	L1						
			12	12	12	18.3	100	80	SC350760	T15				
			14	14	14	20.3	100	80						
铣削	1212H16G	16ER/L..	16	16	16	21.7	100	80	YE16(R) YI16(L)	SC351260				
	1414H16G		20	20	20	26.2	125	100						
	1616H16G		20	20	20	26.2	125	100	SA300	T15				
	2020K16G		20	20	20	26.2	125	100						

THREADING TURNING TOOL

THREADING TURNING TOOL



CER/L


型号	刀片	尺寸						刀垫	C型环	侧螺丝	压板	压板螺丝	扳手			
		h	b	h1	f	L	L1									
CER/L	1616H16	16ER/L..	16	16	16	20	100	80	YE16(R)	C5	CY16	CL0515	T15,T10			
	2020K16		20	20	20	25	125	100								
	2525M16		25	25	25	32	150	120	YI16(L)	SA3007						
	3232P16		32	32	32	40	170	135								
	2525M22	22ER/L..	25	25	25	32	150	120	YE22(R)	C6	CY22	CL0515	T15,T10			
	3232P22		32	32	32	40	170	135								
	2525M27	27ER/L..	25	25	25	32	150	120	YE27(R)	T20,T10						
	3232P27		32	32	32	40	170	135								



SIR/L-S

型号	刀片	尺寸								压紧螺丝	扳手	
		最小加工径	Φd	b	f	L	l1	h	a°			
SIR/L-S	0007M08-S20	08IRA60	Φ10	7	20	5.3	150	22	20	T6	SC220656	T6
	0008M08-S20		Φ11	8	20	5.8	150	25	20			
	0010M11-S20	11IRA60	Φ12	10	20	7.4	150	31	20	T8	SC250744	T8</


THREADING TURNING TOOL

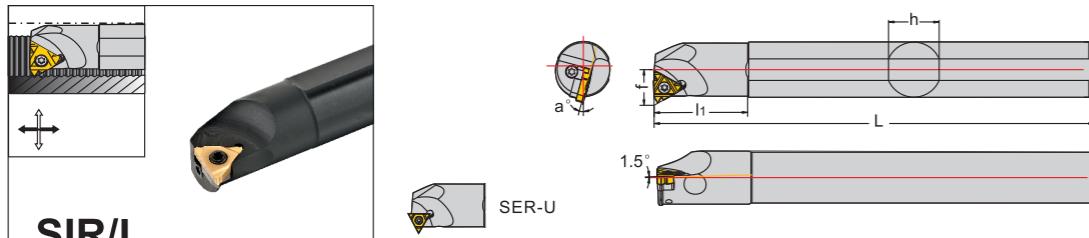

型号	刀片	尺寸						刀垫	压紧螺丝	侧螺丝	扳手	
		最小加工径	Φd	f	L	l1	h					
外圆车削	0005K06-A12	06IR/L..	Φ6	12	4.3	125	13.5	11	SC200460			
	0006K06-A12		Φ7.5	12	4.8	125	16	11				
	0007K08-4/5	08IR/L..	Φ10	8	5.3	125	12	7	SC220656		T6	
	0007K08-A16-4/5		Φ10	16	5.3	125	18.5	15				
	0008K08-4/5		Φ11	8	5.7	125	14	7				
	0008K08-A16-4/5		Φ15	16	5.8	125	21	15				
	0008K11		Φ11	8	5.7	125	14	7				
	0010K11	11IR/L..	Φ12	10	7.4	125	17	9	SC250744		T8	
	0010K11-A16		Φ12	16	7.4	125	26	15				
	0012K11		Φ15	12	8.4	125	25	15				
	0012K11-A16		Φ15	16	8.4	125	31	15				
内孔车削	0013M16	SIR/L	Φ16	16	10.2	150	22	15	SC350960		T15	
	0013M16-A16		Φ16	16	10.2	150	33.5	15				
	0016M16		Φ19	16	11.7	150	27	15				
	0020Q16		Φ24	20	13.7	180	34	18		SA3007	T15, T10	
	0020Q16-W		Φ24	20	13.7	180	34	18				
	0025R16		Φ29	25	16.2	200	43	23	SA3007	T15, T10		
	0025R16-W		Φ29	25	16.2	200	43	23				
	0032S16		Φ36	32	19.7	250	54	30	SA3007	T15, T10		
	0040T16		Φ44	40	23.7	300	68	37				
	0050U16		Φ54	50	28.7	350	85	47	SC351260		T15	
	0020Q22		Φ24	20	15.6	180	34	18				
螺纹车削	0025R22	22IR/L..	Φ29	25	18.1	200	43	23	YI22(R) YE22(L)	SA3007	T15, T10	
	0032S22		Φ38	32	21.6	250	54	30				
	0040T22		Φ46	40	25.6	300	68	37	YI22(R) YE22(L)	SC401460	T15, T10	
	0050U22	22IR/L..	Φ56	50	30.6	350	85	47				
	0032S27		Φ40	32	22.6	250	54	30	YI27(R) YE27(L)	SC502060	T20, T10	
	0040T27	27IR/L..	Φ48	40	26.6	300	68	37				
	0050U27		Φ58	50	31.6	350	85	47	SA3007	T15, T10		
阻尼减振系列	0032S22U	22UIR/L..	Φ38	32	24.4	250	54	30	YI22U(R) YE22U(L)	SC401460	T15, T10	
	0040T22U		Φ46	40	28.1	300	68	37				
	0032S27U	27UIR/L..	Φ40	32	22.6	250	54	30	YI27U(R) YE27U(L)	SC502060	T20, T10	
	0040T27U		Φ48	40	26.6	300	68	37				
	0050U27U		Φ58	50	31.6	350	85	47	SA3007	T20, T10		
铣削	0040T22	22IR/L..	Φ46	40	25.6	300	68	37	YI22(R) YE22(L)	SC401460	T15, T10	
	0050U22		Φ56	50	30.6	350	85	47				
	0032S27	27IR/L..	Φ40	32	22.6	250	54	30	YI27(R) YE27(L)	SC502060	T20, T10	
	0040T27		Φ48	40	26.6	300	68	37				
	0050U27		Φ58	50	31.6	350	85	47	SA3007	T15, T10		
	0032S22U	22UIR/L..	Φ38	32	24.4	250	54	30	YI22U(R) YE22U(L)	SC401460	T15, T10	
	0040T22U		Φ46	40	28.1	300	68	37				
	0032S27U		Φ40	32	22.6	250	54	30	YI27U(R) YE27U(L)	SC502060	T20, T10	
	0040T27U		Φ48	40	26.6	300	68	37				
	0050U27U		Φ58	50	31.6	350	85	47	SA3007	T20, T10		

R型刀片对应L型刀垫,L型刀片对应R型刀垫



THREADING TURNING TOOL

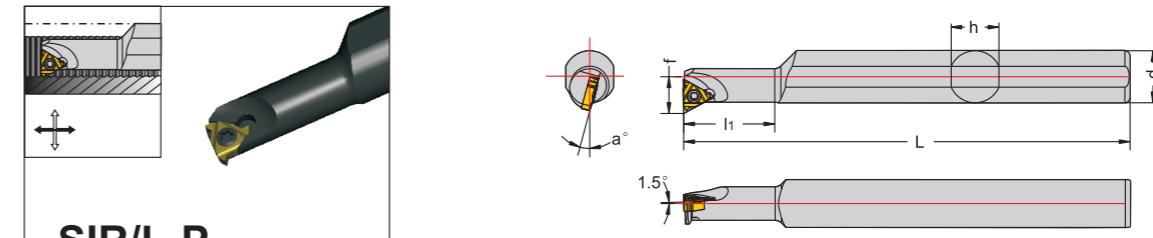

型号	刀片	尺寸						刀垫	压紧螺丝	侧螺丝	扳手	
		最小加工径	Φd	f	L	l1	h					
SIR/L	0007K08-12P	08IR/L..	Φ10	12	7.7	125	18.5	11	SC220656		T6	
	0008K08-12P		Φ10	12	8.4</td							




SL切槽车削

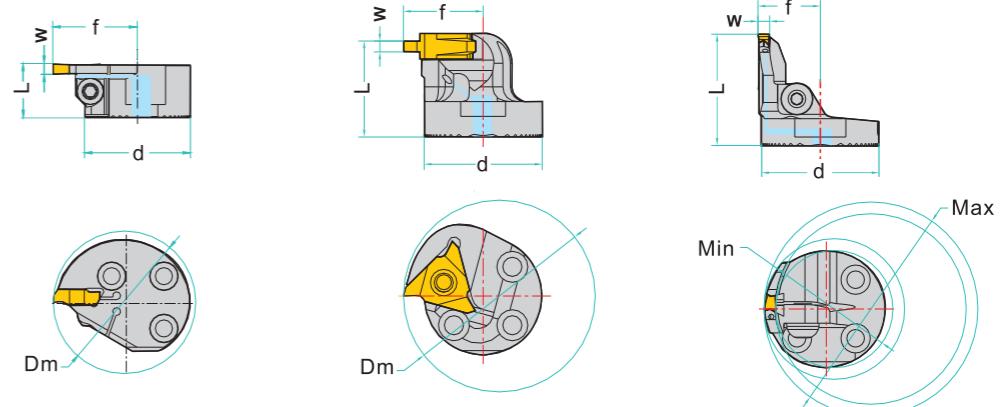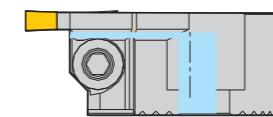

- 可配于各品牌槽刀片。
- 适配减振杆需单独订购, 请参照: E1-E12页。

外圆车削
内孔车削
螺纹车削
槽刀
阻尼减振系列
铣削

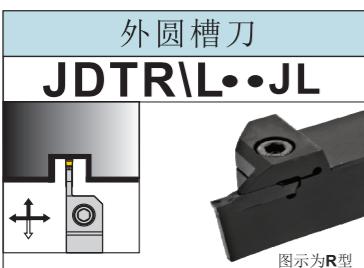

轴向切削时，切削量不宜过大

型号	基本尺寸						适用刀片	螺钉	扳手
	HXB	L	L1	F	W	最大切深T			
JDTR/L1616-2-JL	16X16	125	100	16.3	2	17		M5*16	L4
JDTR/L2020-2-JL	20X20	125	100	20.3	2	17	TD..2..	M6*20	L5
JDTR/L2525-2-JL	25X25	150	120	25.3	2	17		M6*25	
JDTR/L1616-3-JL	16X16	125	100	16.3	3	20		M5*16	L4
JDTR/L2020-3-JL	20X20	125	100	20.3	3	20	TD..3..	M6*20	
JDTR/L2525-3-JL	25X25	150	120	25.3	3	20		M6*25	L5
JDTR/L3232-3-JL	32X32	170	135	32.5	3	20			
JDTR/L2020-4-JL	20X20	125	100	20.3	4	17	TD..4..	M6*20	
JDTR/L2525-4-JL	25X25	150	120	25.5	4	17		M6*25	L5
JDTR/L3232-4-JL	32X32	170	135	32.5	4	17			

外圆车削

内孔车削

螺纹车削

槽刀

阻尼减振系列


铣削



径向切削时，切削量不宜过大


型号	基本尺寸						适用刀片	螺钉	扳手
	H=h	B	F	L	L1	最大切深T (min-max)			
JDFRR/L420-62/120-T15-JL	20	20	20.6	125	100	15	62-120		
JDFRR/L420-112/200-T15-JL	20	20	20.6	125	100	15	112-200	TD..4..	M6*20
JDFRR/L425-62/120-T15-JL	25	25	25.6	150	120	15	62-120		L5
JDFRR/L425-112/200-T15-JL	25	25	25.6	150	120	15	112-200	M6*25	

备忘录

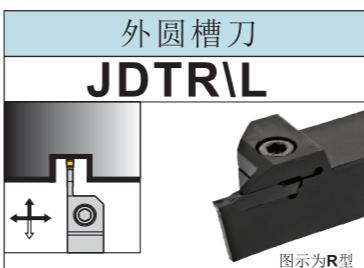

轴向切削时，切削量不宜过大

型号	基本尺寸						适用刀片	螺钉	扳手
	HXB	L	L1	F	W	最大切深T			
JDTR/L1616-2	16X16	125	100	16.3	2	17		M5*16	L4
JDTR/L1616-2-T08	16X16	125	100	16.3	2	8			
JDTR/L2020-2	20X20	125	100	20.3	2	17	TD..2..	M6*20	
JDTR/L2020-2-T08	20X20	125	100	20.3	2	8			L5
JDTR/L2525-2	25X25	150	120	25.3	2	17		M6*25	
JDTR/L2525-2-T08	25X25	150	120	25.3	2	8			
JDTR/L1616-3	16X16	125	100	16.3	3	20		M5*16	L4
JDTR/L1616-3-T10	16X16	125	100	16.3	3	10			
JDTR/L2020-3	20X20	125	100	20.3	3	20	TD..3..	M6*20	
JDTR/L2020-3-T10	20X20	125	100	20.3	3	10			L5
JDTR/L2525-3	25X25	150	120	25.3	3	20		M6*25	
JDTR/L2525-3-T10	25X25	150	120	25.3	3	10			
JDTR/L3232-3	32X32	170	135	32.5	3	20		M6*25	
JDTR/L3232-3-T10	32X32	170	135	32.5	3	10			
JDTR/L2020-4	20X20	125	100	20.3	4	17	TD..4..	M6*20	
JDTR/L2020-4-T10	20X20	125	100	20.3	4	10			L5
JDTR/L2525-4	25X25	150	120	25.5	4	17		M6*25	
JDTR/L2525-4-T10	25X25	150	120	25.5	4	10			
JDTR/L3232-4	32X32	170	135	32.5	4	17			
JDTR/L3232-4-T10	32X32	170	135	32.5	4	10			

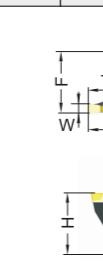

径向切削时，切削量不宜过大

型号	基本尺寸						适用刀片	螺钉	扳手
	H=h	B	F	L	L1	最大切深T (min-max)			
JDFRR/L420-62/120-T15	20	20	20.6	125	100	15	62-120		
JDFRR/L420-112/200-T15	20	20	20.6	125	100	15	112-200	TD..4..	M6*20
JDFRR/L425-62/120-T15	25	25	25.6	150	120	15	62-120		L5
JDFRR/L425-112/200-T15	25	25	25.6	150	120	15	112-200	M6*25	

下刀直径范围




轴向切削时，切削量不宜过大

型号	基本尺寸						适用刀片	螺钉	扳手	
	HXB	L	L1	F	W	最大切深T				
QEED	1616R/L10	16X16	125	100	16.3	2.5	10	Z*ED *****	M5*16	L4
	1616R/L17	16X16	125	100	16.3	2.5	17		M6*20	L5
	2020R/L10	20X20	125	100	20.3	2.5	10		M6*25	
	2020R/L17	20X20	125	100	20.3	2.5	17	Z*FD *****	M5*16	L4
	2525R/L10	25X25	150	120	25.3	2.5	10		M6*20	L5
	2525R/L17	25X25	150	120	25.3	2.5	17		M6*25	
QEFD	1616R/L10	16X16	125	100	16.3	3	10	Z*FD *****	M5*16	L4
	1616R/L17	16X16	125	100	16.3	3	17		M6*20	L5
	2020R/L10	20X20	125	100	20.3	3	10		M6*25	
	2020R/L17	20X20	125	100	20.3	3	17		M6*20	L5
	2525R/L10	25X25	150	120	25.3	3	10		M6*25	
	2525R/L17	25X25	150	120	25.3	3	17		M6*25	
QECD	2020R/L13	20X20	125	100	20.5	4	13	Z*GD *****	M6*20	L5
	2020R/L22	20X20	125	100	20.5	4	22		M6*25	
	2525R/L13	25X25	150	120	25.5	4	13		M6*25	
	2525R/L22	25X25	150	120	25.5	4	22		M6*25	L5
	3232R/L13	32X32	170	135	32.5	4	13		M6*25	
	3232R/L22	32X32	170	135	32.5	4	22		M6*25	
QEHD	2525R/L13	25X25	150	120	25.5	5	13	Z*HD *****	M6*25	L5
	2525R/L22	25X25	150	120	25.5	5	22		M6*25	
	3232R/L13	32X32	170	135	32.5	5	13		M6*25	L5
	3232R/L22	32X32	170	135	32.5	5	22		M6*25	
QEKD	2525R/L13	25X25	150	120	25.6	6	13	Z*KD *****	M6*25	L5
	2525R/L22	25X25	150	120	25.6	6	22		M6*25	
	3232R/L13	32X32	170	135	32.6	6	13		M6*25	L5
	3232R/L22	32X32	170	135	32.6	6	22		M6*25	

备忘录



图示为R型

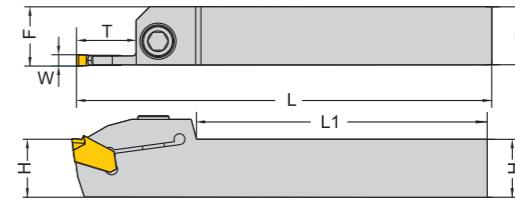


型号	基本尺寸						适用刀片	螺钉	扳手	
	HXB	L	L1	F	W	最大切深T				
QZQ	1616R/L03	16X16	100	80	16.4	3	16	ZQMX3N11-1E	M5*16	L4
	2020R/L03	20X20	125	100	20.4	3	20			
	2525R/L03	25X25	150	120	25.4	3	20		M6*20	L5
	3225R/L03	32X25	170	135	25.4	3	25			
	1616R/L04	16X16	100	80	16.4	4	16	ZQMX4N11-1E	M5*16	L4
	2020R/L04	20X20	125	100	20.4	4	20			
	2525R/L04	25X25	150	120	25.4	4	20		M6*20	L5
	3225R/L04	32X25	170	135	25.4	4	25			

备忘录

GROOVING TOOL SERIES




轴向切削时，切削量不宜过大

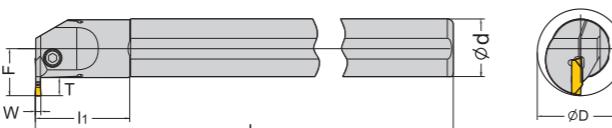



型号	基本尺寸							适用刀片	螺钉	扳手
	Φd	L	l1	F	W	最大切深T	最小加工径φD			
C20Q-QEDR/L05-27	20	180	40	15.2	2.5	5	Ø 27	M5*12		
C25R-QEDR/L07-33	25	200	45	20.3	2.5	7	Ø 33	ZTED *****	L4	
C32S-QEDR/L09-42	32	250	58	25.3	2.5	9	Ø 42	ZRED *****		
C20Q-QFDR/L05-27	20	180	40	15.2	3	5	Ø 27	ZTFD *****	M5*12	
C25R-QFDR/L07-33	25	200	45	20.3	3	7	Ø 33	ZRFD *****	L4	
C32S-QFDR/L09-42	32	250	58	25.3	3	9	Ø 42		M5*16	
C25R-QGDR/L08-35	25	200	45	21.5	4	8	Ø 35	ZTGD *****		
C32S-QGDR/L11-44	32	250	58	27.5	4	11	Ø 44	ZRGD *****	M5*16	L4
C40T-QGDR/L13-54	40	300	72	33.5	4	13	Ø 54			
C25R-QHDR/L08-35	25	200	45	21.5	5	8	Ø 35	ZTHD *****		
C32S-QHDR/L11-44	32	250	58	27.5	5	11	Ø 44	ZRHD *****	M6*20	L5
C40T-QHDR/L13-54	40	300	72	33.5	5	13	Ø 54			
C25R-QKDR/L08-35	25	200	45	21.5	6	8	Ø 35	ZTKD *****		
C32S-QKDR/L11-44	32	250	58	27.5	6	11	Ø 44	ZRKD *****	M6*20	L5
C40T-QKDR/L13-54	40	300	72	33.5	6	13	Ø 54			

备忘录

GROOVING TOOL SERIES

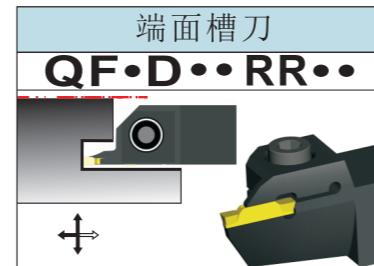




径向切削时，切削量不宜过大

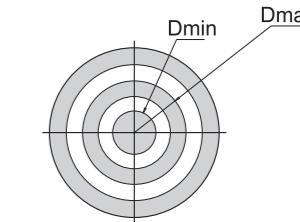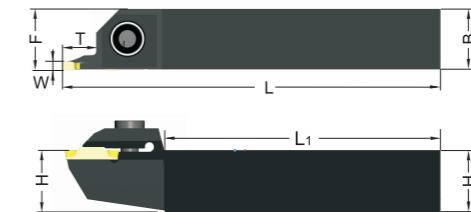

下刀直径范围




型号	基本尺寸							适用刀片	螺钉	扳手
	HXB	L	L1	F	W	最大切深T (min-max)				
QFFD	2525RR10-48H	25X25	150	120	26	3	10	48-66		
	2525RR17-48H	25X25	150	120	26	3	17	48-66		
	2525RR10-60H	25X25	150	120	26	3	10	60-80		
	2525RR17-60H	25X25	150	120	26	3	17	60-80		
	2525RR10-74H	25X25	150	120	26	3	10	74-110		
	2525RR17-74H	25X25	150	120	26	3	17	74-110		
	2525RR10-100H	25X25	150	120	26	3	10	100-150		
	2525RR17-100H	25X25	150	120	26	3	17	100-150		
QFGD	2525RR13-52H	25X25	150	120	26	4	13	52-72		
	2525RR22-52H	25X25	150	120	26	4	22	52-72		
	2525RR13-64H	25X25	150	120	26	4	13	64-100		
	2525RR22-64H	25X25	150	120	26	4	22	64-100		
	2525RR13-90H	25X25	150	120	26	4	13	90-140		
	2525RR22-90H	25X25	150	120	26	4	22	90-140		
	2525RR13-130H	25X25	150	120	26	4	13	130-230		
	2525RR22-130H	25X25	150	120	26	4	22	130-230		
QFHD	2525RR13-58H	25X25	150	120	26	5	13	58-96		
	2525RR22-58H	25X25	150	120	26	5	22	58-96		
	2525RR13-86H	25X25	150	120	26	5	13	86-140		
	2525RR22-86H	25X25	150	120	26	5	22	86-140		
	2525RR13-130H	25X25	150	120	26	5	13	130-200		
	2525RR22-130H	25X25	150	120	26	5	22	130-200		
	2525RR13-185H	25X25	150	120	26	5	13	185-400		
	2525RR22-185H	25X25	150	120	26	5	22	185-400		
QFKD	2525RR13-60H	25X25	150	120	26	6	13	60-100		
	2525RR22-60H	25X25	150	120	26	6	22	60-100		
	2525RR13-88H	25X25	150	120	26	6	13	88-180		
	2525RR22-88H	25X25	150	120	26	6	22	88-180		
	2525RR13-160H	25X25	150	120	26	6	13	160-400		
	2525RR22-160H	25X25	150	120	26	6	22	160-400		

GROOVING TOOL SERIES

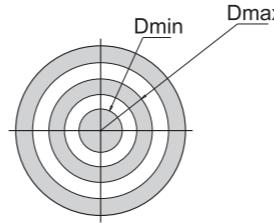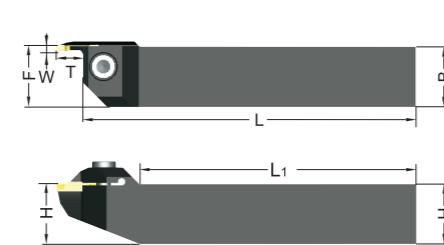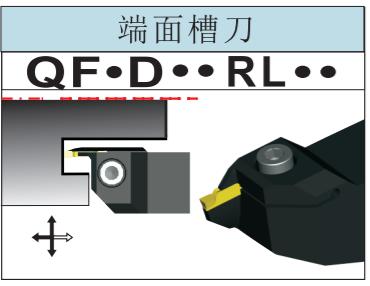

下刀直径范围

GROOVING TOOL SERIES

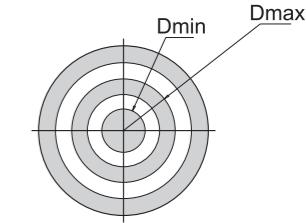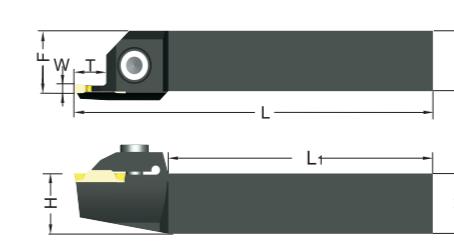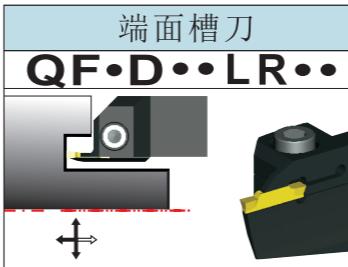


下刀直径范围



型号	基本尺寸							适用刀片	螺钉	扳手
	HXB	L	L1	F	W	最大切深T (min-max)				
QFFD	2525RL10-48H	25X25	150	120	26	3	10	48-66	ZTFD0303-MG	
	2525RL17-48H	25X25	150	120	26	3	17	48-66		
	2525RL10-60H	25X25	150	120	26	3	10	60-80		
	2525RL17-60H	25X25	150	120	26	3	17	60-80		
	2525RL10-74H	25X25	150	120	26	3	10	74-110		
	2525RL17-74H	25X25	150	120	26	3	17	74-110		
	2525RL10-100H	25X25	150	120	26	3	10	100-150		
	2525RL17-100H	25X25	150	120	26	3	17	100-150		
外圆车削	2525RL13-52H	25X25	150	120	26	4	13	52-72	ZTGD0404-MG	
内孔车削	2525RL22-52H	25X25	150	120	26	4	22	52-72		
螺纹车削	2525RL13-64H	25X25	150	120	26	4	13	64-100		
槽刀	2525RL22-64H	25X25	150	120	26	4	22	64-100		
阻尼减振系列	2525RL13-90H	25X25	150	120	26	4	13	90-140		
铣削	2525RL22-90H	25X25	150	120	26	4	22	90-140		
	2525RL13-130H	25X25	150	120	26	4	13	130-230		
	2525RL22-130H	25X25	150	120	26	4	22	130-230		
QFHD	2525RL13-58H	25X25	150	120	26	5	13	58-96	ZTHD0504-MG	
	2525RL22-58H	25X25	150	120	26	5	22	58-96		
	2525RL13-86H	25X25	150	120	26	5	13	86-140		
	2525RL22-86H	25X25	150	120	26	5	22	86-140		
	2525RL13-130H	25X25	150	120	26	5	13	130-200		
	2525RL22-130H	25X25	150	120	26	5	22	130-200		
	2525RL13-185H	25X25	150	120	26	5	13	185-400		
	2525RL22-185H	25X25	150	120	26	5	22	185-400		
QFKD	2525RL13-60H	25X25	150	120	26	6	13	60-100	ZTKD0608-MG	
	2525RL22-60H	25X25	150	120	26	6	22	60-100		
	2525RL13-88H	25X25	150	120	26	6	13	88-180		
	2525RL22-88H	25X25	150	120	26		22	88-180		
	2525RL13-160H	25X25	150	120	26	6	13	160-400		
	2525RL22-160H	25X25	150	120	26	6	22	160-400		

型号	基本尺寸							适用刀片	螺钉	扳手
	HXB	L	L1	F	W	最大切深T (min-max)				
QFFD	2525LR10-48H	25X25	150	120	26	3	10	48-66	ZTFD0303-MG	
	2525LR17-48H	25X25	150	120	26	3	17	48-66		
	2525LR10-60H	25X25	150	120	26	3	10	60-80		
	2525LR17-60H	25X25	150	120	26	3	17	60-80		
	2525LR10-74H	25X25	150	120	26	3	10	74-110		
	2525LR17-74H	25X25	150	120	26	3	17	74-110		
	2525LR10-100H	25X25	150	120	26	3	10	100-150		
	2525LR17-100H	25X25	150	120	26	3	17	100-150		
外圆车削	2525LR13-52H	25X25	150	120	26	4	13	52-72	ZTGD0404-MG	
内孔车削	2525LR22-52H	25X25	150	120	26	4	22	52-72		
螺纹车削	2525LR13-64H	25X25	150	120	26	4	13	64-100		
槽刀	2525LR22-64H	25X25	150	120	26	4	22	64-100		
阻尼减振系列	2525LR13-90H	25X25	150	120	26	4	13	90-140		
铣削	2525LR22-90H	25X25	150	120	26	4	22	90-140		
	2525LR13-130H	25X25	150	120	26	4	13	130-230		
	2525LR22-130H	25X25	150	120	26	4	22	130-230		
QFHD	2525LR13-58H	25X25	150	120	26	5	13	58-96	ZTHD0504-MG	
	2525LR22-58H	25X25	150	120	26	5	22	58-96		
	2525LR13-86H	25X25	150	120	26	5	13	86-140		
	2525LR22-86H	25X25	150	120	26	5	22	86-140		
	2525LR13-130H	25X25	150	120	26	5	13	130-200		
	2525LR22-130H	25X25	150	120	26	5	22	130-200		
	2525LR13-185H	25X25	150	120	26	5	13	185-400		
	2525LR22-185H	25X25	150	120	26	5	22	185-400		
QFKD	2525LR13-60H	25X25	150	120	26	6	13	60-100	ZTKD0608-MG	
	2525LR22-60H	25X25	150	120	26	6	22	60-100		
	2525LR13-88H	25X25	150	120	26	6	13	88-180		

GROOVING TOOL SERIES

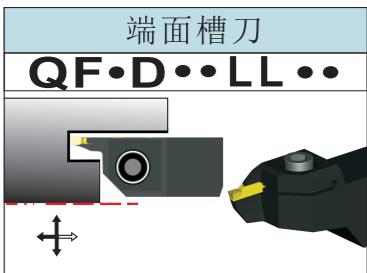

径向切削时，切削量不宜过大

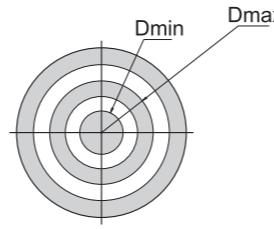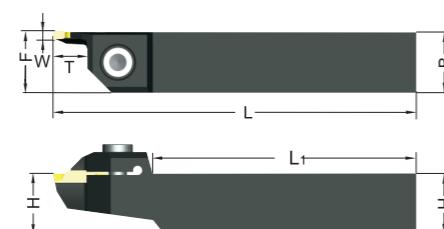



下刀直径范围

型号	基本尺寸							适用刀片	螺钉	扳手
	HXB	L	L1	F	W	最大切深T	(min-max)			
QFFD	2525LL10-48H	25X25	150	120	26	3	10	48-66	ZTFD0303-MG	
	2525LL17-48H	25X25	150	120	26	3	17	48-66		
	2525LL10-60H	25X25	150	120	26	3	10	60-80		
	2525LL17-60H	25X25	150	120	26	3	17	60-80		
	2525LL10-74H	25X25	150	120	26	3	10	74-110		
	2525LL17-74H	25X25	150	120	26	3	17	74-110		
	2525LL10-100H	25X25	150	120	26	3	10	100-150		
	2525LL17-100H	25X25	150	120	26	3	17	100-150		
外圆车削	2525LL13-52H	25X25	150	120	26	4	13	52-72	ZTGD0404-MG	
内孔车削	2525LL22-52H	25X25	150	120	26	4	22	52-72		
螺纹车削	2525LL13-64H	25X25	150	120	26	4	13	64-100		
槽刀	2525LL22-64H	25X25	150	120	26	4	22	64-100		
阻尼减振系列	2525LL13-90H	25X25	150	120	26	4	13	90-140		
铣削	2525LL22-90H	25X25	150	120	26	4	22	90-140		
	2525LL13-130H	25X25	150	120	26	4	13	130-230		
	2525LL22-130H	25X25	150	120	26	4	22	130-230		
QFHD	2525LL13-58H	25X25	150	120	26	5	13	58-96	ZTHD0504-MG	
	2525LL22-58H	25X25	150	120	26	5	22	58-96		
	2525LL13-86H	25X25	150	120	26	5	13	86-140		
	2525LL22-86H	25X25	150	120	26	5	22	86-140		
	2525LL13-130H	25X25	150	120	26	5	13	130-200		
	2525LL22-130H	25X25	150	120	26	5	22	130-200		
	2525LL13-185H	25X25	150	120	26	5	13	185-400		
	2525LL22-185H	25X25	150	120	26	5	22	185-400		
QFKD	2525LL13-60H	25X25	150	120	26	6	13	60-100	ZTKD0608-MG	
	2525LL22-60H	25X25	150	120	26	6	22	60-100		
	2525LL13-88H	25X25	150	120	26	6	13	88-180		
	2525LL22-88H	25X25	150	120	26	6	22	88-180		
	2525LL13-160H	25X25	150	120	26	6	13	160-400		
	2525LL22-160H	25X25	150	120	26	6	22	160-400		

GROOVING TOOL SERIES





径向切削时，切削量不宜过大

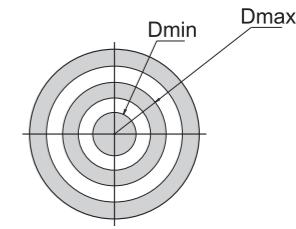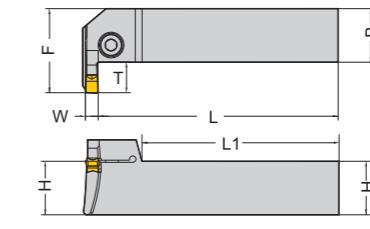

下刀直径范围

型号	基本尺寸							适用刀片	螺钉	扳手
	HXB	L	L1	F	W	最大切深T	(min-max)			
QFFD	2525R/L10-48L	25X25	150	130	26	3	10	48-66	ZTFD0303-MG	
	2525R/L17-48L	25X25	150	130	26	3	17	48-66		
	2525R/L10-60L	25X25	150	130	26	3	10	60-80		
	2525R/L17-60L	25X25	150	130	26	3	17	60-80		
	2525R/L10-74L	25X25	150	130	26	3	10	74-110		
	2525R/L17-74L	25X25	150	130	26	3	17	74-110		
	2525R/L10-100L	25X25	150	130	26	3	10	100-150		
	2525R/L17-100L	25X25	150	130	26	3	17	100-150		
外圆车削	2525R/L13-52L	25X25	150	130	26	4	13	52-72	ZTGD0404-MG	
内孔车削	2525R/L22-52L	25X25	150	130	26	4	22	52-72		
螺纹车削	2525R/L13-64L	25X25	150	130	26	4	13	64-100		
槽刀	2525R/L22-64L	25X25	150	130	26	4	22	64-100		
阻尼减振系列	2525R/L13-90L	25X25	150	130	26	4	13	90-140		
铣削	2525R/L22-90L	25X25	150	130	26	4	22	90-140		
	2525R/L13-130L	25X25	150	130	26	4	13	130-230		
	2525R/L22-130L	25X25	150	130	26	4	22	130-230		
QFHD	2525R/L13-58L	25X25	150	130	26	5	13	58-96	ZTHD0504-MG	
	2525R/L22-58L	25X25	150	130	26	5	22	58-96		
	2525R/L13-86L	25X25	150	130	26	5	13	86-140		
	2525R/L22-86L	25X25	150	130	26	5	22	86-140		
	2525R/L13-130L	25X25	150	130	26	5	13	130-200		
	2525R/L22-130L	25X25	150	130	26	5	22	130-200		
	2525R/L13-185L	25X25	150	130	26	5	13	185-400		
	2525R/L22-185L	25X25	150	130	26	5	22	185-400		
QFKD	2525R/L13-60L	25X25	150	130	26	6	13	60-100	ZTKD0608-MG	
	2525R/L22-60L	25X25	150	130	26	6	22	60-100		

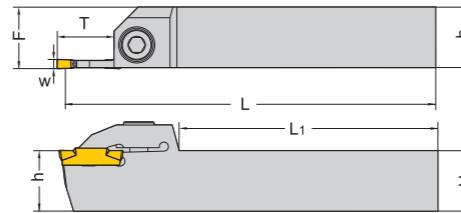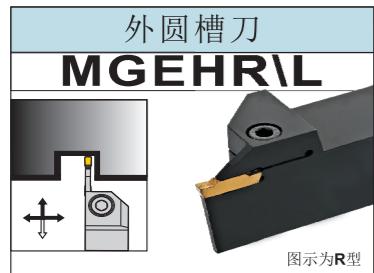


轴向切削时，切削量不宜过大

型号	基本尺寸						适用刀片	螺钉	扳手	
	H=h	B	F	L	L1	最大切深T				
MGEHR/L	1212-1.5	12	12	12.25	100	80	14.5	MGMN150-G	M5*16	L4
	1616-1.5	16	16	16.25	100	80	14.5			
	2020-1.5	20	20	20.25	125	100	14.5			
	2525-1.5	25	25	20.25	150	120	14.5			
	1212-2	12	12	14.25	100	80	14.5	MGMN200-G MGMN200-M MGMN200-□□	M5*16	L4
	1616-2	16	16	16.25	100	80	14.5			
	1616-2-T08	16	16	16.25	100	80	8			
	2020-2	20	20	20.25	125	100	14.5			
	2020-2-T08	20	20	20.25	125	100	8			
MGEVR/L	2525-2	25	25	25.25	150	120	14.5	MGMN250-G MGMN250-M	M6*16	L5
	2525-2-T08	25	25	25.25	150	120	8			
	1212-2.5	12	12	14.3	100	80	16.5			
	1616-2.5	16	16	16.3	100	80	16.5			
	1616-2.5-T10	16	16	16.3	100	80	10			
	2020-2.5	20	20	20.3	125	100	16.5	MGMN300-M MGGN300-□□M MRMN300-M MGMR300-□□	M6*20	L5
	2020-2.5-T09	20	20	20.3	125	100	9			
	2525-2.5	25	25	25.3	150	120	16.5			
	2525-2.5-T09	25	25	25.3	150	120	9			
	1616-3	16	16	16.35	100	80	18.5			
MGEVR/L	1616-3-T10	16	16	16.35	100	80	10	MGMN300-M MGGN300-□□M MRMN300-M MGMR300-□□	M6*25	L5
	2020-3	20	20	20.4	125	100	18			
	2020-3-T10	20	20	20.4	125	100	10			
	2525-3	25	25	25.4	150	120	18			
	2525-3-T10	25	25	25.4	150	120	10			
	3232-3	32	32	32.4	170	135	18	MGMN400-M MGGN400-□□M MRMN400-M MGMR400-□□	M6*20	L5
	3232-3-T10	32	32	32.4	170	135	10			
	2020-4	20	20	20.4	125	100	18			
	2020-4-T10	20	20	20.4	125	100	10			
	2525-4	25	25	25.4	150	120	18			
JING RUI TOOLS	2525-4-T10	25	25	25.4	150	120	10	MGEVR/L	M6*25	L5
	3232-4	32	32	32.4	170	135	18			
	3232-4-T10	32	32	32.4	170	135	10			

续下页

接上页

型号	基本尺寸						适用刀片	螺钉	扳手	
	H=h	B	F	L	L1	最大切深T				
MGEVR/L	2020-5	20	20	20.5	150	120	23	MGMN500-M MGGN500-□□M MRMN500-M MGMR500-□□	M6*20	L5
	2020-5-T15	20	20	20.5	150	120	15			
	2525-5	25	25	25.5	150	120	23			
	2525-5-T15	25	25	25.5	150	120	15			
	3232-5	32	32	32.5	170	135	23			
	3232-5-T15	32	32	32.5	170	135	15	MGMN600-M MGGN600-□□M MRMN600-M	M6*25	L5
	2020-6	20	20	20.6	125	100	23			
	2020-6-T15	20	20	20.6	125	100	15			
	2525-6	25	25	25.6	150	120	23			
	2525-6-T15	25	25	25.6	150	120	15			
	3232-6	32	32	32.6	170	135	23	MRMN800-M	M6*25	L5
	3232-6-T15	32	32	32.6	170	135	15			
	2525-8	25	25	26.1	150	120	28			
	2525-8-T15	25	25	26.1	150	120	15			
	3232-8	32	32	33.1	170	135	28			
	3232-8-T15	32	32	33.1	170	135	16	MRGN600-A	L5	L5
	2525-6A	25	25	25.6	150	120	23			
	2525-6A-T15	25	25	25.6	150	120	15			
	3232-6A	32	32	32.6	170	135	23			
	3232-6A-T15	32	32	32.6	170	135	15			
	2525-8A	25	25	26.1	150	120	28	MRGN800-A	L5	L5
	2525-8A-T15	25	25	26.1	150	120	16			
	3232-8A	32	32	33.1	170	135	28			
	3232-8A-T15	32	32	33.1	170	135	15			

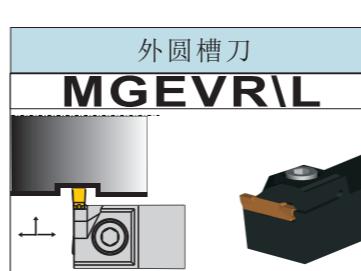


轴向切削时，切削量不宜过大

型号	基本尺寸						适用刀片	螺钉	扳手
H=h	B	F	L	L1	最大切深T				

<tbl

接上页

型号	基本尺寸						适用刀片	螺钉	扳手	
	H=h	B	F	L	L1	最大切深T				
MGEVR/L	2020-3	20	20	25.5	125	100	5	MGMN300-M	M6*20	L5
	2020-4	20	20	26	125	100	5.5	MGMN400-M		
	2525-2	25	25	28	150	120	3.6	MGMN200-G	M5*16	L4
	2525-3	25	25	29.5	150	120	5	MGMN300-M	M6*20	L5
	2525-4	25	25	30	150	120	5.5	MGMN400-M		

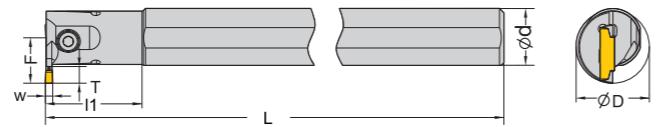


轴向切削时，切削量不宜过大

型号	基本尺寸						适用刀片	螺钉	扳手
	Ød	F	L	L1	最大切深T	最小加工径D			
MGIVRL	2016-1.5	16	11.3	125	32	4	20	M3*10	L2.5
	2520-1.5	20	13.1	150	40	4	25		M5*12
	2925-1.5	25	16.2	200	45	4	29	M3*10	L4
	2016-2	16	12.4	125	32	5	20		L2.5
	2520-2	20	14	150	40	5	25	M5*12	L4
	2925-2	25	17.2	200	45	5	29		
	2016-2.5	16	12.5	125	32	6	20	M3*10	L2.5
	2520-2.5	20	15.1	150	40	6	25		M5*12
	2925-2.5	25	18.2	200	45	6	29	M5*12	L4
	2520-3	20	15.6	150	40	6	25		
	3125-3	25	18.9	200	45	6	31	M5*16	L4
	3732-3	32	21.5	250	58	6	37		
	2520-4	20	15.6	150	40	6	25	M5*12	L4
	3125-4	25	18.9	200	45	6	31		
	3732-4	32	21.5	250	58	6	37	M5*16	L4
	3125-5	25	19.4	200	45	8	31		
	3732-5	32	21.5	250	58	8	37	M6*20	L5
	5240-5	40	30	300	72	8	52		
	6250-5	50	35	350	90	8	62	MGMN500-M/G	L5
	3125-6	25	19.4	200	45	8	31		
	3732-6	32	21.5	250	58	8	37	MGMN600-M/G	L5

接上页

型号	基本尺寸						适用刀片	螺钉	扳手
	Ød	F	L	L1	最大切深T	最小加工径ØD			
MGIVRL	3732-8	32	23.4	250	58	10	37	MRMN800-M	L5
	4540-8	40	27.2	300	72	10	45		
	3125-6A	25	19.4	200	45	8	31	MRGN600-A	M6*20
	3732-6A	32	21.5	250	58	8	37		
	3732-8A	32	23.4	250	58	10	37	MRGN800-A	L5
	4540-8A	40	27.2	300	72	10	45		

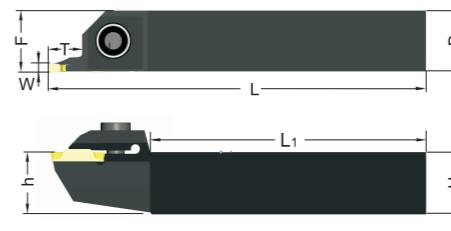


下刀直径范围


型号	基本尺寸							适用刀片	螺钉	扳手
	H=h	B	F	L	L1	最大切深T	(min-max)			
MGFHR	320-24/35-T10	20	20	20.6	125	100	10	24-35	MFMN300	L5
	320-29/40-T10	20	20	20.6	125	100	10	29-40		
	320-34/50-T10	20	20	20.6	125	100	10	34-50		
	320-44/70-T10	20	20	20.6	125	100	10	44-70		
	320-64/99-T10	20	20	20.6	125	100	10	64-99		
	320-64/99-T10	20	20	20.6	125	100	10	64-99	MGMN300-M	M6*20
	320-62/120-T10	20	20	20.6	125	100	10	62-120		
	320-112/200-T10	20	20	20.6	125	100	10	112-200		
	420-62/120-T15	20	20	20.6	125	100	15	62-120		
	420-112/200-T15	20	20	20.6	125	100	15	112-200		
	325-24/35-T10	25	25	25.6	150	120	10	24-35	MFMN300	L5
	325-29/40-T10	25	25	25.6	150	120	10	29-40		
	325-34/50-T10	25	25	25.6	150	120	10	34-50		
	325-44/70-T10	25	25	25.6	150	120	10	44-70		
	325-64/99-T10	25	25	25.6	150	120	10	64-99		
	325-62/120-T10	25	25	25.6	150	120	10	62-120		
	325-112/200-T10	25	25	25.6	150	120	10	112-200	MGMN300-M	L5
	425-62/120-T15	25								

接上页

型号	基本尺寸							适用刀片	螺钉	扳手			
	H=h	B	F	L	L1	最大切深 T	(min-max)						
MGFHRL	320-34/50-T10	20	20	20.6	125	100	10	34-50	MFMN300	M6*20	L5		
	320-44/70-T10	20	20	20.6	125	100	10	44-70					
	320-64/99-T10	20	20	20.6	125	100	10	64-99	MGMN300-M				
	320-62/120-T10	20	20	20.6	125	100	10	62-120					
	320-112/200-T10	20	20	20.6	125	100	10	112-200	MGMN400-M				
	420-62/120-T15	20	20	20.6	125	100	15	62-120					
	420-112/200-T15	20	20	20.6	125	100	15	112-200	MGMN400-M				
	325-24/35-T10	25	25	25.6	150	120	10	24-35					
	325-29/40-T10	25	25	25.6	150	120	10	29-40	MFMN300				
	325-34/50-T10	25	25	25.6	150	120	10	34-50					
	325-44/70-T10	25	25	25.6	150	120	10	44-70	MGMN300-M				
	325-64/99-T10	25	25	25.6	150	120	10	64-99					
	325-62/120-T10	25	25	25.6	150	120	10	62-120	MGMN400-M				
	325-112/200-T10	25	25	25.6	150	120	10	112-200					
	425-62/120-T15	25	25	25.6	150	120	15	62-120	MGMN400-M				
	425-112/200-T15	25	25	25.6	150	120	15	112-200					

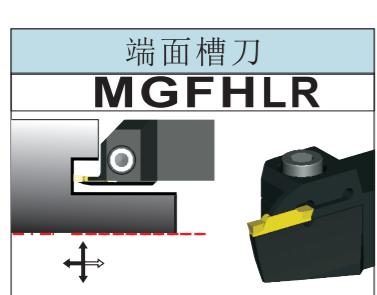


径向切削时，切削量不宜过大


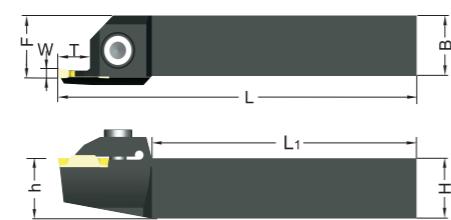


下刀直径范围

型号	基本尺寸							适用刀片	螺钉	扳手			
	H=h	B	F	L	L1	最大切深 T	(min-max)						
MGFHRL	320-24/35-T10	20	20	20.6	125	100	10	24-35	MFMN300	M6*20	L5		
	320-29/40-T10	20	20	20.6	125	100	10	29-40					
	320-34/50-T10	20	20	20.6	125	100	10	34-50	MGMN300-M				
	320-44/70-T10	20	20	20.6	125	100	10	44-70					
	320-64/99-T10	20	20	20.6	125	100	10	64-99	MGMN400-M				
	320-62/120-T10	20	20	20.6	125	100	10	62-120					
	320-112/200-T10	20	20	20.6	125	100	10	112-200	MGMN400-M				
	420-112/200-T15	20	20	20.6	125	100	15	112-200					
	325-24/35-T10	25	25	25.6	150	120	10	24-35	MFMN300				
	325-29/40-T10	25	25	25.6	150	120	10	29-40					
	325-34/50-T10	25	25	25.6	150	120	10	34-50	MGMN300-M				
	325-44/70-T10	25	25	25.6	150	120	10	44-70					
	325-64/99-T10	25	25	25.6	150	120	10	64-99	MGMN400-M				
	325-62/120-T10	25	25	25.6	150	120	10	62-120					
	325-112/200-T10	25	25	25.6	150	120	10	112-200	MGMN400-M				
	425-62/120-T15	25	25	25.6	150	120	15	62-120					
	425-112/200-T15	25	25	25.6	150	120	15	112-200					

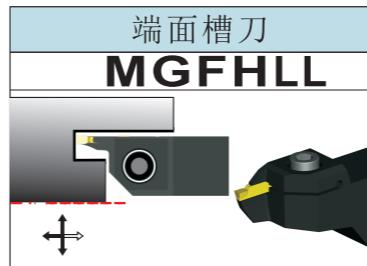


径向切削时，切削量不宜过大

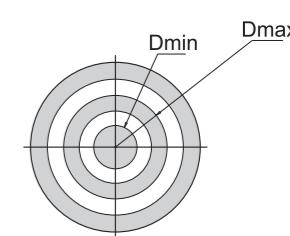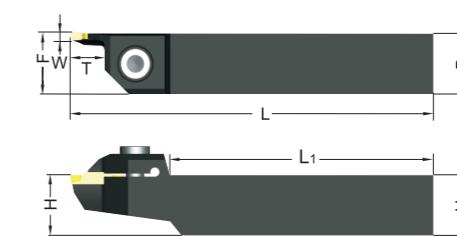

下刀直径范围


型号	基本尺寸							适用刀片	螺钉	扳手			
	H=h	B	F	L	L1	最大切深 T	(min-max)						
MGFLH	320-24/35-T10	20	20	20.6	125	100	10	24-35	MFMN300	M6*20	L5		
	320-29/40-T10	20	20	20.6	125	100	10	29-40					
	320-34/50-T10	20	20	20.6	125	100	10	34-50	MGMN300-M				
	320-44/70-T10	20	20	20.6	125	100	10	44-70					
	320-64/99-T10	20	20	20.6	125	100	10	64-99	MGMN400-M				
	320-62/120-T10	20	20	20.6	125	100	10	62-120					
	320-112/200-T10	20	20	20.6	125	100	10	112-200	MGMN400-M				
	420-112/200-T15	20	20	20.6	125	100	15	112-200					
	325-24/35-T10	25	25	25.6	150	120	10	24-35	MFMN300				
	325-29/40-T10	25	25	25.6	150	120	10	29-40					
	325-34/50-T10	25	25	25.6	150	120	10	34-50	MGMN300-M				
	325-44/70-T10	25	25	25.6	150	120	10	44-70					
	325-64/99-T10	25	25	25.6	150	120	10	64-99	MGMN400-M				
	325-62/120-T10	25	25	25.6	150	120	10	62-120					

GROOVING TOOL SERIES

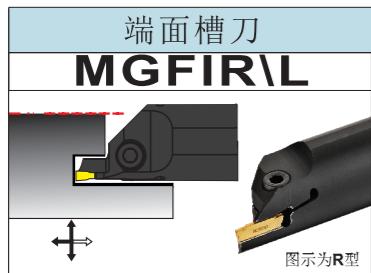

径向切削时，切削量不宜过大

型号	基本尺寸					适用刀片	螺钉	扳手
	d	F	L	最大切深 T (min-max)				
MGFI RL	320-2435-T10	20	9.37	180	10	24-35	MFMN300	L4
	320-2940-T10	20	9.37	180	10	29-40		
	320-3450-T10	20	9.37	180	10	34-50		
	325-2435-T10	25	12.37	200	10	24-35		
	325-2940-T10	25	12.37	200	10	29-40		
	325-3450-T10	25	12.37	200	10	34-50		

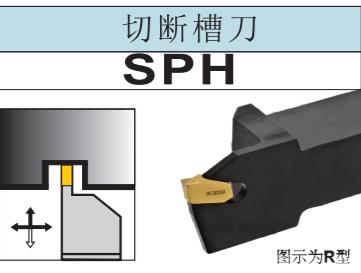

外圆车削

内孔车削

螺纹车削

槽刀

阻尼减振系列

铣削

型号	基本尺寸						适用刀片	螺钉	扳手
	H=h	B	F	L	L1	最大切深 T			
SPH	316R/L	16	16	16.4	100	80	16	SP300	T10
	320R/L	20	20	20.4	125	100	20		
	325R/L	25	25	25.4	150	120	20		
	332R/L	32	32	32.4	170	135	25		
	416R/L	16	16	16.4	100	80	16		
	420R/L	20	20	20.4	125	100	20		
	425R/L	25	25	25.4	150	120	20		
	432R/L	32	32	32.4	170	135	25		



轴向切削时，切削量不宜过大

型号	基本尺寸						适用刀片	螺钉	扳手
	H=h	B	F	L	L1	最大切深 T			
KTGF RL	1616H16	16	16	21	100	80	2.3	TGF32R/L.....	SC350982
	2020K16	20	20	25	125	100	2.5		
	2525M16	25	25	30	150	120	2.5		

GROOVING TOOL SERIES



轴向切削时，切削量不宜过大

型号	基本尺寸						适用刀片	螺钉	扳手
	H=h	B	F	L	L1	最大切深 T			
KTGR RL	1616H16	16	16	21	100	80	2.3	TG32R200	SC350982
	2020K16	20	20	25	125	100	2.5		
	2525M16	25	25	30	150	120	2.5		
	2020K22-15	20	20	25	125	100	4.0		
	2525M22-15	25	25	30	150	120	4.0		
	2020K22-25	20	20	25	125	100	4.5		
	2525M22-25	25	25	30	150	120	4.5		
	2020K22-35	20	20	25	125	100	5.5		
	2525M22-35	25	25	30	150	120	5.5		



轴向切削时，切削量不宜过大

型号	基本尺寸						适用刀片	螺钉	扳手
	d	F	L	l1	最大切深 T	最小加工径ΦD			
SIGER RL	0808A-EH	8	4.8	100	20	1.5	8	GER/L100-005A~GER/L200-010A GER100-050AR~GER200-100AR	SC200560
	1010B-EH	10	6.2	125	24	2.2	10		
	1210B-EH	10	7	125	30	2.2	12	GER/L100-005B~GER/L300-020B GER100-050BR~GER200-100BR	SC220660
	1412C-EH	12	8	150	33	2.5	14		
	1612C-EH	12	8.5	150	20	2.5	16	GER/L100-005C~GER/L350-020C GER150-010CM~GER350-020CM GER200-100CR~GER300-150CR	SC250760
	1616C-EH	16	9	150	36	2.5	16		
	2020D-EH	20	12.1	180	40	4.5	20	GER/L100-005D~GER/L400-020D GER150-010DM~GER400-020DM GER200-100DR~GER300-150DR	SC300760
	2525E-EH	25	15.6	200	45	6.5	25		
	3232E-EH	32	19	250	55	6.5	32	GER/L100-005E~GER/L500-020E GER150-010EM~GER500-020EM	SC350960
	4032E-EH	32	23	250	45	6.5	40		



轴向切削时, 切削量不宜过大

型号	基本尺寸						适用刀片	螺钉	扳手
	d	F	L	l1	最大切深 T	最小加工径φD			
SNGR/L	08H06	8	4.7	100	16	1.7	8	6GR.....	SC200560
	08H07	8	5.8	100	16	1.7	10	7GR.....	SC220560
	10K07	10	6.8	125	20	1.7	12	8GR300	SC220660
	10K08	10	7.6	125	20	2.2	14	8GR100	SC220760
	12M08	12	8.6	150	24	2.2	16	9GR.....	SC250960
	16Q09	16	11.5	180	32	3.2	20	T6	
	20R09	20	13.6	200	40	3.2	24	T8	



轴向切削时, 切削量不宜过大

型号	基本尺寸					压板	压板螺丝	刀片螺丝	弹簧	扳手
	H=h	B	L	F	最大切深 T					
GTBR/L	1616H16	16	16	100	20	2.5				
	2020K16	20	20	125	25	2.5		SC350760		L4.5,T15
	2525M16	25	25	150	30	2.5				
	2020K22-15	20	20	125	25	4				
	2525M22-15	25	25	150	30	4	GYR	B0620	SP-0612	L4.5,T20
	2525M22-25	25	25	150	30	4.5				
	2020K22-35	20	20	125	25	5.5	GYR	B0620	SC501260	
	2525M22-35	25	25	150	30	5.5				



轴向切削时, 切削量不宜过大

型号	基本尺寸					压板	压板螺丝	刀片螺丝	弹簧	扳手
	H=h	B	F	L	最大切深 T					
GTBR/L	1616H16L	16	16	100	20	2.5				
	2020K16L	20	20	125	25	2.5			SC350760	L4.5,T15
	2525M16L	25	25	150	30	2.5				
	2020K22-15L	20	20	125	27	4				
	2525M22-15L	25	25	150	32	4	GYL	B0620	SP-0612	
	2020K22-25L	20	20	125	27	4.5			SC501260	L4.5,T20
	2525M22-25L	25	25	150	32	4.5				
	2020K22-35L	20	20	125	27	5.5				
	2525M22-35L	25	25	150	32	5.5				

备忘录