

#### HTBLuVA Wiener Neustadt Höhere Lehranstalt für Informatik



### DIPLOMARBEIT

#### Localisation via ML Methods

Ausgeführt im Schuljahr 2019/20 von:

Algorithm Ida Hönigmann System Engineering Peter Kain

5AHIF

5AHIF

Betreuer / Betreuerin:

MMag. Dr. Michael Stifter

Wiener Neustadt, am October 7, 2019/20

Abgabevermerk:

Übernommen von:

## Eidestattliche Erklärung

Hiermit erkläre ich an Eides statt, dass ich die vorliegende Arbeit selbstständig und ohne fremde Hilfe verfasst und keine anderen als die im Literaturverzeichnis angegeben Quellen und Hilfsmittel verwendet habe. Insbesondere versichere ich, dass ich alle wörtlichen und sinngemäßen Übernahmen aus anderen Werken als solche kenntlich gemacht habe.

Wiener Neustadt am October 7, 2019/20

Verfasser / Verfasserinnen:

Ida HÖNIGMANN

Peter KAIN

## Contents

Ei	desta	attliche Erklärung	i							
$\mathbf{A}$	Acknowledgement									
K	urzfa	ssung	v							
$\mathbf{A}$	bstra	${f ct}$	vi							
1	Intr	oduction	1							
	1.1	Goal	1							
	1.2	Motivation	2							
	1.3	Outlook / Perspective	2							
	1.4	Equipment	3							
<b>2</b>	Stu	Study of Literature								
	2.1	Different Approaches to the Problem	4							
		2.1.1 LIDAR	4							
		2.1.2 Structure from Motion	4							
		2.1.3 Feature Tracking	4							
	2.2	Depth perception	4							
		2.2.1 Depth sensation	4							
3	Methodology									
	3.1	Stereo Camera	5							
	3.2	Image preprocessing	5							
	3.3	Neural Network	5							
	3.4	TensorFlow	5							
		3.4.1 Computation graph	6							
		3.4.2 Convolutional Neural Networks?	7							
		3.4.3 Alternatives to Tensorflow	7							
	3.5	Generating data	8							
		3.5.1 Blandar	Q							

4	ROS	$\mathbf{S}2$	<b>10</b>
	4.1	What is ROS?	10
		4.1.1 Nodes	10
		4.1.2	10
	4.2	Why use ROS?	10
	4.3	Comparing ROS and ROS2	10
5	Imp	lementation	11
	5.1	Generating test data	11
	5.2	OpenCV	11
		5.2.1 Greyscale	11
		5.2.2 Saturated	12
		5.2.3 Resolution	12
		5.2.4 Brightness	12
	5.3	Neural Network	12
		5.3.1 Structure of our Neural Network	12
	5.4	C++ Implementation	12
	5.5	Technical difficulties	12
6	Exp	eriment 1	13
	6.1	Environment	13
	6.2	Setup	13
	6.3	Sequence of Events	13
	6.4	Results	13
7	Less	sons learned	14
8	Exp	periment 2	15
	8.1	Environment	15
	8.2	Setup	15
	8.3	Materials	15
	8.4	Sequence of Events	15
	8.5	Results	15
9	Con	aclusion	16

# Acknowledgement

The authors would like to thank ...

# Kurzfassung

asdf

## Abstract

 $\operatorname{asdf}$ 

### Introduction

#### Author: Ida Hönigmann

Robots are getting more and more mobile. While a few years ago their usage was mostly limited to aid factory automation, robots have found widespread adoption in a multitude of industries, such as self driving cars and autonomous delivery drones. A challenge frequently encountered is navigating in unknown environments, which either requires the robot to sense specific characteristics of its surroundings or to communicate with some external system.

The problem of navigation has been looked at from many different angles. One popular approach in mobile robotics is to use the GPS, an external positioning system. In order to determine the position of a robot using the GPS, it has to establish communication with at least four satellites. The exact position of each satellite as well as the current time is broadcast by the satellites. By measuring the time needed for the signal to reach the robot, the position can be calculated up to three meters accurately.

However, in some cases positioning a robot using external positioning methods is not possible. In the case of the GPS this can be due to obstacles interfering with the radio signals send by the satellites, for example occurring inside a building. In comparison this work focuses on a system that can navigate in outdoor as well as in indoor environments.

#### 1.1 Goal

The goal of this diploma thesis is to implement a system which can localize a robot using no other sensors than a camera. This limitation was purposely chosen as the system will be used by future robotic students at the HTBLuVA (Technical Secondary College) and many robot systems used in the field of education are only poorly equipped with sensors that are able to detect its environment. One sensor used in the field of educational robotics is the either already equipped, or easily mountable camera.

As part of this thesis the authors not only want to implement an easy to use API for future robotic students, but to also show the possibilities and advantages of machine learning in localisation

In order to accomplish precise localisation in various different surroundings, the authors plan on implementing a neural network. The neural network should take images, taken by the camera, as an input, and outputs the relative distance to any object shown in the images. By using machine learning the system should be less dependent on a specific situation or setup in comparison to different camera based localisation methods. For example the localisation should work on objects varying in size and shape, as well as in different situations of lighting.

#### 1.2 Motivation

In July 2019 the two authors of this work participated in the aerial tournament at the Global Conference on Educational Robotics held in Norman, Oklahoma. One of the two main challenges encountered at this tournament was landing a drone next to some randomly placed object, which colour, shape and size was known in advance.

The second challenge the participants at the tournament faced was flying from one side of randomly placed cardboard boxes to the other. The cardboard boxes, representing a mountain, are placed in one of various configurations, one of which can be seen in figure 1.1.




Figure 1.1: Seven cardboard boxes, representing a mountain, are placed in a random configuration. The team scores points if the drone passes the mountain while staying under the height limit indicated by the red dotted line.

The drones used at this aerial tournament are equipped with a camera, while lacking any other sensor that can be used to detect the obstacles and game items. Therefore the participants needed to be able to detect the distance to the object and the cardboard boxes using only the camera. At the Global Conference on Educational Robotics the authors of this work decided to detect the object based on its colour, but had to invest quite some time tweaking the values to get the localisation working correctly. Therefore the authors want to research and implement a method that is more robust than the colour based one.

#### 1.3 Outlook / Perspective

The objective of this work is to create a system which uses machine learning methods in localising objects. After having trained the system, it should reliably return the x, y and z distances to an object, shown in two pictures taken from different angles.

It is planned that the distance will be measured from the second camera position to the centre of object, as seen in Figure 1.2.

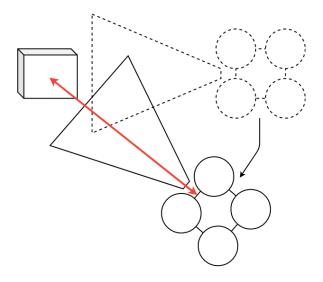


Figure 1.2: A drone tries to gather the data needed for the localisation of an object. After taking the first picture (dotted line) the drone flies to a second position (solid line) to take another picture from a different point of view. The red line indicates the distance vector to be returned.

#### 1.4 Equipment

[TODO: Mit welcher Drohne soll das System funktionieren?, Kamera auf der Drohne]

## Study of Literature

#### Author:

#### 2.1 Different Approaches to the Problem

[Input: Paper (gleiches Problem ohne NN) finden - Peter]

[Input: Video (eine Kamera, Entfernung zu Punkt (größe bekannt)) finden (ohne NN) - Peter]

[Vielleicht ist irgendetwas davon spannend: Links im Tex file]

- 2.1.1 LIDAR
- 2.1.2 Structure from Motion
- 2.1.3 Feature Tracking

#### 2.2 Depth perception

[TODO: humans, two eyes - gleich wie bei unserem Aufbau]

#### 2.2.1 Depth sensation

[TODO: Pigeons, deer, children (visual cliff)]

### Methodology

Author:

#### 3.1 Stereo Camera

[warum verwenden wir keine stereo kamera?, weil keine vorhanden]

#### 3.2 Image preprocessing

[ schwarz-weiß? auflösung? filter? object detection? ]

#### 3.3 Neural Network

The authors decided to use a software framework called TensorFlow for the first implementation of the neural network. This has the following two advantages: using Tensorflow allows for a low effort proof of concept and it makes testing out different configurations (e.g. number of hidden layers or filters in image preprocessing) of the neural network easier.

After it has been shown that the challenge of detecting the distance to an object can be solved using machine learning, the authors plan on implementing a neural network in C++ on their own. The knowledge gained in the TensorFlow implementation will be used in the C++ implementation, which hopefully will make the work less time consuming.

#### 3.4 TensorFlow

As machine learning has gained popularity in recent years the demand for applicable frameworks grew. One of the most popular is called TensorFlow. It was developed by Google for internal use and was published under the Apache License 2.0 on the 9<sup>th</sup> of November 2015. TensorFlow supports APIs for Python, C, C++, Go, Java, JavaScript and Swift. Due to its popularity third party APIs for C#, R, Scala, Rust and many more were developed.

Its use cases reach from categorizing handwritten digits to YouTube video recommendations, one of the many applications Google use it for.

Tom Hope et al. describe TensorFlow as a software framework for numerical computations based on dataflow graphs<sup>1</sup>.

#### 3.4.1 Computation graph

To compute a value using TensorFlow a computation graph has to be constructed. In this graph each node corresponds to an operation, such as subtraction or division. By connecting these nodes via edges the output of one node can be fed as input into another node. One example of such a computation graph can be seen in Figure 3.1.

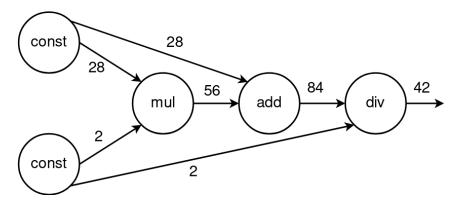


Figure 3.1: Each node represents an operation, where const stands for a constant value, add for addition, mul for multiplication and div for division. Edges, represented by arrows, connect nodes. The information shared between the nodes is described by the numbers written next to the edges. This computational graph calculates the result of the arithmetic expression (28\*2) + 28/2.

The implementation of the computation graph, shown in Figure 3.1, in Python could look as follows:

```
import tensorflow as tf

a = tf.constant(28)
b = tf.constant(2)

c = tf.multiply(a, b)
d = tf.add(a, c)
e = tf.divide(d, b)

with tf.Session() as sess:
out = sess.run(e)

print(out)
```

<sup>&</sup>lt;sup>1</sup>Itay Lieder Tom Hope Yehezkel S. Resheff. *Learning TensorFlow*. O'Reilly, 2017, page 6.

The first line specifies that the TensorFlow functionality should be imported. Line 3 and 4 define the two constant values and assigns them the values 28 and 2 respectively. In line 6 to 8 the other nodes of the graph are specified. E.g. in line 6 a new node, named c, is created and the output of node a and node b are connected as its input. To perform the calculation described by the graph a new session is created in line 10. Finally the output of the graph (node e) is specified in line 11, the result is calculated and printed in line 13.

TensorFlow allows for another way of specifying a graph with these arithmetic operations:

```
import tensorflow as tf

a = tf.constant(28)
b = tf.constant(2)

e = (a * b + a) / b

with tf.Session() as sess:
out = sess.run(e)

print(out)
```

This code is equivalent to the first one, but uses syntactic sugar to shorten line 6 to 8 in the first code block into line 6. At this point it should be noted that while it might look like it line 6 does not calculate anything. It simply describes how the computational graph should look. The answer (42) is calculated in the session in line 9.

#### 3.4.2 Convolutional Neural Networks?

#### 3.4.3 Alternatives to Tensorflow

[INFO: Abstraction libraries such as Keras and TF-Slim offer simplified high-level access to the "LEGO bricks" in the lower-level library, helping to streamline the construction of the dataflow graphs, training them, and running inference.<sup>2</sup>]

<sup>&</sup>lt;sup>2</sup>Tom Hope, Learning TensorFlow, page 7.

	Open Source	Actively	Parallelization	Interface
		developed		
TensorFlow	Yes	Yes	Yes	Python, C, C++,
				Go, Java, JavaScript,
				Swift, R, Julia
Keras	Yes	Yes	Yes	Python
PyTorch	Yes	Yes	Yes	Python, C++
Torch	Yes	No	Yes	Lua, LuaJIT, C,
				C++, OpenGL
Wolfram	No	Yes	Yes	Wolfram Language
Mathematica				

[+ warum verwenden wir ausgerechnet Tenserflow]

#### 3.5 Generating data

Neural Networks require huge amounts of data to work reliably. Because of the author's limited time frame this test data will be generated with the help of Blender 2.8. Blender is a free program for designing and animating 3D objects, which also supports scripting with python to add or remove objects from a scene. The authors will use this capability to generate the huge amounts of test data needed from the perspectives of the 2 cameras, which point to a specific object in the scene. This enables the authors to use and train a neural network, since shooting the amount of pictures needed by hand would take too long to consider this idea.

#### 3.5.1 Blender

Besides 3D-modelling Blender enables the user to perform various different actions, such as laying out scenes, UV-Editing, shading, animating and rendering. Additionally scenes can be modified by executing Python scripts. Figure 3.2 shows the interface of blender with the default file loaded.

The authors decided to extensively use the scripting function in their work. One example of a Python script, that can be executed in blender is the following code:

python code
-------------

It modifies ...

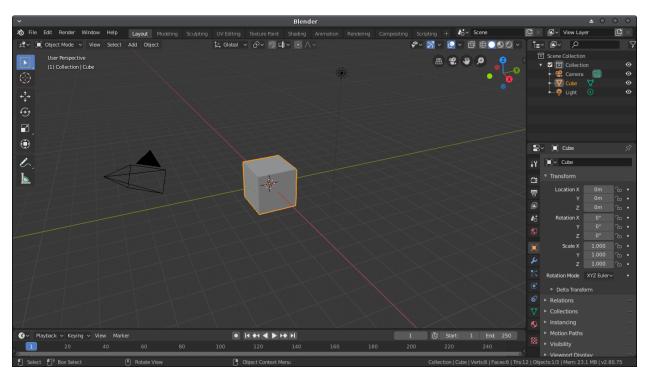


Figure 3.2: Blender interface after startup. The default scene features a grey cube, a camera (left of the cube) and a light source (black dot and circle positioned on the top right of the cube).

### ROS2

#### Author:

#### 4.1 What is ROS?

[Ubuntu?]

[INFO: ROS (Robot Operating System) provides libraries and tools to help software devel-

opers create robot applications.<sup>1</sup>] [TEST: asdf<sup>2</sup>] [Core Concepts]

#### 4.1.1 Nodes

[Wie verwenden wir das? / Wie macht es unsere Arbeit leicher?]

- 4.1.2 ...
- 4.2 Why use ROS?
- 4.3 Comparing ROS and ROS2

[python2 < python3]

<sup>&</sup>lt;sup>1</sup>Inc. Open Source Robotics Foundation. *Documentation - roswiki*. 2019. URL: https://wiki.ros.org.

<sup>&</sup>lt;sup>2</sup>Open Source Robotics Foundation, *Documentation - roswiki*.

### Implementation

#### Author:

#### 5.1 Generating test data

Good test data is of utmost importance in machine learning. The system can only know information that is depicted in the training data, which is why it is important to include as many aspects of the problem as possible in this data.

Since machine learning needs a lot of data in order to solve the given task it can be tiresome to generate and label all this data by hand. Therefore the authors decided to simulate the objects and the camera using a computer graphics modelling software called Blender.

Blender allows for relatively easy generation of training data by providing a Python API.

[TODO: Image camera setup, lightning, objects in Blender]

[TODO: Renders and labels for example objects]

#### 5.2 OpenCV

OpenCV is a framework for image manipulation. Some of its use cases are changing the colour spectrum, filtering the image by colour and cropping images. The authors use OpenCV to test whether there are differences between filters for the images in the training data, for example greyscale images compared to coloured images.

[TODO: image manipulation und ...; aka besser beschreiben was OpenCV ist]

[TODO: wofür verwenden wir es? Ergebnisse zw. Graustufen und Farbbildern]

[TODO: Codebeispiele?]

#### 5.2.1 Greyscale

[TODO: Input zweidimensionale Matrix statt dreidimensional (eine Zahl statt 3 pro Pixel)]

Figure 5.1: Comparison between normal and greyscale image.

#### 5.2.2 Saturated

Figure 5.2: Comparison between normal and saturated image.

#### 5.2.3 Resolution

Figure 5.3: Comparison between normal and resolution image.

#### 5.2.4 Brightness

Figure 5.4: Comparison between normal and brightness image.

#### 5.3 Neural Network

#### 5.3.1 Structure of our Neural Network

[wie lesen wir Daten ein, wie viele layer, was ist der output (maximale entfernung? z.B. 10m)]

#### 5.4 C++ Implementation

#### 5.5 Technical difficulties

## Experiment 1

#### Author:

#### 6.1 Environment

[TODO: viele Fotos] [TODO: Hintergrundfarbe, Untergrundfarbe, Struktur (Hintergrund und Untergrund), Beleuchtung (Art, Helligkeit, Richtung, mehrere Lichtquellen, welche Lichtquellen, ...)]

#### 6.2 Setup

[TODO: viele Fotos] [TODO: welche Objekte (Größe, Farbe, wie viele (mindestens 3)?, ...), Kameras, Entfernung zu Objekten]

#### 6.3 Sequence of Events

#### 6.4 Results

## Lessons learned

Author:

# Experiment 2

#### Author:

#### 8.1 Environment

[TODO: viele Fotos]

#### 8.2 Setup

[TODO: viele Fotos]

#### 8.3 Materials

[TODO: viele Fotos]

#### 8.4 Sequence of Events

#### 8.5 Results

## Conclusion

Author:

## Index

#### **Authors Index**

Open Source Robotics Foundation, Inc.,

Tom Hope Yehezkel S. Resheff, Itay Lieder, 6, 7

#### Literature Index

Documentation - roswiki, 10

Learning TensorFlow, 6, 7

# Bibliography

Open Source Robotics Foundation, Inc. *Documentation - roswiki.* 2019. URL: https://wiki.ros.org.

Tom Hope Yehezkel S. Resheff, Itay Lieder. Learning TensorFlow. O'Reilly, 2017.

## Messbox zur Druckkontrolle



— Diese Seite nach dem Druck entfernen! —