


Schematic setup:

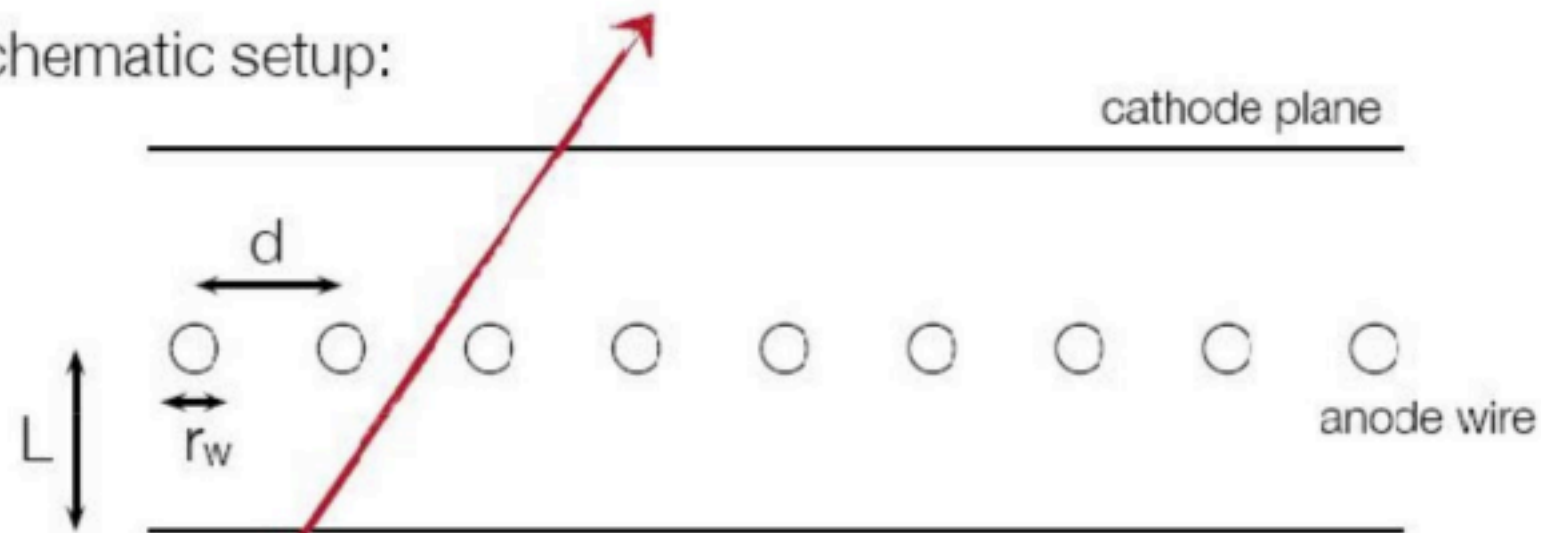

Parameters:

$$d = 1 - 4 \text{ mm}$$

$$r_w = 10 - 20 \text{ } \mu\text{m}$$

$$L = 2 - 4 \text{ mm}$$

Features:

Tracking of charged particles

Some PID capabilities via dE/dx

Large area coverage

High rate capabilities

particle track