



Compare first QC Measurements with the new Set Up

- Measurements with the new configuration - (now moving as it should)
- SiPM opposite of the LED was covered and used as noise measure - to exclude noise effects from the motor
- the measurements on the inner LED is displayed left
- the measurements on the outer LED is displayed right



Covered SiPMs - Noise measurement

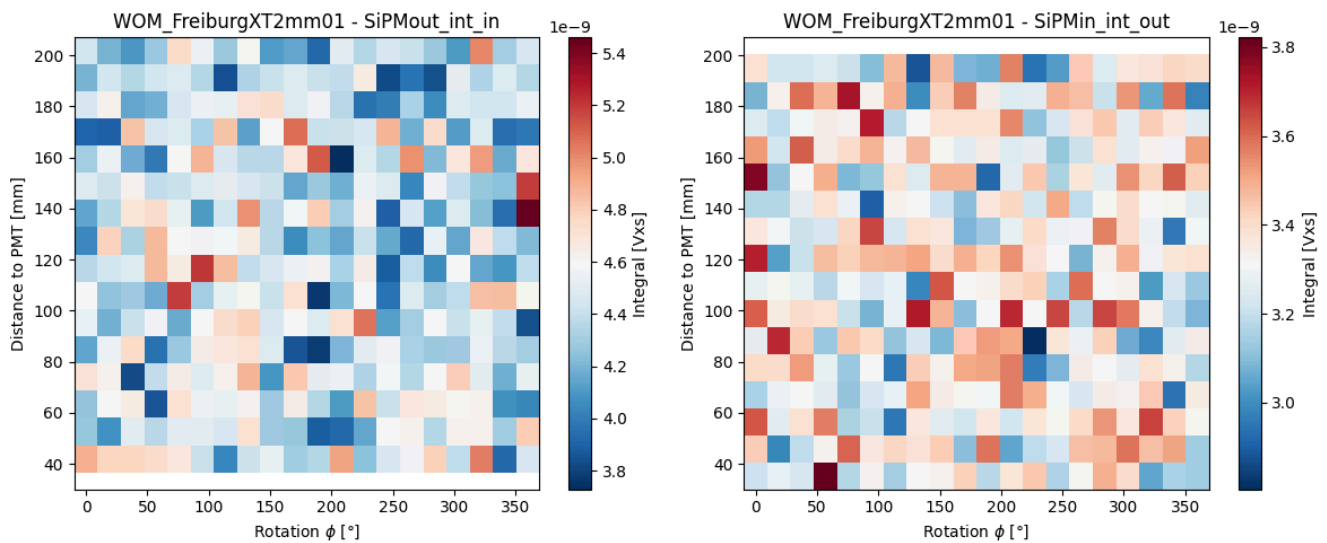



Reference SiPMs (next to the LEDs)

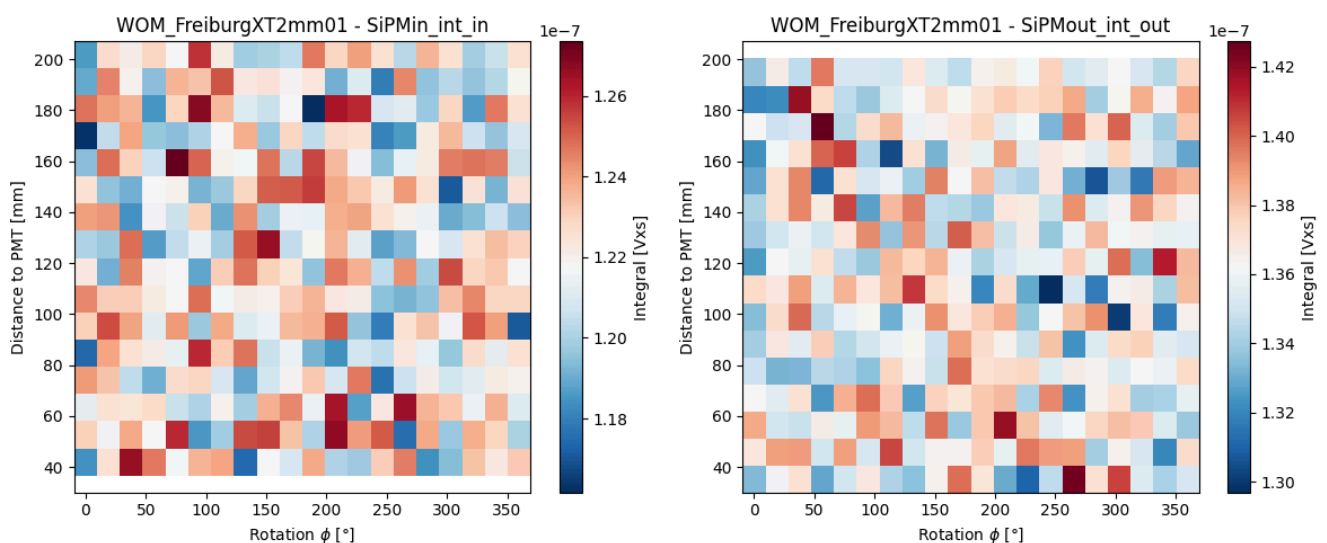



Reference SiPM with Noise from covered SiPMs substracted

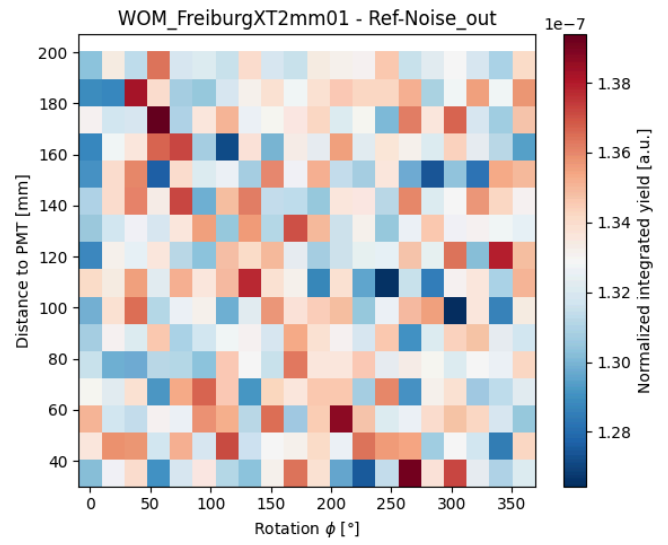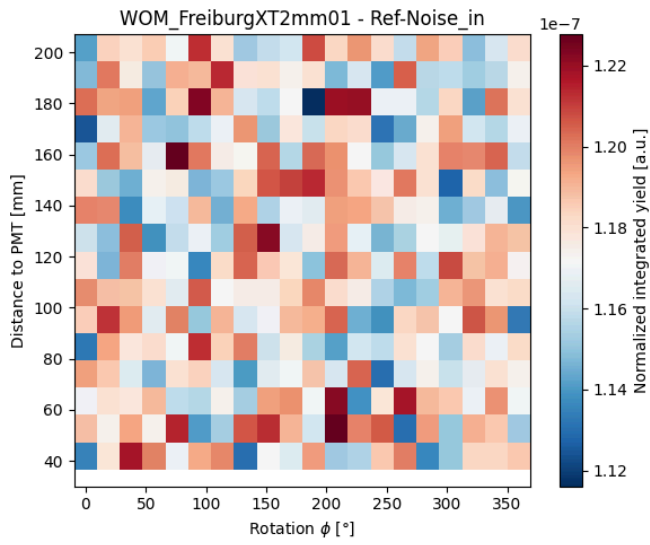


PMT only

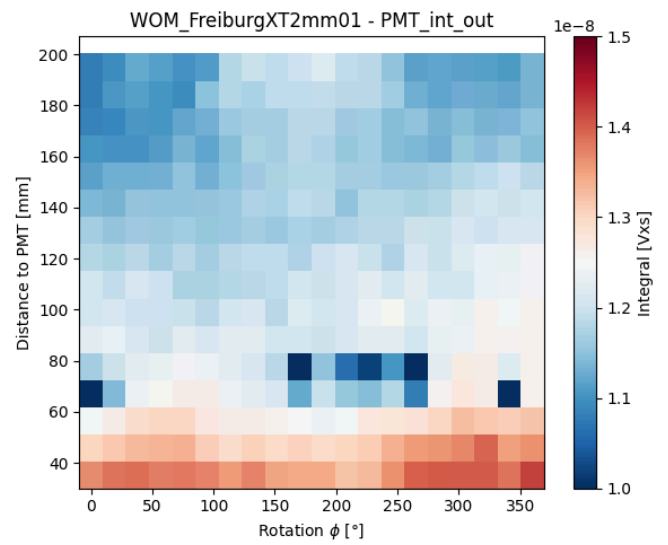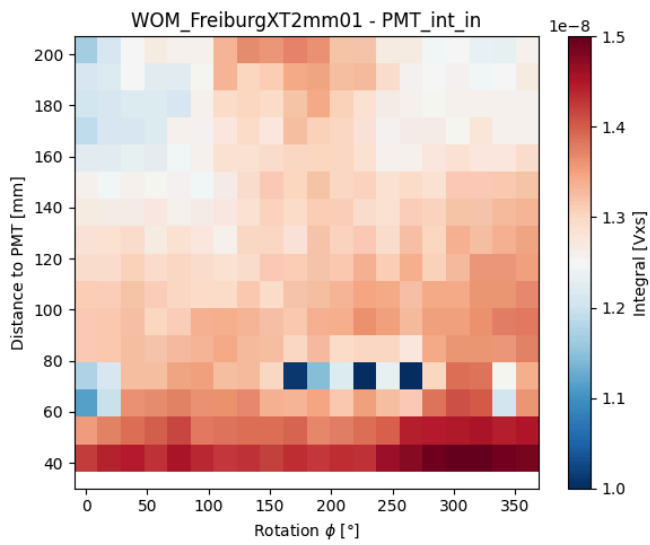

PMT divided by Reference SiPM

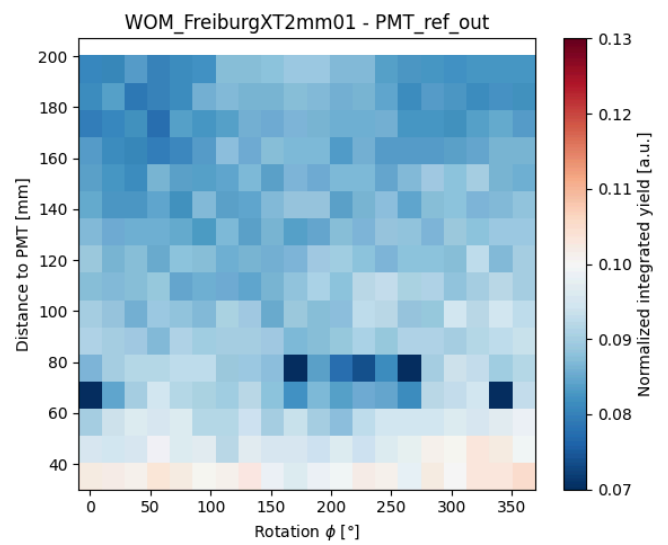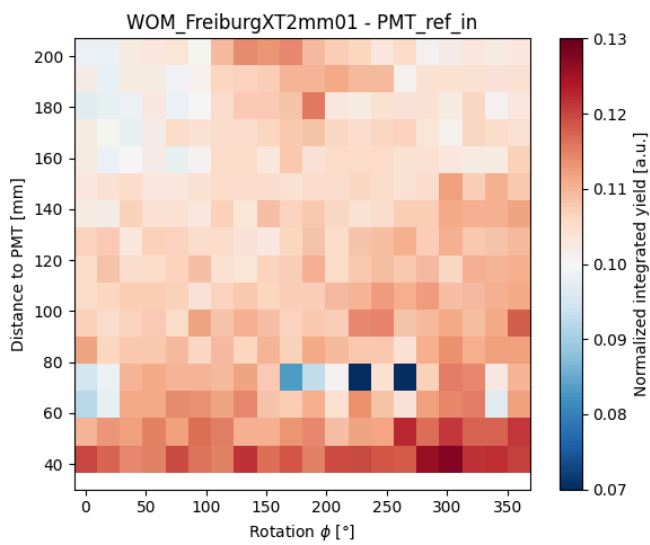

PMT devided by (Reference - Noise)

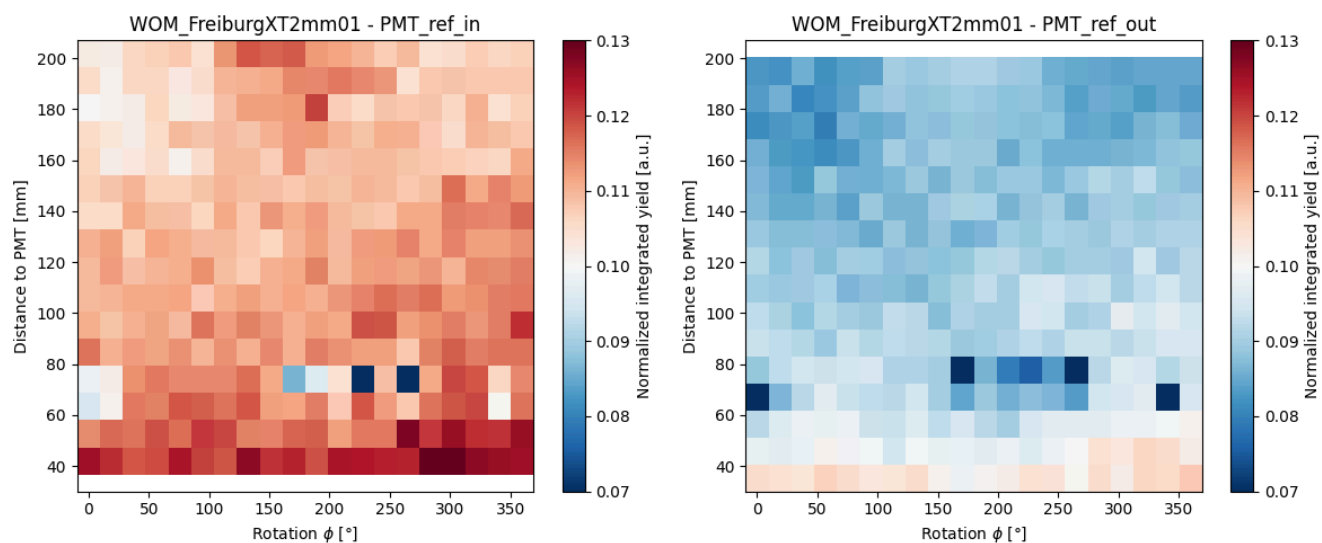

Measurements on the same WOM with old configuration

- Not the same rotation

