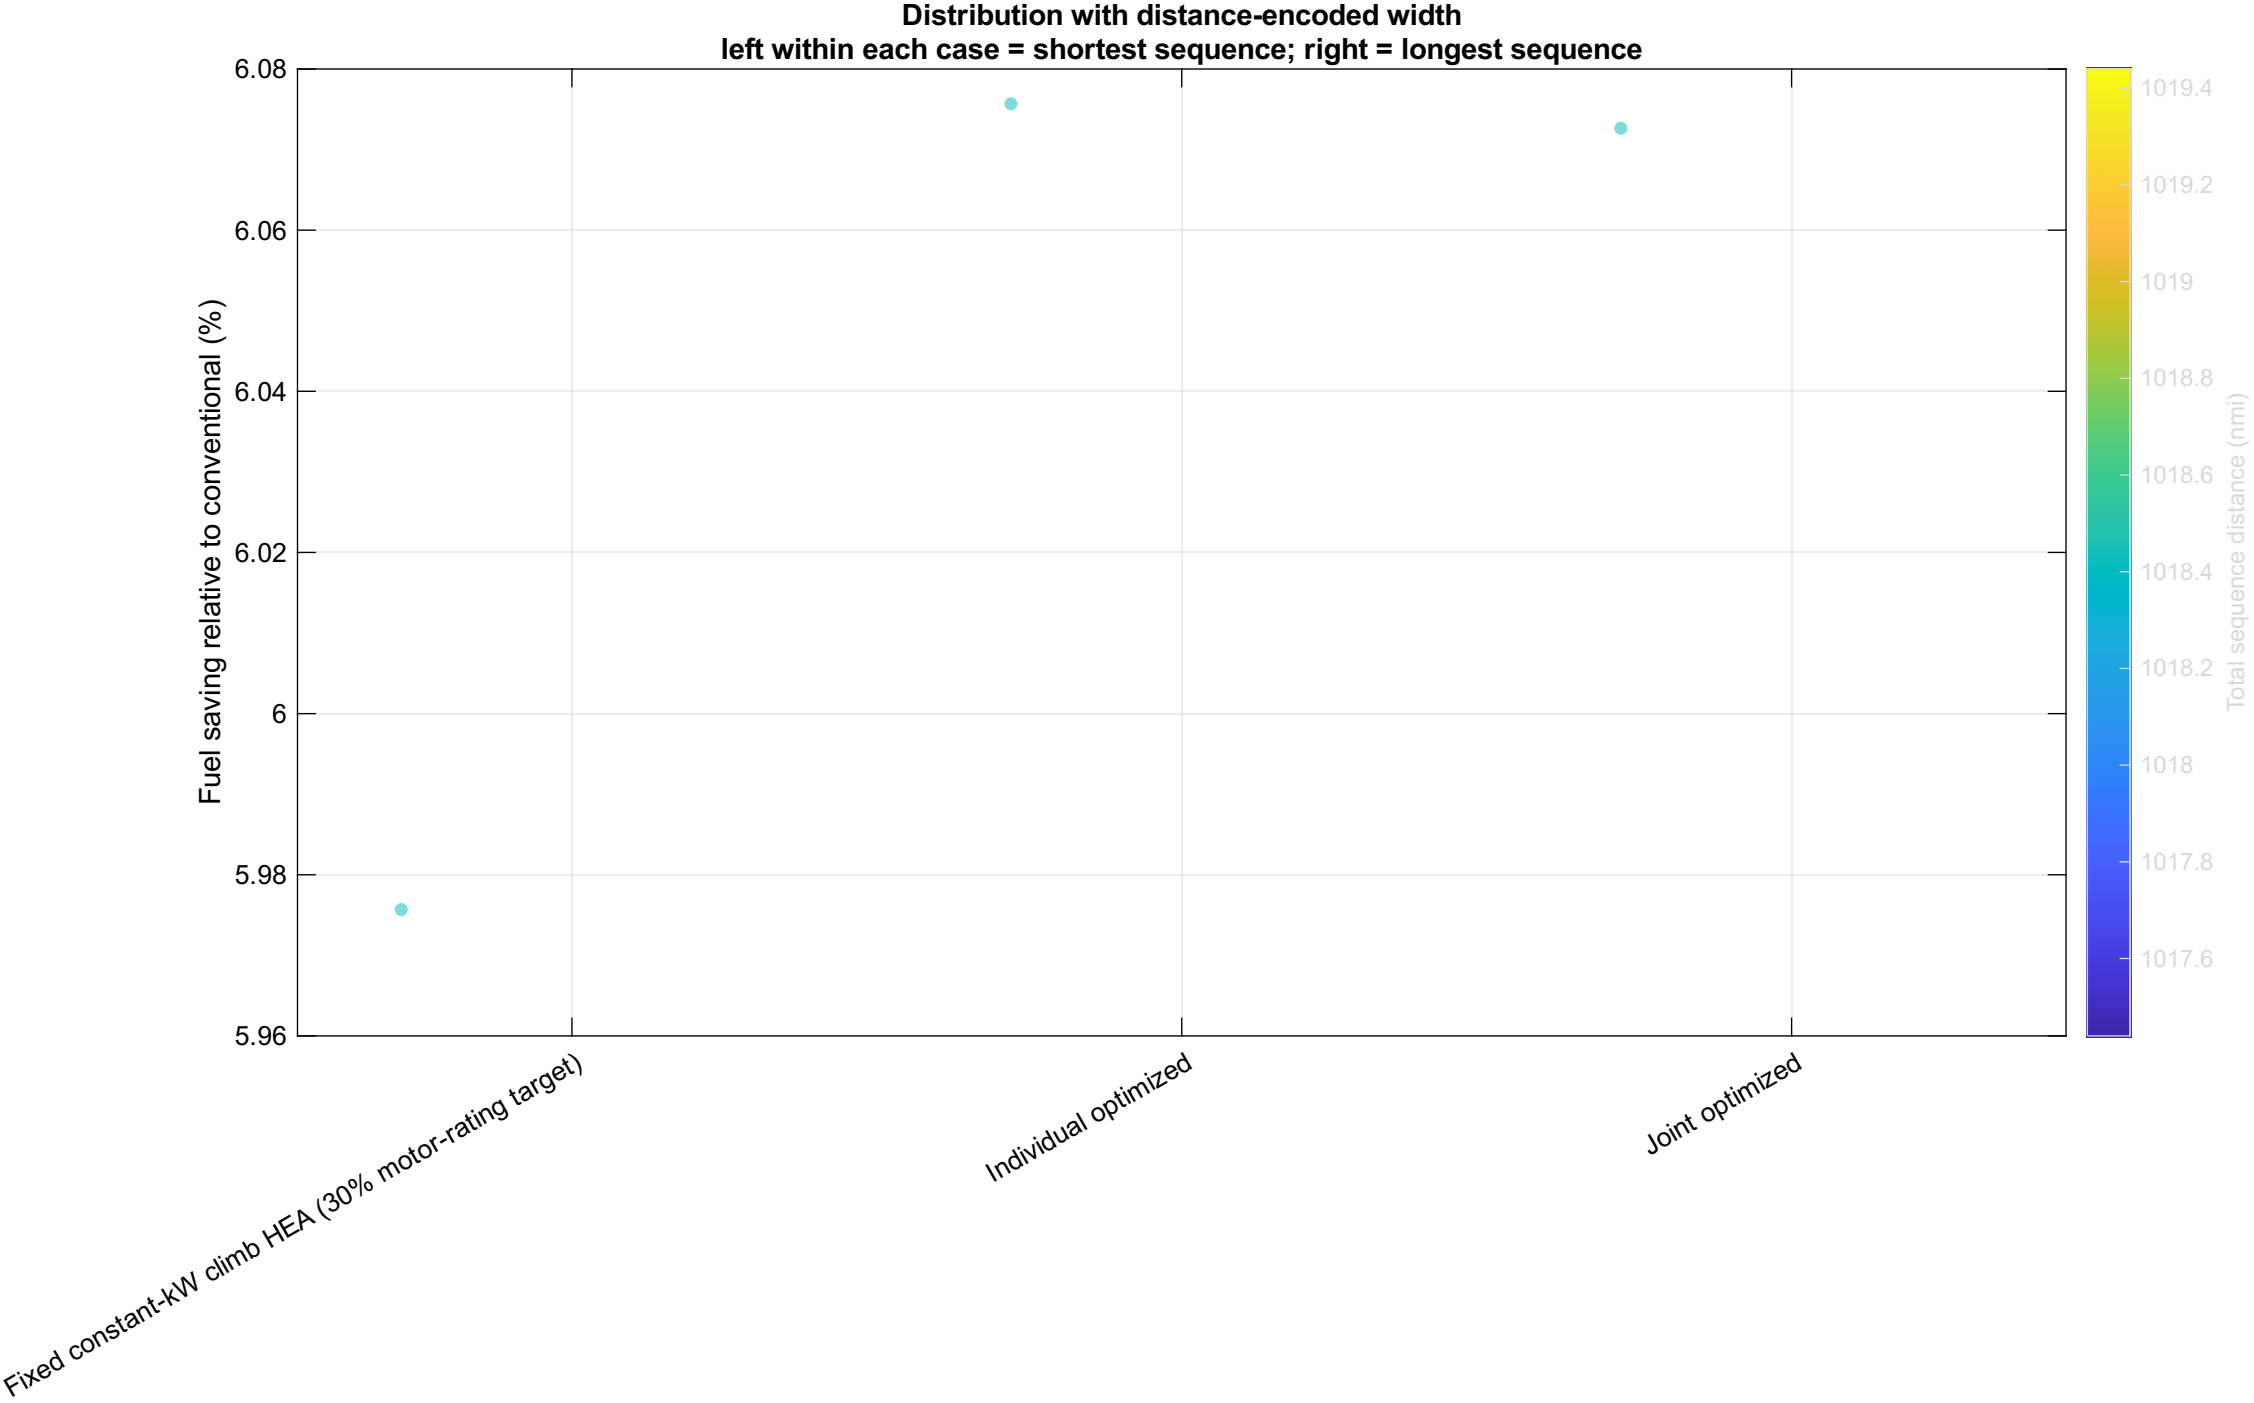
Distribution with distance-encoded width
left within each case = shortest sequence; right = longest sequence
Fuel saving relative to conventional (%)
6.08
6.06
6.04
6.02
6
5.98
5.96
Total sequence distance (nmi)
1019.4
1019.2
1019
1018.8
1018.6
1018.4
1018.2
1018
1017.8
1017.6
Fixed constant-kW climb HEA (30% motor-rating target)
Individual optimized
Joint optimized