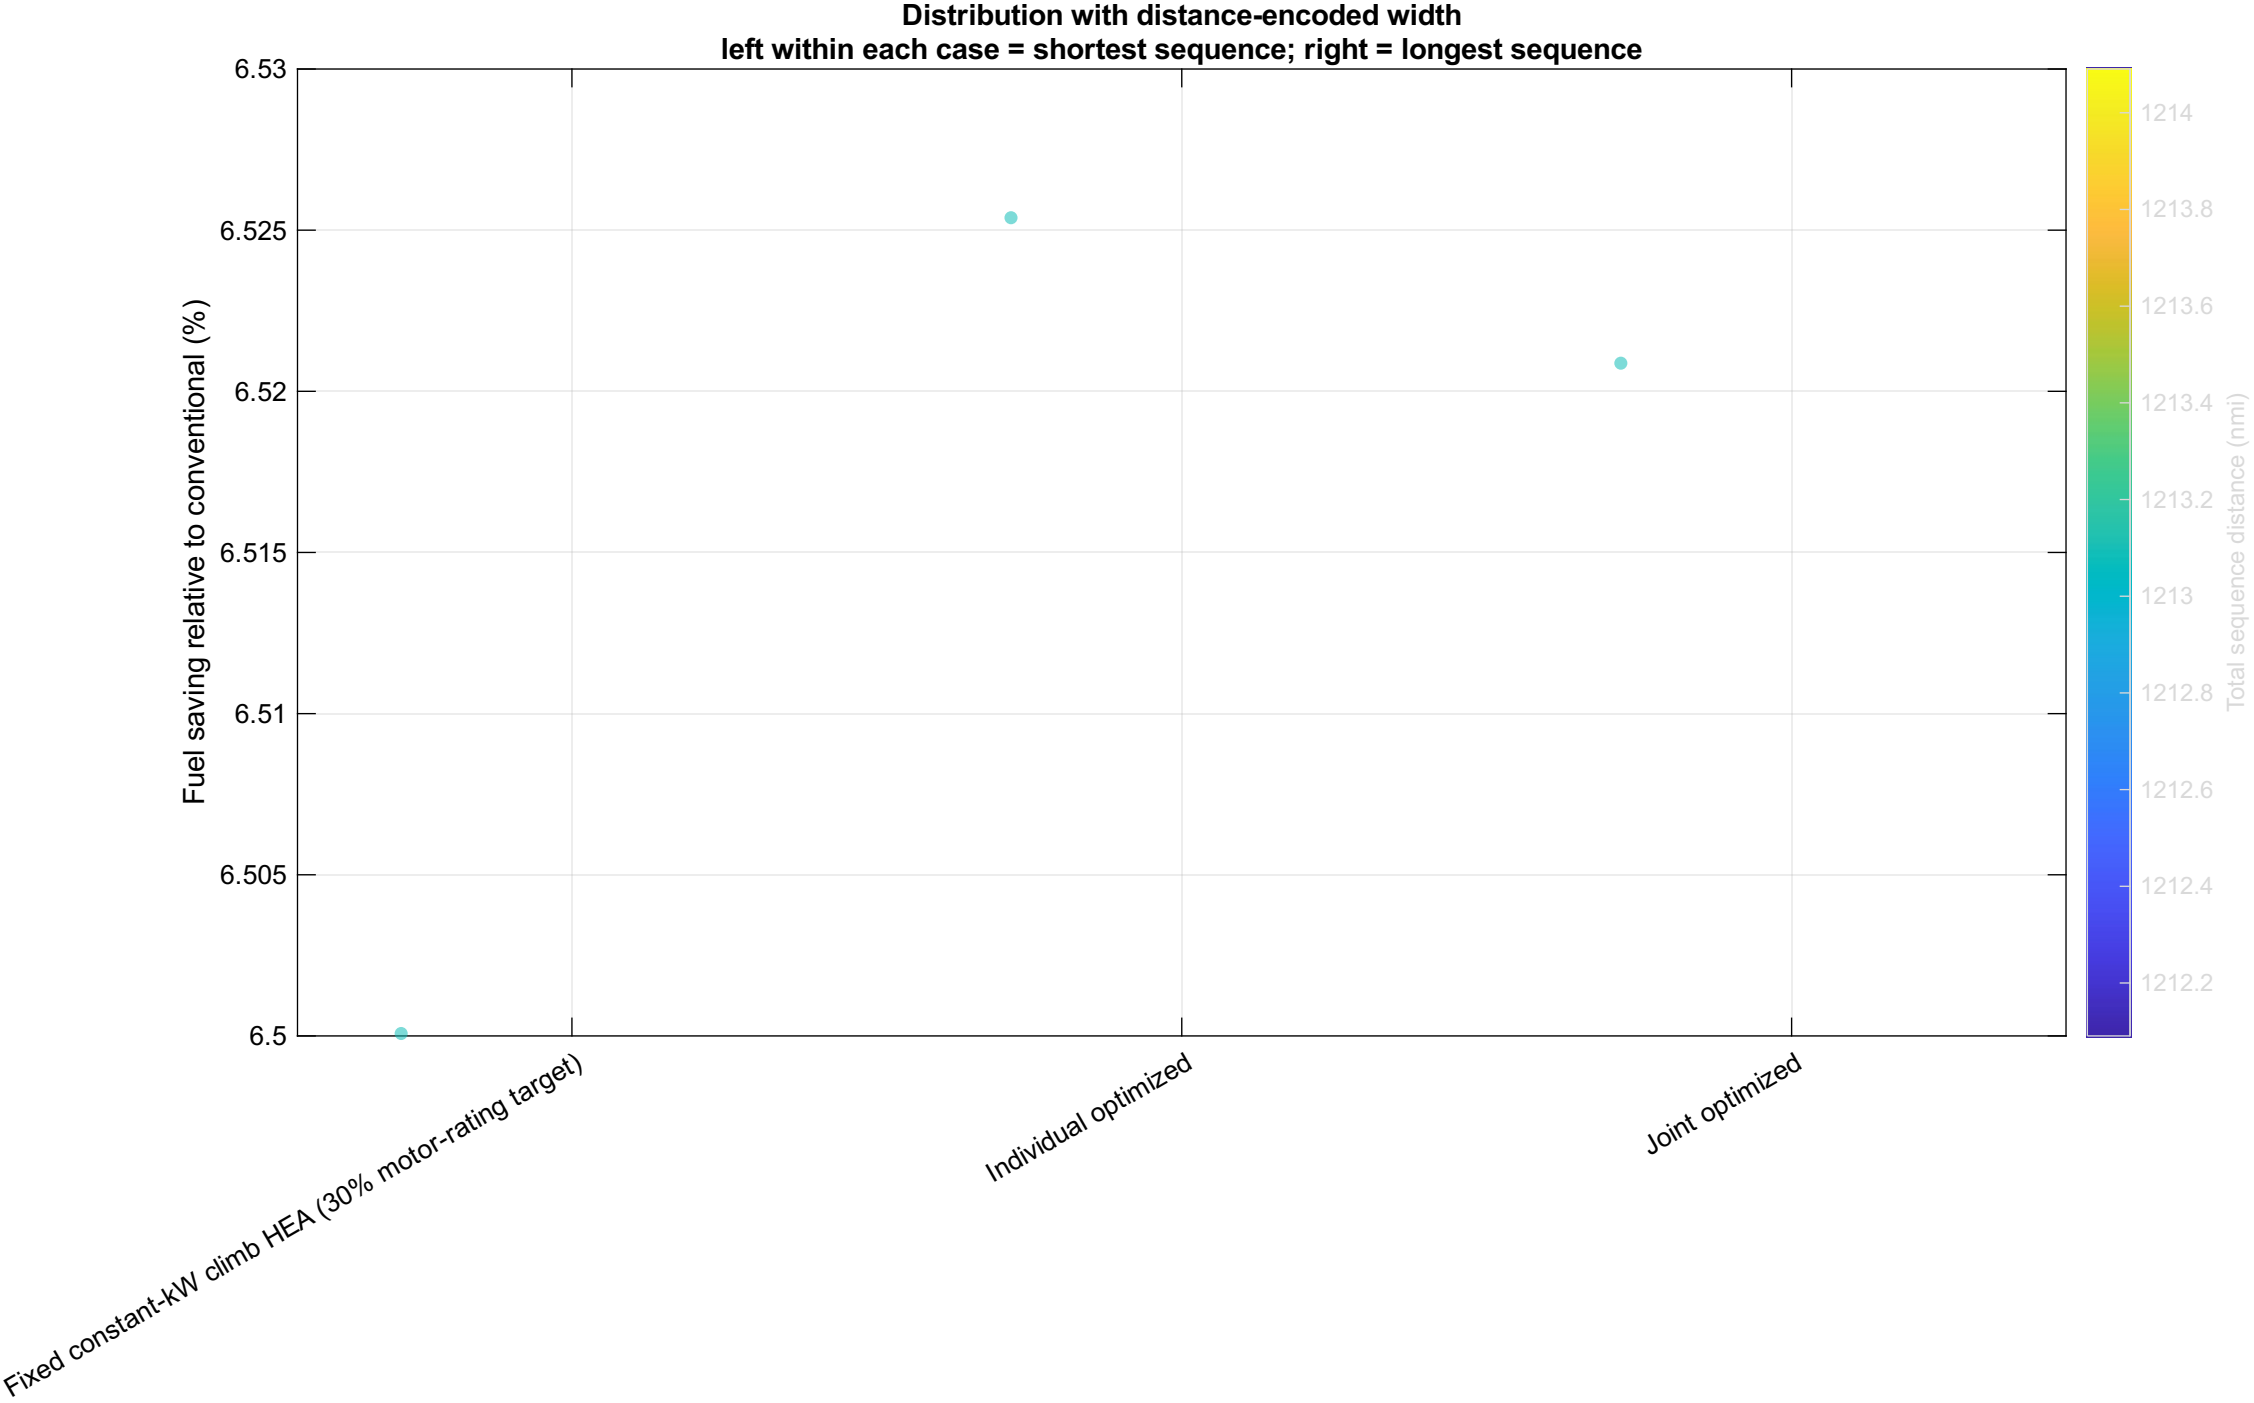
Distribution with distance-encoded width
left within each case = shortest sequence; right = longest sequence
Fuel saving relative to conventional (%)
6.53
6.525
6.52
6.515
6.51
6.505
6.5
Fixed constant-kW climb HEA (30% motor-rating target)
Individual optimized
Joint optimized
Total sequence distance (nmi)
1214
1213.8
1213.6
1213.4
1213.2
1213
1212.8
1212.6
1212.4
1212.2