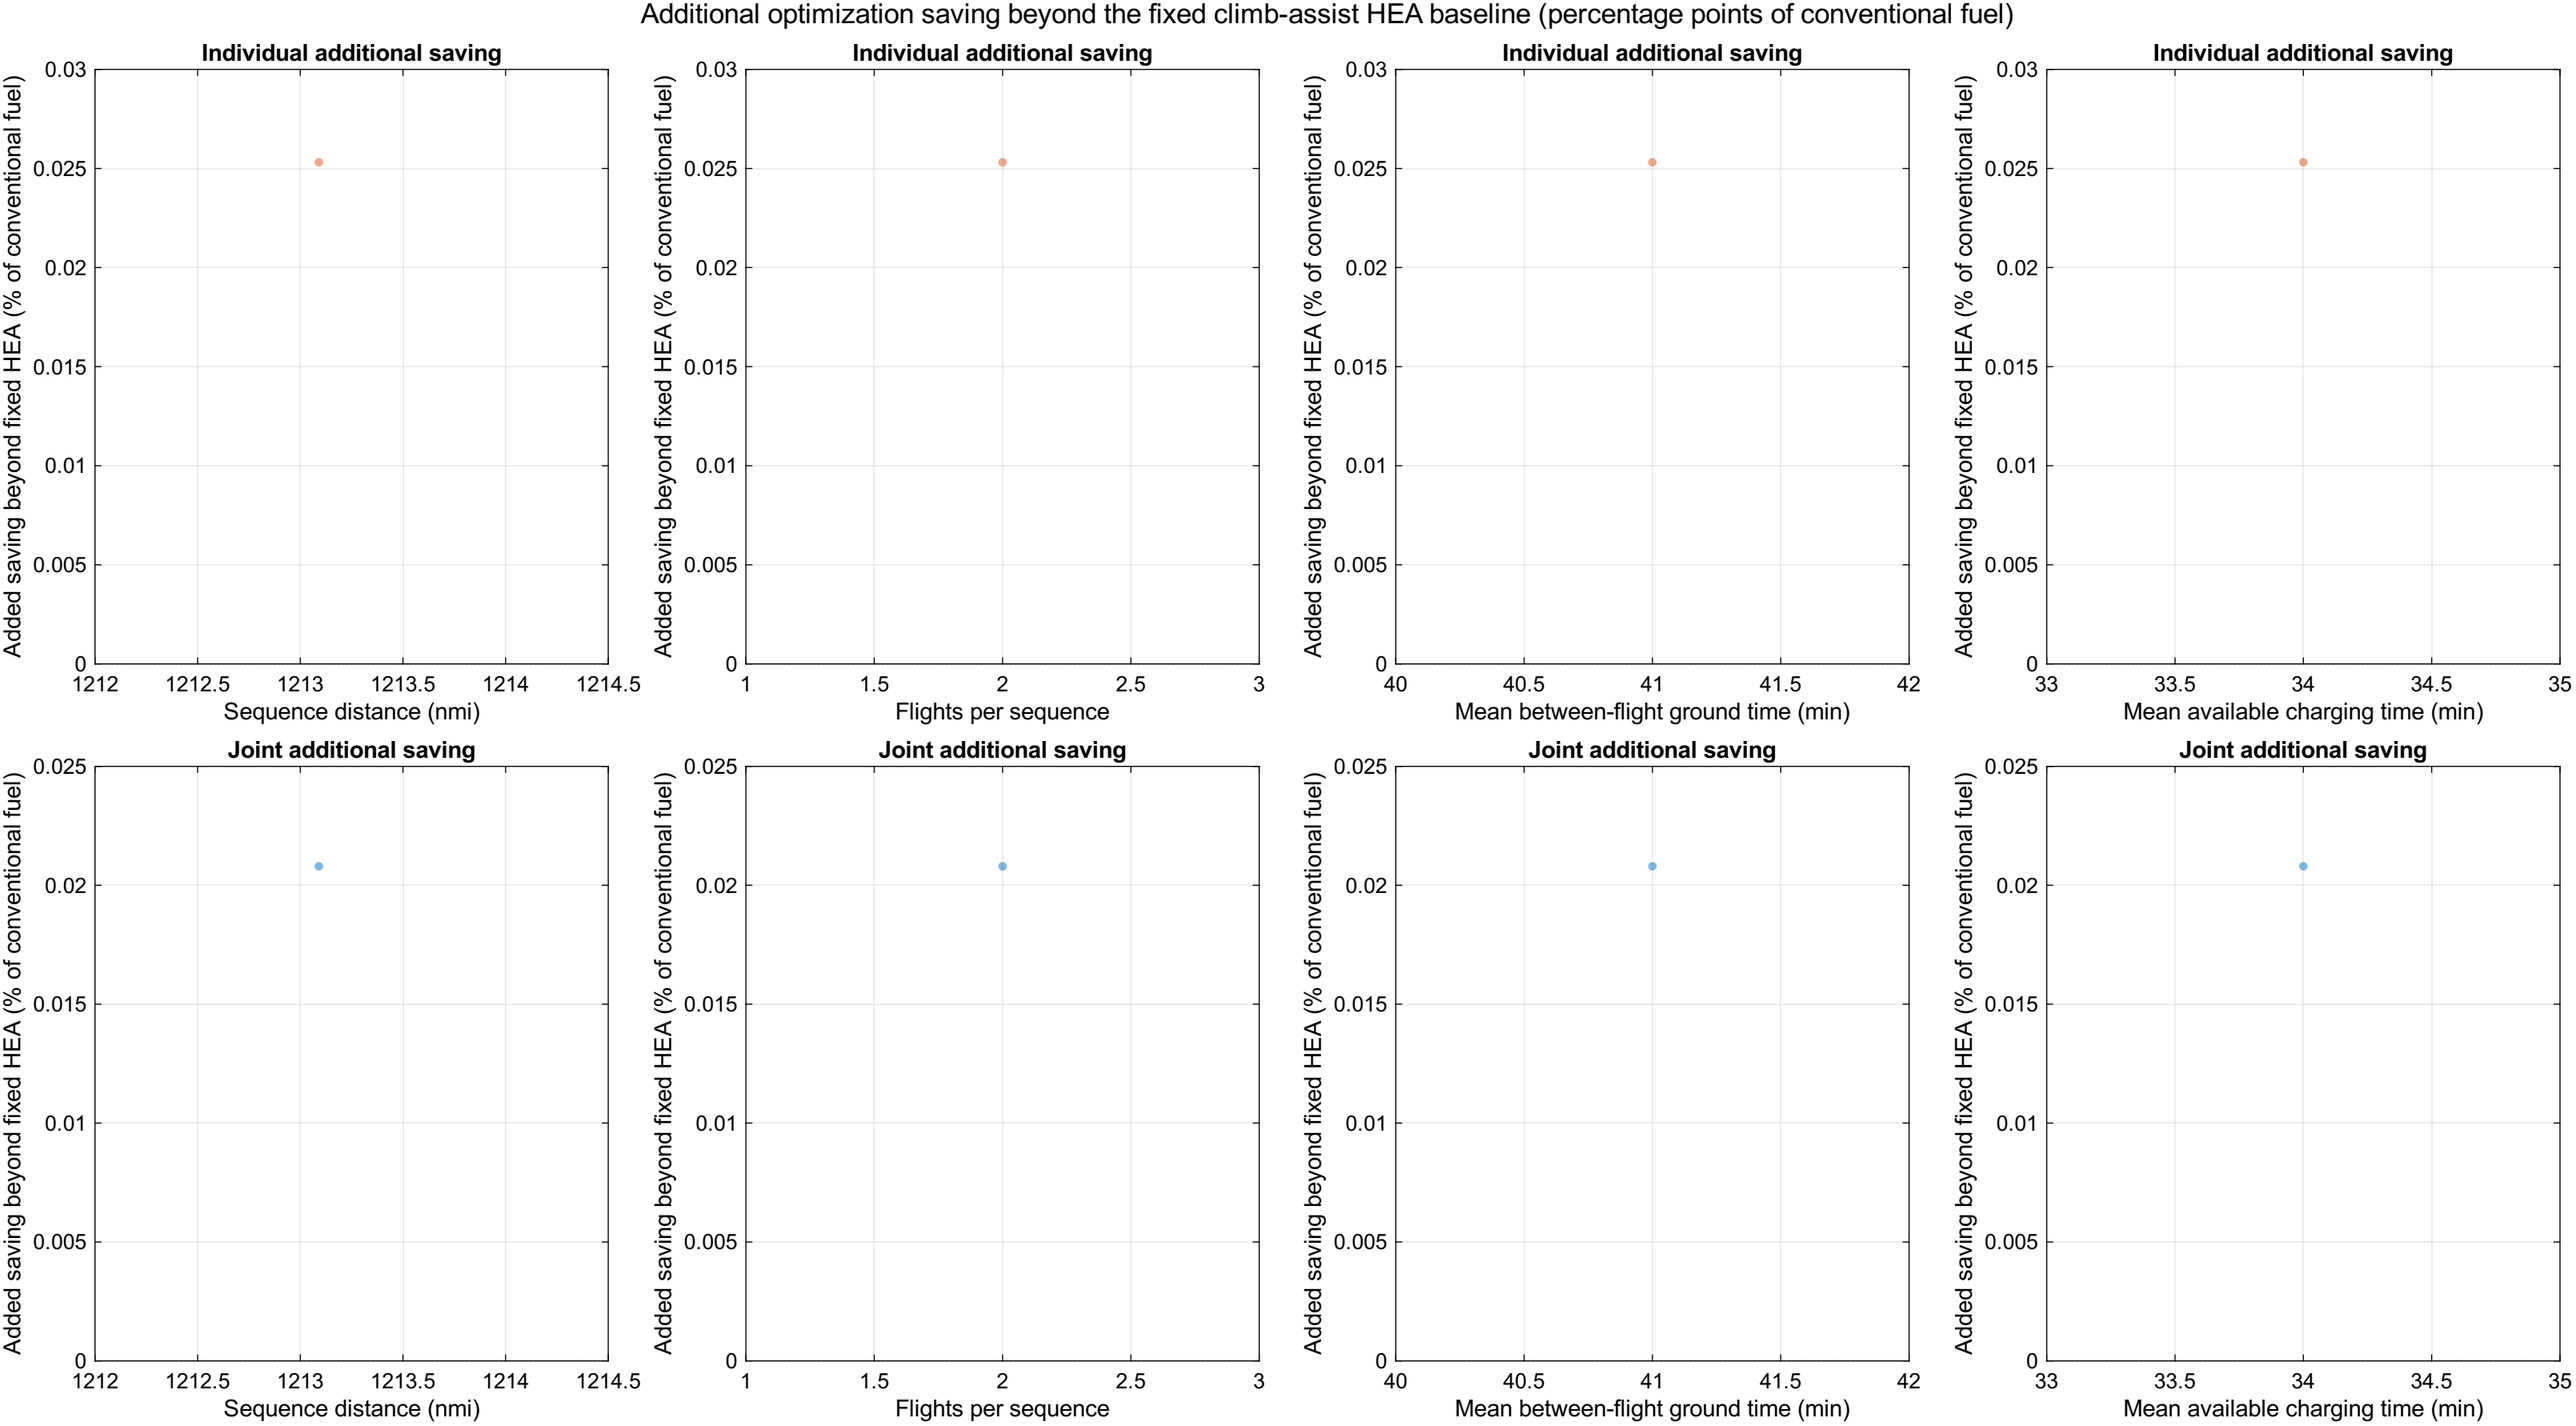
Additional optimization saving beyond the fixed climb-assist HEA baseline (percentage points of conventional fuel)
Individual additional saving
Joint additional saving
Added saving beyond fixed HEA (% of conventional fuel)
0
0.005
0.01
0.015
0.02
0.025
0.03
1212
1212.5
1213
1213.5
1214
1214.5
Sequence distance (nmi)
1
1.5
2
2.5
3
Flights per sequence
40
40.5
41
41.5
42
Mean between-flight ground time (min)
33
33.5
34
34.5
35
Mean available charging time (min)