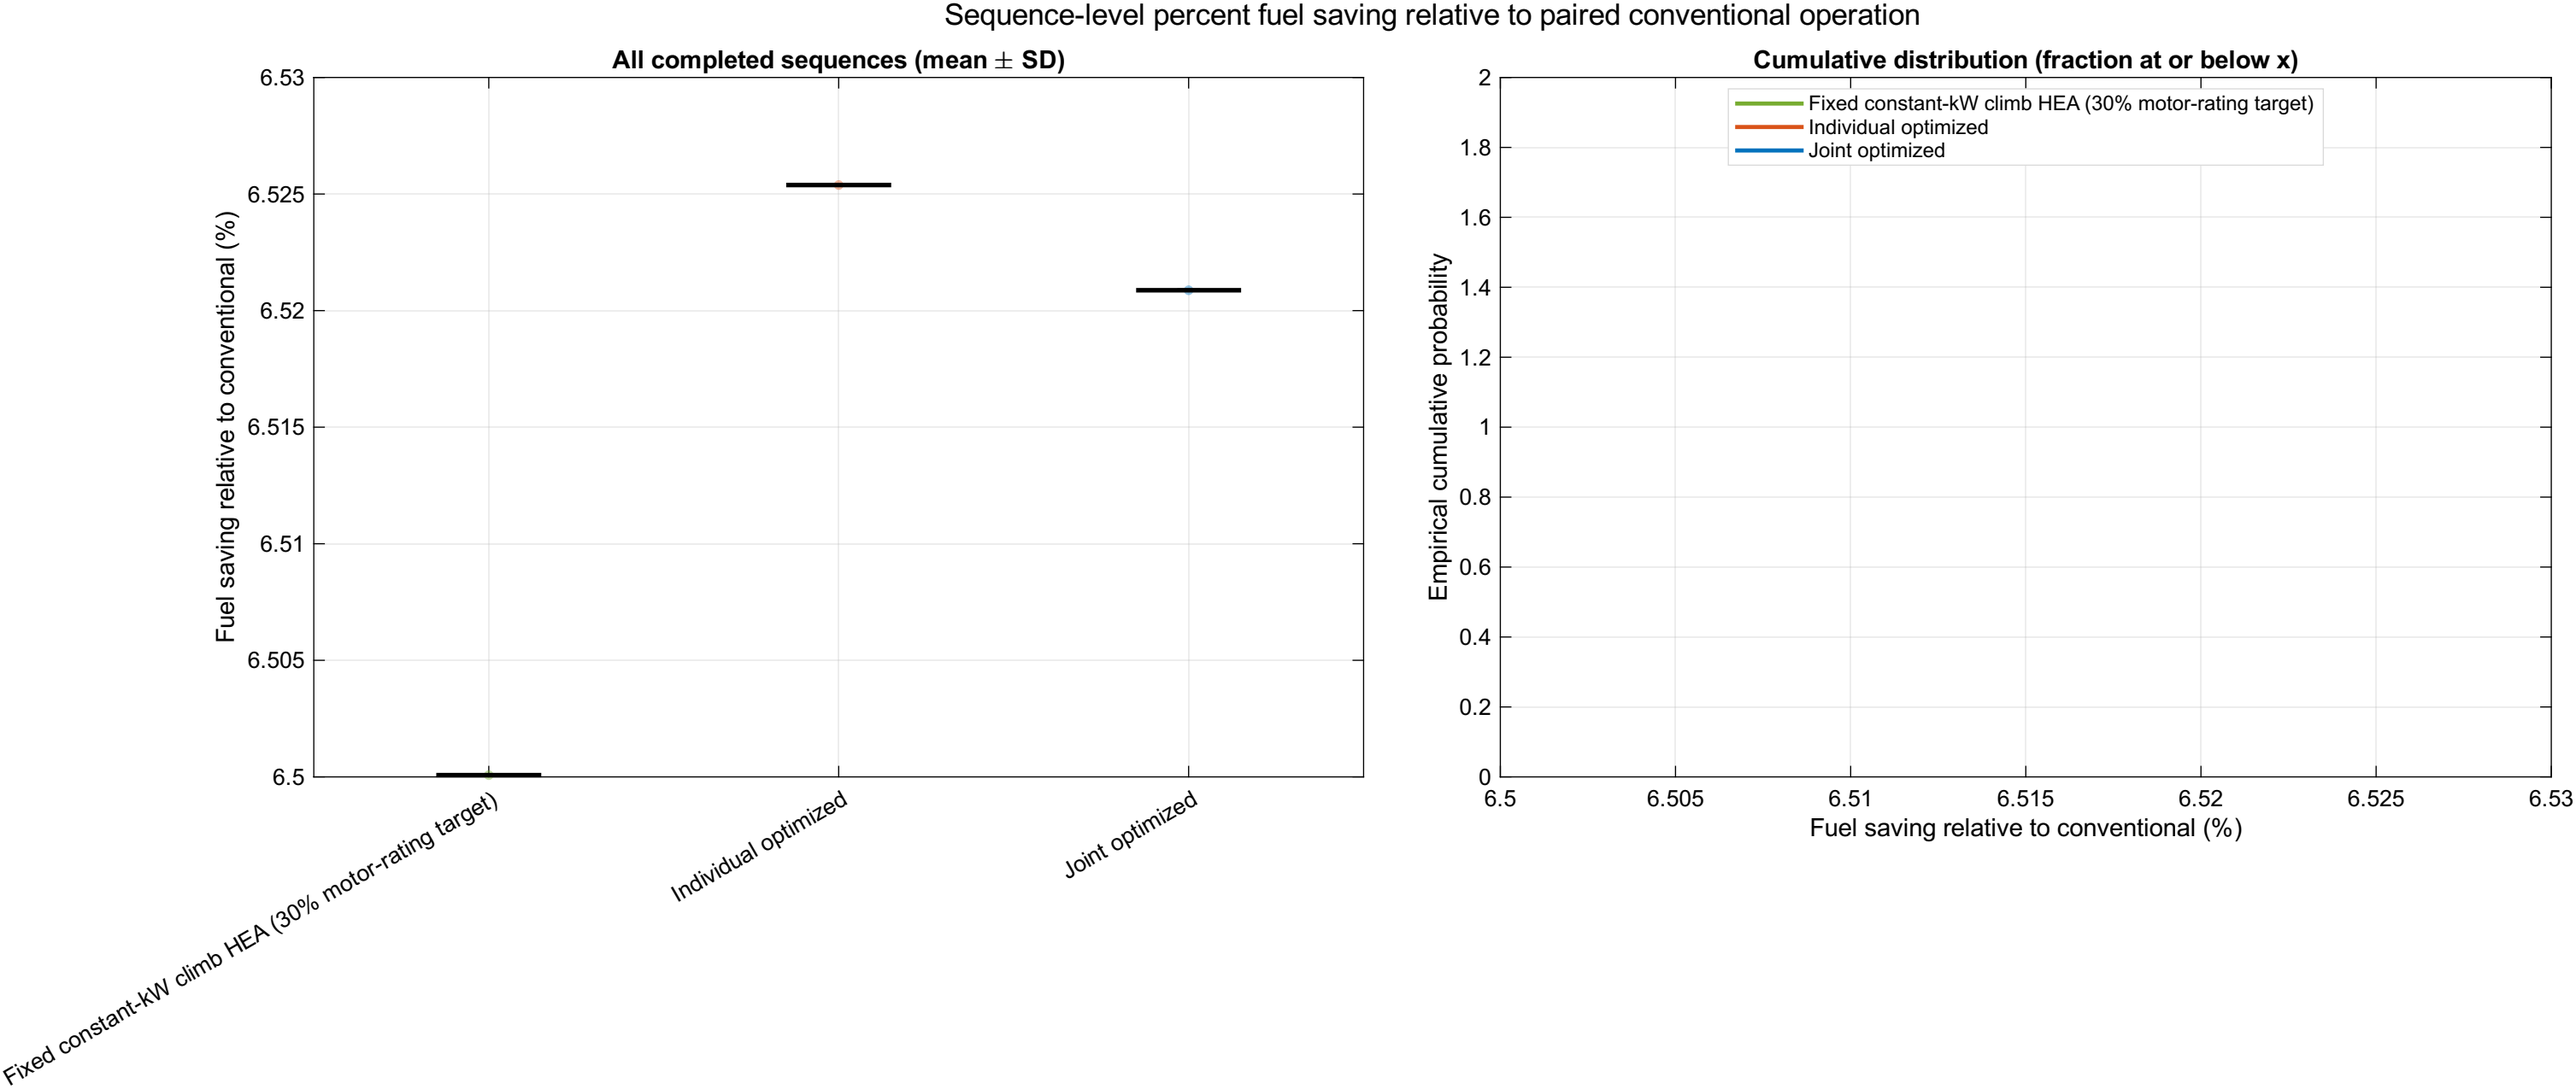
Sequence-level percent fuel saving relative to paired conventional operation
All completed sequences (mean ± SD)
Fuel saving relative to conventional (%)
6.53
6.525
6.52
6.515
6.51
6.505
6.5
Fixed constant-kW climb HEA (30% motor-rating target)
Individual optimized
Joint optimized
Cumulative distribution (fraction at or below x)
Empirical cumulative probability
2
1.8
1.6
1.4
1.2
1
0.8
0.6
0.4
0.2
0
Fixed constant-kW climb HEA (30% motor-rating target)
Individual optimized
Joint optimized
6.5
6.505
6.51
6.515
6.52
6.525
6.53
Fuel saving relative to conventional (%)