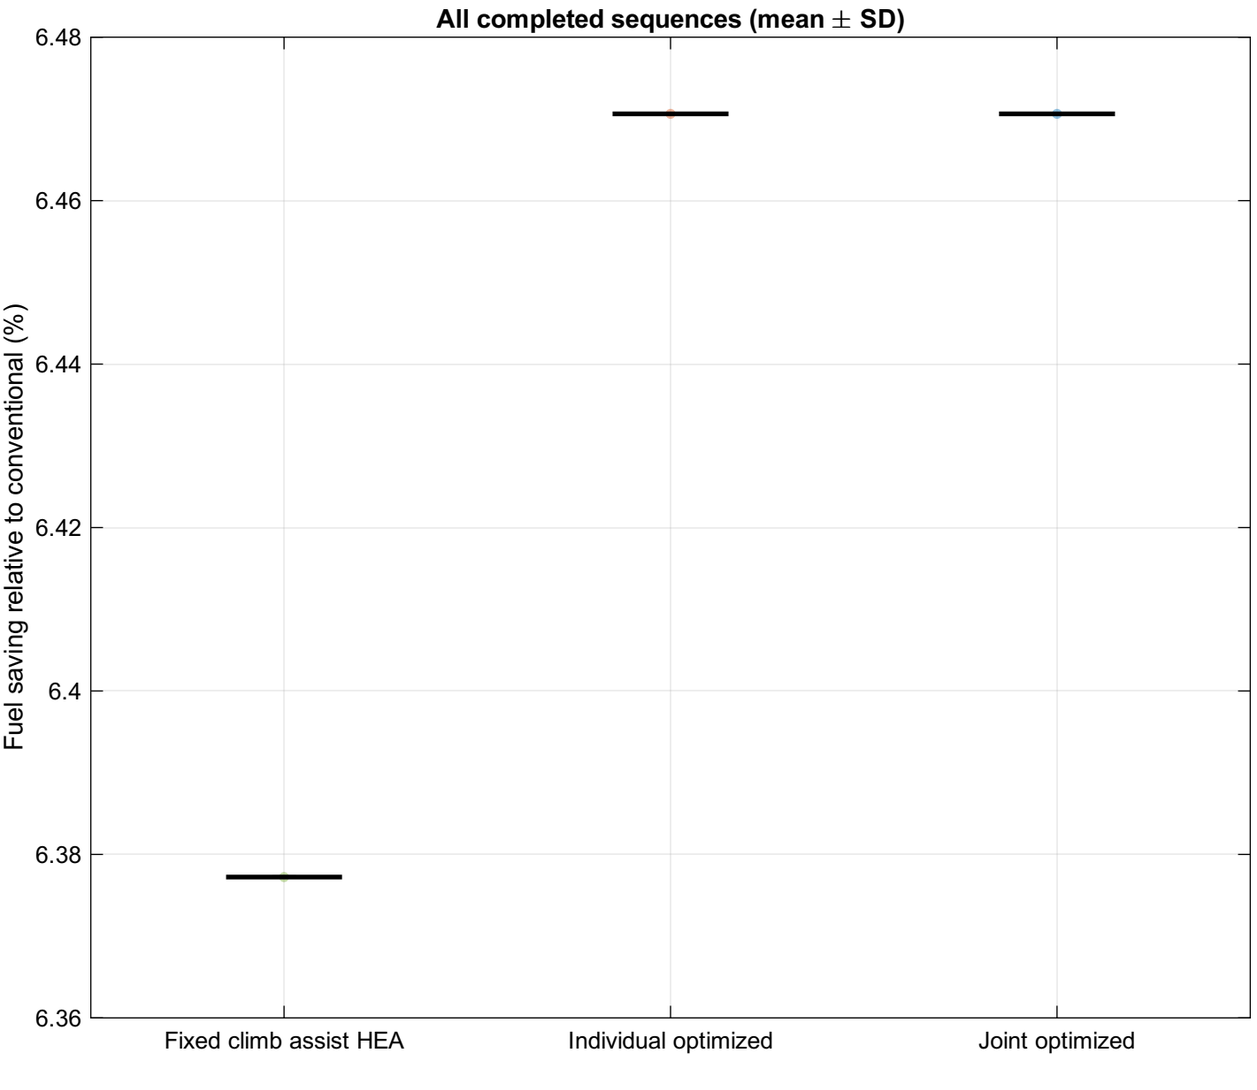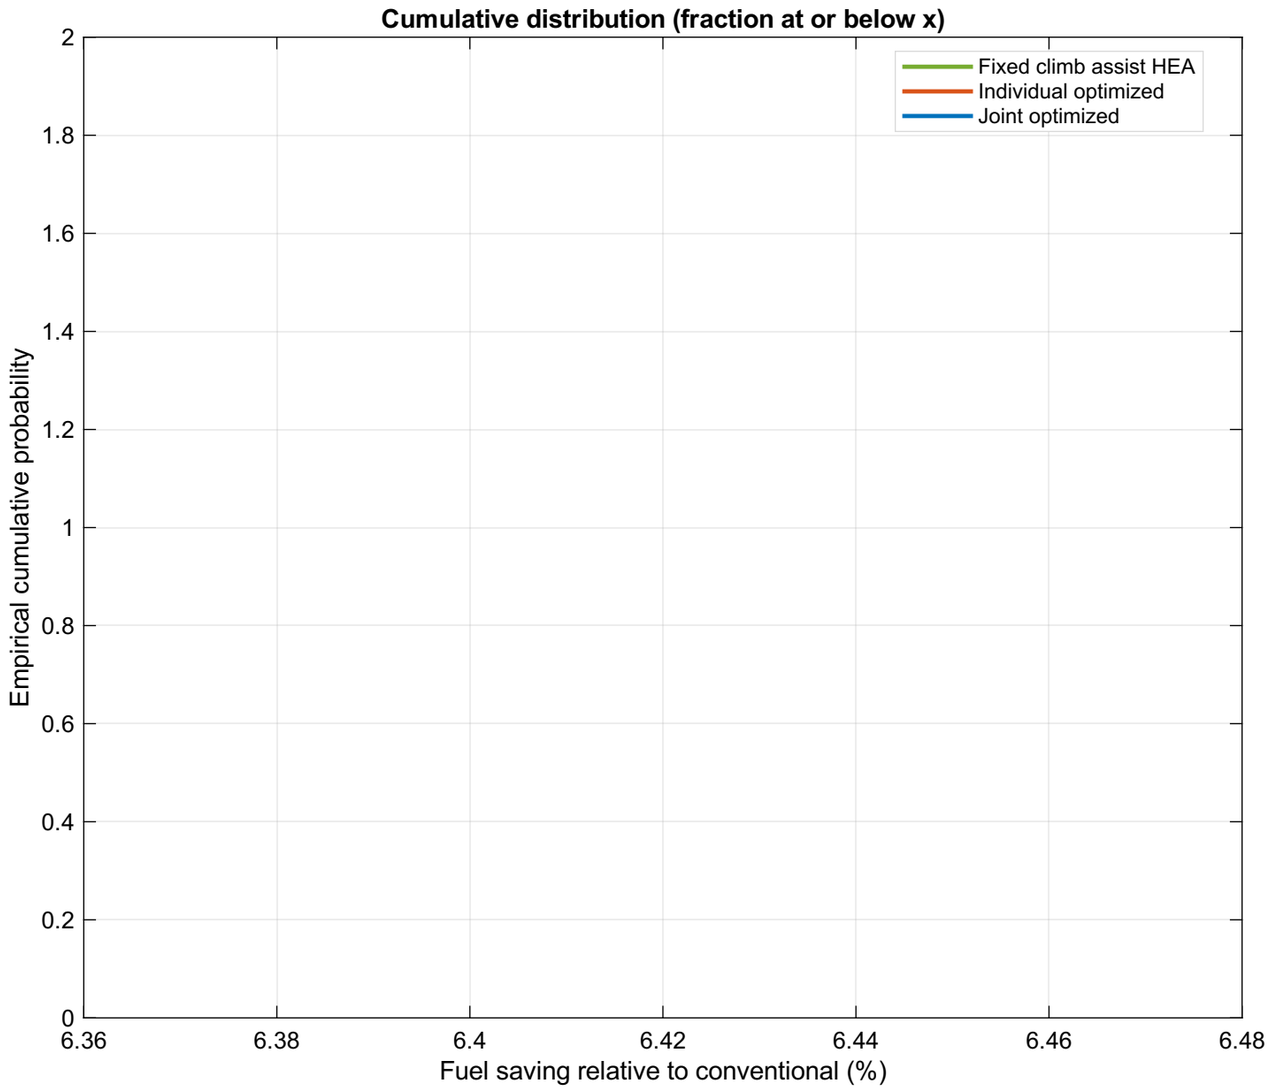Sequence-level percent fuel saving relative to paired conventional operation