



VRIJE
UNIVERSITEIT
BRUSSEL

Vrije Universiteit Brussel
Faculteit Wetenschappen en
Bio-ingenieurswetenschappen
Departement Natuurkunde

1

2

3

4

5

6

7

Search for Dark Matter in the Monojet and Trackless Jets Final States with the CMS Detector at the LHC

Isabelle De Bruyn

8

9

Promotor
Prof. Dr. Steven Lowette

10

11

Proefschrift ingediend met het oog op het behalen van de
academische graad van Doctor in de Wetenschappen

12

September 2017

Acknowledgements

Table of Contents

1

2	Acknowledgements	i
3	1 Introduction	1
4	2 Dark Matter Scenarios Beyond the Standard Model	3
5	2.1 The Standard Model of Particle Physics	3
6	2.1.1 Elementary particles and their interactions	3
7	2.1.2 Unanswered questions of the Standard Model	3
8	2.2 Dark matter	3
9	2.2.1 Observational evidence	3
10	2.2.2 Detection of dark matter	3
11	2.2.3 Dark matter models	3
12	2.3 Strongly Interacting Massive Particles	3
13	2.3.1 Motivation	3
14	2.3.2 Experimental constraints	3
15	3 The LHC and the CMS Detector	5
16	3.1 The Large Hadron Collider at CERN	5
17	3.1.1 The LHC injector chain	5
18	3.1.2 The Large Hadron Collider	6
19	3.1.3 The experiments at the LHC	7
20	3.2 The CMS detector	8
21	3.2.1 The tracker	9
22	3.2.1.1 The pixel tracker	9
23	3.2.1.2 The strip tracker	10
24	3.2.2 The electromagnetic calorimeter	10
25	3.2.3 The hadronic calorimeter	11
26	3.2.4 The muon system	13
27	3.2.5 Trigger and data acquisition	14
28	3.2.6 CMS performance in Run 2	16
29	3.2.6.1 Pre-amplifier saturation in the APV25 chip	16
30	4 Event Simulation and Reconstruction	19
31	4.1 Event generation	19
32	4.2 Detector simulation	20
33	4.3 Event reconstruction	20
34	4.3.1 Track reconstruction	20
35	4.3.2 Electron and isolated photon reconstruction	22
36	4.3.3 Muon reconstruction	23
37	4.3.4 Particle flow	23
38	4.3.5 Jet reconstruction	24
39	4.3.6 Missing transverse energy reconstruction	25
40	4.4 Simulation of the SIMP signal	25

1	5 The Monojet Analysis	29
2	5.1 Introduction	29
3	5.2 Event selection	29
4	5.3 Background estimation	29
5	5.4 Results	29
6	5.5 Improvement going from the 2015 to 2016 analysis	29
7	5.6 Interpretation	29
8	6 Search for SIMPs using Trackless Jets	31
9	6.1 Introduction	31
10	6.2 Event selection	31
11	6.3 Background estimation	31
12	6.4 Results	31
13	6.5 SIMP model interpretation	31
14	7 Conclusion & Outlook	33

1

Introduction

1

2

2

1

2

3

Dark Matter Scenarios Beyond the Standard Model

2.1 The Standard Model of Particle Physics

2.1.1 Elementary particles and their interactions

2.1.2 Unanswered questions of the Standard Model

2.2 Dark matter

2.2.1 Observational evidence

2.2.2 Detection of dark matter

2.2.3 Dark matter models

2.3 Strongly Interacting Massive Particles

2.3.1 Motivation

2.3.2 Experimental constraints

3

1
2

The LHC and the CMS Detector

3 In order to investigate the currently unsolved mysteries of particle physics, such as the existence of dark
4 matter, many experiments can be conducted, among other things at particle colliders. The largest particle
5 accelerator in the world is the Large Hadron Collider (LHC), located at the European Organization for
6 Nuclear Research (CERN) in Geneva, Switzerland. At this accelerator, protons are being accelerated at
7 energies up to 6.5 TeV, giving rise to a record center-of-mass energy of 13 TeV in the proton collisions.
8 Using data from the collisions generated at the interaction points along the accelerator ring, the Stan-
9 dard Model can be tested in many ways and searches for particles beyond the Standard Model can be
10 performed.

11 In Section 3.1 more details are given about the LHC and the 4 main experiments situated at the inter-
12 action points. In particular, the general-purpose Compact Muon Solenoid (CMS) detector is described in
13 Section 3.2.

14 **3.1 The Large Hadron Collider at CERN**

15 The LHC was built in the already existing Large Electron Positron (LEP) collider tunnel, which was
16 excavated in the 1980's and has a circumference of 27.6 km. Contrary to the LEP collider, the LHC
17 accelerates particles of the same charge, namely protons or lead ions. Much higher luminosities can
18 therefore be reached, since only particles are used and the generation of anti-particles is not needed. This
19 was the limiting factor at the Tevatron, where protons and anti-protons were used. Additionally, at the
20 probed energies the colliding particles are not the protons or ions, but their constituents, which carry
21 a varying fraction of the total momentum. This makes the LHC an ideal instrument for exploration at
22 higher energies, as the collisions naturally cover a wide energy range.

23 **3.1.1 The LHC injector chain**

24 The protons (or lead ions) can not directly be injected in the LHC, but need to be accelerated gradually
25 in several pre-accelerators, as illustrated in Figure 3.1. For the proton beams, the LHC injection chain
26 starts at a bottle of hydrogen, where protons are stripped from the hydrogen atoms and accelerated up
27 to 50 MeV by a linear accelerator (LINAC2). The protons are then transferred to a chain of circular
28 accelerators, starting with the Proton Synchrotron Booster (PSB) which accelerates them to an energy of
29 1.4 GeV. Next, the protons go through the Proton Synchrotron (PS) and are delivered to the Super Proton
30 Synchrotron (SPS) at an energy of 26 GeV. Finally, the protons are injected in the LHC in opposite
31 direction with an energy of 450 GeV.

The lead ions are first accelerated in a different linear accelerator, LINAC3, before being injected in the Low Energy Ion Ring (LEIR) at an energy of 4.5 MeV per nucleon. Here the ions are accelerated to an energy of 72 MeV per nucleon, and they then follow the same path as the protons through the PS, where they are accelerated to 5.9 GeV and stripped from the last of their electrons, and the SPS, where they are accelerated to 177 GeV. The record center-of-mass energy for heavy ion collisions at the LHC so far has been 5.02 TeV and 8.16 TeV, for lead-lead (Pb-Pb) and proton-lead (p-Pb) collisions in 2015 and 2016, respectively.

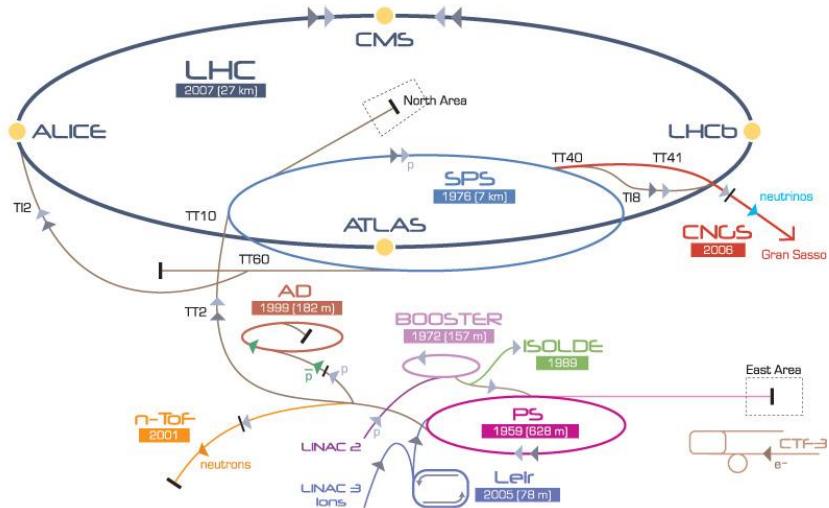


Figure 3.1: Schematic view of the various linear and circular accelerators of the CERN accelerator complex, including the LHC injection chain.

3.1.2 The Large Hadron Collider

The most relevant specifications for a particle physics accelerator are the maximum energy and the luminosity that can be reached. High energy is necessary in order to be able to create new heavy particles, which are for example predicted in many theories beyond the Standard Model.

The protons are kept on the correct orbit by the 1232 LHC dipole magnets. These magnets are cooled down to 1.9 K with liquid Helium and supplied with a current of 12 kA to reach the design field of 8.33 T. This limits the maximum beam momentum of the accelerator to

$$p = B/\rho = 8.33 \text{ T}/2804 \text{ m} = 7 \text{ TeV}/c, \quad (3.1)$$

with ρ the bending radius of the tunnel. The protons are accelerated up to the desired energy by radio-frequency (RF) cavities, which produce an oscillating electric field. As a consequence, late or early protons will feel a stronger or weaker acceleration, respectively.

A high event rate or luminosity \mathcal{L} is equally important, to obtain a sufficiently high number of collisions. For a process with cross section σ , this rate is

$$\frac{dN}{dt} = \mathcal{L}\sigma. \quad (3.2)$$

In order to achieve the high design luminosity of $10^{34} \text{ cm}^{-2}\text{s}^{-1}$ in the LHC, the protons are focused in bunches with a 25 ns spacing by strong quadrupole magnets around the interaction regions. Additionally, 225 ns gaps are present as well between the bunch trains, corresponding to the rise time of the injection kicker magnets. One gap of 3 μs is necessary as well to allow clean beam dumps. These requirements limit the number of bunches to a maximum of 2808.

After almost 25 years of design and construction, the LHC was completed in 2008 and the commissioning of the machine started. However, during a powering test on 19 September of the same year an

1 electric arc developed inside a bus bar which led to a large release of helium and a pressure wave that
 2 caused extensive mechanical damage to the affected LHC sector. This incident delayed the first collisions,
 3 at a beam energy of 900 GeV, until late 2009. During 2010 and 2011 a center-of-mass energy of 7 TeV
 4 was used for the collisions, which was then increased to 8 TeV in 2012. The instantaneous luminosity
 5 was also increased, starting from $2 \times 10^{32} \text{ cm}^{-2}\text{s}^{-1}$ in 2010 to more than $6 \times 10^{33} \text{ cm}^{-2}\text{s}^{-1}$ in 2012.
 6 During the 3 years of data-taking in Run 1, data corresponding to an integrated luminosity of 45.0 pb^{-1} ,
 7 6.1 fb^{-1} , and 23.3 fb^{-1} , respectively, were delivered. After Run 1, a long shutdown (LS1) of 2 years
 8 followed, which was used to correct the problems that were discovered in the aftermath of the incident at
 9 the startup in 2008, and to upgrade and consolidate the experiments located on the LHC ring.

10 In 2015, the LHC restarted operations with Run 2, at an even higher center-of-mass energy of 13 TeV.
 11 During 2016 the design luminosity of $10^{34} \text{ cm}^{-2}\text{s}^{-1}$ was exceeded and a total of 41 fb^{-1} of data were
 12 delivered. A comparison of the delivered integrated luminosity per year is shown in Figure 3.2.

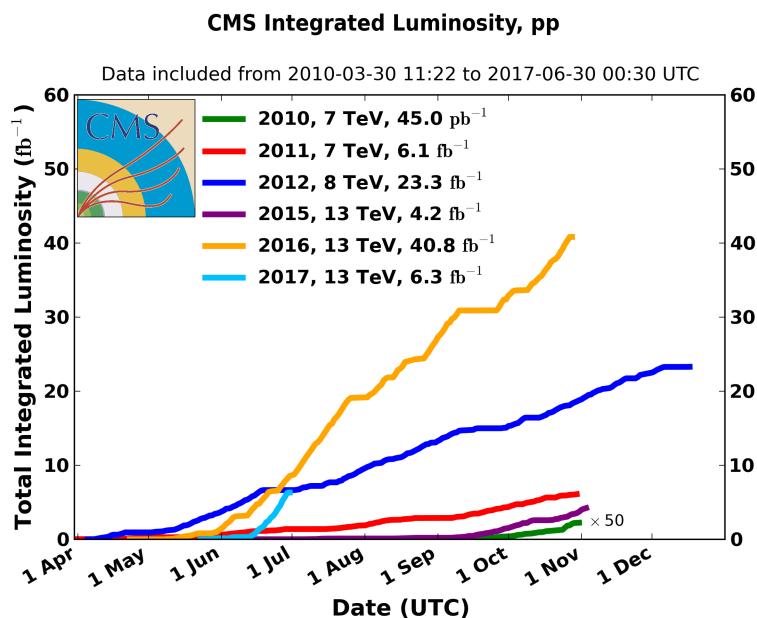


Figure 3.2: Overview of the integrated luminosity delivered to the CMS detector during Run 1 (2010 to 2012) and Run 2 (2015 to 2017).

3.1.3 The experiments at the LHC

14 There are four interaction points (IPs) where the proton or lead ion beams of the LHC can collide, and
 15 around each of these points large particle detectors were built in order to record the generated colli-
 16 sions. The ATLAS and CMS detectors, located at IP1 and IP5, are both high luminosity general-purpose
 17 detectors and consist of several layers surrounding the IP in an onion-like structure to avoid particles
 18 escaping detection. These detectors can cover a wide range of high energy physics, from precision mea-
 19 surements of the Standard Model to searches beyond the Standard Model. At IP2 the ALICE detector
 20 is specialized in heavy ion collisions with low instantaneous luminosities, around $10^{27} \text{ cm}^{-2}\text{s}^{-1}$. With
 21 this detector information is gathered about the quark-gluon plasma, a state of matter that exists at ex-
 22 tremely high temperatures and densities where quarks and gluons are no longer confined in hadrons. The
 23 fourth main detector, LHCb, is located at IP8 and requires instantaneous luminosities of the order of a
 24 few $10^{32} \text{ cm}^{-2}\text{s}^{-1}$. Using this detector b quarks are being studied, focusing among other things on the
 25 matter-antimatter asymmetry in the universe.

3.2 The CMS detector

The searches described in this thesis were conducted using data collected with the CMS detector, a general-purpose detector located on the LHC ring. It consists of the typical components of a particle physics detector, namely a tracker, an electromagnetic calorimeter (ECAL), a hadronic calorimeter (HCAL), a solenoidal magnet, and muon detectors. One peculiar aspect is however that both calorimeters are situated inside the superconducting magnet. This design was chosen in order to improve the energy resolution by reducing the amount of material in front of the calorimeters. The overall detector has a length of 21.6 m, a diameter of 14.6 m and a total weight of 12500 t. A schematic overview is shown in Figure 3.3.

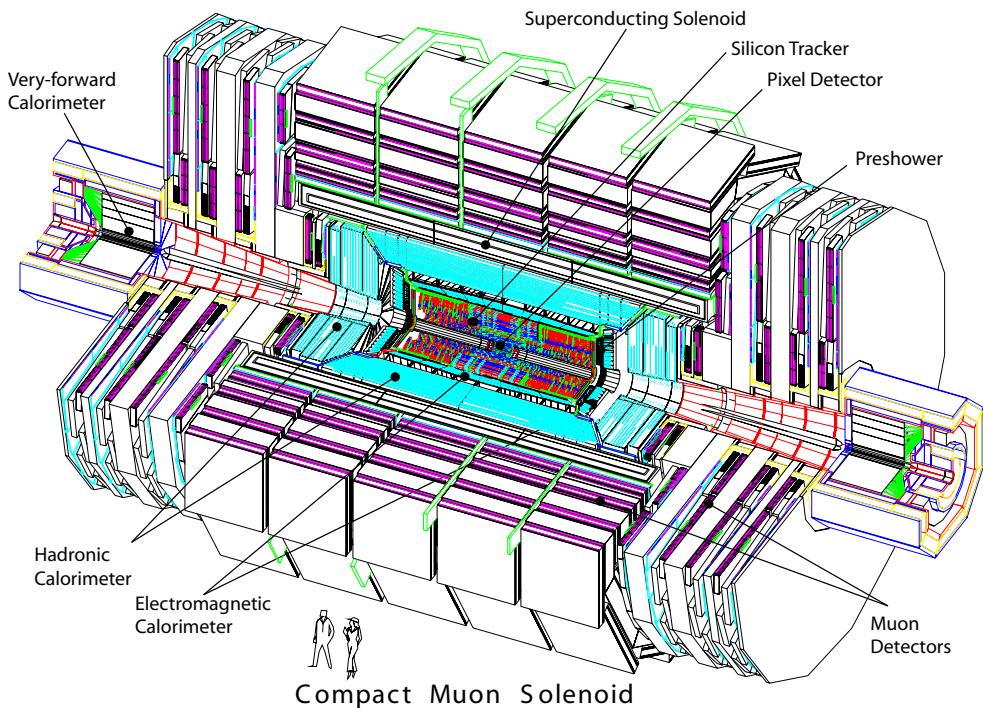


Figure 3.3: The CMS detector, consisting of the pixel and strip tracker, the electromagnetic calorimeter (ECAL) with preshower, the hadronic calorimeter (HCAL) with its forward component, and the muon systems.

The CMS coordinate system places the origin at the nominal collision point. The x axis is perpendicular to the beam and points towards the center of the LHC ring, the y axis is vertical and pointing upwards, and the z axis is defined anti-clockwise along the beam direction. The azimuthal angle ϕ is then defined in the xy plane, relative the the x axis and the polar angle θ is measured with respect to the z axis. In general, the polar angle is converted into the pseudorapidity

$$\eta = -\ln \left(\tan \frac{\theta}{2} \right) \quad (3.3)$$

for convenience, since differences in pseudorapidity are invariant under Lorentz boosts along the z axis. A pseudorapidity of 0 corresponds to the direction perpendicular to the beam ($\theta = \pi/2$), and an infinite pseudorapidity corresponds to the direction parallel to the beam ($\theta = 0$).

Due to the conservation of momentum before and after the collision, the momenta of the particles in the final state of a collision should be balanced in the transverse plane. Another variable that is therefore often used in particle physics is the transverse momentum of a particle, defined as

$$p_T = p \cdot \sin \theta. \quad (3.4)$$

3.2.1 The tracker

The innermost part of the CMS detector, closest to the IP, is the tracking system, which is designed to provide a precise measurement of the trajectories of charged particles. This all-silicon detector is divided into a pixel and a strip detector, with a layout as shown in Figure 3.4. The inner part, consisting of pixel modules, provides very precise 3D hits, which are important for vertex reconstruction and track seeding. This allows to have a precise measurement of secondary vertices and track impact parameters, necessary for the efficient identification of e.g. heavy flavor particles. As the hit occupancy is lower in the outer part of the detector, a larger cell size can be afforded, and silicon strips are used instead of pixels. This strip detector provides a large lever arm and a link to the calorimeters and the muon system. The tracker covers a pseudorapidity range $|\eta| < 2.5$.

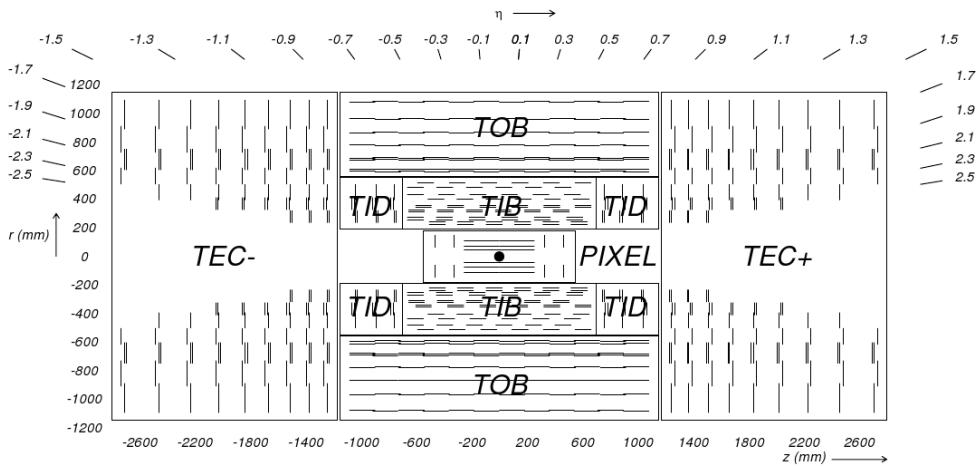


Figure 3.4: A transverse view of the pixel and strip tracker detectors.

3.2.1.1 The pixel tracker

The pixel tracker was replaced during the extended technical stop in 2016 and 2017 [1], as a part of the CMS Phase 1 upgrades. As the data used for this thesis were recorded before that, only the so-called Phase 0 detector is described here.

For the pixel modules n+ pixels on n-substrate are used, allowing the sensors to also work in under-depletion after type inversion. The 1440 modules are arranged in several cylindrical layers and disks, as illustrated in Figure 3.4. The barrel, consisting of 3 pixel layers surrounding the beam pipe at radii of 4.4, 7.3 and 10.2 cm, is complemented by the forward pixel detector, composed of 2 endcap disks on each side extending from 6 to 15 cm in radius. The barrel and the forward parts contain respectively 48 million and 18 million pixels with a size of $100 \times 150 \mu\text{m}^2$, covering a total area of 1.06 m^2 .

In the barrel, the magnetic field of CMS is perpendicular to the drift of the electrons to the collecting pixels, which results in a Lorentz drift. This drift leads to a spread of the charge over several pixels. Since the read-out of the modules is analog, an improved spatial resolution can therefore be achieved with charge interpolation. In the forward pixel detector the drift of the electrons would be parallel to the magnetic field so in order to profit from the Lorentz angle, the modules are tilted by 20° in a turbine-like arrangement, as can be seen in Figure 3.5. A spatial resolution of $10 \mu\text{m}$ ($30 \mu\text{m}$) can be achieved in the local directions x (y) of the module, respectively. In the barrel x is the longitudinal direction perpendicular to the beam and y is the longitudinal direction parallel to the beam.

The signals from the pixel sensors are read out by custom read-out chips (ROCs), which amplify and store the signals, and already apply zero-suppression on-detector. The data rate from the detector to the Front End Drivers (FEDs) is therefore not constant for every event. Additionally, if there are too many hits on a pixel module for a given event, they can not all be stored on the finite buffer of the ROC. Consequently, as the instantaneous luminosity increases the pixel modules start to show a “dynamic

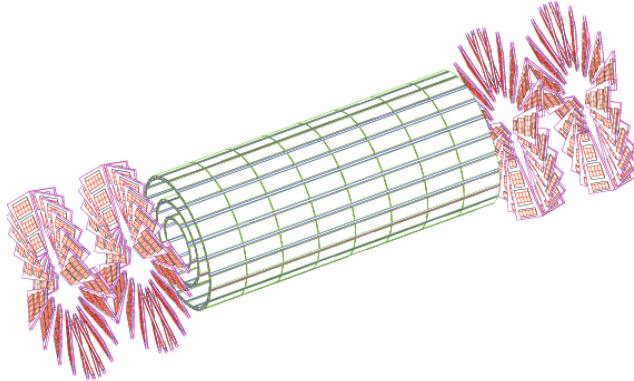


Figure 3.5: A 3D view of the barrel and forward pixel detector.

inefficiency” which is most pronounced in the first layer, closest to the beampipe. This was one of the main motivations for the Phase 1 upgrade of the pixel detector.

3.2.1.2 The strip tracker

The outer part of the tracker consists of 15 148 strip modules, which are distributed among multiple barrel layers and endcap disks and make up a total active area of 198 m^2 . The inner part is composed of 4 Tracker Inner Barrel (TIB) layers with 3 Tracker Inner Disks (TID) on each side. Surrounding these are 6 Tracker Outer Barrel (TOB) layers and the 2 Tracker EndCaps (TEC), which are composed of 9 disks. This geometric arrangement is shown in Figure 3.4, with double lines to indicate back-to-back modules. These so-called double-sided modules are mounted with a stereo angle of 100 mrad to improve the 3D point resolution by providing a measurement of the z and r coordinate in the barrel and disks, respectively.

In the TOB and the 3 outermost rings of the TEC two silicon sensors are daisy chained, while single sensors are used in the inner part. This is done to limit the number of read-out channels, since the area that had to be instrumented is larger in the outer region. The larger cell size can be afforded due to the lower occupancy in the outer part. However, the noise of the sensors also increases with strip length, so thicker silicon sensors, $500 \mu\text{m}$ compared to $320 \mu\text{m}$ in the inner part, are used in order to collect more signal per traversing particle.

The strip sensors are single sided p-on-n type silicon. The signals from the sensors are amplified, shaped, and stored by 4 or 6 custom APV25 chips per module. When the trigger has made a positive decision, the analog signals from two APV25 chips are multiplexed and sent to the FED boards in the service cavern via optical fibers, where they are converted to digital signals. The FEDs then perform pedestal and common mode subtraction as well as cluster finding. Additionally, the data is sparsified in these off-detector electronics, before being sent to the CMS central data acquisition (DAQ). Due to charge sharing, this analog read-out scheme also results in an improved spatial resolution of 15 to $40 \mu\text{m}$, depending on the position of the modules and the strip pitch.

3.2.2 The electromagnetic calorimeter

Surrounding the tracker, the CMS electromagnetic calorimeter (ECAL) is designed to measure the energy of photons and electrons. It is composed of 75 848 lead tungstate (PbWO_4) crystals arranged in a cylindrical barrel and 2 endcaps. The barrel crystals measure $22 \times 22 \text{ mm}^2$ at the front face of crystal, and $26 \times 26 \text{ mm}^2$ at the rear face, which corresponds to approximately 0.0174×0.0174 in $\eta\phi$. The length of the crystal is 230 mm, corresponding to 25.8 radiation lengths. In the endcaps, the crystals have a rear face cross section of $30 \times 30 \text{ mm}^2$, front face cross section of $28.62 \times 28.62 \text{ mm}^2$, and a length of 220 mm, corresponding to 24.7 radiation lengths.

The high density material was chosen due to its short radiation length and small Moliére radius, resulting in a small spread of the electromagnetic shower generated by an incoming photon or electron.

This allows for a fine granularity, a better shower separation, and a compact calorimeter. Additionally, this scintillating material has a fast response, as about 80% of the light is emitted during the first 25 ns. The scintillation light is collected by photodetectors, digitized, and read out.

The layout of the ECAL is shown in Figure 3.6, with the barrel (EB) extending up to $|\eta| < 1.470$ and the endcaps (EE) on each side covering the range $1.479 < |\eta| < 3.0$. A preshower detector (ES) is positioned in front of the endcap crystals, covering the pseudorapidity range between $|\eta| = 1.653$ and $|\eta| = 2.6$. This detector consists of a layer of lead which initiates an electromagnetic shower from incoming photons or electrons, and a layer of silicon sensors which measures the deposited energy. The main goal of this 20 cm thick detector is to discriminate between photons and neutral pions.

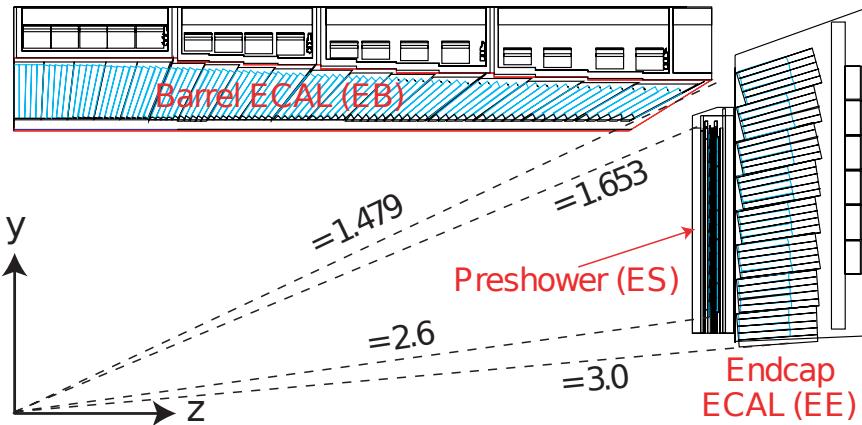


Figure 3.6: A transverse view parallel to the beamline showing one quarter of the ECAL, with its barrel (EB), endcap (EE), and preshower (ES) detectors.

The energy resolution of calorimeters can be parametrized by the following stochastic (S), noise (N), and constant (C) terms:

$$\left(\frac{\sigma}{E}\right)^2 = \left(\frac{S}{\sqrt{E}}\right)^2 + \left(\frac{N}{E}\right)^2 + C^2 \quad (3.5)$$

The stochastic term represents contributions from the shower containment, the number of photoelectrons and the fluctuations in the gain process. The noise term takes into account all noise components, such as electronics and digitization noise. Finally, the constant term characterizes among others energy leakage from the back of the calorimeter crystals and non-uniformities of the longitudinal light collection. The latter term dominates the energy resolution for high-energy electron and photon showers. Figure 3.7 shows the energy dependence of this resolution for incident electrons as measured in a beam test, as well as the determined stochastic, noise, and constant terms obtained by fitting equation 3.5 to the data.

A more recent measurement of the energy resolution was performed using electrons from Z boson decays in collision data. In the central region, up to $|\eta| < 0.8$, it was measured to be better than 2%. Outside of this region, in the more forward direction, the energy resolution is 2-5% [2]. The reconstruction of the electrons and photons will be discussed in Section 4.3.2.

3.2.3 The hadronic calorimeter

The hadronic calorimeter (HCAL) surrounds the ECAL with the aim to measure the energy of charged and neutral hadrons. The missing transverse energy can then be inferred from this measurement together with the measured energy in the ECAL, in order to identify neutrinos or exotic particles. The HCAL consists of brass absorber plates interleaved with plastic scintillator tiles.

Figure 3.8 shows a longitudinal quarter view of the different HCAL components. A cylindrical barrel (HB) covers the region up to $|\eta| < 1.4$ and is complemented by endcaps (HE) on each side, extending

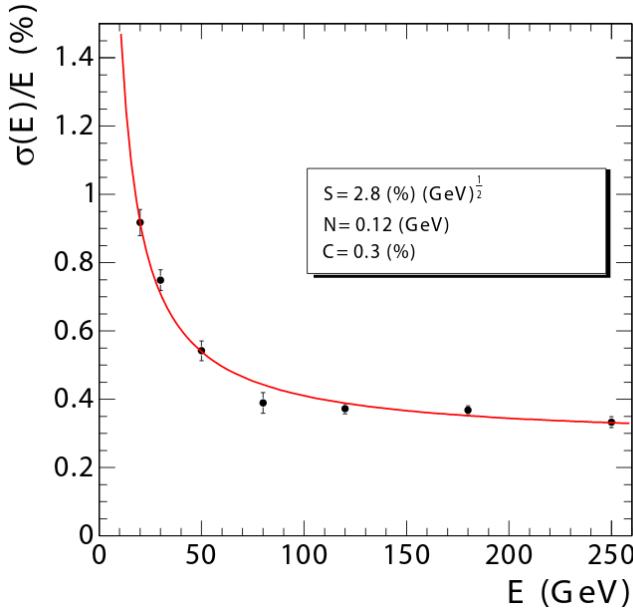


Figure 3.7: The ECAL energy resolution as a function of the electron energy, measured from a beam test. The stochastic (S), noise (N), and constant (C) are given as well.

the pseudorapidity range to $|\eta| < 3.0$. In the central region, the stopping power of the ECAL and HCAL barrel is not sufficient to contain the entire hadron showers. The HCAL was therefore extended outside the solenoid with an outer calorimeter (HO), which uses the magnet coil as absorber and consists of scintillators. Two layers are positioned at $\eta = 0$, where the absorber depth is minimal, and only 1 layer is used for the 2 rings on each side of the central ring. Finally, a forward calorimeter (HF) is positioned at 11.2 m from the IP covering $3.0 < |\eta| < 5.2$. Unlike the other HCAL components, this detector consists of iron and quartz fibers. Cherenkov-based, radiation-hard technology, since it is exposed to very large particle fluxes.

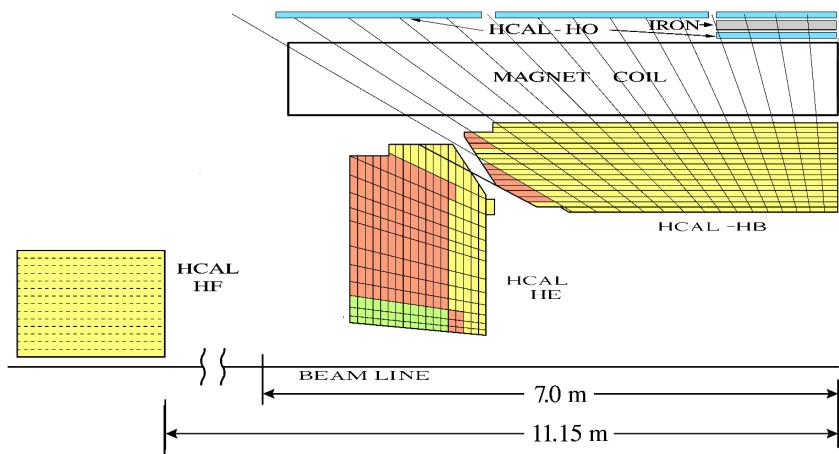


Figure 3.8: A quarter view of the hadronic calorimeter (HCAL), parallel to the beamline. The barrel (HB), endcap (HE), outer (HO), and forward (HF) detectors are indicated.

The optical signals from the scintillators in the HB and HE are converted to electrical signals by multichannel hybrid photodiodes, while silicon photomultipliers (SiPMs) are used in the HO. In the HF, the Cherenkov light emitted in the quartz fibers is detected by standard photomultiplier tubes (PMTs), since the magnetic field is much smaller in this region.

The expected transverse energy resolution for jets is shown in Figure 3.9 for various pseudorapidity regions: barrel jets ($|\eta| < 1.4$), endcap jets ($1.4 < |\eta| < 3.0$), and very forward jets ($3.0 < |\eta| < 5.0$). Details about the reconstruction of jets from calorimeter and tracking information will be given in Section 4.3.5.

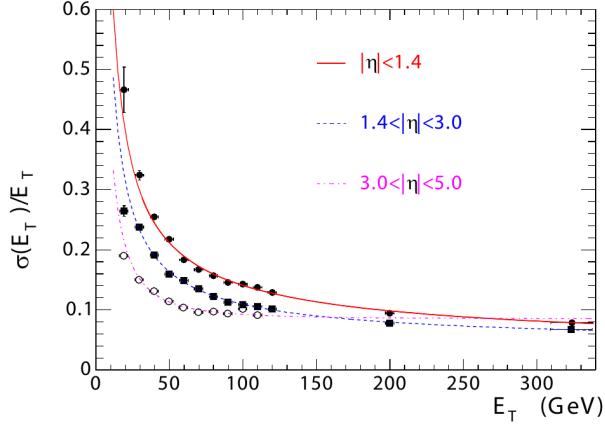


Figure 3.9: The jet transverse energy resolution as a function of the jet transverse energy, for barrel jets ($|\eta| < 1.4$), endcap jets ($1.4 < |\eta| < 3.0$), and very forward jets ($3.0 < |\eta| < 5.0$).

3.2.4 The muon system

The outermost detector, located entirely on the outside of the solenoid, is a dedicated muon detection system. The purpose of this subsystem is muon identification, momentum measurement, and triggering. As illustrated in Figure 3.10, the layers of muon chambers are embedded in the iron yoke constraining the magnetic field lines. The strong magnetic field completely saturates the return yoke with a field of about 2 T, in opposite direction with respect to the field inside the magnet.

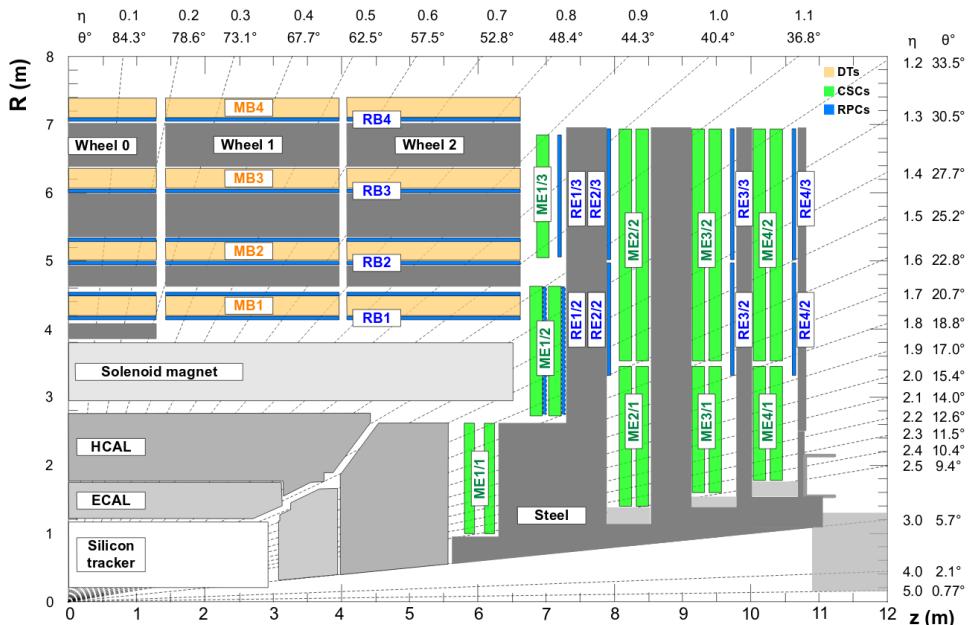


Figure 3.10: A transverse view of one quarter of CMS showing the position of the 3 types of muon detectors. The Drift Tubes (DT) are located in the barrel, the Cathode Strip Chambers (CSC) in the endcaps, and the Resistive Plate Chambers (RPC) in both regions up to $|\eta| < 1.8$.

Three different types of gaseous detectors are used. In the barrel, 4 layers of Drift Tubes (DT) are installed, covering the pseudorapidity range up to $|\eta| < 1.2$. Due to the higher flux and the larger and non-uniform magnetic field at larger pseudorapidities, Cathode Strip Chambers (CSC) are used in the endcap region ($0.9 < |\eta| < 2.4$). The DTs are designed for the low muon rates that are expected in the barrel and thus have a slower response time than the CSCs. Resistive Plate Chambers (RPCs) complement the DT and CSC systems in the pseudorapidity region up to $|\eta| < 1.8$. They provide a fast response, with a good time resolution but a worse spatial resolution than the DTs or CSCs. The RPCs are therefore very well suited to trigger on muons.

The offline reconstruction efficiency of simulated events containing one muon is typically between 95% and 99%, except for the regions between 2 DT wheels ($|\eta| = 0.25$ and $|\eta| = 0.8$) and the transition region between the DTs and CSCs ($|\eta| = 1.2$), where the efficiency drops to 92%. The reconstruction of muons using the information from the tracker and the muon detectors will be detailed in Section 4.3.3. For low pseudorapidities and small momenta, the offline momentum resolution of the standalone muon system is about 9%. At momenta around 1 TeV, the resolution varies from 15% to 40%, depending on the pseudorapidity. As demonstrated in Figure 3.11, performing a global momentum fit using the tracker as well improves the resolution by an order of magnitude at low muon momenta. At high momenta the resolution of the full system is about 5%.

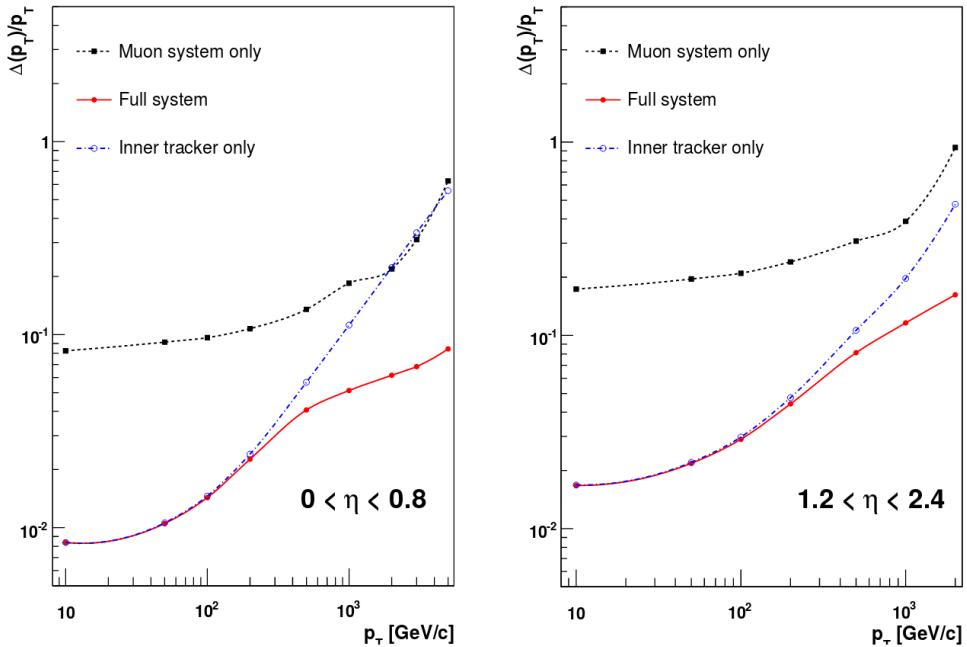


Figure 3.11: The muon transverse momentum resolution as a function of transverse momentum for low (left) and (high) pseudorapidities. The resolution is shown for the muon system and the tracker separately, and for the full system. [3]

3.2.5 Trigger and data acquisition

Collisions are provided by the LHC at high interaction rates, with an interval of 25 ns between bunch crossings. This corresponds to a frequency of 40 MHz. Additionally, multiple collisions occur at the same time, depending on the luminosity. Since it is impossible to store and process the large amount of data produced in the collisions at this high rate, a severe rate reduction is needed. This rate reduction is performed by the trigger system, which decides whether to store or reject an event. Since this decision process is constrained in time, the computing time is optimized by rejecting uninteresting events as quickly as possible. The rate is reduced to 1 kHz in two steps by the Level-1 (L1) Trigger and the High-Level Trigger (HLT).

The L1 Trigger decision is based on information from the calorimeters and muon systems, following the structure illustrated in Figure 3.12. At the lowest level, the Local Triggers are based on energy deposits in calorimeter towers and track segments or hit patterns in the muon system. Regional triggers, indicated as Calo Trigger Layer 1 and Muon Track-Finder Layer in the figure, then combine this information and use pattern logic to determine trigger objects such as jet or muon candidates in separated spatial regions. The candidates are ranked based on their energy or momentum and quality, reflecting the level of confidence assigned to the L1 parameter measurements. Finally, the Calo Trigger Layer 2 and the Global Muon Trigger (GMT) determine the highest-rank calorimeter and muon objects across the whole detector and transfer them to the Global Trigger, which makes the final decision to accept or reject an event. Following this procedure, the L1 Trigger thresholds are tuned to reduce the event rate to 100 kHz. The L1 Trigger is composed of custom electronics located partially on the detectors, and partially in the underground service cavern. The L1 decision needs to be made and distributed to the detector front-end electronics within 3.8 μ s [4].

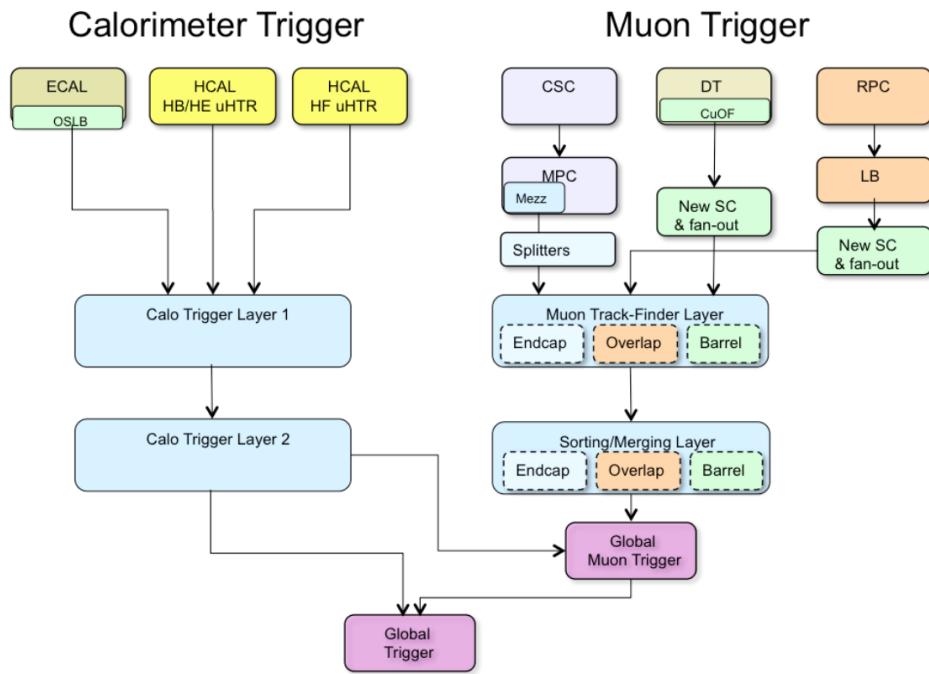


Figure 3.12: Schematic overview of the L1 Trigger. [4]

The readout of the data proceeds as illustrated in Figure 3.13. When an event is accepted by the L1 Trigger, the data from about 740 FEDs is read out by the Readout Units (RUs). For so-called *legacy* systems, i.e. systems which are using VME-based hardware from the initial installation, the FEDs are read out by custom Front-End-Readout-Link (FRL) cards, while for systems that changed their readout architecture from the VME standard to the newer μ TCA standard during or after LS1 they are read out via the newer Front-End-Readout-Optical-Link (FEROL) cards. The event fragments are then sent over the event-builder switch to the Builder Units (BUs), which assemble the events. Next, the events are distributed to the Filter Units (FUs) by a large switch network.

The HLT software system is implemented in this filter farm, which uses more than 15000 CPU cores for the final event selection. In this second step, the HLT reduces the event rate further to 1 kHz. The complete read-out data, including information from the pixel and strip tracker, are available for this step. New objects can therefore be reconstructed such as e.g. tau leptons and b-jets, as is done in the offline software, but speed-optimized.

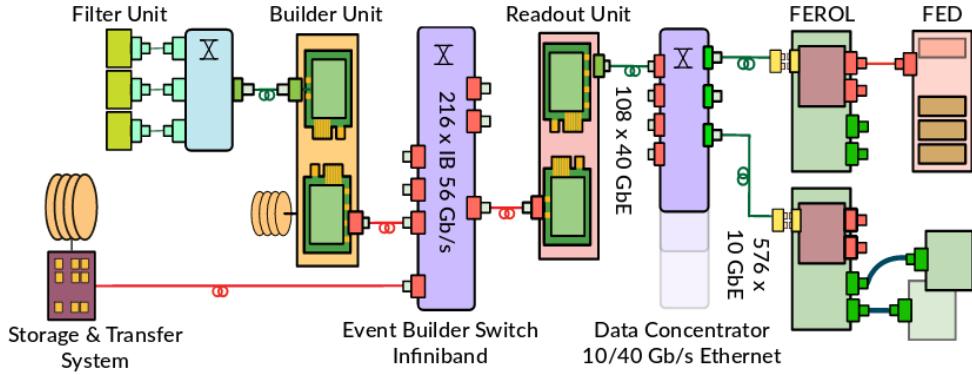


Figure 3.13: Schematic of the data acquisition (DAQ) system. [5]

3.2.6 CMS performance in Run 2

The number of collisions recorded at the experiments will differ from the amount delivered by the LHC. Data loss can be caused by e.g. problems with a particular subdetector, the trigger rate, the data acquisition, or the infrastructure. During Run 2, CMS achieved a data taking efficiency of 89% and 92% in 2015 and 2016, respectively. The comparison between the delivered and recorded cumulative integrated luminosity in 2016 is shown in Figure 3.14. Subsequently, the recorded data is certified by the offline Data Quality Monitoring (DQM), to ensure that the data are suited for physics analysis.

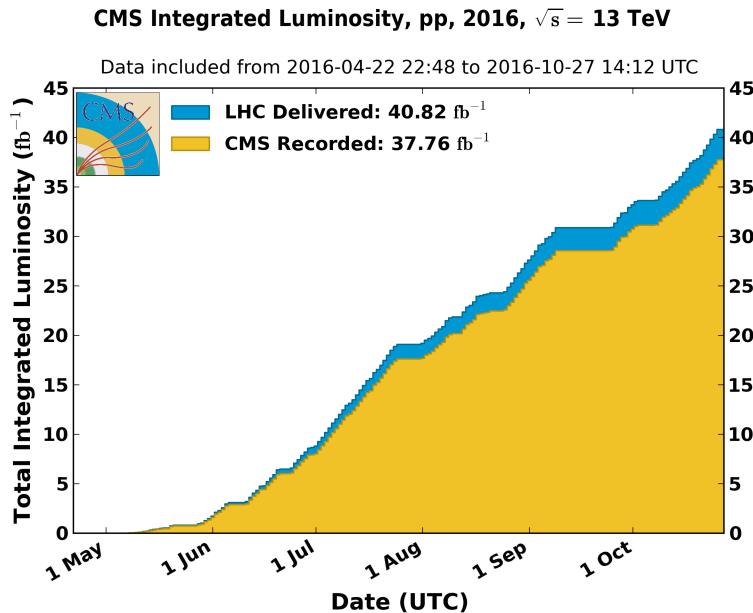


Figure 3.14: The cumulative distribution of the instantaneous luminosity delivered by the LHC (blue) and recorded by CMS (yellow) in 2016.

3.2.6.1 Pre-amplifier saturation in the APV25 chip

During Run 2, the instantaneous luminosity delivered by the LHC increased continuously, and even exceeded the design luminosity of $10^{34} \text{ cm}^{-2}\text{s}^{-1}$ in 2016. As the luminosity increased, a dynamic inefficiency appeared in the strip tracker, which was most noticeable in the first layer of the TOB. The symptoms were a change in the signal-to-noise ratio and loss of hits. As can be seen from Figure 3.15, the most probable value (MPV) of the signal-to-noise ratio is shifted towards lower values and the low

tail increased as well. The loss of hits is clearly visible in Figure 3.16, showing the change in number of hits per track for increasing instantaneous luminosities. The run periods indicated in the plot refer to a subset of the data taken over the course of the year. Run period boundaries are typically defined by changes in the LHC running conditions, changes to the detector configuration or calibration, or other parameters. The number of hits decreases for later run periods such as D and F, as the instantaneous luminosity increases. This loss of hits results in less and shorter tracks.

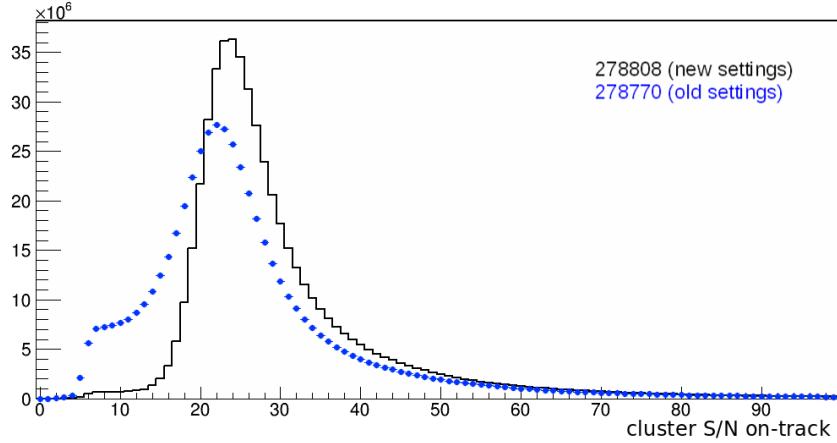


Figure 3.15: The signal-to-noise ratio for clusters on reconstructed tracks in the first layer of the TOB for a run before (blue) and after (black) the change of pre-amplifier drain speed.

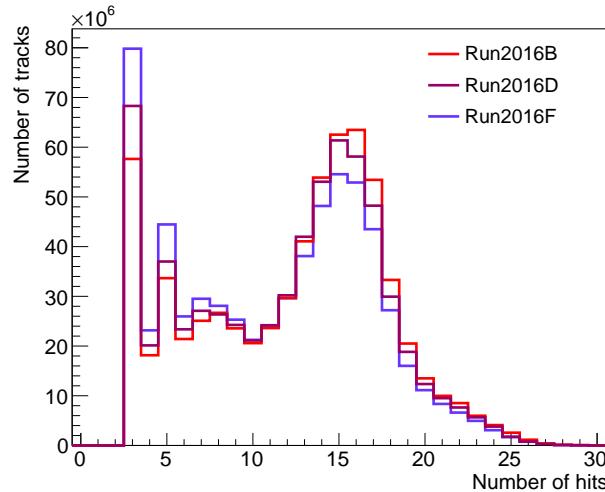


Figure 3.16: The number of hits per track for run periods B, D, and F, showing the effect of the increasing instantaneous luminosity.

The origin of this inefficiency was eventually tracked down to saturation effects in the pre-amplifier of the APV25 chip. The pre-amplifier decay time changes significantly with temperature. As the operating temperature of the strip tracker was lowered from +4°C to -15°C coolant temperature during LS1, the decay time was no longer sufficient to cope with the high luminosities. The dynamic inefficiency was cured in August 2016 by changing the pre-amplifier drain speed. This lead among others to the recovery of the muon efficiency, which showed a large drop for the highest luminosities before the change and an essentially flat behavior afterwards, as demonstrated in Figure 3.17.

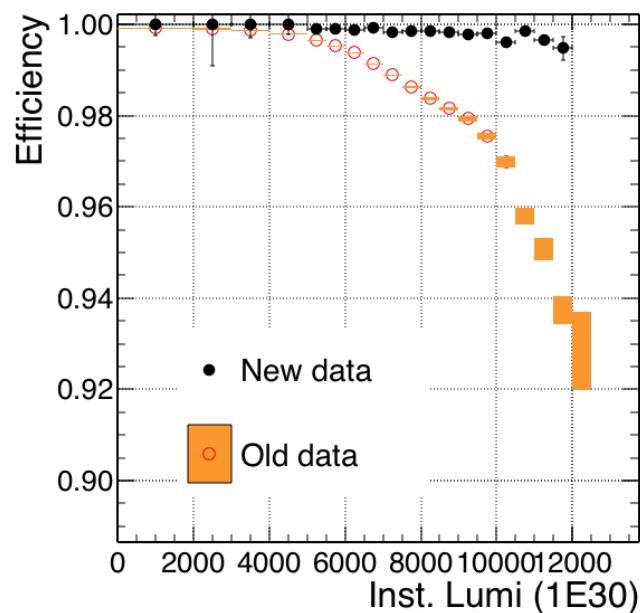


Figure 3.17: The muon efficiency as a function of the instantaneous luminosity for before (orange) and after (black) the change of pre-amplifier drain speed which cured the dynamic inefficiency.

4

1
2

Event Simulation and Reconstruction

3 In order to use the recorded data, the obtained signals coming from various parts of the detector must be
4 reconstructed to be able to identify the particles in the event. Additionally, to compare the experimental
5 results with theory, events are generated and the resulting signals in the detector are simulated, as detailed
6 in Sections 4.1 and 4.2, respectively. The event reconstruction is detailed in Section 4.3. Finally, some
7 details about the simulation of strongly interacting massive particles (SIMPs) are given in Section 4.4.

4.1 Event generation

8 The event structure at the LHC is complicated by the composite nature of protons, as well as the attainable
9 high momentum transfers. A number of aspects must therefore be taken into account when generating
10 events, such as parton distribution functions (PDFs), hard scattering, the parton shower, hadronization,
11 and additional activity in the event.

12 Two partons, meaning the quark or gluon constituents of the colliding protons, will interact with a
13 certain probability for a given momentum transfer. This is parametrized by the PDFs $f(x, Q^2)$, where
14 x is the momentum fraction of the partons and Q^2 is the momentum transfer scale. Experimentally
15 determined PDFs are available from various groups, including e.g. CTEQ [6], MRST/MSTW [], and
16 NNPDF []. These PDFs are then used to calculate the matrix element of the hard scattering, which is
17 the process of interest where the two colliding partons create high-energetic final state particles. This
18 is done using an event generator, such as MADGRAPH5_aMC@NLO [7] and POWHEG []. With
19 MADGRAPH5_aMC@NLO the matrix element can be calculated analytically at tree-level or leading
20 order (LO), and now at next-to-leading order (NLO) as well. This generator was used to generate most
21 of the background processes for the Monojet analysis detailed in Chapter 5 and for the SIMP signal used
22 in Chapter 6. POWHEG is able to generate events using NLO computations, but only for a relatively lim-
23 ited number of physics processes. In this thesis, background processes from single-top production were
24 generated with this program. Since NLO calculations are more time-consuming, one can also scale a LO
25 cross section to the NLO level by using a so-called k-factor, defined as the ratio of the NLO and LO cross
26 sections. However, these k-factors often need to be determined as a function of the relevant kinematic
27 variables as they depend on the kinematic phase space and the probed energy scale.

28 Since the colliding partons have a color charge, the hard scattering will be accompanied by a cas-
29 cade of radiation from QCD processes. This radiation can originate from the incoming partons, which
30 is referred to as initial state radiation (ISR), or the outgoing partons in the final state, the so-called fi-
31 nal state radiation (FSR). The perturbative evolution of the cascade can be modeled using the DGLAP
32 (Dokshitzer-Gribov-Lipatov-Altarelli-Parisi) equations []. These equations describe the time evolution of
33 the probability of a ‘mother’ parton to split into ‘daughter’ partons at an energy scale Q^2 . The momen-

1 tum of the mother is then divided among the daughter partons, which can in turn split into other partons
 2 at a lower Q^2 scale. The cascade continues down to an energy scale Λ_{QCD} where the strong coupling
 3 constant becomes unity.

4 The next step after the showering is the hadronization of the colored particles produced in the parton
 5 shower, transforming them into color-neutral hadrons. Since this happens at low energy scales where the
 6 perturbative approach of QCD is not valid, phenomenological models have to be used. For most of the
 7 processes considered in this thesis, the showering and hadronization is done with PYTHIA 8 [8], using a
 8 standard set of parameters which were tuned to reproduce the experimental data.

9 In addition to ISR and FSR, also beam remnants and multiple parton interactions give rise to ad-
 10 dditional activity in the event, referred to as the underlying event. After the partons participating in the
 11 hard scattering are extracted, the remainder of the protons have a non-zero color charge. The creation of
 12 additional hadrons during the hadronization is therefore possible. Multiple parton interactions represent
 13 additional interactions which can take place between other incoming partons. Finally, additional colli-
 14 sions between other protons in the same bunch crossing or from a previous bunch crossing, respectively
 15 referred to as in-time and out-of-time pileup, add extra activity in the event.

16 **4.2 Detector simulation**

17 After being generated, the collision events are passed on to the CMS detector simulation, which is based
 18 on the GEANT 4 [] simulation toolkit. This toolkit provides a description of the interaction between
 19 particles and the detector material, including effects such as bremsstrahlung of charged particles, photon
 20 conversions, energy loss of charged particles by ionization, and the showering of electrons, photons and
 21 hadrons in the calorimeters due to interaction with the material. The CMS simulation package contains
 22 the geometry of the detector with all the sensitive layers designed to detect the traversing particles, as well
 23 as the dead material regions consisting of e.g. support structures, cables and cooling pipes. A precise map
 24 of the magnetic field is also included in order to simulate the curvature of the charged particles correctly.

25 Next, the electronic response produced by the hits in the active detector material is simulated, resulting
 26 in an event content similar to the output of the real detector. At this point the effect of pileup is also
 27 included by adding detector hits of generated proton-proton interactions on top of the hits resulting from
 28 the main interaction. Most of the simulated event samples used in this thesis are processed using this
 29 detector simulation. However, the interaction of new particles that can arise from specific theory models
 30 is not always readily described in GEANT. This is the case for the signal samples used in the analysis
 31 described in Chapter 6, so an additional step was needed in order to simulate strongly interacting massive
 32 particles (SIMPs) in the CMS detector.

33 **4.3 Event reconstruction**

34 Once the detector response has been simulated, the obtained events can be reconstructed. The same
 35 method is applied for these simulated events and for data coming from the detector. First, the reconstruc-
 36 tion of tracks is performed, with a specific track reconstruction for electrons and muons. Furthermore,
 37 the calorimeter deposits, generated by electrons, photons, and hadrons, are grouped into clusters. Addi-
 38 tionally, the reconstruction is further improved by using the so-called particle flow (PF) algorithm. This
 39 algorithm greatly improves the performance for jet and hadronic τ decay reconstruction, missing trans-
 40 verse energy momentum determination, as well as electron and muon identification. Finally, the obtained
 41 particle flow (PF) candidates are clustered into jets, and the missing transverse energy can be derived.

42 **4.3.1 Track reconstruction**

43 The tracks of charged particles going through the CMS tracker are reconstructed with an iterative tracking
 44 approach. This is used to cope with the high occupancy and consequently high combinatorics. Addition-
 45 ally, the first iterations search for tracks with less possible combinations, such as tracks with many pixel

1 hits or a high momentum. After every iteration, the hits associated with the found track are removed to
2 reduce the combinatorics. Each iteration consists of four steps:

- 3 1. **Seed generation.** In this first step hits are combined into seeds for the subsequent track finding. In
4 the initial iterations pixel triplets are used, then pixel pairs, in order to take gaps or non-working
5 modules into account. Next, mixed pixel/strip triplets are taken, and finally strip-only seeds are
6 used. These additional iterations improve the acceptance in p_T and in displacement with respect to
7 the primary vertex.
- 8 2. **Track finding.** The seeds are used as starting point for a Kalman filter algorithm. This method
9 extrapolates the seed trajectory outward to the next layer, taking into account potential energy
10 loss and multiple scattering. If compatible hits are found in the next layer, the parameters of the
11 trajectory are updated. This process continues until the outermost layer of the tracking system.
12 Using this method, a given seed can generate multiple tracks, or different tracks can share hits. A
13 trajectory cleaner therefore determines the fraction of hits the tracks have in common and discards
14 the track with the lowest number of hits when there are too many shared hits. If both tracks have
15 the same number of hits, the track with the largest χ^2 value is removed.
- 16 3. **Track fitting.** The track parameters are then refitted using a Kalman filter and smoother, taking all
17 hits determined in the track finding step into account.
- 18 4. **Track selection.** Finally, the tracks are selected based on quality requirements, such as the number
19 of layers that have hits, the χ^2/dof , and the distance to a primary vertex. This greatly reduces the
20 fraction of reconstructed tracks that are fake.

21 The performance of the track reconstruction is excellent, and a high track-finding efficiency is ob-
22 tained [9] while keeping the rate of fake tracks negligible. The highest tracking efficiency is obtained for
23 muons, which traverse the full detector volume and have an improved momentum resolution due to track-
24 ing information from the muon detectors giving a long lever arm. For isolated muons with p_T between 1
25 and 100 GeV the tracking efficiency is higher than 99% for the entire η coverage of the tracker, as can be
26 seen from the left plot in Figure 4.1. The p_T resolution is about 2-3% for a muon with $p_T = 100$ GeV
27 up to $|\eta| < 1.6$, but worsens for higher pseudorapidities. Different types of particles interact differently
28 with the detector material. Charged hadrons, for example, are also subject to elastic and inelastic nu-
29 clear interactions and have a tracking efficiency of 80-95% depending on pseudorapidity and transverse
30 momentum, as shown in the right plot of Figure 4.1.

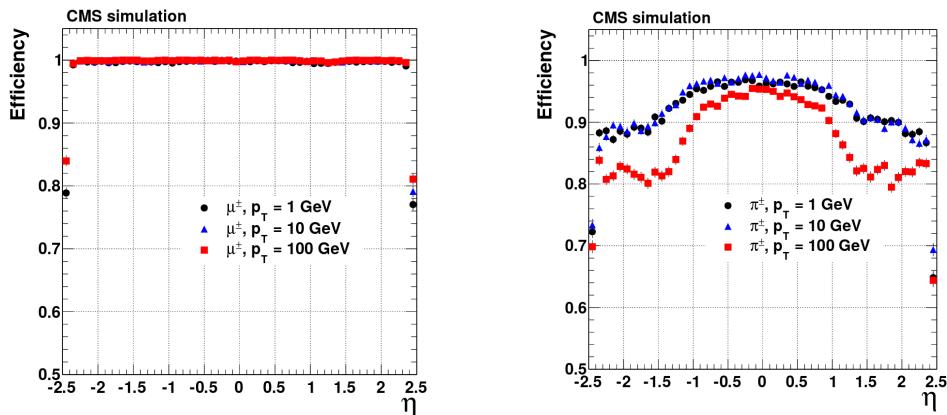


Figure 4.1: The muon efficiency (left) and pion efficiency (right) as a function of pseudorapidity, for multiple transverse momenta. [9]

31 Finally, the primary vertex is reconstructed from the tracks. Since the collisions happen between
32 bunches of protons, multiple protons will be colliding at the same time. The extra collisions, next to the
33 potentially interesting collision, are referred to as pile-up interactions. The particles generated in these

1 collisions are all detected simultaneously and form a challenge to disentangle them from the particles
2 coming from the to be studied interaction.

3 The reconstruction is done in 2 steps: first the tracks that appear to originate from the same interaction
4 vertex are clustered, then a fitting procedure computes the vertex parameters and assigns a weight to each
5 associated track, reflecting the probability that it corresponds to the considered vertex. Figure 4.2 shows
6 the reconstruction efficiency and the resolution of the primary vertex. The more tracks, the better the
7 vertex is constrained and thus the better the resolution.

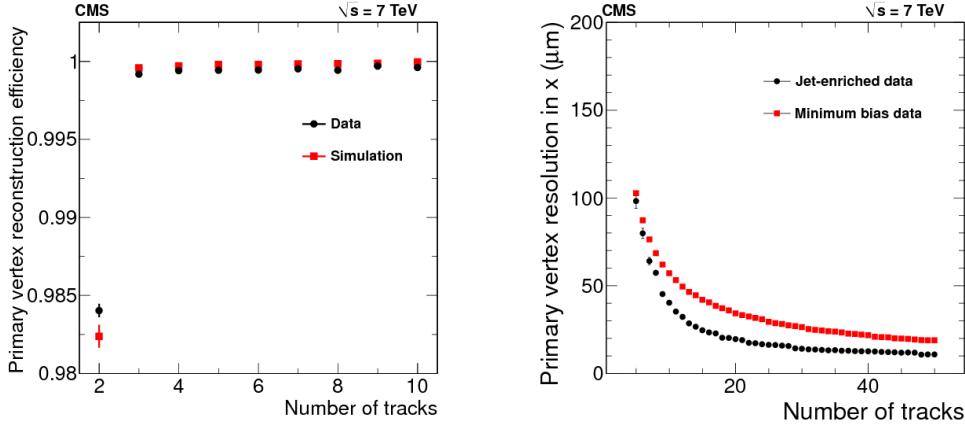


Figure 4.2: The primary vertex reconstruction efficiency (left) and resolution (right) as a function of the number of tracks associated to it. [9]

8 4.3.2 Electron and isolated photon reconstruction

9 Electrons are reconstructed using information from both the tracker and the calorimeters. Due to the large
10 amount of material present in the tracker, electrons will emit bremsstrahlung photons, and photons will
11 often convert into e^+e^- pairs, which can again radiate bremsstrahlung photons. The electron and photon
12 reconstruction is therefore very similar.

13 For electrons, a Gaussian-sum filter (GSF) [] candidate is taken as starting point. This candidate is
14 obtained using 2 different methods to reconstruct the electron track from the hits in the tracker. This track
15 reconstruction should gather all radiated energy from the electron. First, the ECAL-based approach is
16 used, grouping ECAL clusters into superclusters. These superclusters collect the energy of the electron
17 and the bremsstrahlung photons in a small η window and a large ϕ window, taking the bending of the
18 electron track in the magnetic field into account. The supercluster energy and position is then used to
19 determine the position of the corresponding hits in the tracker layers. Next, the tracker-based approach
20 is used to reconstruct electrons missed by the ECAL-based method. In this case, all the tracks from the
21 iterative tracking with transverse momentum larger than 2 GeV are used. The obtained electron seeds are
22 then used in the specific electron tracking, done by a GSF fit, which is more adapted to electrons than
23 the Kalman filter used in the iterative tracking, as it describes the energy loss in each tracker layer. In the
24 case of isolated photons, a candidate is seeded from an ECAL supercluster with transverse energy larger
25 than 10 GeV which is not linked to a GSF track.

26 The total energy of the accumulated ECAL clusters is corrected for the energy that was lost in the
27 process, using analytical functions of the energy and pseudorapidity. The applied corrections can be as
28 large as 25%, at low transverse momentum and at $|\eta| = 1.5$, where the material density in the tracker is
29 largest. The energy of the electron is then obtained from a combination of the corrected energy and the
30 momentum of the GSF track, while the direction of the electron is taken from the GSF track. For photons,
31 the corrected energy and the direction of the supercluster are used.

32 Additionally, the electron and photon candidates must satisfy identification criteria to be retained. In
33 the case of electrons a boosted decision tree is used, combining fourteen variables including the amount
34 of energy radiated and the ratio between the energies gathered in HCAL and ECAL, while for photons
35 the candidates must be isolated from other tracks and calorimeter clusters, and the energy distribution in

- 1 the ECAL and the ratio between the HCAL and ECAL energies must be compatible with the expectation
 2 from a photon shower.

3 **4.3.3 Muon reconstruction**

4 Muon tracking is performed using 2 complementary approaches. The first method starts from standalone
 5 muons which are reconstructed from hits in the muon detectors using pattern recognition. The stand-
 6 alone muons are then matched to tracks in the tracker, and the hits are combined to form a global muon
 7 track. This global muon fit improves the momentum resolution compared to the tracker-only fit at muon
 8 momenta larger than 200 GeV.

9 For momenta below 10 GeV, muons often fail the global muon conditions which require the muon to
 10 penetrate through more than one muon detector plane, due to the large multiple scattering in the return
 11 yoke. In this case, tracker muon reconstruction is more efficient since it only requires one muon segment.
 12 Each track in the tracker with a transverse momentum larger than 0.5 GeV and a total momentum larger
 13 than 2.5 GeV is therefore extrapolated to the muon system and if at least one matching track segment is
 14 found, it is retained as muon track.

15 Within the geometrical acceptance of the muon system about 99% of the muons are reconstructed,
 16 either as global muon or as tracker muon and frequently as both. Global and tracker muons that share
 17 the same track inside the tracker are merged into a single candidate. Some muons are only reconstructed
 18 as standalone muons, in which case they have a worse momentum resolution compared to the global and
 19 tracker muons.

20 Charged hadrons can be misreconstructed as muons if e.g. a part of the hadron shower reaches the
 21 muon system. In order to improve the muon identification, the PF muon identification algorithm described
 22 in Section 4.3.4 also matches energy deposits in the ECAL and HCAL with the muon track.

23 **4.3.4 Particle flow**

24 The particle flow (PF) algorithm reconstructs so-called particle flow candidates by combining information
 25 from all different CMS subdetectors, linking different elements, such as tracks in the tracker, calorime-
 26 ter clusters, and muon tracks. The obtained collection of particle candidates is subsequently used to
 27 reconstruct jets and to determine the missing transverse energy.

28 In a first step, the PF algorithm identifies charged particle tracks, as defined in Section 4.3.1, and Sec-
 29 tions 4.3.2 and 4.3.3 for electron and muon tracks, respectively. At the same time, the calorimeter clusters
 30 are reconstructed with a clustering algorithm designed specifically for the PF event reconstruction. In this
 31 algorithm, cluster seeds are first identified as local energy maxima above a given seed threshold, and with
 32 respect to the four or eight closest cells. The clusters are then formed by accumulating neighboring cells
 33 with an energy above a given cell threshold, in order to suppress noise.

34 The PF elements in the different subdetectors are then connected by a link algorithm which avoids
 35 any double counting. The link algorithm produces blocks of associated elements, quantifying the quality
 36 of the link by defining a distance between the elements. When an element is linked to multiple other ele-
 37 ments, only the link with the shortest distance is kept. More precisely, a link between a track in the tracker
 38 and a calorimeter cluster is made by extrapolating it from the last hit in the tracker to the calorimeters.
 39 The distance between the position of the extrapolated track and the cluster in the (η, ϕ) plane is then used
 40 to define the link distance. At the interaction points between the track and the tracker layers, tangents to
 41 the GSF tracks are extrapolated to the ECAL in order to collect the energy of photons radiated by elec-
 42 tron bremsstrahlung. A dedicated conversion finder was also developed to identify bremsstrahlung and
 43 prompt photon conversions into e^+e^- pairs. Links between calorimeter clusters are established outside
 44 of the tracker acceptance, or between the preshower and ECAL clusters in the preshower acceptance. In
 45 this case the link distance is also defined as the distance between the position of the clusters. Charged
 46 particle tracks can also be linked by a common secondary vertex. Finally, links between tracks in the
 47 tracker and in the muon detectors are established as explained in Section 4.3.3.

48 In a next step, the PF blocks are classified as muons, electrons, or isolated photons. The corresponding
 49 elements are then excluded from further consideration. Once electrons, muons, and isolated photons have

been identified, the remaining elements are identified as charged hadrons, neutral hadrons, or photons produced in jets. Within the tracker acceptance, the ECAL clusters not linked to any track are classified as photons, while the clusters in the HCAL without a matched track are labeled as neutral hadrons. Outside of the tracker acceptance, charged and neutral hadrons can not be distinguished. ECAL clusters linked to an HCAL cluster are then assumed to arise from the same hadron shower, and the estimated energy for these particles is the sum of the energy deposited in the ECAL and the HCAL. The remaining clusters are then linked to one or several tracks in order to reconstruct the charged hadrons.

4.3.5 Jet reconstruction

Jets are reconstructed with the anti- k_T algorithm [10], which clusters either the particles reconstructed by the PF algorithm (PF jets) or the energy deposits in the calorimeters (Calo jets). This procedure takes into account the transverse momentum p_T , also called k_T , of the particles and the distance between particles, defined as

$$\Delta R_{ij} = \sqrt{(y_i - y_j)^2 + (\phi_i - \phi_j)^2}. \quad (4.1)$$

The strategy consists of the following steps:

1. For every pair of particles i and j , a distance d_{ij} defined as

$$d_{ij} = \min \left(\frac{1}{p_{Ti}^2}, \frac{1}{p_{Tj}^2} \right) \frac{\Delta R_{ij}^2}{R^2} \quad (4.2)$$

is calculated.

2. For every particle i , a distance d_{iB} to the beam pipe is calculated with

$$d_{iB} = 1/p_{Ti}^2. \quad (4.3)$$

3. The minimum of d_{ij} and d_{iB} is then determined.

If it is d_{ij} , particles i and j are recombined into a new particle by adding the four-momenta of the particles. If it is d_{iB} , particle i is declared to be a jet and it is removed from the list of particles.

5. This is repeated until no particles remain.

In this clustering algorithm, the parameter R determines what is called a jet. If a particle i has no other particles within a distance R , d_{iB} will be smaller than d_{ij} and the particle will become a jet. A consequence of this is that an arbitrarily soft particle can become a jet, and therefore a minimum transverse momentum for a jet to be of interest is defined.

The anti- k_T algorithm favors clustering around hard particles, and the jets then grows outward from this seed. However, since it still involves a combination of energy and angle in the distance measure, this is a collinear-safe growth, meaning that the jet will not change when one of the particles of the jet is split collinearly. This algorithm is also infrared-safe, i.e. the same set of jets is obtained when soft particles are emitted, and gives rise to circular jets.

A reliable determination of the jet energy is however not straightforward, since many effects can distort the energy estimation, such as the calorimeter response, the limited particle reconstruction efficiency, the underlying event, the pileup, and the charged particles bending out of the jet cone due to the strong magnetic field. The pileup is mitigated by applying charged hadron subtraction (CHS), which consists of removing charged hadrons associated with vertices other than the primary vertex from the list of PF candidates. Additionally, the jet energy is corrected using a factorized approach with the following steps:

- **Pileup correction (L1).** The first level of jet energy corrections is applied event-by-event and jet-by-jet, and is determined from simulation. It is dependent on the pseudorapidity and transverse momentum of the jet, the average p_T density in the event, and the effective jet area. This effective area is determined by injecting a large number of very soft particles in the event before the jet clustering. The spread of the soft particles in each jet then defines the jet area.

- **Relative η and absolute p_T corrections (L2L3).** This correction is also obtained from simulations and corrects for the non-uniform response of the calorimeters in η and p_T .
- **Residual η and p_T corrections (L2L3Residual).** Since the L2L3 correction is derived from simulation, additional residual corrections are needed.

Finally, a set of identification criteria are applied on the PF jets. A jet is required to consist of at least two particles. For jets in the region $|\eta| < 2.7$, the fraction of energy coming from either neutral hadrons or photons should not exceed 99%. Additionally, for jets restricted to the tracker acceptance ($|\eta| < 2.4$), there should at least be some energy deposited in the HCAL, the jet should contain 1 or more charged constituent, and the fraction of energy corresponding to electrons or photons should not exceed 99%.

4.3.6 Missing transverse energy reconstruction

While most particles produced in the collisions can be reconstructed from the hits and energy deposits in the detector, neutrinos are neutral and weakly interacting and will therefore traverse the entire detector, escaping detection. Other hypothetical neutral weakly interacting particles, which are being searched for in many physics analyses, would escape the detector without producing hits as well. This makes an accurate reconstruction of this type of particles rather challenging.

In order to be able to reconstruct neutrinos and search for new neutral and weakly interacting particles, another method is used, based on indirect observations. As the detector is hermetically closed such that all other particles in the event can be detected, the missing transverse energy can be determined. This energy then corresponds to all neutrinos and other weakly interacting neutral particles in the event, and can be calculated from the total transverse momentum of all the observed final state particles as

$$\vec{E}_T^{miss} = - \sum \vec{p}_T, \quad (4.4)$$

where the sum runs over all reconstructed PF particles.

4.4 Simulation of the SIMP signal

For the generation of the SIMP signal, the model Lagrangian given in equation ?? is implemented in FEYNRULES 2.0 [11]. Next, the matrix element is calculated at LO and events are generated using MADGRAPH 5. The subsequent parton shower and hadronization is done with PYTHIA 8, using tune CUEP8M1. Next, the events are simulated in the CMS detector using GEANT. However, the SIMPs are not included in the simulation, as their interaction with matter is not implemented in GEANT. The SIMPs were instead incorporated by adding an additional step to the standard reconstruction described in Section 4.3. In this additional step the SIMPs are directly converted to neutral PF candidates and merged with the rest of the PF candidates. The standard pileup corrections, jet clustering, and charged hadron subtraction are then applied in order to obtain the resulting jets, denoted here as P2PF jets.

In order to validate this method, a second sample was produced using neutrons instead of SIMPs and applying the same additional step. In this case the the neutrons will also be correctly reconstructed by the standard reconstruction. The reconstructed PF candidates that are matched to the generated neutrons were therefore removed before injecting the converted generated neutrons to the collection of PF candidates. This sample is then used to evaluate the difference with a standard neutron sample where the full GEANT simulation is done. Neutrons were chosen because of their resemblance to the SIMPs as single neutral particles generating a hadronic shower.

The two leading generator-level jets (GEN) can then be compared to the uncorrected P2PF jets from the custom sample and the PF jets from the standard sample. The transverse momentum of these jets is compared in Figure 4.3. This shows that the jet energy resolution (JER) is not described properly, since the additional step directly converts generated particles to PF candidates without taking into account any other effects. In order to produce a more realistic simulation, the new PF candidates are therefore smeared with JER distributions derived using the uncorrected PF jets matching the neutrons in the standard neutron sample in bins of η and p_T . An example of this resolution is shown in Figure 4.4 for central neutrons with low and high transverse momentum.

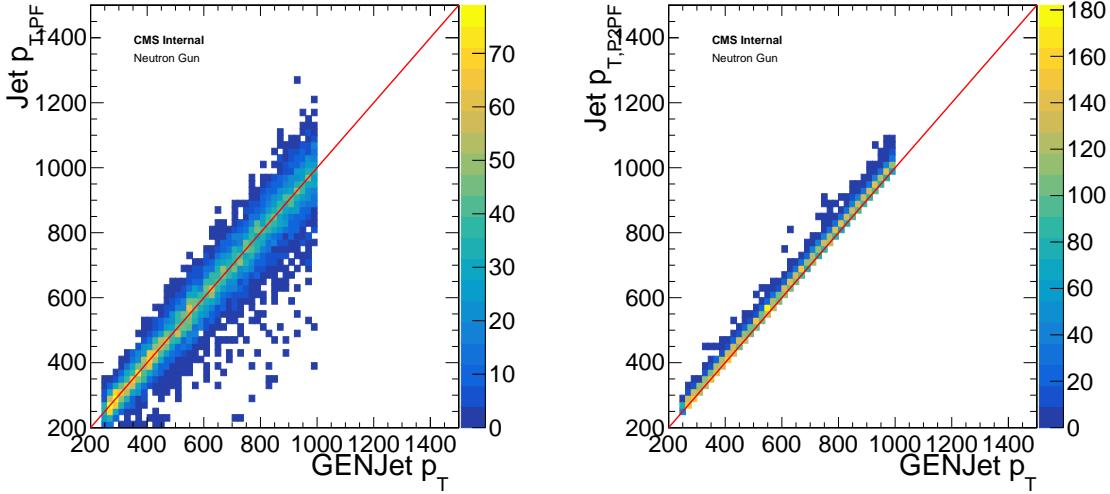


Figure 4.3: Comparison of the transverse momentum of the generator-level jets to the PF jets (left) and P2PF jets (right) without jet energy resolution smearing, using a neutron sample.

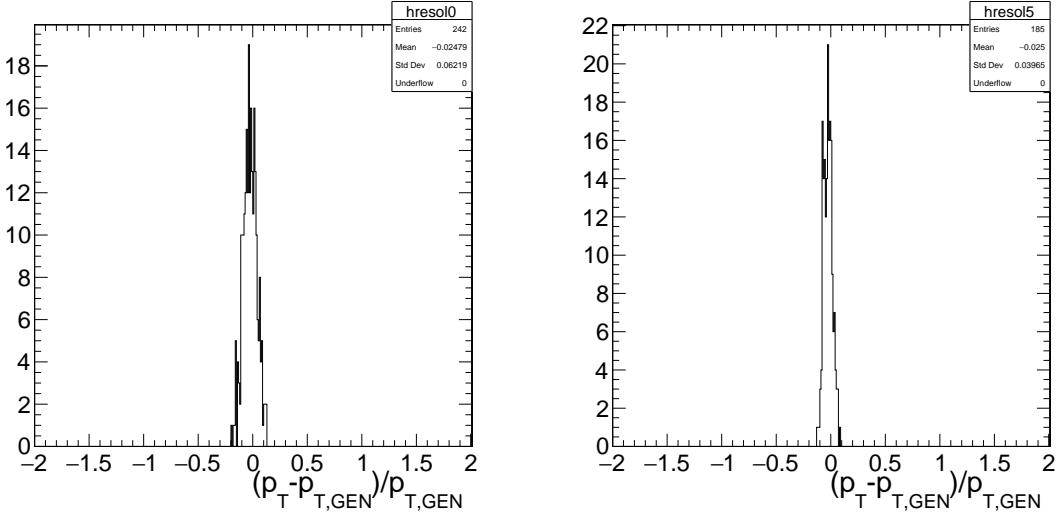


Figure 4.4: The jet energy resolution of neutrons with $0 < |\eta| < 0.5$ and $200 \text{ GeV} < p_T < 300 \text{ GeV}$ (left) or $700 \text{ GeV} < p_T < 800 \text{ GeV}$ (right).

After applying this smearing, the P2PF jets are processed with the standard sequence of charged hadron subtraction, jet clustering, L1FastJet, and L2/L3 corrections. The comparison of the corrected P2PF jets and the standard corrected PF jets is shown in Figure 4.5 for the neutron sample, validating that the jet transverse momentum is now correctly smeared. The JER distributions are also compared in Figure 4.6 and fitted with a Crystal Ball function, showing compatible parameters. This demonstrates that the procedure, where the JER distributions derived from a neutron sample are used to smear the PF candidates from generator-level SIMPs, can sufficiently accurately simulate SIMPs in a realistic detector.

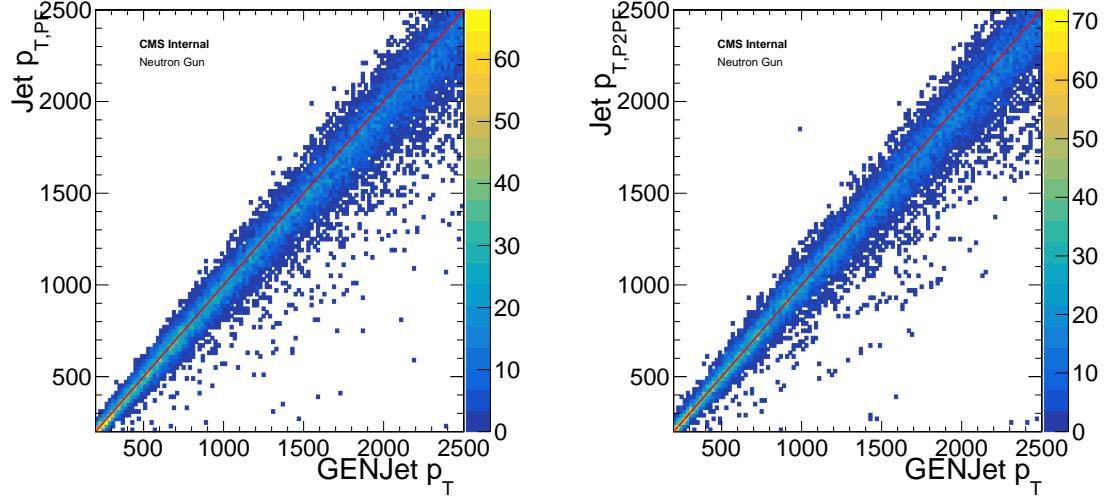


Figure 4.5: Comparison of the transverse momentum of the generator-level jets to the PF jets (left) and P2PF jets (right) in the region $0 < |\eta| < 0.5$ with jet energy resolution smearing, using a neutron sample.

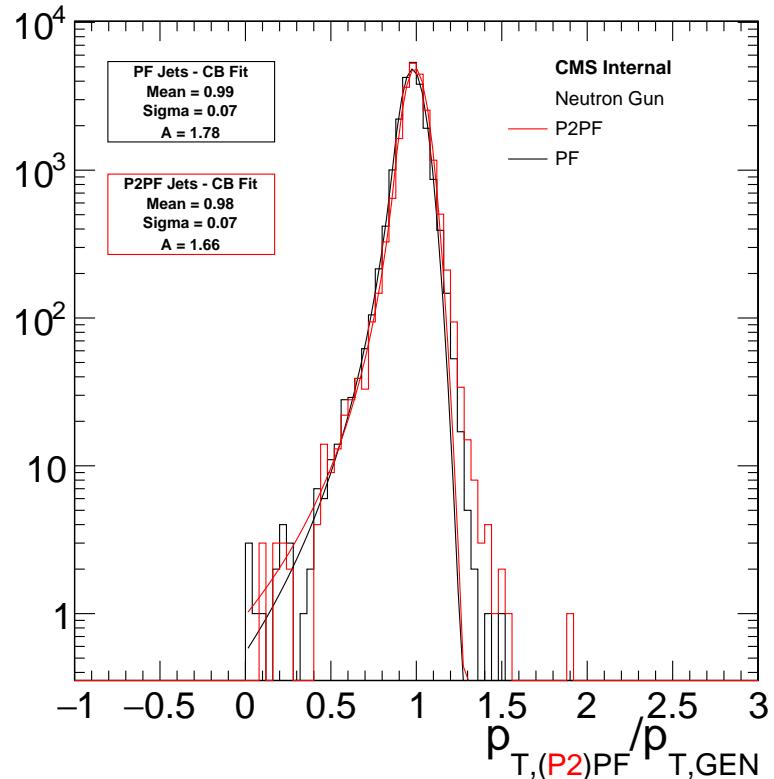


Figure 4.6: The jet energy resolution of the corrected P2PF jets (red) and PF jets (black), fitted with a Crystal Ball function.

5

The Monojet Analysis

¹ **5.1 Introduction**

² **5.2 Event selection**

³ **5.3 Background estimation**

⁴ **5.4 Results**

⁵ **5.5 Improvement going from the 2015 to 2016 analysis**

⁶ **5.6 Interpretation**

6

1

2

Search for SIMPs using Trackless Jets

3 **6.1 Introduction**

4 **6.2 Event selection**

5 **6.3 Background estimation**

6 **6.4 Results**

7 **6.5 SIMP model interpretation**

7

1

2

Conclusion & Outlook

References

- 1
- 2 [1] David Aaron Matzner Dominguez, D. Abbaneo, K. Arndt, N. Bacchetta, A. Ball, E. Bartz, W. Bertl,
3 G. M. Bilei, G. Bolla, H. W. K. Cheung, et al. *CMS Technical Design Report for the Pixel Detector
4 Upgrade*. 2012.
- 5 [2] Serguei Chatrchyan et al. *Energy Calibration and Resolution of the CMS Electromagnetic Calorimeter
6 in pp Collisions at $\sqrt{s} = 7 \text{ TeV}$* . JINST, 8:P09009, 2013. [JINST8,9009(2013)].
- 7 [3] S. Chatrchyan et al. *The CMS Experiment at the CERN LHC*. JINST, 3:S08004, 2008.
- 8 [4] A. Tapper and Darin Acosta. *CMS Technical Design Report for the Level-1 Trigger Upgrade*. 2013.
- 9 [5] Jean-marc Olivier Andre, Ulf Behrens, James Branson, Philipp Maximilian Brummer, Olivier
10 Chaze, Sergio Cittolin, Cristian Contescu, Benjamin Gordon Craigs, Georgiana Lavinia Dar-
11 lea, Christian Deldicque, Zeynep Demiragli, Marc Dobson, Nicolas Doualot, Samim Erhan,
12 Jonathan Richard Fulcher, Dominique Gigi, Maciej Szymon Gladki, Frank Glege, Guillermo
13 Gomez Ceballos, Jeroen Guido Hegeman, Andre Georg Holzner, Mindaugas Janulis, Raul
14 Jimenez Estupinan, Lorenzo Masetti, Franciscus Meijers, Emilio Meschi, Remigius Mommsen,
15 Srecko Morovic, Vivian O'Dell, Luciano Orsini, Christoph Maria Ernst Paus, Petia Petrova, Marco
16 Pieri, Attila Racz, Thomas Reis, Hannes Sakulin, Christoph Schwick, Dainius Simelevicius, Petr
17 Zejdl, Hamburg, California, San Diego, California, Chicago, Illinois, Massachusetts Institute
18 of Technology, Cambridge, Massachusetts, also at Vilnius University, Vilnius, Lithuania, and also
19 at. *Performance of the CMS Event Builder*. Technical Report CMS-CR-2017-034, CERN, Geneva,
20 Feb 2017.
- 21 [6] J. Pumplin, D. R. Stump, J. Huston, H. L. Lai, Pavel M. Nadolsky, and W. K. Tung. *New generation
22 of parton distributions with uncertainties from global QCD analysis*. JHEP, 07:012, 2002.
- 23 [7] J. Alwall, R. Frederix, S. Frixione, V. Hirschi, F. Maltoni, O. Mattelaer, H. S. Shao, T. Stelzer, P. Tor-
24 rielli, and M. Zaro. *The automated computation of tree-level and next-to-leading order differential
25 cross sections, and their matching to parton shower simulations*. JHEP, 07:079, 2014.
- 26 [8] Torbjörn Sjöstrand, Stephen Mrenna, and Peter Skands. *PYTHIA 6.4 physics and manual*. JHEP,
27 05:026, 2006.
- 28 [9] Serguei Chatrchyan et al. *Description and performance of track and primary-vertex reconstruction
29 with the CMS tracker*. JINST, 9(10):P10009, 2014.
- 30 [10] Matteo Cacciari, Gavin P. Salam, and Gregory Soyez. *The anti- k_t jet clustering algorithm*. Journal
31 of High Energy Physics, 2008(04):063, 2008.
- 32 [11] Adam Alloul, Neil D. Christensen, Céline Degrande, Claude Duhr, and Benjamin Fuks. *FeynRules
33 2.0 - A complete toolbox for tree-level phenomenology*. Comput.Phys.Commun., 185:2250–2300,
34 2014.

List of Acronyms

1

2

3

A

4

5

6 ATLAS A Toroidal LHC ApparatuS

7

8

B

9

10 BU Builder Unit

11

12

13

C

14

15 CERN European Organization for Nuclear Research
16 CHS charged hadron subtraction
17 CMS Compact Muon Solenoid
18 CSC Cathode Strip Chambers

19

20

21

D

22

23 DAQ data acquisition
24 DQM Data Quality Monitoring
25 DT Drift Tubes

26

27

28

E

29

30 ECAL electromagnetic calorimeter

31

32

33

F

34

35 FED Front End Driver
36 FSR final state radiation
37 FU Filter Unit

1

2

G

3

5 GSF

Gaussian-sum filter

6

7

H

8

10 HCAL

hadronic calorimeter

11 HLT

High-Level Trigger

12

13

I

14

16 IP

interaction point

17 ISR

initial state radiation

18

19

J

21

22 JER

jet energy resolution

23

24

L

25

27

28 L1

Level-1

29 LEIR

Low Energy Ion Ring

30 LEP

Large Electron Positron

31 LHC

Large Hadron Collider

32 LO

leading order

33

34

N

35

36 NLO

next-to-leading order

37

38

P

39

41 PDF

parton distribution function

42 PF

particle flow

43 PS

Proton Synchrotron

44 PSB

Proton Synchrotron Booster

1

2

3 **Q**

4

5 QCD Quantum Chromodynamics

6

7

8 **R**

9

10 RF radio-frequency

11 ROC read-out chip

12 RPC Resistive Plate Chambers

13 RU Readout Unit

14

15

16 **S**

17

18 SIMP strongly interacting massive particle

19 SPS Super Proton Synchrotron

20

21

22 **T**

23

24 TEC Tracker EndCaps

25 TIB Tracker Inner Barrel

26 TID Tracker Inner Disks

27 TOB Tracker Outer Barrel

