



GRABO



PLANK/IT

LUXURY
VINYL TILE FLOORING



100%
WATER
RESISTANT

GRABO
PLANK/IT

GRABO PLANKIT

LUXURY VINYL TILE FLOORING

GRABO PLANKIT IS THE NEW LUXURY VINYL TILE FROM GRABOPLAST WHICH ENSURES NATURAL FEELING FOR YOUR FLOOR IN BOTH COMMERCIAL AND DOMESTIC APPLICATIONS.



CONSTRUCTIONS



ECOLOGICAL FORMULA


THE NEW GRABO LVT IS INSPIRED BY NATURE, MANUFACTURED WITH **PHTHALATE FREE** TECHNOLOGY AND PROVIDES AN ENVIRONMENTALLY FRIENDLY FLOORING SOLUTION FOR THE USERS.

Grabo Plank/T is a long lasting flooring solution due to its durability against impacts, stains and scratches thus it is a perfect choice for shops, offices, hotels, restaurants or any other hospitality areas.

Our product has iGuard surface coating with low maintenance requirement.

Due to its glass fibre reinforcement Grabo Plank/T is a **dimensionally stable LVT flooring** with sound insulating properties and warm underfoot feeling.

Its flexibility provides economic, easy and quick installation.

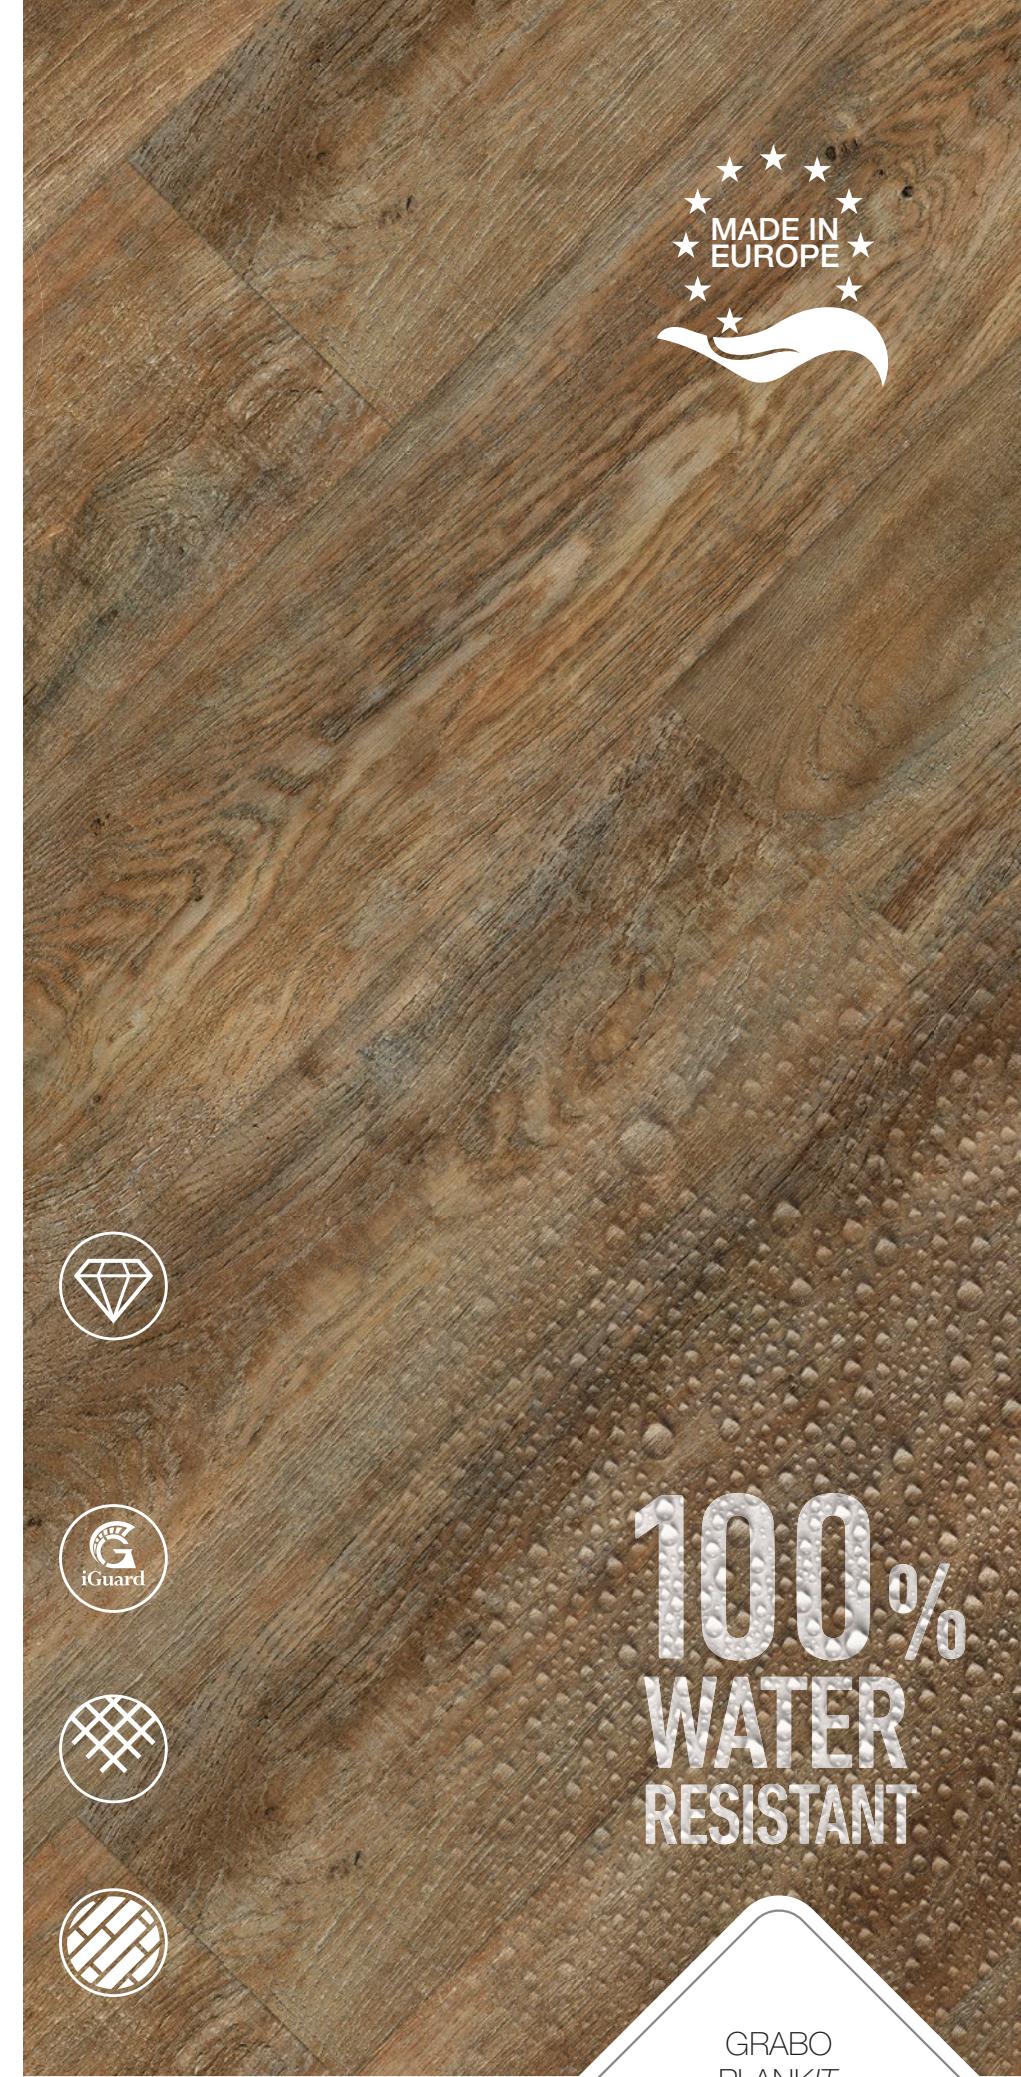



PLANK-IT
WOOD
NATURAL WOOD
STRUCTURE

Plank size
185×1220
mm

Qty/Box
~2.7m²
12 PIECES



GRABO
PLANK/IT



MALISTER

LANNISTER

TULLY

STARK

ARRYN

TORMUND

NAHARIS

MELISANDRE

BRONN

MORMONT

TARGARYEN

DROGO



REED



SELMY



MORDANE



GRABO
PLANK^{IT}
DROGO

GRABO
PLANK^{IT}

GRABO PLANK^{IT}

- EASY TO INSTALL THANKS TO IT'S TILE FORMAT
- RESISTS TO WATER SO IT IS SUITABLE TO WET ROOMS AS WELL
- OPTIMAL SOLUTION FOR HOTELS, RESTAURANTS OFFICES AND SHOPS





YGRITTE

TARLY

LUWIN

CASSEL

VARYS

BRIENNE

MISSANDEI

ROYCE



SPECIFICATION


CONSTRUCTION	Luxury Vinyl Tile with iGuard Surface	
PLANK SIZE WOOD	EN ISO 24346	185x1220 mm
PLANK SIZE STONE	EN ISO 24346	305x610 mm
THICKNESS	EN ISO 24346	2.5 mm
WEAR LAYER	EN ISO 24340	0.55 mm
TOTAL WEIGHT	EN ISO 23997	4.0 kg/m ²

CLASSIFICATION

BINDER CONTENT	EN ISO 10582	Type I.
EUROPEAN CLASSIFICATION	EN ISO 10582	class: 33/42
RESIDUAL INDENTATION	EN ISO 24343	max. 0.1 mm
DIMENSIONAL STABILITY	EN ISO 23999	max. 0.15 %
CURLING	EN ISO 23999	max. 2 mm

PERFORMANCE

ABRASION GROUP	MSZ EN 660-1	class: T
FIRE RESISTANCE	EN 13501-1	class: Bfl-s1
SLIP RESISTANCE	EN 13893	DS
ELECTRICAL PROPERTIES	EN 1815	max. 2 kV / Antistatic
THERMAL RESISTANCE	ISO 8302	0.014 m ² K/W
LIGHT FASTNESS	EN ISO 105-B0	grade 6
CHEMICAL RESISTANCE	EN ISO 26987	✓
	ASTM F925	✓
HYGENIE	bacterial resistant	
CASTOR CHAIR RESISTANCE	EN 425 / ISO 4918	✓
ENVIRONMENTAL ATTRIBUTES	solvent and phthalate free	
SURFACE TREATMENT	iGuard PUR Surface / Easy cleaning	
CONTENT OF PCP	EN 12673	does not contain
FORMALDEHIDE EMISSION	ENV 717-1	E1 (no emission)
VOC		pass
CE MARKING	EN 14041	✓

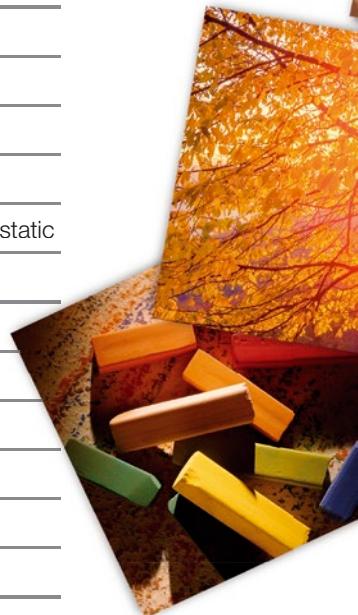

GRABOPLAST

FLOOR COVERING MANUFACTURERS LTD.

H-9023 Győr, Fehérvári út. 16/b. Telefon: (+36) 96 506-100

www.graboplast.com



www.facebook.com/graboplast

GRABO
PLANK/T