


Photometric

## iFLEXTUBE CLEARFILM RGBW

The iFLEXTUBE CLEARFILM RGBW is a unique product that has all colours in one LED package, compared to alternate chips of different colour. In combination with 16.67 mm pitch between each SMD, the iFLEXTUBE CLEARFILM RGBW is a tape that has an increased lumen output, with the ability to colorize the lit space, creating a unique atmosphere.

## PRODUCT FEATURES

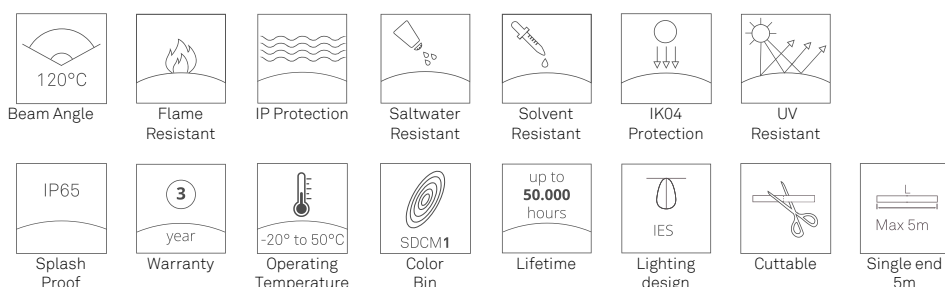

## SPECIFICATION

Colour	SMD 5050 4-in-1 RGBW LEDs
Spool length	5 meter
Beam Angle	120°
Max Fixture Runs	5 meter, 1 spool maximum
Dimming Protocol	DMX/RDM (0-100%), 0-10V (10-100%), or DALI (0-100%) via iFlexpower Driver Series
Operating Voltage	24 VDC
Lumen Maintenance	L70 @ 50,000 hours (25° C)
Mounting	3M VHB adhesive backing included, optional aluminium profile
Housing	Silicone
Operating Temperature	-20° C to 50° C


All rights reserved. iFLEXTUBE is a registered trademark of LuxBalance Lighting Limited in various countries. Due to continuous improvement and innovation, specifications may change without notice.

IP Rating	IP65
IK Rating	IK04
Fixture Connectors	1.5m attached feed cable included
Warranty	3 years standard
Weight	0.5 kg per reel of 5 m
Dimensions	W 15 x H 6 x L 5000 mm




## PRODUCT TYPE

Colour	Voltage	LED QTY/M	Wattage	Lumen/M	Lumen Efficiency	Wavelength	Pitch (mm)
RGBW=3000K	24 V	60	14.4 W/M	748	52 Lm/W	R625 G525 B465	16.67
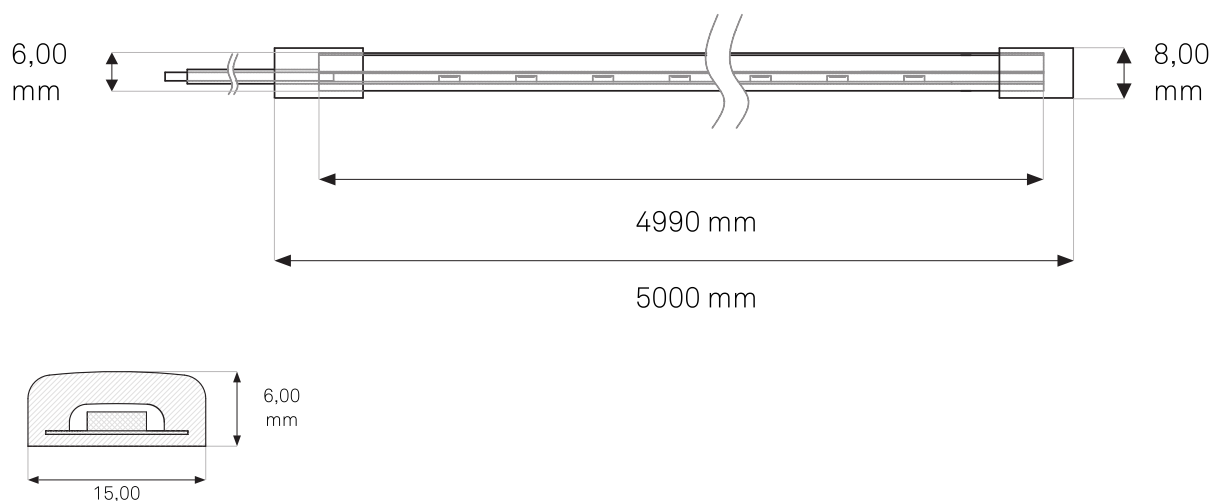
## DIMENSIONS



## AVAILABLE

-  Power supplies
-  Cables
-  Connectors

