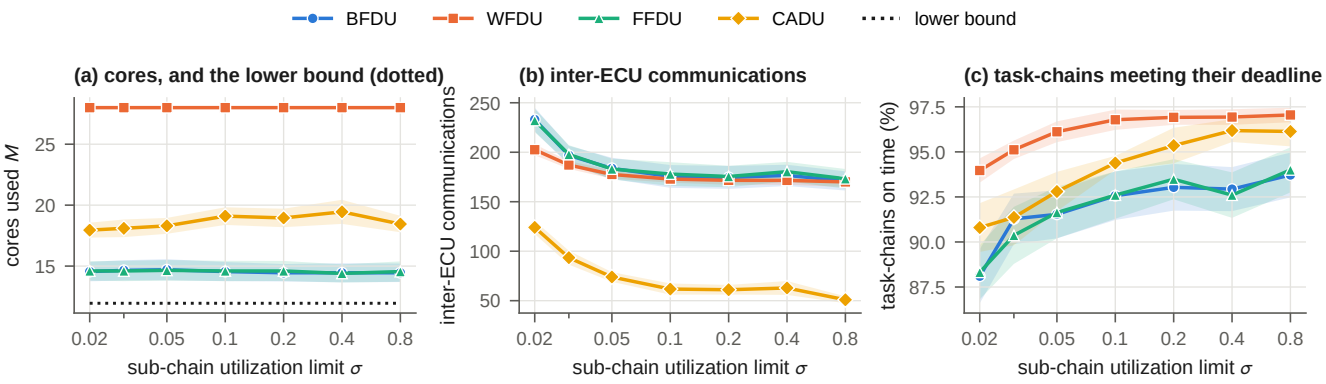
BFDU
WFDU
FFDU
CADU
lower bound
(a) cores, and the lower bound (dotted)
cores used M
25
20
15
0.02
0.05
0.1
0.2
0.4
0.8
sub-chain utilization limit σ
(b) inter-ECU communications
inter-ECU communications
250
200
150
100
50
0.02
0.05
0.1
0.2
0.4
0.8
sub-chain utilization limit σ
(c) task-chains meeting their deadline
task-chains on time (%)
97.5
95.0
92.5
90.0
87.5
0.02
0.05
0.1
0.2
0.4
0.8
sub-chain utilization limit σ