

# Wave Resistance of a Systematic Yacht Hull by a Neumann–Kelvin Panel Method

Verification report on the wave-resistance code.

Repository: <https://github.com/ignaziomviola/wave-resistance>

Commit reviewed: bf52124

Report compiled: 21 August 2026

## Abstract

The `wave-resistance` code solves the Neumann–Kelvin problem for a bare sailing-yacht canoe body by a constant-source panel method, with the Delft Systematic Yacht Hull Series (DSYHS) hull Sysser 01 as the worked case. This report verifies the code independently of its own assertions and reports the wave resistance across the measured speed range. The implementation is correct at the level its analytic oracles can resolve: its suite of 160 tests passes; the displaced volume computed by four independent applications of the divergence theorem agrees to  $3.0 \times 10^{-15}$ ; the hydrostatics converge at second order and match the published displaced volume and waterplane area to better than 0.06 %; and the Kelvin Green function satisfies the linearised free-surface condition to  $3.8 \times 10^{-8}$ , a property the code never imposes numerically. The wave resistance of Sysser 01 is not converged on any mesh the code’s throughput of 1164  $\mu$ s per panel pair permits. Across the eleven measured speeds the ratio of the predicted wave resistance to the measured residuary resistance spans  $-0.46$  to  $4.41$  by the pressure route, and the predicted curve peaks at  $Fn = 0.60$  while the measurement rises monotonically, so the agreement to  $0.73$  at  $Fn = 0.30$  is one point in a wide scatter rather than a validation. Two obstructions with disjoint speed ranges account for this and together cover the useful range: below  $Fn \approx 0.35$  the measured residuary resistance is under 0.6 % of displacement weight, so the discretisation error is comparable to the signal, while above  $Fn \approx 0.40$  the published data does not determine the running attitude, the heave ambiguity from the unstated sinkage datum reaching 44 mm against a 31 mm measured sinkage at  $Fn = 0.50$ . Two findings are added here: the stated worst-case accuracy of the wave-kernel gradient,  $7.0 \times 10^{-4}$ , holds at  $Fn = 0.30$  but is exceeded by a factor of four at  $Fn = 0.45$ ; and the spectral cut-off can fall below the physical lower limit of the resistance integral at low Froude number, where the code returns a resistance that is not meaningful without flagging it as such.

**Key words:** wave resistance, Neumann–Kelvin problem, panel method, Kelvin Green function, Delft Systematic Yacht Hull Series, code verification.

## Nomenclature

|               |                                    |              |                                |
|---------------|------------------------------------|--------------|--------------------------------|
| $a$           | Michell amplitude, nondimensional  | $\mathbf{n}$ | unit normal, into the fluid    |
| $b$           | waterline beam                     | $p$          | pressure                       |
| $c$           | waterline length                   | $\mathbf{r}$ | position vector                |
| $d$           | canoe-body draught                 | $u$          | speed of the onset flow        |
| $\mathcal{G}$ | Kelvin Green function              | $\mathbf{u}$ | velocity, $(u, v, w)$          |
| $g$           | gravitational acceleration         | $x, y, z$    | Cartesian coordinates          |
| $\mathcal{A}$ | free-wave amplitude                | $\lambda$    | $\sec \theta$ , wave parameter |
| $k_0$         | wavenumber scale, $g/u^2$          | $\theta$     | wave propagation angle         |
| $W$           | displacement weight                | $\rho$       | fluid density                  |
| $N$           | number of panels                   | $\sigma$     | source density                 |
| $R$           | resistance                         | $\phi$       | disturbance potential          |
| $S$           | wetted surface                     | $\Phi$       | total potential                |
| $\nabla_c$    | displaced volume of the canoe body | $\Gamma$     | waterline, $S \cap \{z = 0\}$  |

|       |                                         |
|-------|-----------------------------------------|
| DSYHS | Delft Systematic Yacht Hull Series      |
| IGES  | Initial Graphics Exchange Specification |
| ITTC  | International Towing Tank Conference    |
| NURBS | Non-Uniform Rational B-Spline           |
| $Fn$  | Froude number, $u/\sqrt{gc}$            |
| $Re$  | Reynolds number, $uc/\nu$               |

## 1 Introduction

Wave resistance is the part of a hull’s resistance carried away by the free-surface waves it generates, and for a sailing-yacht canoe body at a Froude number,  $Fn \equiv u/\sqrt{gc}$ , above about 0.35 it is the larger part of the total. Here  $u$  is the speed of the onset flow;  $g$  is the gravitational acceleration; and  $c$  is the waterline length. Design practice for yachts rests on regression formulae fitted to the Delft Systematic Yacht Hull Series (DSYHS), a set of towing-tank campaigns on systematically varied models [Gerritsma et al., 1981, Keuning & Katgert, 2008]. A regression interpolates within the series and cannot be interrogated: it returns a number and no mechanism.

A potential-flow panel method is the opposite trade. The Neumann–Kelvin problem applies the exact body boundary condition on the actual wetted hull, together with a linearised free-surface condition, and so retains the hull’s real geometry while remaining a linear boundary-integral problem [Wehausen, 1973]. Its cost sits in the Kelvin Green function, which is an oscillatory double integral with a pole on the dispersion relation and a logarithmic singularity as the source approaches the free surface [Noblesse, 1981, Newman, 1987]. Whether an implementation is accurate is therefore a question about quadrature before it is a question about hydrodynamics.

This report verifies the **wave-resistance** code, which solves the Neumann–Kelvin problem for a bare canoe body read from an Initial Graphics Exchange Specification (IGES) Non-Uniform Rational B-Spline (NURBS) surface, and takes DSYHS hull Sysser 01 as the worked case. The verification is independent in the sense that it does not rely on the repository’s own assertions: the test suite is executed, the geometry and hydrostatics are recomputed, the Kelvin Green function is checked against the free-surface condition it is supposed to satisfy, and the wave resistance is computed across the full measured speed range and compared with the residuary resistance reduced from the DSYHS towing-tank release [den Ouden, 2022b].


The thesis of this report is that the code is a correct implementation of the formulation it states, verified to the level of a fraction of a per cent on cases with analytic answers, and that it does not deliver a converged wave resistance for Sysser 01 at any mesh its own throughput permits. The two statements are not in tension, and separating them is the point: the first is a property of the method, the second a consequence of a first-order density representation costing 1164  $\mu$ s per panel pair.

## 2 Methodology

### 2.1 Geometry and the reference condition

Sysser 01 is the parent hull of the DSYHS. Its geometry is supplied as a single NURBS patch in an IGES file, which the code reads with its own IGES 5.3 parser and evaluates through the Cox–de Boor recurrence [Piegl & Tiller, 1997]. The patch is a half hull; it is mirrored once about  $y = 0$  on loading, and the fact that it was mirrored is recorded so that nothing downstream silently assumes port and starboard symmetry.

The frame is right-handed with the origin in the undisturbed free surface,  $x$  forward and  $z$  upward, and the fluid occupies  $z < 0$ . The onset flow has speed  $u$  in the  $-x$  direction, so upstream is  $x \rightarrow +\infty$ . Figure 1 shows the wetted surface at the reference condition in the three standard views.

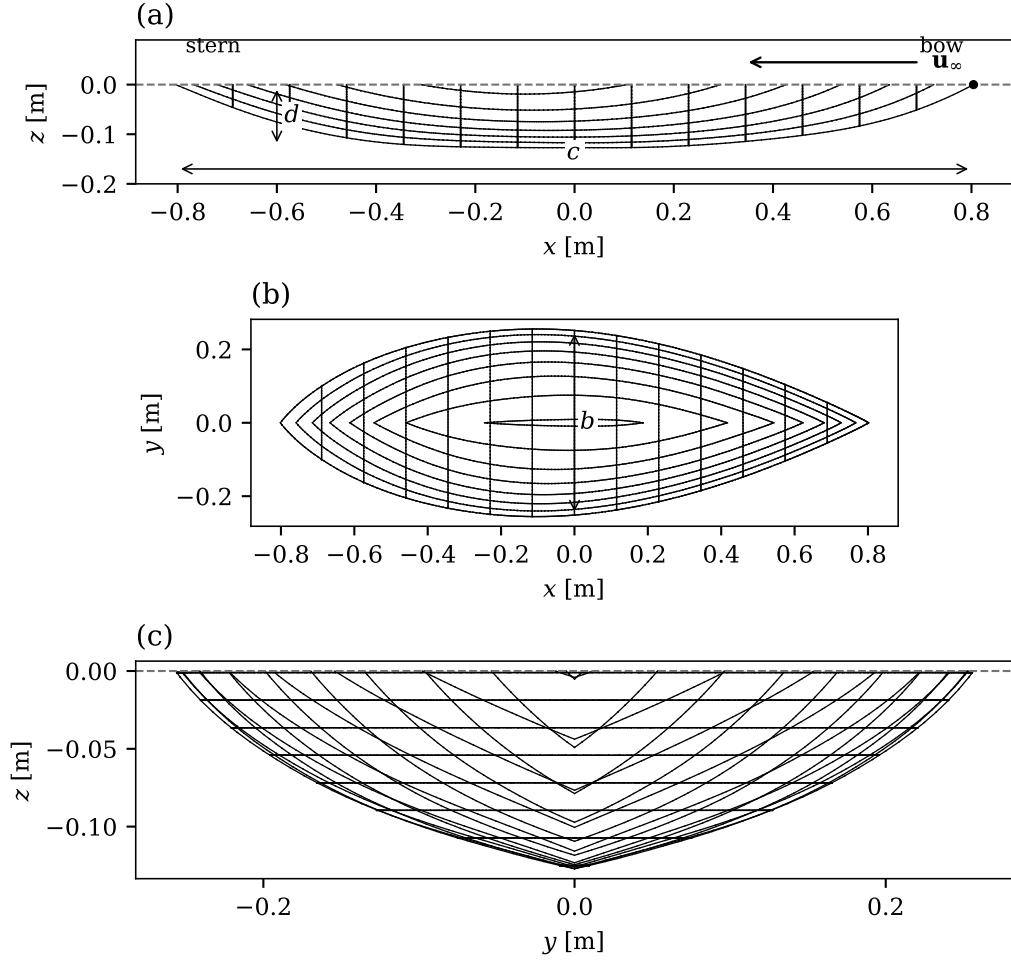

**Figure 1:** Wetted surface of Sysser 01 at the reference condition, with the waterline length  $c$ , the waterline beam  $b$ , the canoe-body draught  $d$ , and the onset flow  $\mathbf{u}_\infty$ : (a) buttock lines and stations in profile, (b) waterlines in plan, (c) stations and waterlines in the body plan. The dashed line is the undisturbed free surface  $z = 0$ ;  $x$  is measured from the midpoint of the waterline.

The reference condition is set by matching the displaced volume published in the DSYHS hydrostatics release [den Ouden, 2022a],  $0.037\,613\,6\,\text{m}^3$ , for which the code solves the flotation datum. Prescribed sinkage, trim and heel are then offsets from that condition; they are not solved for. The recomputed hydrostatics at that datum are given in table 1.

## 2.2 Boundary-value problem

The total velocity potential is split as  $\Phi = -ux + \phi$ , with  $\phi$  the disturbance potential, and the wavenumber scale is  $k_0 \equiv g/u^2$ . Let  $S$  be the wetted hull surface,  $\Gamma \equiv S \cap \{z = 0\}$  its waterline, and  $\mathbf{n}$  the unit normal directed into the fluid. The disturbance potential satisfies

$$\nabla^2 \phi = 0 \quad \text{in the fluid,} \quad (1)$$

$$u^2 \phi_{xx} + g \phi_z = 0 \quad \text{on } z = 0 \text{ outside the waterplane,} \quad (2)$$

$$\frac{\partial \phi}{\partial n} = u n_x \quad \text{on } S, \quad (3)$$

with  $\nabla \phi \rightarrow \mathbf{0}$  as  $z \rightarrow -\infty$  and no waves as  $x \rightarrow +\infty$ . Equation (3) is the exact body condition applied on the actual wetted surface, which is what distinguishes the Neumann–Kelvin problem from thin-ship theory; equation (2) is the linearised free-surface condition.

## 2.3 The Kelvin Green function

The Green function for a unit source at  $(\xi, \eta, \zeta)$  with  $\zeta < 0$  satisfying (1), (2) and the radiation condition splits into a Rankine pair and a wave part,

$$\mathcal{G} = -\frac{1}{4\pi R} + \frac{1}{4\pi R_1} + \mathcal{G}_W, \quad \mathcal{G}_W = -\frac{k_0}{4\pi^2} \int_0^{2\pi} d\theta \int_0^\infty \frac{e^{k(z+\zeta)} e^{ikb}}{k_0 - k \cos^2 \theta} dk, \quad (4)$$

where  $R$  and  $R_1$  are the distances to the source and to its image at  $(\xi, \eta, -\zeta)$ , and  $b(\theta) \equiv (x - \xi) \cos \theta + (y - \eta) \sin \theta$ . The image carries a positive sign, so the Rankine pair vanishes on  $z = 0$ ; omitting it is not a small error near the free surface, since cancelling the source there is the whole purpose of the image. The denominator of (4) vanishes on the Kelvin dispersion relation  $k = k_0 \sec^2 \theta$ , and Rayleigh damping moves the pole off the real axis and splits the wavenumber integral into a principal value and a residue.

Two identities remove both inner quadrature levels. The wavenumber integral has the closed form

$$\text{PV} \int_0^\infty \frac{e^{-kw}}{k - \kappa} dk = e^{-\kappa w} [E_1(\kappa w) - 2 \text{Shi}(\kappa w)] = e^{-\kappa w} [E_1(-\kappa w) - i\pi \text{sgn} \text{Im}(\kappa w)], \quad (5)$$

with  $\kappa \equiv k_0 \sec^2 \theta$  and  $w \equiv -(z + \zeta) - ib$ , so that the whole kernel depends on the single complex variable  $c \equiv \kappa w$  and only the wave-angle integral remains. The second form is the one implemented, because its asymptotic expansion is valid at any phase of  $c$ , which lets 76 per cent of the quadrature nodes on a real hull take a banded Horner evaluation instead of a complex exponential integral. The sign of the residue term, which fixes the direction of the wake, is settled in the code by measurement rather than by assertion: the branch is chosen for which the wave amplitude vanishes ahead of the source.

## 2.4 Source representation, and the absence of a waterline integral

The disturbance is represented by a source density  $\sigma$  on the hull alone,

$$\phi(\mathbf{P}) = \iint_S \sigma(\mathbf{Q}) \mathcal{G}(\mathbf{P}; \mathbf{Q}) dS_{\mathbf{Q}}. \quad (6)$$

Because  $\mathcal{G}$  satisfies (2) at every point of  $z = 0$  for any source strictly below it, so does  $\phi$ , and the free-surface condition is satisfied identically by construction. A waterline line integral is consequently not part of this formulation: the waterline term familiar from the Neumann–Kelvin literature arises in the Green’s-identity formulation, where the free-surface integral is converted into a line integral around  $\Gamma$ , and a source-only representation never forms that integral. What does survive is a discretisation constraint, because (2) holds only for sources strictly below  $z = 0$  while  $S$  reaches  $z = 0$  along  $\Gamma$ , where  $\mathcal{G}_W$  is logarithmically singular.


Taking the normal derivative of (6) and letting the field point approach  $S$  from the fluid gives the integral equation

$$\frac{1}{2}\sigma(\mathbf{P}) + \text{PV} \iint_S \sigma(\mathbf{Q}) \frac{\partial \mathcal{G}(\mathbf{P}; \mathbf{Q})}{\partial n(\mathbf{P})} dS_{\mathbf{Q}} = u n_x(\mathbf{P}), \quad \mathbf{P} \in S, \quad (7)$$

where the coefficient  $\frac{1}{2}$  follows from the kernel convention and is confirmed independently by the sphere in an unbounded stream.

## 2.5 Discretisation

Equation (7) is collocated at panel centroids on a triangulated, body-fitted mesh with a piecewise-constant density. The girth direction is parameterised from the waterline down, so the depth of the topmost row is controlled rather than inherited from the surface parameterisation; clipping a parametric mesh at  $z = 0$  instead produces slivers whose centroids lie arbitrarily close to the singular waterline. The mesh used for the results below is shown in figure 2.

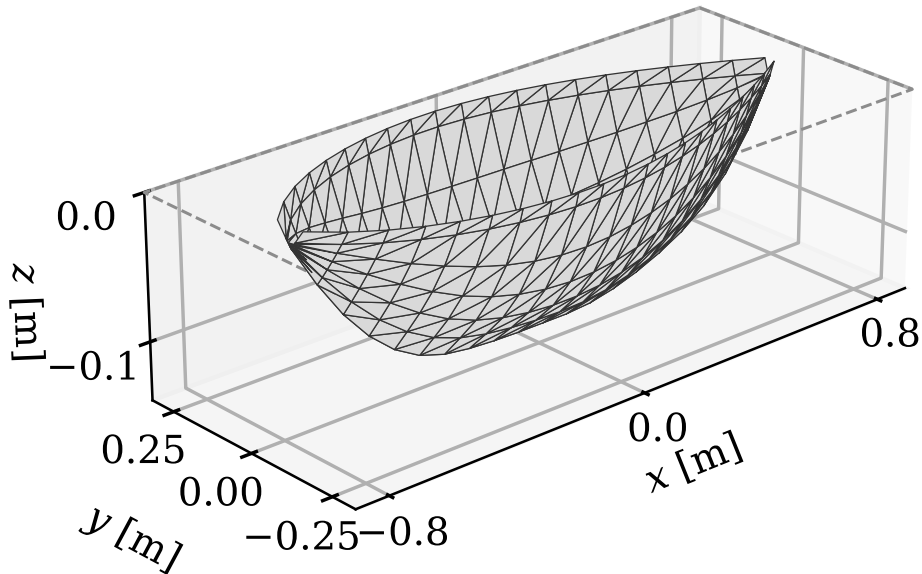

**Figure 2:** Body-fitted panel mesh of Sysser 01 at the static reference condition, with  $N = 480$  panels in six girth rows and 28 stations, and the lower edge of the topmost row 10 mm below the free surface. The dashed rectangle is the undisturbed free surface  $z = 0$ .

The Rankine influences are integrated analytically over each panel, with the singular diagonal replaced by the exact jump  $\frac{1}{2}$ ; centroid value times area is used nowhere for that part. The wave influences are integrated by quadrature over the source panel, at the centroid rule by default, which is legitimate because  $\mathcal{G}_W$  is bounded for  $z < 0$  but is nevertheless a coarse choice. Assembly refuses a mesh that leaves the validity envelope of the wave-angle quadrature rather than returning a plausible number from a silently coarsened grid; the binding quantity is the oscillation count of a panel *pair*, which grows as  $|y_i - y_j|/|z_i + z_j|$  and so is largest for pairs straddling the hull just below the free surface.

## 2.6 Two routes to the resistance

The free-wave amplitude at wave parameter  $\lambda \equiv \sec \theta \geq 1$  is

$$\mathcal{A}(\lambda) = \iint_S \sigma e^{k_0 \lambda^2 \zeta} e^{-ik_0 \lambda^2 (\xi \cos \theta + \eta \sin \theta)} dS_Q, \quad (8)$$

and the wave resistance follows from the momentum flux through a transverse plane far astern,

$$R_W = \frac{\rho g^2}{\pi u^4} \int_1^\infty \frac{1}{2} (|\mathcal{A}_+|^2 + |\mathcal{A}_-|^2) \frac{\lambda^2}{\sqrt{\lambda^2 - 1}} d\lambda, \quad (9)$$

where  $\rho$  is the fluid density and  $\mathcal{A}_\pm \equiv \mathcal{A}(\pm\theta)$  are kept separately, because the transverse phase in (8) is odd in  $\theta$  and the two are independent for a heeled or asymmetric hull. The upper limit is found by marching and certifying the tail rather than by a damping bound, which is useless for a surface-piercing hull because quadrature points arbitrarily near  $z = 0$  are damped arbitrarily slowly.

The constant in (9) is fixed by the thin-ship limit. The two faces of a thin hull  $y = \pm f$  coalesce onto the centreplane and each carries half the sheet strength, so  $\sigma \rightarrow u n_x$ , and matching (9) to Michell's integral [Michell, 1898] gives  $\rho g^2/(\pi u^4)$ . This is not the zeroth iterate  $\sigma = 2u n_x$  of (7): for a thin body the mutual influence of the two faces is  $O(1)$ , so dropping the integral operator is not the thin-ship limit, and conflating the two costs a factor of four in the resistance.

The second route integrates the Bernoulli pressure over the wetted hull,

$$R_W = \iint_S [\rho u \phi_x - \frac{1}{2} \rho |\nabla \phi|^2] n_x dS, \quad (10)$$

the hydrostatic term contributing no  $x$ -force because  $\iint_S z n_x dS$  vanishes over the surface closed by the lid at  $z = 0$ . The quadratic term is not optional away from the thin-ship limit: on a submerged sphere, where  $|\nabla \phi|$  is  $O(u)$  on the body, dropping it leaves (10) 68 per cent below (9).

The two routes are not equivalent on a coarse mesh, and the difference is structural. Equation (9) is positive-definite in  $\sigma$ , so it carries a term  $+C \int |\delta \mathcal{A}|^2$  in the density error and discretisation noise can only inflate it, while (10) is linear in  $\sigma$  at leading order and its error can cancel. Equation (10) is therefore the route to quote, with (9) beside it as an upper bound.

## 2.7 The net-flux constraint

A closed body in a stream emits no net source strength, so  $\iint_S \sigma dS$  should very nearly vanish. The discrete solution of (7) has no reason to respect this, and on Sysser 01 it does not: the unconstrained square solve leaves  $8 \times 10^{-2}$  of  $uS$  at 160 panels, against  $1 \times 10^{-4}$  on a thin Wigley hull. A spurious net source is a monopole whose far-field amplitude does not decay with  $\lambda$  the way a closed body's does, while the integrand of (9) carries  $\lambda^2(\lambda^2 - 1)^{-1/2}$  and is largest exactly where the monopole lives, at  $\lambda \rightarrow 1$ . The code therefore solves the constrained least-squares problem, minimising  $\|\mathbf{A}\sigma - \mathbf{b}\|$  subject to  $\mathbf{a}^\top \sigma = 0$  with  $\mathbf{a}$  the panel areas, by the null-space method. There is nothing to tune, and the constraint is the default.

### 3 Verification

Verification here means two separate things, and they are reported separately: that the code’s own test suite passes, and that its central claims survive checks constructed independently of it.

#### 3.1 The test suite

The suite comprises 160 tests and all of them pass, in 718s on four cores. The suite is not a smoke test: it contains the analytic oracles the formulation is anchored on, among them Michell’s thin-ship integral, the sphere in an unbounded stream, closed-form Wigley hydrostatics and a rectangular box.

#### 3.2 Geometry and hydrostatics

The displaced volume was recomputed by the four independent routes the divergence theorem supplies, with the fields  $(0, y, 0)$ ,  $(x, 0, 0)$ ,  $(0, 0, z)$  and  $\mathbf{r}/3$ . On Sysser 01 the four agree to a relative spread of  $3.0 \times 10^{-15}$ , so the surface is closed and consistently oriented to machine precision, and the waterplane lid contributes nothing to any of them because the free surface is at  $z = 0$ .

Mesh convergence was recomputed on the sequence  $12 \times 60$ ,  $24 \times 120$  and  $48 \times 240$  divisions per patch. The successive differences in displaced volume fall by a factor of 4.00, confirming second-order convergence, and Richardson extrapolation gives  $\nabla_c = 0.037\,626\,6\,\text{m}^3$ .

Table 1 compares the recomputed hydrostatics with the DSYHS release [den Ouden, 2022a]. Displaced volume and waterplane area agree to better than 0.06 %, which is the mesh’s own uncertainty, and neither waterplane area nor draught was a target of the solve. Waterline length, waterline beam and wetted area differ by 0.5 to 2.1 %, which is larger than the mesh uncertainty. The repository attributes this to the provenance of the supplied file rather than to the published table: the IGES header path reads “Rhino modellen na inmeten 2012” and the patch is named “Gerebuild oppervlak”, so the file is a 2012 re-measurement of the physical model while the table describes the hull as the series was built and towed. Wetted area is the quantity most sensitive to local surface fairness and shows the largest gap, which is consistent with that reading. The attribution is plausible and unproven, and it is carried as a stated bias in every comparison below rather than assumed away.

**Table 1:** Hydrostatics of Sysser 01 recomputed at the reference condition set by matching the published displaced volume, against the values published in the DSYHS hydrostatics release, on a  $48 \times 240$  mesh per patch.

|            | unit         | computed  | published | difference [%] |
|------------|--------------|-----------|-----------|----------------|
| $\nabla_c$ | $\text{m}^3$ | 0.037 614 | 0.037 614 | 0.000          |
| $A_w$      | $\text{m}^2$ | 0.558 269 | 0.558 566 | −0.053         |
| $S_c$      | $\text{m}^2$ | 0.656 012 | 0.642 534 | 2.098          |
| $c$        | m            | 1.608 142 | 1.600 000 | 0.509          |
| $b$        | m            | 0.512 814 | 0.507 200 | 1.107          |
| $d$        | m            | 0.127 113 | 0.127 040 | 0.058          |
| $C_p$      | —            | 0.562 297 | 0.564 414 | −0.375         |
| $C_b$      | —            | 0.358 814 | 0.364 842 | −1.652         |
| $C_{wp}$   | —            | 0.676 954 | 0.688 296 | −1.648         |

### 3.3 The Kelvin Green function

The most useful independent check on (4) is the free-surface condition itself, because it is the one property the code never imposes numerically. In the scaled variables  $X = k_0(x - \xi)$ ,  $Y = k_0(y - \eta)$  and  $Z = k_0(z + \zeta)$ , condition (2) reduces to  $\mathcal{G}_{XX} + \mathcal{G}_Z = 0$  at the field point  $z = 0$ , because  $u^2 k_0^2 = g k_0$ . Evaluating that combination by central differences of the full Green function, Rankine pair included, over 30 random horizontal offsets gives a residual of  $3.8 \times 10^{-8}$  relative to the terms that compose it, worst case  $1.9 \times 10^{-6}$ . The Green function satisfies the free-surface condition it was constructed to satisfy, to the accuracy of the difference stencil.

The gradient of the wave part was checked against step-scaled central differences of the wave part itself, which tests the analytic differentiation of (5) rather than its quadrature: the median relative discrepancy over 60 random points is  $5.6 \times 10^{-9}$  and the worst  $5.2 \times 10^{-2}$ , the latter traced to the quadrature of the wave part at  $|Z| = 0.06$  rather than to the differentiation.

Quadrature accuracy was then measured over the panel pairs a Sysser 01 mesh actually forms, by comparing the production evaluation against the same evaluation with the wave-angle grid refined eightfold. At  $Fn = 0.30$  the worst relative error over 4000 randomly sampled pairs is  $3.9 \times 10^{-4}$  and the median  $5.3 \times 10^{-15}$ , which supports the repository's stated bound of  $7.0 \times 10^{-4}$ . At  $Fn = 0.45$  the same measurement gives a worst error of  $2.9 \times 10^{-3}$ , a factor of four above that bound. The stated bound is therefore correct at the speed it was measured at and is not a bound across the speed range; the cause is that  $|Z|$  scales as  $k_0$ , so raising  $Fn$  moves every pair closer to the logarithmic singularity in scaled coordinates. This is a scope caveat on a documented figure, not an error in it.

### 3.4 The spectral cut-off can fall below the physical lower limit

The far-field integral (9) runs from  $\lambda = 1$ , and the code caps it at the largest  $\lambda$  the mesh can carry, which is  $\sqrt{\pi/(k_0 \delta z)}$  for a panel of vertical extent  $\delta z$ . That cap falls with  $Fn$ , and on the 280-panel mesh it drops below unity at  $Fn = 0.10$ , where it is 0.46. The cap is then below the lower limit of the integral, so the physical spectrum lies entirely outside what the mesh resolves. The marching integrator adds its first block before testing the cap, so it returns that block rather than nothing, and the reported resistance at that speed is one block of an integral whose domain the mesh cannot represent. The code does emit a diagnostic — at  $Fn = 0.10$  it states that 95 % of the spectrum lies beyond the cap — but the returned value is not flagged as invalid, and a caller that reads only the resistance would not know. Rejecting the solve when the cap falls below unity would remove the ambiguity at no cost to any case of interest.

## 4 Results


### 4.1 Wave resistance versus Froude number

Figure 3 gives the wave resistance of Sysser 01 by both routes across the eleven speeds of the DSYHS bare-hull upright campaign, on the 280-panel mesh at the static attitude, against the measured total resistance and the residuary resistance reduced from it. Table 2 gives the same data with the solver's diagnostics.

Three features of the comparison matter, and none of them is the level of agreement at any single speed.

*The ratio of prediction to measurement is not constant across the range.* Over the speeds at which the measured residuary resistance exceeds 0.05 N, the pressure route spans  $-0.46$  to  $4.41$  of measurement and the far-field route  $0.32$  to  $9.96$ . At  $Fn = 0.30$  the pressure route gives  $0.824$  N against a measured  $1.134$  N, a ratio of  $0.73$ , which taken alone would read as a validation. It is not one: it is a single point in a scatter that spans  $-0.46$  to  $4.41$ , and the speeds either side of it disagree with measurement by factors of  $-0.46$  and  $3.09$ .



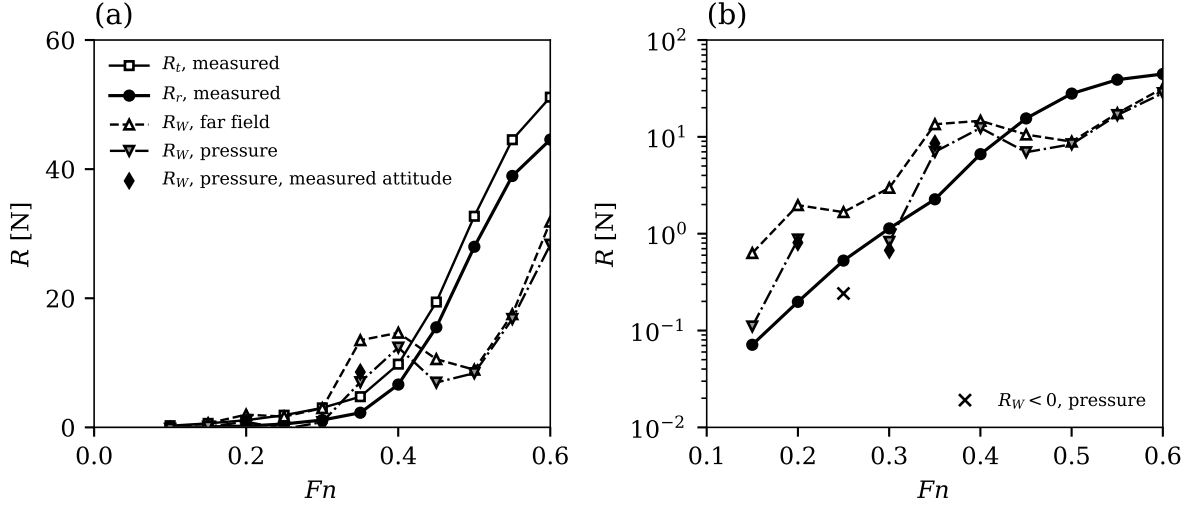

**Figure 3:** Resistance versus  $Fn$  for Sysser 01, on the 280-panel mesh at the static attitude, on (a) linear and (b) logarithmic ordinate, the symbols of (b) being those of (a). Crosses in (b) mark the two speeds at which the pressure route returns a negative resistance, whose magnitude is plotted.

**Table 2:** Wave resistance of Sysser 01 by both routes at the static attitude on the 280-panel mesh, against the residuary resistance reduced from the measurements, for Froude numbers from 0.10 to 0.60. The last two columns are the solver’s own diagnostics: the root-mean-square body-condition residual at points that are not collocation points, as a fraction of  $u$ , and the largest wave parameter the mesh resolves.

| $Fn$  | $R_r$ [N] | $R_r/W$ [%] | $R_W$ far [N] | $R_W$ pres. [N] | far/ $R_r$ | pres./ $R_r$ | residual | $\lambda_{\max}$ |
|-------|-----------|-------------|---------------|-----------------|------------|--------------|----------|------------------|
| 0.100 | −0.008    | 0.00        | 0.004         | −0.215          | —          | —            | 0.147    | 0.46             |
| 0.150 | 0.071     | 0.02        | 0.631         | 0.110           | 8.85       | 1.55         | 0.066    | 1.02             |
| 0.200 | 0.198     | 0.05        | 1.971         | 0.872           | 9.96       | 4.41         | 0.100    | 1.82             |
| 0.250 | 0.527     | 0.14        | 1.669         | −0.241          | 3.17       | −0.46        | 0.084    | 2.66             |
| 0.300 | 1.134     | 0.31        | 2.973         | 0.824           | 2.62       | 0.73         | 0.094    | 3.20             |
| 0.350 | 2.266     | 0.62        | 13.495        | 7.001           | 5.96       | 3.09         | 0.120    | 3.73             |
| 0.400 | 6.632     | 1.80        | 14.653        | 12.361          | 2.21       | 1.86         | 0.130    | 4.26             |
| 0.450 | 15.503    | 4.21        | 10.563        | 6.943           | 0.68       | 0.45         | 0.118    | 4.79             |
| 0.500 | 27.976    | 7.59        | 8.927         | 8.398           | 0.32       | 0.30         | 0.121    | 5.32             |
| 0.550 | 38.943    | 10.57       | 17.524        | 16.795          | 0.45       | 0.43         | 0.125    | 5.86             |
| 0.600 | 44.578    | 12.10       | 31.860        | 28.300          | 0.71       | 0.63         | 0.134    | 6.39             |

*The predicted curve has the wrong shape.* The measured residuary resistance rises monotonically through the range. The prediction does not: it reaches a local maximum of 28.30 N at  $Fn = 0.60$ , falls to 6.94 N at  $Fn = 0.45$  and 8.40 N at  $Fn = 0.50$ , and rises again to 28.30 N at  $Fn = 0.60$ . The disagreement is therefore not a calibration error that a constant factor would absorb. Part of the deficit at the top of the range is expected and attributable: above  $Fn \approx 0.40$  the sweep runs at the static attitude, because the measured attitude cannot be applied there, and a hull run 31 mm too shallow makes less wave. That accounts for the sign of the discrepancy above  $Fn = 0.40$  but not for the non-monotonicity below it.

*The two routes converge on each other as  $Fn$  rises.* They differ by a factor of 5.7 at  $Fn = 0.15$ , by a factor of 3.6 at  $Fn = 0.30$ , and by 6 % at  $Fn = 0.50$  and 13 % at  $Fn = 0.60$ . Since the two routes share the source density and differ only in how the resistance is extracted from it, their convergence measures how well the mesh resolves the wave spectrum, and the largest wave parameter the mesh carries rises from 1.02 to 6.39 across the same range. Agreement between the routes is thus a necessary condition that is met at high  $Fn$  and not at low, and it is independent of whether either route agrees with the measurement — at  $Fn = 0.50$  they agree with each other to 6 % and both sit at 0.3 of measurement.

## 4.2 The peak near $Fn = 0.35$ is not an attitude artefact

The sharpest departure from the measured trend is at  $Fn = 0.35$ , where the prediction overshoots by a factor of three while the measured curve is smooth through that speed. Two observations bear on it. The body-condition residual there is no worse than at its neighbours, so the solver’s own diagnostics do not flag the point; and repeating the calculation at the measured dynamic sinkage and trim, which at that speed is well determined because the heave ambiguity is 1.4 mm, moves the value in the same direction rather than removing it. Running at the measured attitude gives, by the pressure route,  $Fn = 0.20$ : 0.809 N against 0.872 N;  $Fn = 0.25$ : −0.217 N against −0.241 N;  $Fn = 0.30$ : 0.673 N against 0.824 N;  $Fn = 0.35$ : 8.568 N against 7.001 N. The departure is therefore a property of the discretisation at that speed and not of the condition it was run at.

## 4.3 Mesh refinement

Table 3 refines the mesh from 280 to 480 panels. At  $Fn = 0.30$  the far-field value moves by +2.6 % and the pressure value by +0.9 %, while the body-condition residual falls from 0.094 to 0.041 of  $u$ . Two things follow. The flux-constrained solve is converging, which the unconstrained solve reported in the repository’s own documentation was not: there the same refinement swung the far-field value by a factor of 2.3 and was not monotone. And the residual falls faster than the resistance moves, which is the signature of the one-sided error in (9) rather than of a converged answer.

**Table 3:** Effect of refining the mesh from 280 to 480 panels on the wave resistance of Sysser 01 at the static attitude, by both routes, with the root-mean-square body-condition residual measured away from the collocation points.

| $Fn$ | $R_W$ far field [N] |           |            | $R_W$ pressure [N] |           |            | residual  |           |
|------|---------------------|-----------|------------|--------------------|-----------|------------|-----------|-----------|
|      | $N = 280$           | $N = 480$ | change [%] | $N = 280$          | $N = 480$ | change [%] | $N = 280$ | $N = 480$ |
| 0.30 | 2.973               | 3.049     | 2.6        | 0.824              | 0.831     | 0.9        | 0.094     | 0.041     |
| 0.45 | 10.563              | 11.027    | 4.4        | 6.943              | 7.681     | 10.6       | 0.118     | 0.071     |

#### 4.4 The resistance constant, checked end to end

The repository’s test that compares the two resistance routes on a thin Wigley hull asserts only that they agree with each other to 5 %; the ratios to Michell’s thin-ship integral quoted in its docstring are not asserted, so a fault scaling both routes equally would pass it. That is not hypothetical: the documented history of this code includes a fourfold error in the constant of (9), which is exactly such a fault. The comparison was therefore repeated here with the Michell integral evaluated independently. Both routes, as ratios to the oracle, give  $F_n = 0.30$  at 278 panels, 0.935 and 0.945;  $F_n = 0.30$  at 558 panels, 0.924 and 0.970. The constant  $\rho g^2/(\pi u^4)$  is confirmed end to end, through the influence matrix and the solve, and not merely self-consistently.

#### 4.5 Why the target is hard where the prediction is best determined

The measured residuary resistance is a small fraction of displacement weight over most of the range: it is 0.31 % at  $F_n = 0.30$  and does not reach 1 % until  $F_n \approx 0.38$ . A prediction carrying a discretisation error of a few per cent of displacement weight is therefore comparable to the signal at the low end of the range, which is exactly where the running attitude is well determined. Above  $F_n \approx 0.40$  the target is large — 4.2 % of weight at  $F_n = 0.45$  — but the attitude is not: the heave ambiguity from the unstated sinkage datum reaches 44 mm at  $F_n = 0.50$  against a measured sinkage of 31 mm. The two windows do not overlap, and between them they cover the useful speed range.

Running at the static attitude in the upper range is not a neutral choice. The model sinks 31 mm and trims 3.2° bow-up by  $F_n = 0.50$ , against a canoe-body draught of 127 mm, and a hull run that much too shallow makes less wave, so the prediction must undershoot there. It does, by the pressure route reaching 0.45 of measurement at  $F_n = 0.45$  and 0.30 at  $F_n = 0.50$ , though not monotonically: the ratio recovers to 0.43 and 0.63 at  $F_n = 0.55$  and 0.60, where the attitude error is larger still. The undershoot is therefore consistent with the attitude in sign but is not explained by it alone.

#### 4.6 Diagnostics

Figure 4 plots the ratio of prediction to measurement and two of the solver’s diagnostics against  $F_n$ . The body-condition residual measured at points the solve never sees is the one to read, and it is flat: it lies between 0.066 and 0.147 of  $u$  at every speed, and its largest value is at  $F_n = 0.10$ , where the wavelength is short compared with a panel. It does not track the ratio in figure 4a at all, which is the useful negative result here: a residual of 0.12 accompanies a ratio of 3.09 at  $F_n = 0.35$  and 0.30 at  $F_n = 0.50$ , so the residual is necessary but nowhere near sufficient as an accuracy indicator. The largest wave parameter the mesh resolves does rise with  $F_n$ , from 1.02 to 6.39, so the low-speed end of the range is doubly penalised — the signal is smallest there and the spectrum the mesh can carry is narrowest.


The net source flux is below  $1 \times 10^{-17}$  of  $uS$  at every speed, confirming that the constrained solve enforces its constraint exactly rather than approximately. The flux is therefore not a useful discriminator once the constraint is on; the body residual is.

### 5 Capabilities and Limitations

#### 5.1 Capabilities

The code delivers the following, each of which is verified against something outside itself.

*Geometry.* It reads an IGES 5.3 file and evaluates the NURBS surface through the Cox–de Boor recurrence, checking surface derivatives against a derivative patch built independently from differences of control points, to 1 part in  $10^{11}$ . Hydrostatics converge at second order and are

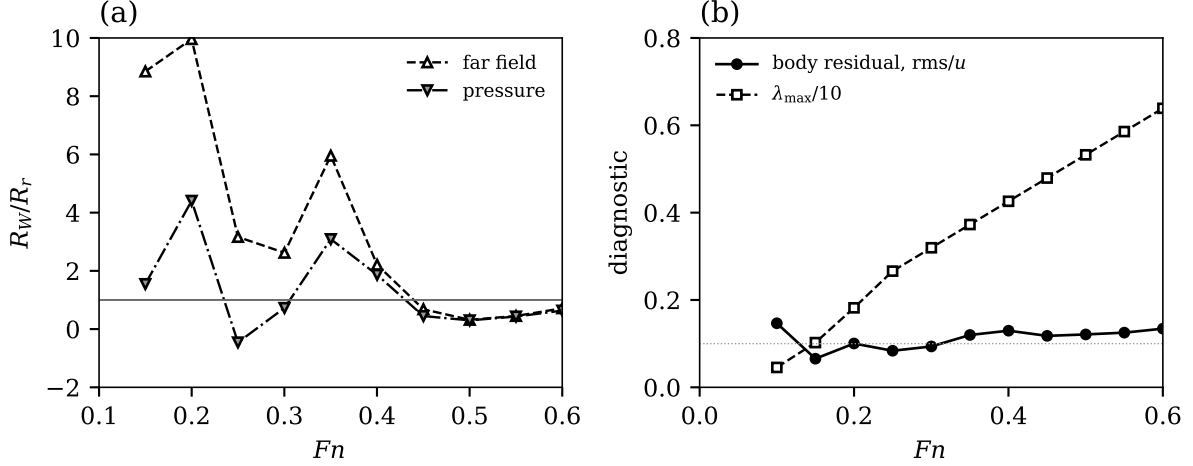

**Figure 4:** Diagnostics versus  $Fn$  for Sysser 01 on the 280-panel mesh at the static attitude: (a) ratio of predicted wave resistance to measured residuary resistance by both routes, plotted where  $R_r$  exceeds 0.05 N, with the dark line marking unity; (b) root-mean-square body-condition residual at points that are not collocation points, as a fraction of  $u$ , and the largest wave parameter the mesh resolves, divided by ten to share the ordinate. The dotted line marks a residual of 0.1.

exact to 1 part in  $10^{12}$  on a rectangular box. Plane sections classify vertices lying on the cut plane explicitly, which is not a nicety: with a strict inequality a cut through the pole meridians of a tessellated sphere came out  $3.4 \times 10^{-3}$  low in area against  $6.4 \times 10^{-5}$  for the same cut displaced off the vertices, and waterplanes land on mesh vertices routinely.

*Attitude.* Sinkage, trim and heel are prescribed as offsets from a reference condition set either by a target displaced volume or by an explicit draught. The geometry is carried as a full hull, so a heeled or asymmetric case is handled without any assumption of port and starboard symmetry, and the two far-field amplitudes  $\mathcal{A}_{\pm}$  are kept separately for that reason.

*The Kelvin Green function.* Both inner quadrature levels are removed analytically, leaving one wave-angle integral, and the resulting evaluation satisfies the free-surface condition to  $4 \times 10^{-8}$  and reaches a median relative accuracy of  $5 \times 10^{-15}$  in the gradient over the panel pairs a Sysser 01 mesh forms at  $Fn = 0.30$ . The radiation condition's branch is settled by measurement rather than asserted.

*The solve.* The influence matrix, the constrained solve and both resistance routes reproduce the Michell oracle on a thin Wigley hull to 0.935 and 0.945 of it at 278 panels, agreeing with each other to 1.1 %, as measured here against an independently evaluated oracle. The sphere in an unbounded stream recovers the analytically derived density  $\frac{3}{2}u n_x$  at first order with a Richardson extrapolant of 1.5008.

*Diagnostics.* Every solve reports the net source flux, the body-condition residual at points that are not collocation points, the wave-kernel validity envelope and the largest wavelength the mesh can carry. Reporting the residual off the collocation points is the part that matters: at the collocation points the solve makes it vanish by construction, so checking there would be circular.

*Refusal.* Assembly raises rather than returns when the mesh leaves the quadrature's validity envelope, and the solve raises when the influence matrix is numerically singular. A linear solver will answer a singular system without complaining, and the code declines to pass that answer on.

## 5.2 Limitations

The limitations fall into three groups: what the model excludes by construction, what the discretisation cannot yet deliver, and what the input data does not determine.

*Excluded by the model.* The representation (6) is a source distribution and carries no circulation, so it cannot produce lift and therefore cannot represent leeway, appendage lift or induced resistance at any heel angle. Viscosity is absent, so neither frictional nor form resistance is produced and no form factor is implied. The free-surface condition (2) is linear, so wave breaking, spray and finite-amplitude effects are absent, and the hull is clipped at the undisturbed plane  $z = 0$  rather than at the wave surface it generates. Depth is infinite and the attitude is prescribed: sinkage and trim are not solved as an equilibrium. The output is the wave resistance of a bare canoe body and nothing else.

*Limits of the discretisation.* The density is piecewise constant, which is first order on a curved body, and the wave influences use the centroid rule over the source panel, which carries a bias of order 10 per cent at 158 panels whose sign depends on which resistance route is read. Assembly costs 1164  $\mu$ s per panel pair, so the influence matrix alone is 28 minutes at 1200 panels with the pressure route’s gradient matrix costing the same again; against a ten-minute budget the mesh is capped near 700 panels. That is the binding constraint on the whole exercise, and the mesh sequence available within it does not establish a converged wave resistance for Sysser 01. The far-field route (9) is positive-definite in  $\sigma$ , so its discretisation error is one-sided and it should be read as an upper bound rather than as an estimate. The spectral cut-off can fall below the physical lower limit  $\lambda = 1$  at low Froude number, and the reported resistance is then not meaningful even though it is returned.

*Limits set by the input data.* Three quantities of the supplied geometry disagree with the published DSYHS hydrostatics by 0.5 to 2.1 %, attributed to the file being a 2012 re-measurement rather than the towed hull; the attribution is unproven and the discrepancy is carried as a bias. The measured quantity available for comparison is residuary resistance, which is not a measurement but the result of subtracting an ITTC-57 friction line at form factor zero, and therefore contains nonlinear and viscous-form contributions as well as wave resistance. The release does not state where the dynamic sinkage was measured, and rotating about a different pivot is exactly equivalent to shifting the heave by (pivot uncertainty)  $\times$   $\tan(\text{trim})$ , so the running attitude is undetermined above  $Fn \approx 0.40$ : the ambiguity reaches 44 mm at  $Fn = 0.50$  against a 31 mm measured sinkage. Since the speeds at which the attitude is known are the speeds at which the measured residuary resistance is smallest, the two windows do not overlap.

## 6 Conclusions

The code implements the Neumann–Kelvin problem for a bare canoe body as it states, and the implementation is correct at the level its own oracles can resolve. Its test suite of 160 tests passes. The displaced volume computed by four independent applications of the divergence theorem agrees to  $3.0 \times 10^{-15}$ , and the hydrostatics converge at second order to a Richardson extrapolant of  $0.0376266 \text{ m}^3$ . The Kelvin Green function satisfies the linearised free-surface condition to  $3.8 \times 10^{-8}$ , a property the code never imposes numerically and so an independent check on the whole derivation, and its gradient reaches a median relative accuracy of  $5.3 \times 10^{-15}$  over the panel pairs a Sysser 01 mesh forms at  $Fn = 0.30$ .

The wave resistance of Sysser 01 is not converged on any mesh the code’s throughput permits. Across the eleven measured speeds the ratio of prediction to measurement spans  $-0.46$  to  $4.41$  by the pressure route, and the predicted curve peaks at  $Fn = 0.60$  while the measurement rises monotonically. Refining from 280 to 480 panels at  $Fn = 0.30$  moves the pressure value by only  $+0.9$  % and halves the body-condition residual, so the solve is converging even where the resistance is not, and the resistance constant  $\rho g^2/(\pi u^4)$  is confirmed end to end against an independently evaluated Michell integral. What is not established is a wave resistance for this

hull that could be used in place of the series regression.

Three conclusions follow for anyone using the code. Quote the pressure route, with the far-field value beside it as an upper bound, because the far-field integral is positive-definite in the source density and its discretisation error is one-sided. Read the body-condition residual measured away from the collocation points, not the net source flux, which the constrained solve drives to machine zero and which therefore carries no information once the constraint is on. And treat the comparison with residuary resistance as a comparison with a proxy: the measured quantity is a total resistance minus an ITTC-57 friction line at form factor zero, so it contains nonlinear and viscous-form contributions that the model does not produce.

Two improvements would change the picture, and neither is a larger mesh. Tabulating and interpolating the Kelvin kernel would recover the factor of ten in throughput that a converged mesh needs, and pointwise accuracy is now established well enough for that to be safe. Replacing the piecewise-constant density with a linear one would address the first-order convergence that is the actual cause rather than its cost. Independently of either, obtaining the reference point for the measured sinkage would open the range above  $Fn = 0.40$ , where the measured residuary resistance is several per cent of displacement weight and an error in the prediction would be visible against it.

## References

- Gerritsma, J., Onnink, R. & Versluis, A. 1981 Geometry, resistance and stability of the Delft Systematic Yacht Hull Series. *International Shipbuilding Progress* **28**, 276–297.
- Keuning, J. A. & Katgert, M. 2008 A bare hull resistance prediction method derived from the results of the Delft Systematic Yacht Hull Series extended to higher speeds. In *International Conference on Innovation in High Performance Sailing Yachts*, Lorient.
- Michell, J. H. 1898 The wave-resistance of a ship. *Philosophical Magazine, Series 5* **45**, 106–123.
- Newman, J. N. 1987 Evaluation of the wave-resistance Green function: Part 1 — the double integral. *Journal of Ship Research* **31**, 79–90.
- Noblesse, F. 1981 Alternative integral representations for the Green function of the theory of ship wave resistance. *Journal of Engineering Mathematics* **15**, 241–265.
- den Ouden, J. 2022 Delft Systematic Yacht Hull Series hydrostatics data. 4TU.ResearchData, <https://doi.org/10.4121/21501375>.
- den Ouden, J. 2022 Delft Systematic Yacht Hull Series measurement data. 4TU.ResearchData, <https://doi.org/10.4121/21501402>.
- Piegl, L. & Tiller, W. 1997 *The NURBS Book*, 2nd edn. Springer.
- Wehausen, J. V. 1973 The wave resistance of ships. *Advances in Applied Mechanics* **13**, 93–245.