


Consegna W2D1

COMUNICAZIONE "LAPTOP0" CON PC0.

Configurazione:

- Laptop0 ip:192.168.100.100;
- Laptop1 ip:192.168.100.102;
- Pc0 ip:192.168.100.103;

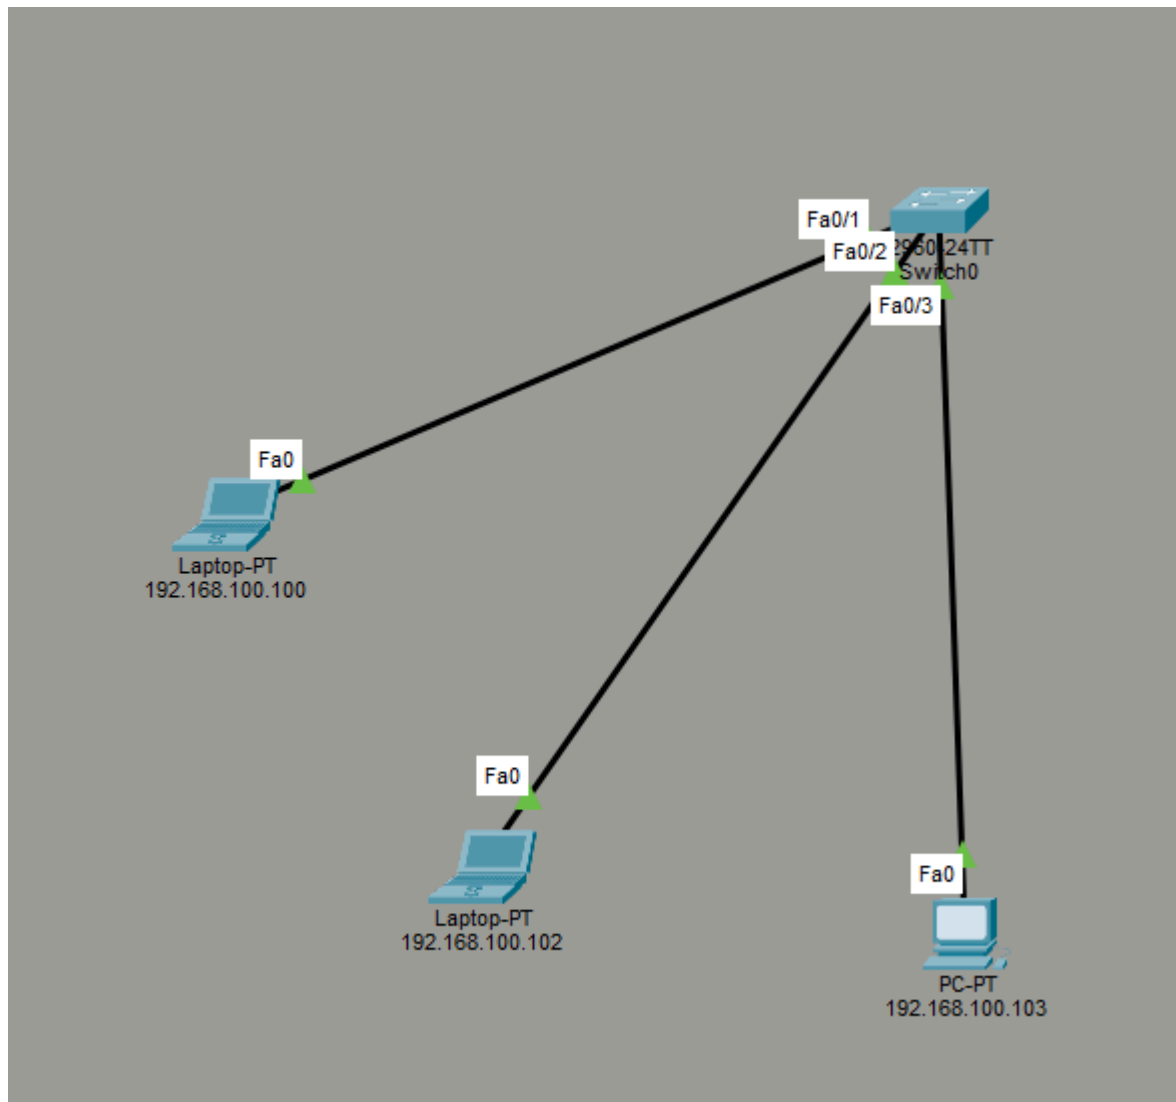

"Dopo aver configurato gli indirizzi IP, si apre il prompt dei comandi ed eseguo il seguente comando: `ping 192.168.100.103`"


```
C:\>ping 192.168.100.103

Pinging 192.168.100.103 with 32 bytes of data:

|
```

Top

Configurare la comunicazione tra i dispositivi Laptop0 e Laptop-PT2.

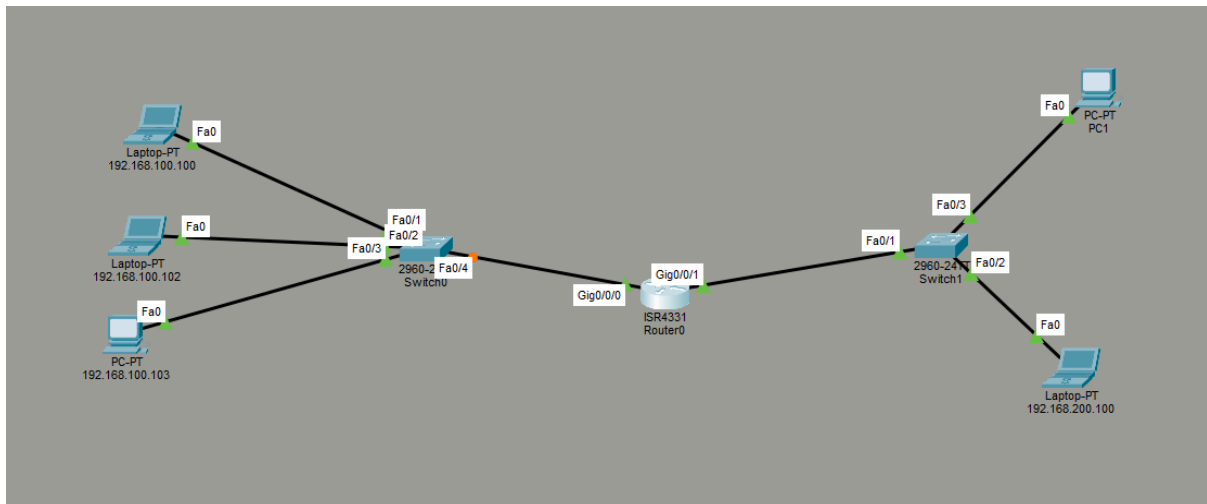

Configurazione router:

Router0

Physical

Config

CLI

Attributes

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

SWITCHING

VLAN Database

INTERFACE

GigabitEthernet0/0/0

GigabitEthernet0/0/1

GigabitEthernet0/0/2

GigabitEthernet0/0/0

Port Status

Link Speed

Duplex

MAC Address

IP Configuration

IPv4 Address

Subnet Mask

Tx Ring Limit

On

1000 Mbps

100 Mbps

10 Mbps

Auto

Half Duplex

Full Duplex

Auto

0060.3E67.0D01

192.168.100.1

255.255.255.0

10

Router(config)#interface GigabitEthernet0/0/0

Router(config-if)#

Router(config-if)#exit

Router(config)#interface GigabitEthernet0/0/1

Router(config-if)#

Router(config-if)#exit

Router(config)#interface GigabitEthernet0/0/0

Router(config-if)#

Router(config-if)#

Router(config-if)#exit

Router(config)#interface GigabitEthernet0/0/2

Router(config-if)#

Router(config-if)#exit

Router(config)#interface GigabitEthernet0/0/0

Router(config-if)#

Top

Router0

Physical **Config** CLI Attributes

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

SWITCHING

VLAN Database

INTERFACE

GigabitEthernet0/0/0

GigabitEthernet0/0/1

GigabitEthernet0/0/2

GigabitEthernet0/0/1

Port Status ☒ On

Link Speed 1000 Mbps 100 Mbps 10 Mbps ☒ Auto

Duplex Half Duplex Full Duplex ☒ Auto

MAC Address 0060.3E67.0D02

IP Configuration

IPv4 Address 192.168.200.1


Subnet Mask 255.255.255.0

Tx Ring Limit 10

```
Router(config)#interface GigabitEthernet0/0/1
Router(config-if)#
Router(config-if)#exit
Router(config)#interface GigabitEthernet0/0/0
Router(config-if)#
Router(config-if)#exit
Router(config)#interface GigabitEthernet0/0/2
Router(config-if)#
Router(config-if)#exit
Router(config)#interface GigabitEthernet0/0/0
Router(config-if)#
Router(config-if)#exit
Router(config)#interface GigabitEthernet0/0/1
Router(config-if)#
```

Top

Prova ping tra pc con indirizzo Ip 192.168.100.100 e pc 192.168.200.100

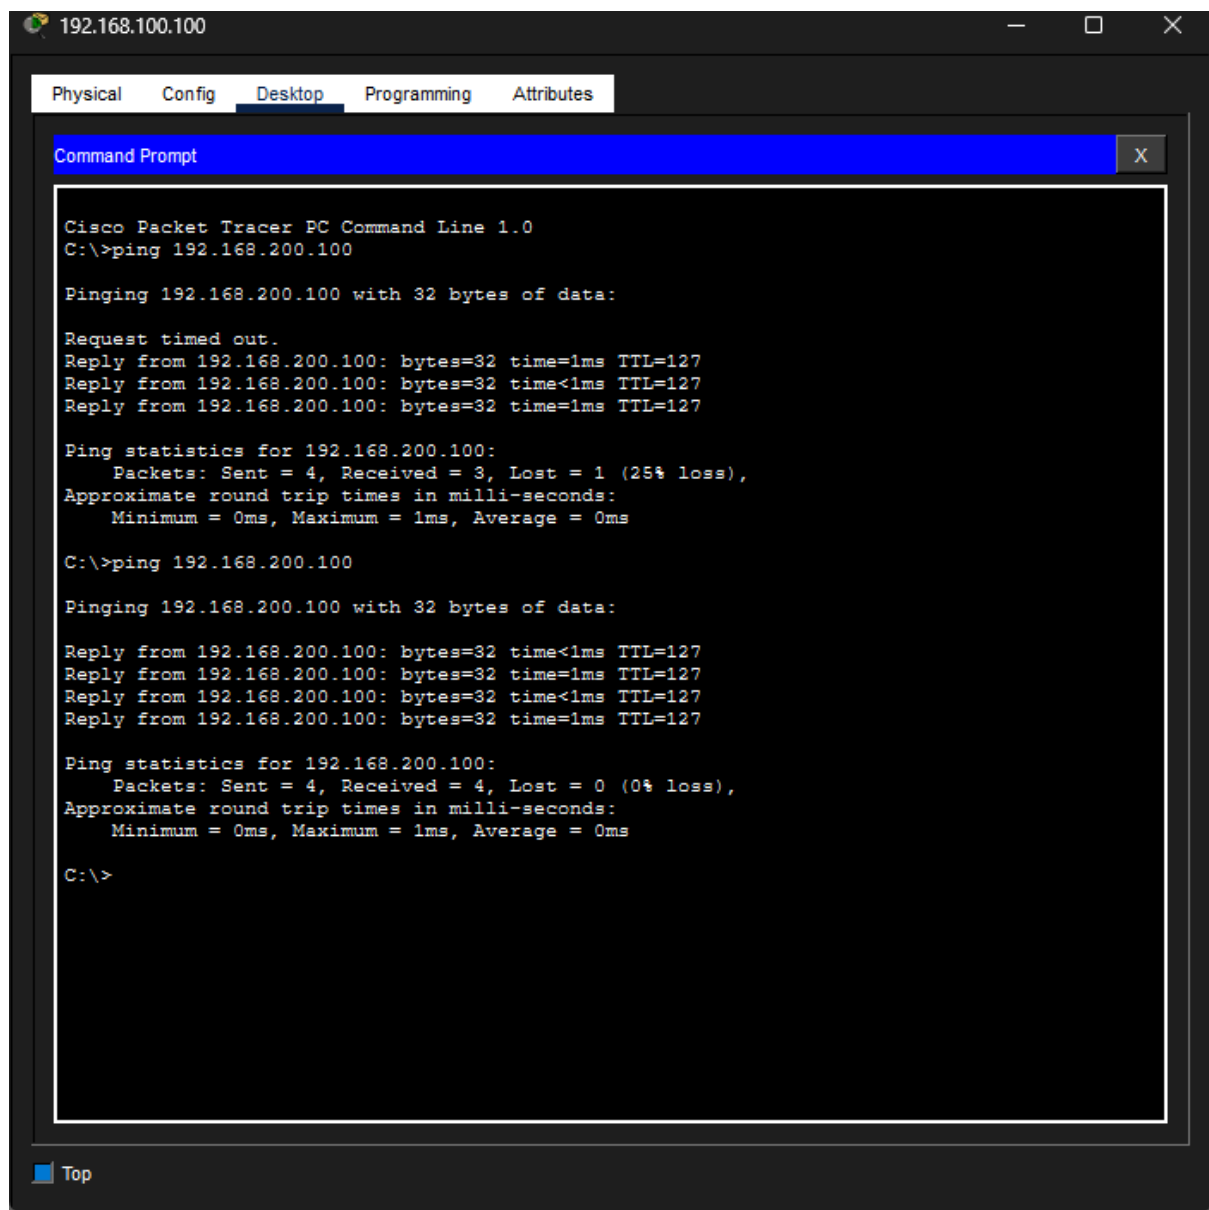

Uscita del del pacchetto dl router

The screenshot displays a network simulation interface with two main panels. The left panel, titled 'PDU Information at Device: Router0', shows the 'Outbound PDU Details' tab. It details an Ethernet II frame with a preamble, source and destination MAC addresses (0002.4A11 and 5B6.958E), and an IP packet. The IP packet has a source IP of 192.168.100.100 and a destination IP of 192.168.200.100. Below the IP packet, an ICMP echo request is shown with type 0x08, code 0x00, and sequence number 9. The right panel, titled 'Simulation Panel', contains an 'Event List' table and a 'Visible Events' list.

PDU Information at Device: Router0 - Outbound PDU Details

Ethernet II

PREAMBLE: 101010...10	DEST ADDR: 000C.85B6.958E
SRC ADDR: 0002.4A11	FCS: 0x0000

IP

VER: 4	HL: 5	DSCP: 0x00	TL: 128
ID: 0x0009	FRAG OFFSET: 0x000		
TTL: 127	PRO: 0x01	CHKSUM	
SRC IP: 192.168.100.100			
DST IP: 192.168.200.100			
DATA (VARIABLE LENGTH)			

ICMP

TYPE: 0x08	CODE: 0x00	CHECKSUM
ID: 0x0004	SEQ NUMBER: 9	

Simulation Panel - Event List

Vis.	Time(sec)	Last Device	At Device
	0.000	--	192.168.10
	0.000	--	192.168.10
	0.001	192.168.100.100	Switch0
	0.002	Switch0	192.168.10
	0.002	Switch0	192.168.10
	0.002	Switch0	Router0
	0.003	Router0	Switch0
	0.004	Switch0	192.168.10
	0.004	--	192.168.10
	0.005	192.168.100.100	Switch0
	0.006	Switch0	Router0
	0.007	Router0	Switch1
	0.008	Switch1	192.168.20
	0.009	192.168.200.100	Switch1
	0.010	Switch1	Router0
	0.011	Router0	Switch0
	0.012	Switch0	192.168.10
	0.621	--	Switch0

Simulation Panel - Visible Events

ACL Filter, ARP, Bluetooth, CAPWAP, CDP, DHCPv6, DTP, EAPOL, EIGRPv6, FTP, H.323, HSRPv6, HTTP, HTTPS, ICMP, ICMPv6, IEC, IPsec, ISAKMP, IoT, IoT.TCP, LACP, LLDP, MODBUS, Meraki, NDP, NETFLOW, NTP, OSPFv6, PaGP, POP3, PPP, PPPoE, PTP, Profinet, RADIUS, REP, RiPing, RTP, SCCP, SMTP, SNMP, SSH, STP, SYSLOG, TACACS, TCP, TFTP, Telnet, UDP, USB, VTP

Simulation Panel - Controls

Reset Simulation ☒ Constant Delay Captured to: 0.621 s

Play Controls: [Previous] [Play] [Next]

Simulation Panel - Bottom

Edit Filters Show All/None

Event List Realtime Simulation

Nelle immagini sottostanti si nota che l'indirizzo IP non cambia, mentre il MAC address si aggiorna a ogni salto per inoltrare il pacchetto tra i vari dispositivi:

PDU Information at Device: Switch0

[OSI Model](#)

Inbound PDU Details

Outbound PDU Details

Layer7	Layer7
Layer6	Layer6
Layer5	Layer5
Layer4	Layer4
Layer3	Layer3
Layer 2: Ethernet II Header 0002.17BB.05E3 >> FFFF.FFFF.FFFF ARP Packet Src. IP: 192.168.100.100, Dest. IP: 192.168.100.1	Layer 2: Ethernet II Header 0002.17BB.05E3 >> FFFF.FFFF.FFFF ARP Packet Src. IP: 192.168.100.100, Dest. IP: 192.168.100.1
Layer 1: Port FastEthernet0/1	Layer 1: Port(s): FastEthernet0/2 FastEthernet0/3 FastEthernet0/4

1. FastEthernet0/1 receives the frame.

Challenge Me

<< Previous Layer

Next Layer >>

Layer7
Layer6
Layer5
Layer4
Layer 3: IP Header Src. IP: 192.168.100.100, Dest. IP: 192.168.200.100 ICMP Message Type: 8
Layer 2: Ethernet II Header 0002.4A11.CD02 >> 000C.85B6.958E
Layer 1: Port FastEthernet0

Layer7
Layer6
Layer5
Layer4
Layer 3: IP Header Src. IP: 192.168.200.100, Dest. IP: 192.168.100.100 ICMP Message Type: 0
Layer 2: Ethernet II Header 000C.85B6.958E >> 0002.4A11.CD02
Layer 1: Port(s): FastEthernet0

1. FastEthernet0 receives the frame.

Challenge Me

<< Previous Layer

Next Layer >>