
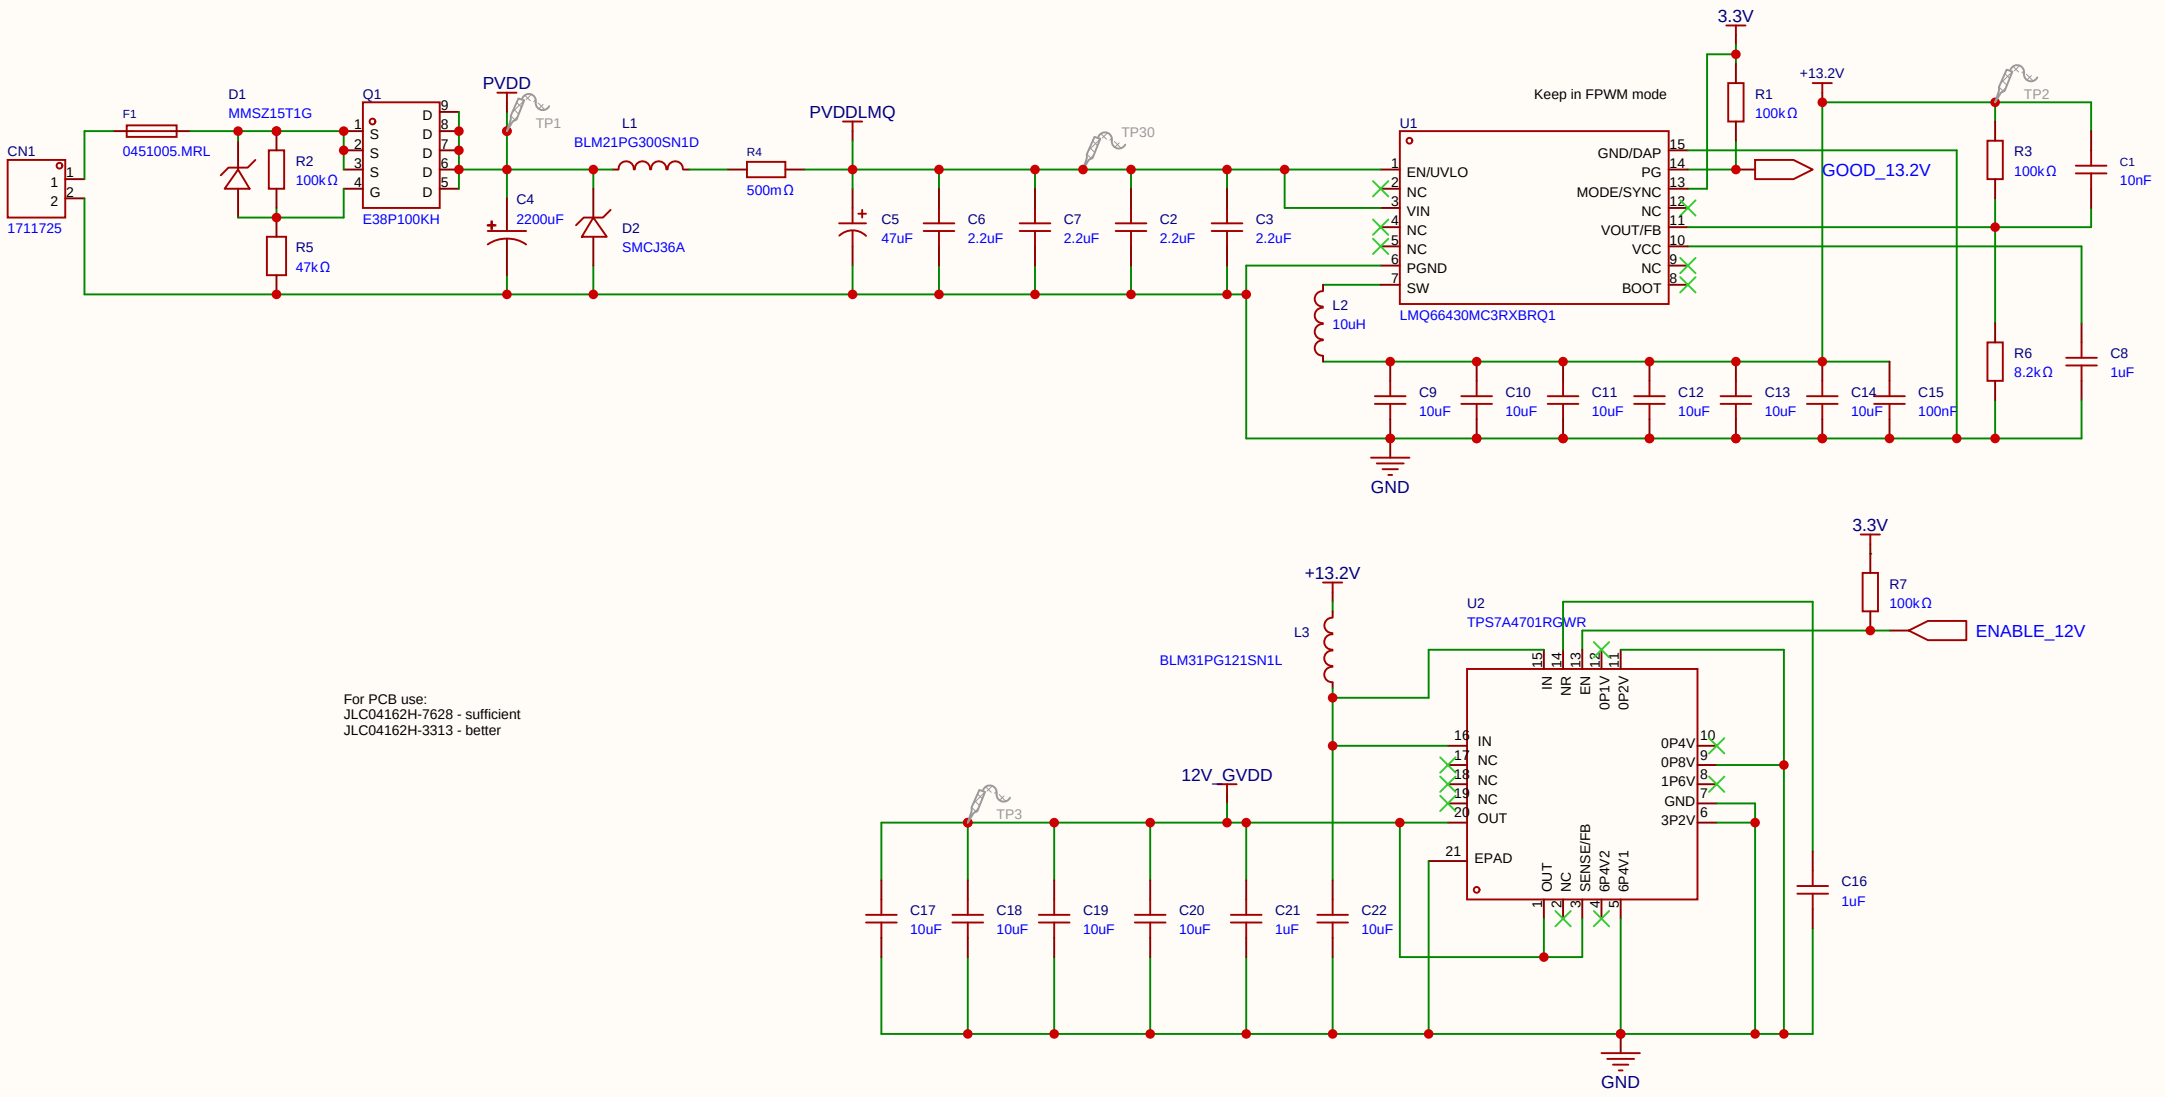


For PCB use:
JLC04162H-7628 - sufficient
JLC04162H-3313 - better


LMQ66410 → 13.2V
LC/ferrite filter
low-noise TPS7A49 / TPS7A47 / LT1763 / TLV767 / TPS7A26 → 12V_GVDD
local decoupling at TAS pins

Schematic	Class D amp	Create at	2026-06-21
		Update at	2026-07-23
Board	MainBoard	Page	Power 12V DC
Drawn	Igor Korzinek	Class D amp	
Reviewed			
		Version	Size / Page 1 Total 5
EasyEDA		V1.1	A4 / zoomMediaPlus

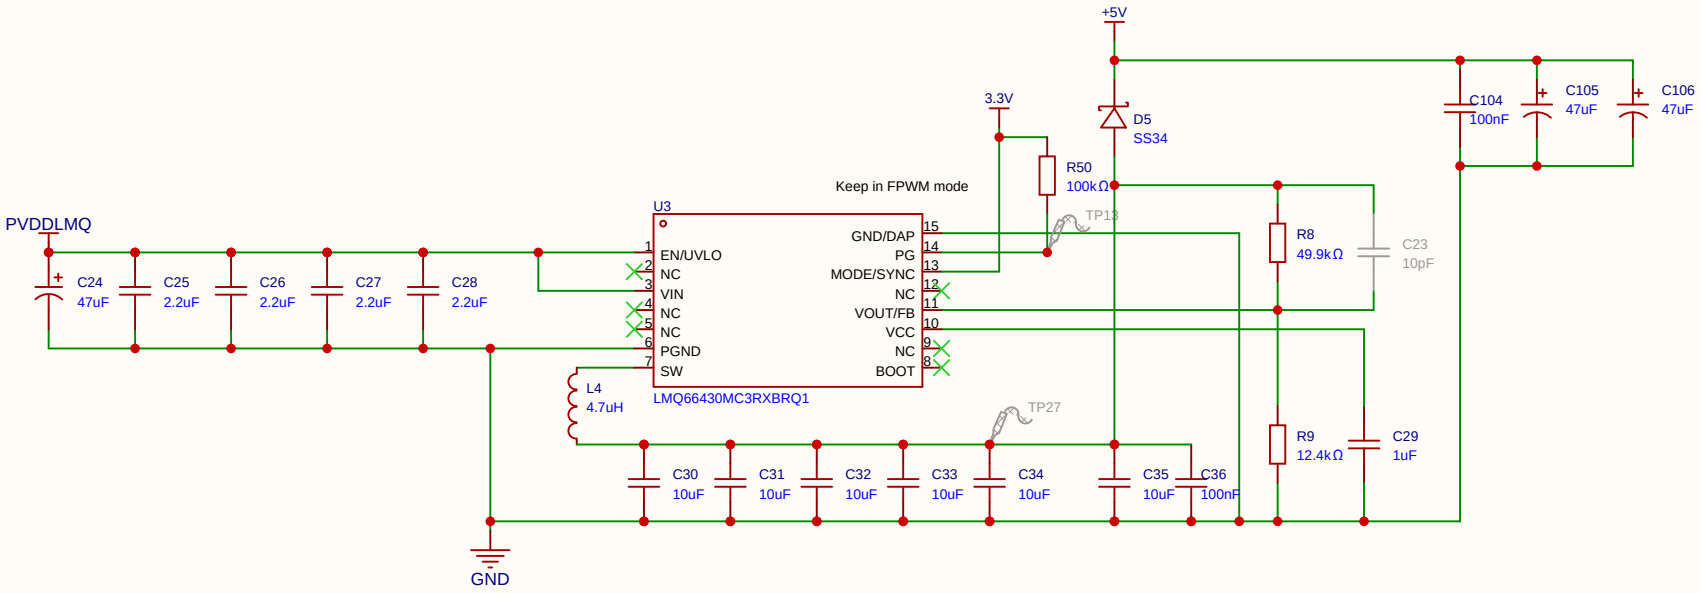


LMQ66430 → 5V_PVDD
└── USB-C VBUS
└── ideal diode / power mux

Schematic	Class D amp	Create at	2026-06-21
		Update at	2026-06-26
Board	MainBoard	Page	Power 5V DC
Drawn		Class D amp	
Reviewed			
		Version	Size	Page 2 Total 5
EasyEDA		V1.0	A4	EasyEDA.com

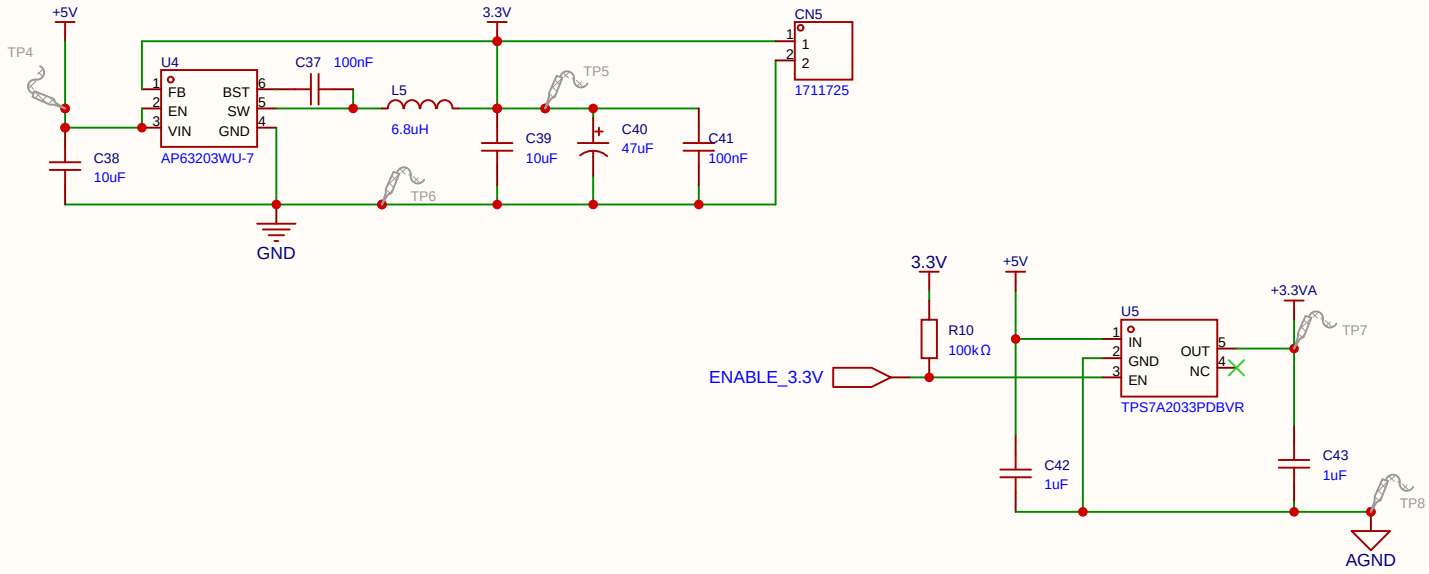


5V_SYS
AP63203 -- 3.3V_DI
ferrite bead → TPS7A20 → 3.3V_ANA

Schematic	Class D amp	Create at	2026-06-03
		Update at	2026-06-26
Board	MainBoard	Page	Power 3.3V DC
Drawn		Class D amp	
Reviewed			
		Version	Size	Page 3 Total 5
EasyEDA		V1.0	A4	EasyEDA.com

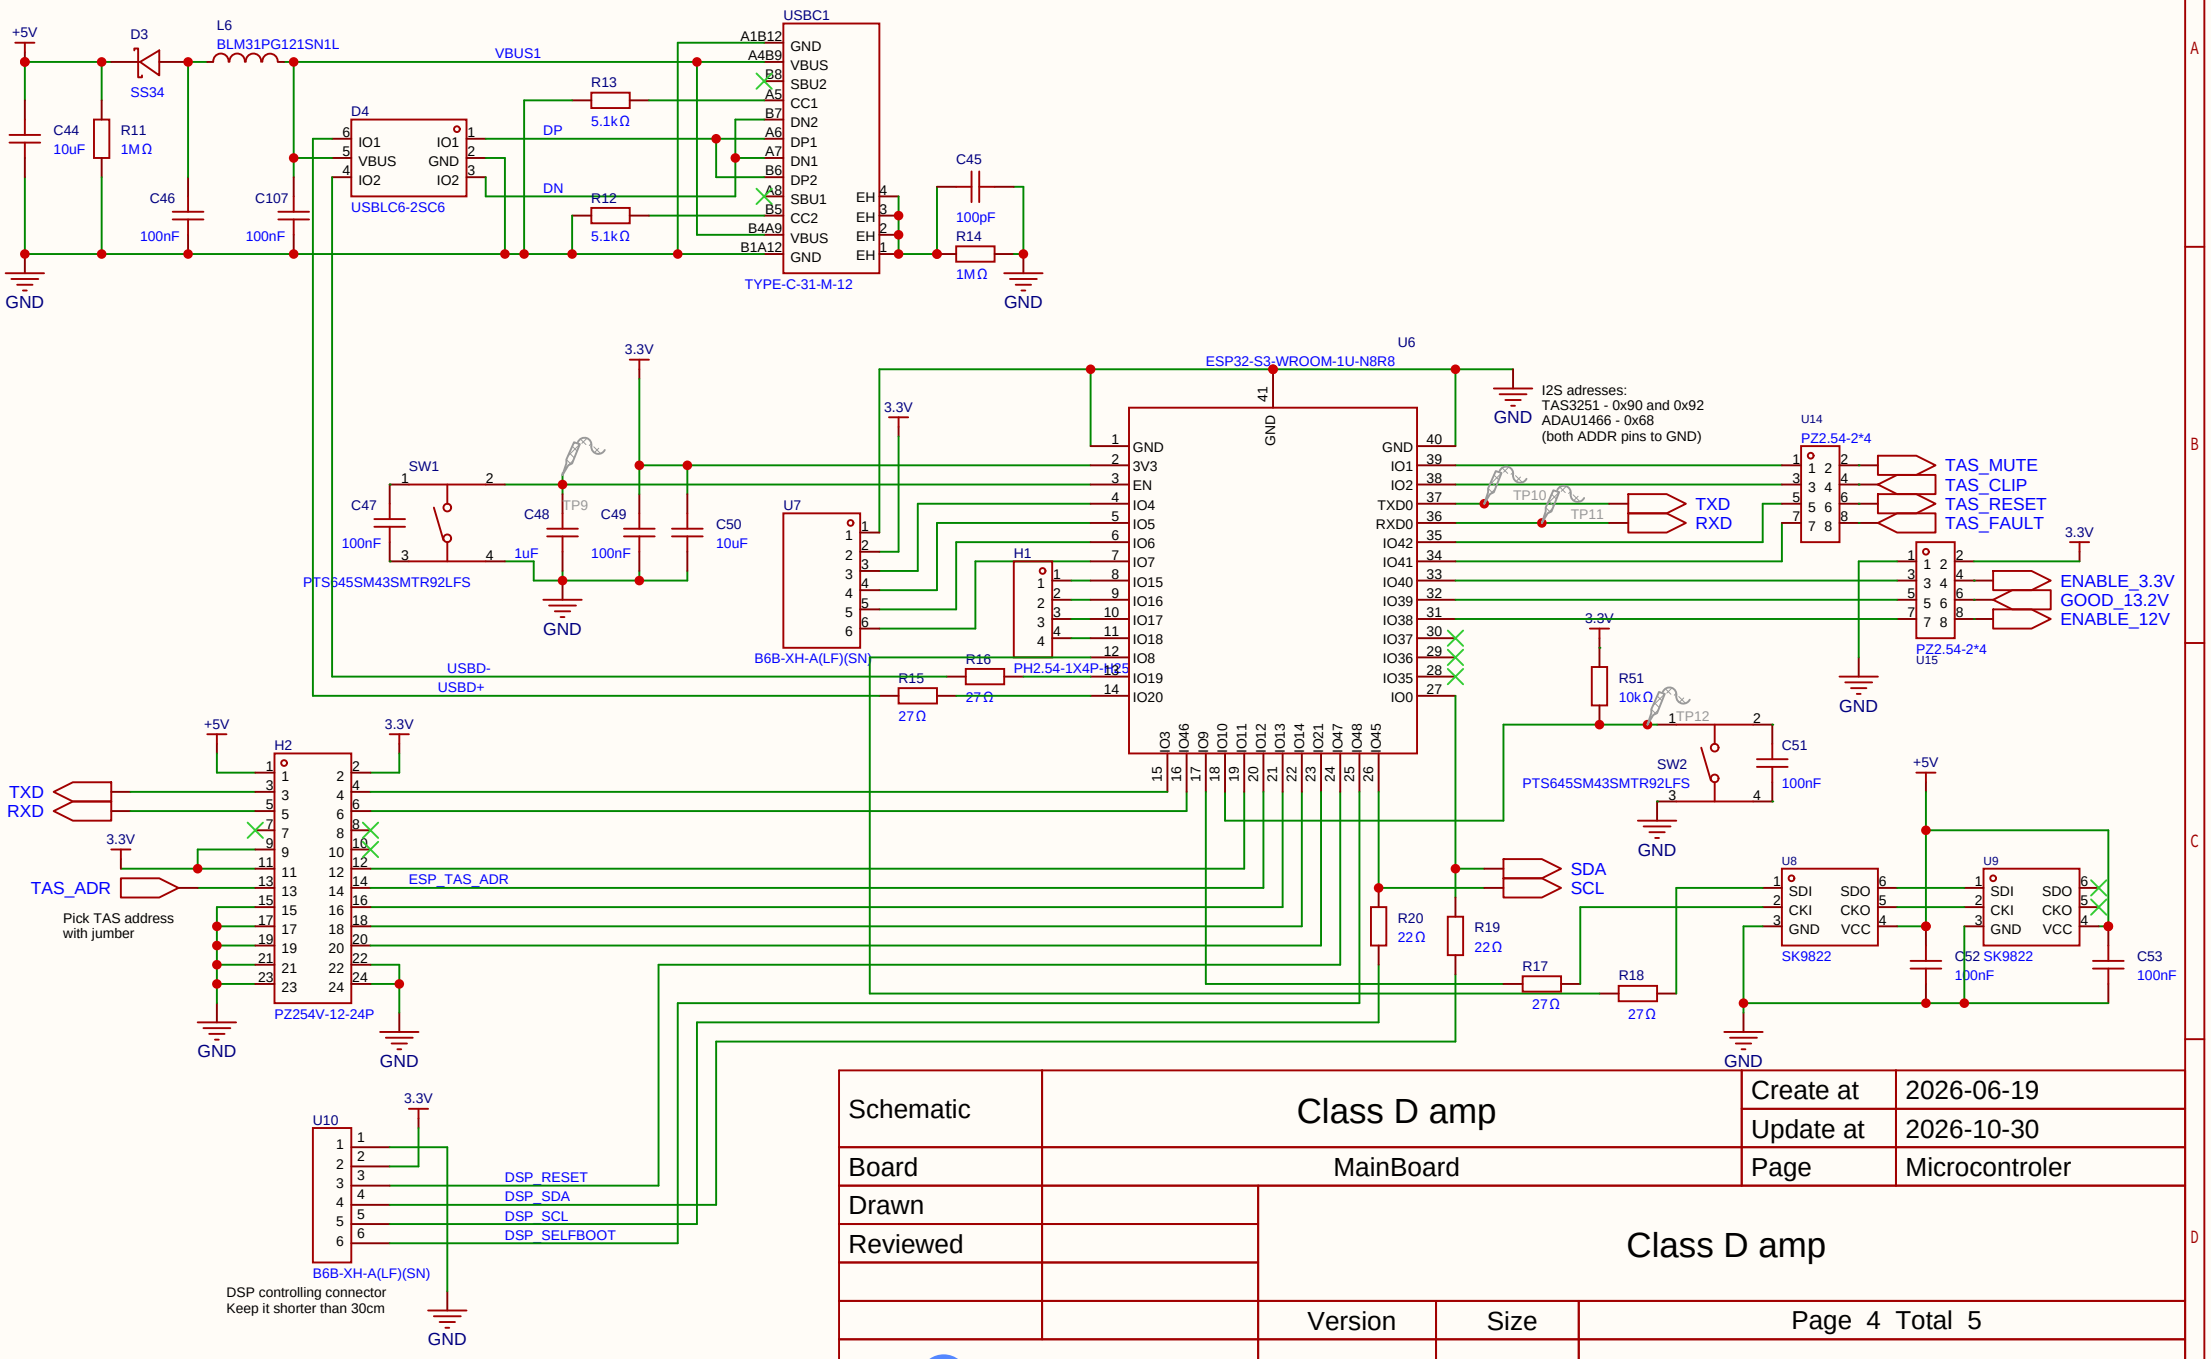

Schematic	Class D amp	Create at	2026-06-19
		Update at	2026-10-30
Board	MainBoard	Page	Microcontroler
Drawn		Class D amp	
Reviewed			
		Version	Size
EasyEDA		V1.2	A4
		Page 4 Total 5	
		EasyEDA.com	

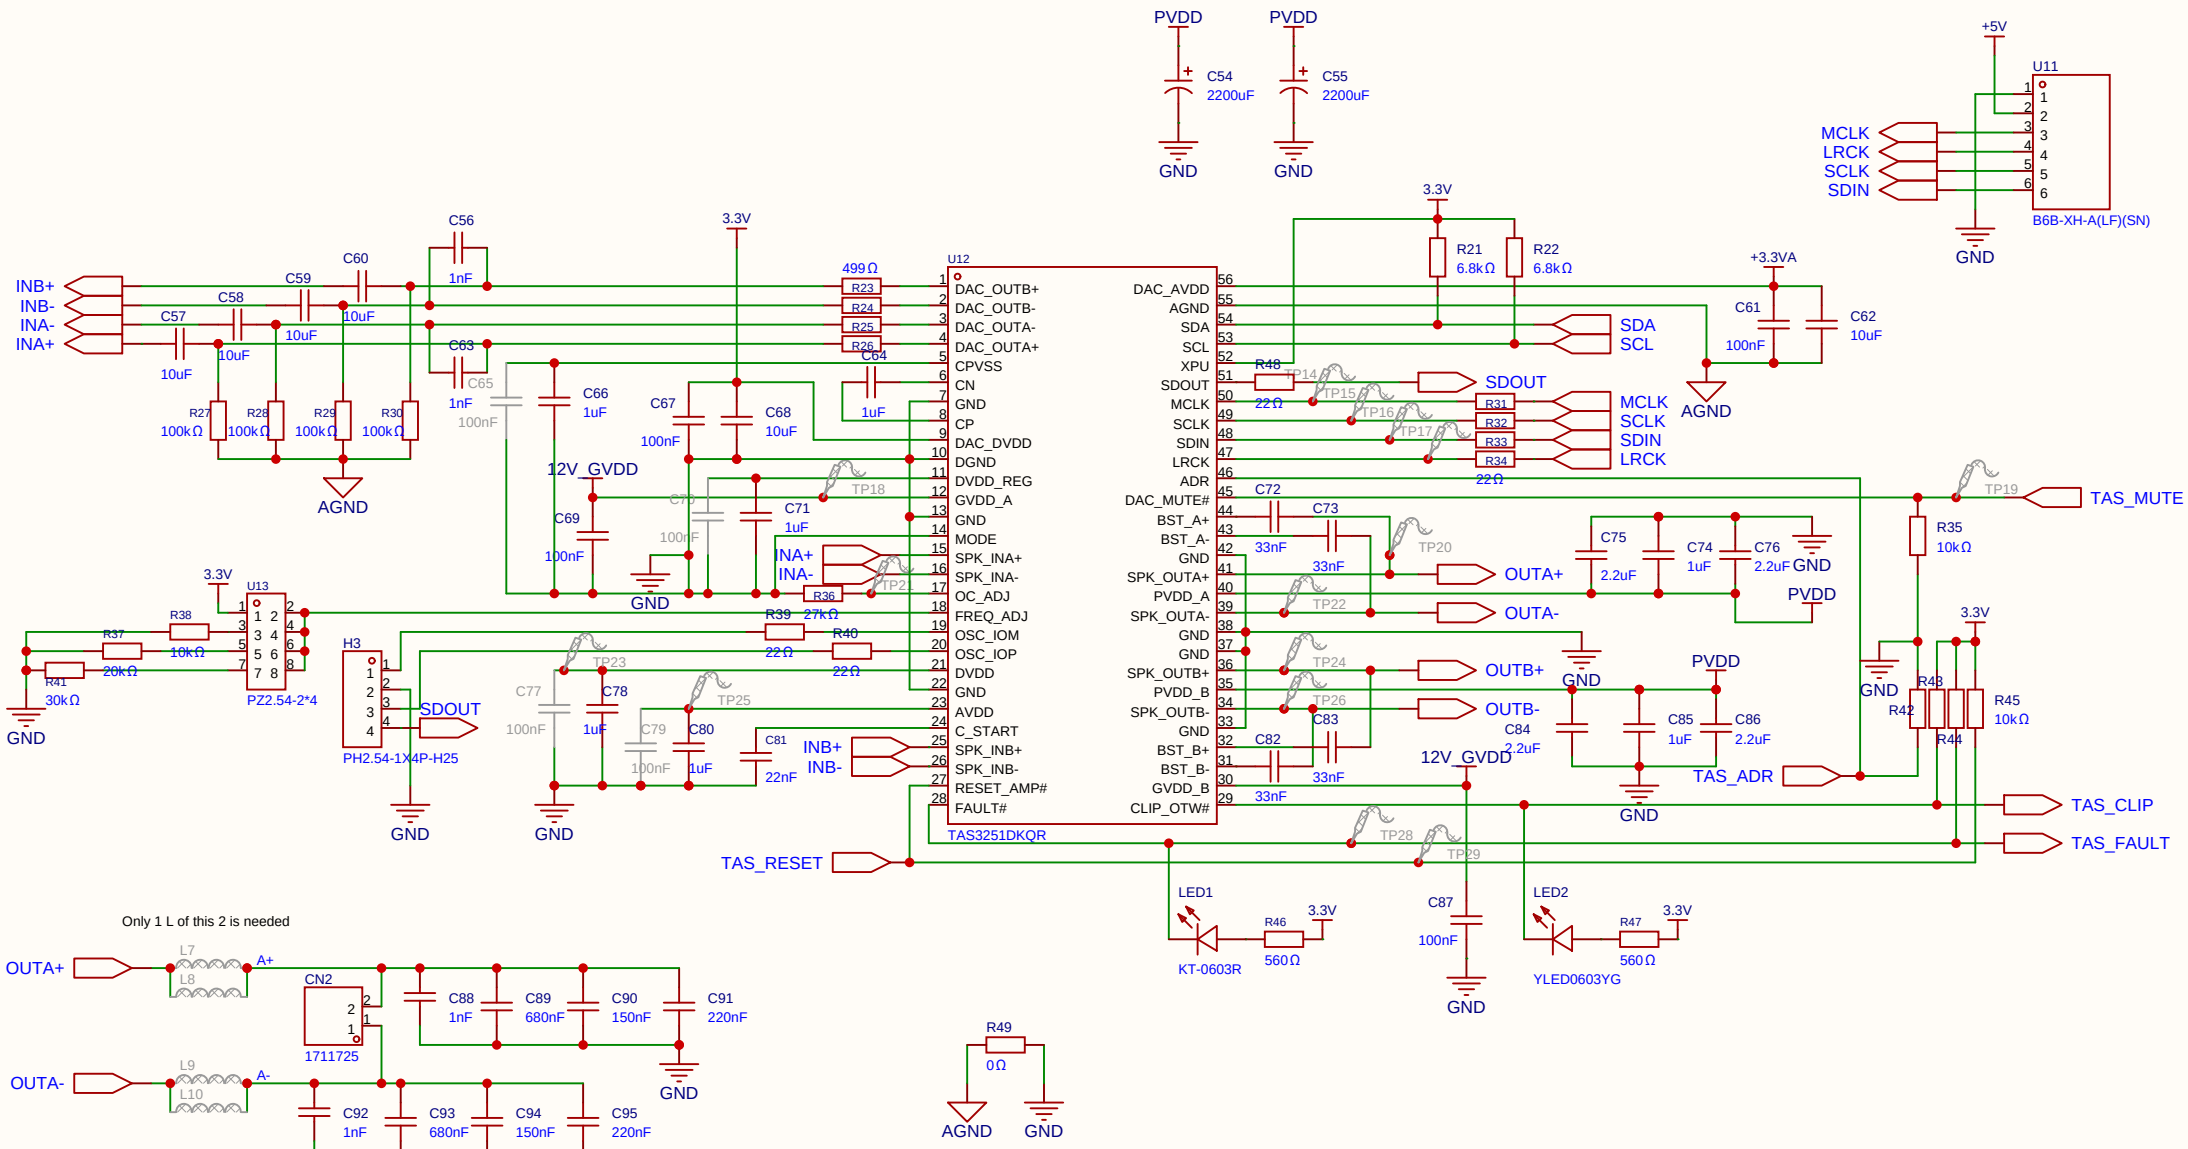

Schematic	Class D amp	Create at	2026-06-05
		Update at	2026-06-26
Board	MainBoard	Page	Amplifier
Drawn		Class D amp	
Reviewed			
		Version	Size / Page 5 Total 5
EasyEDA		V1.1	A4 / EasyEDA.com