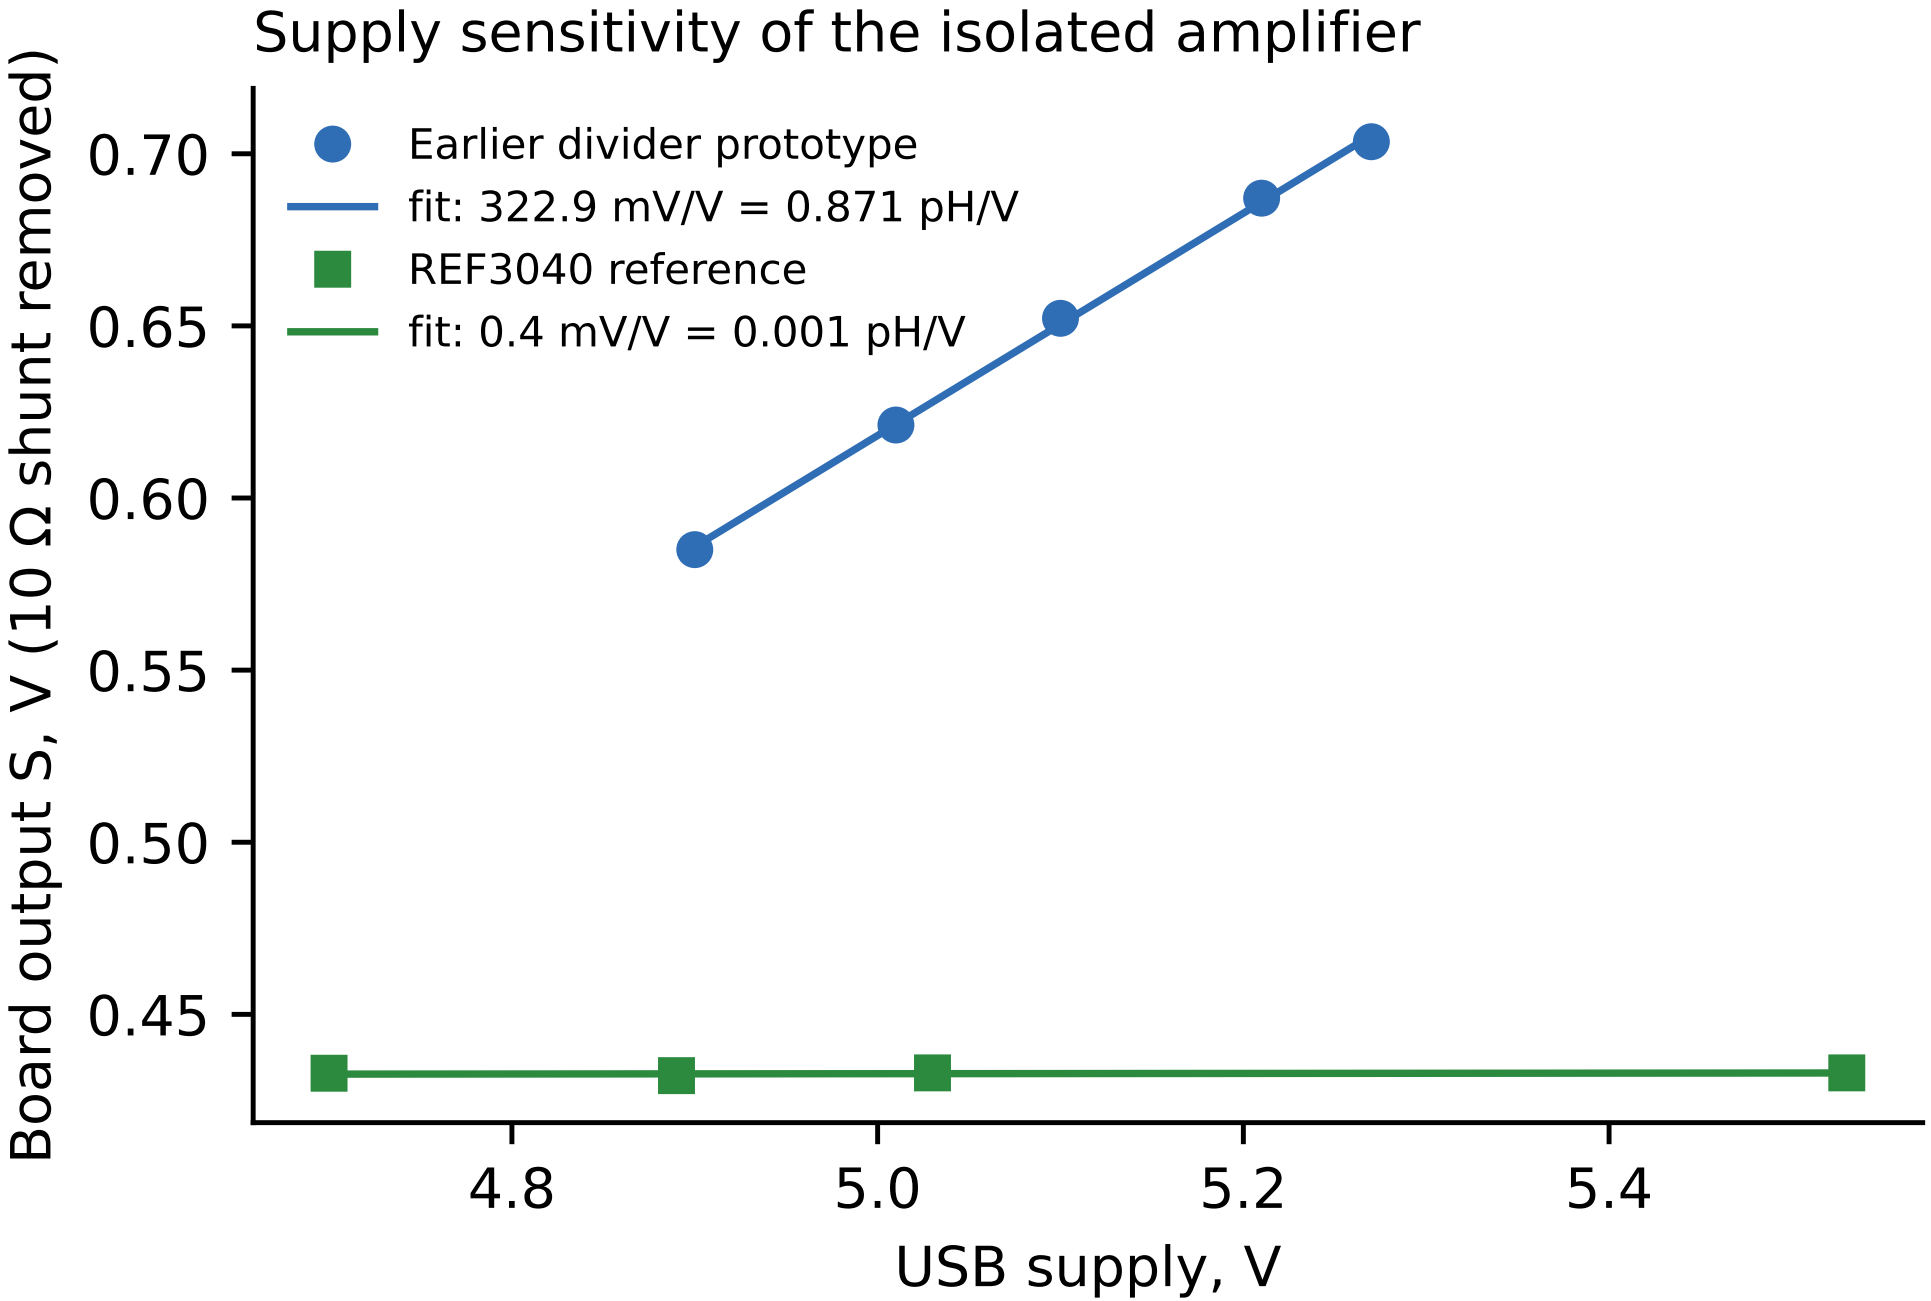
Supply sensitivity of the isolated amplifier
Earlier divider prototype
fit: 322.9 mV/V = 0.871 pH/V
REF3040 reference
fit: 0.4 mV/V = 0.001 pH/V
Board output S, V (10 Ω shunt removed)
0.70
0.65
0.60
0.55
0.50
0.45
4.8
5.0
5.2
5.4
USB supply, V