


REAR COMBINATION LAMP ASSY OVERHAUL

6511F-01

HINT:

- Use the same procedures for the RH side and LH side.
- The procedures listed below are for the LH side.
- Reassembly is in the reverse order of overhaul.

1. REMOVE BACK DOOR TRIM COVER (SEE PAGE 75-47)

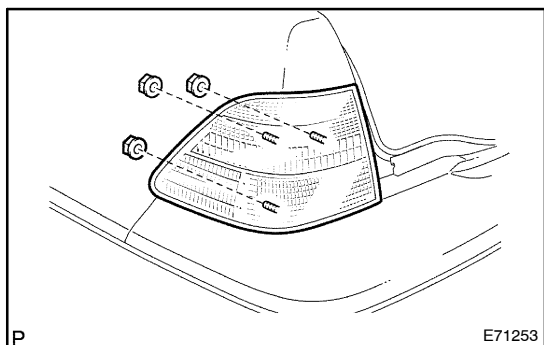

2. REMOVE REAR COMBINATION LAMP ASSY LH

- (a) Disconnect the connectors.
- (b) Remove the 3 nuts and the rear combination lamp assy LH.

3. REMOVE REAR COMBINATION LAMP BULB

- (a) Remove the rear combination lamp bulb and the rear combination lamp socket from the rear combination lamp assy LH.
- (b) Remove the rear combination lamp bulb from the rear combination lamp socket.