


DISPOSAL

HINT:

Dispose of the RH side by following the same procedures as with the LH side.

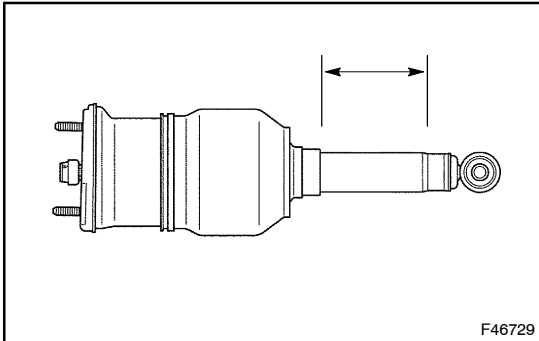

1. DISPOSE OF PNEUMATIC FRONT LH W/ SHOCK ABSORBER CYLINDER ASSY

- (a) Fully extend the shock absorber rod.
 - (1) Using a drill, make a hole in the dimension as shown in the illustration to discharge the gas inside.

CAUTION:

- **Be careful when drilling as shards of metal may fly about. Always use the proper safety equipment.**
- **The gas is colorless, odorless and non-poisonous.**