


## DISPOSAL

### HINT:

Dispose of the RH side by following the same procedures as with the LH side.

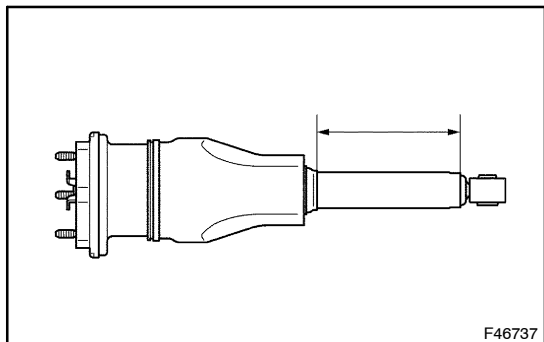

### 1. DISPOSE OF SHOCK ABSORBER ASSY FRONT LH

- (a) Fully extend the shock absorber rod.
- (b) Using a drill, make a hole in the dimension shown in the illustration to discharge the gas inside.

### CAUTION:

- **Be careful when drilling as shards of metal may fly about. Always use the proper safety equipment.**
- **The gas is colorless, odorless and non-poisonous.**