


## BODY PANEL SEALING AREAS

### HINT:

- 1) Prior to applying body sealer, clean the area with a rag soaked in grease, wax and silicone remover.
- 2) If weld-through primer was used, first wipe off any excess and coat with anti-corrosion primer before applying body sealer.
- 3) Wipe off excess body sealer with a rag soaked in a grease, wax and silicone remover.
- 4) If body sealer is damaged by peeling, cracks, etc., be sure to repair as necessary.





Flat Finishing





No Flat Finishing

### 1. ENGINE COMPARTMENT

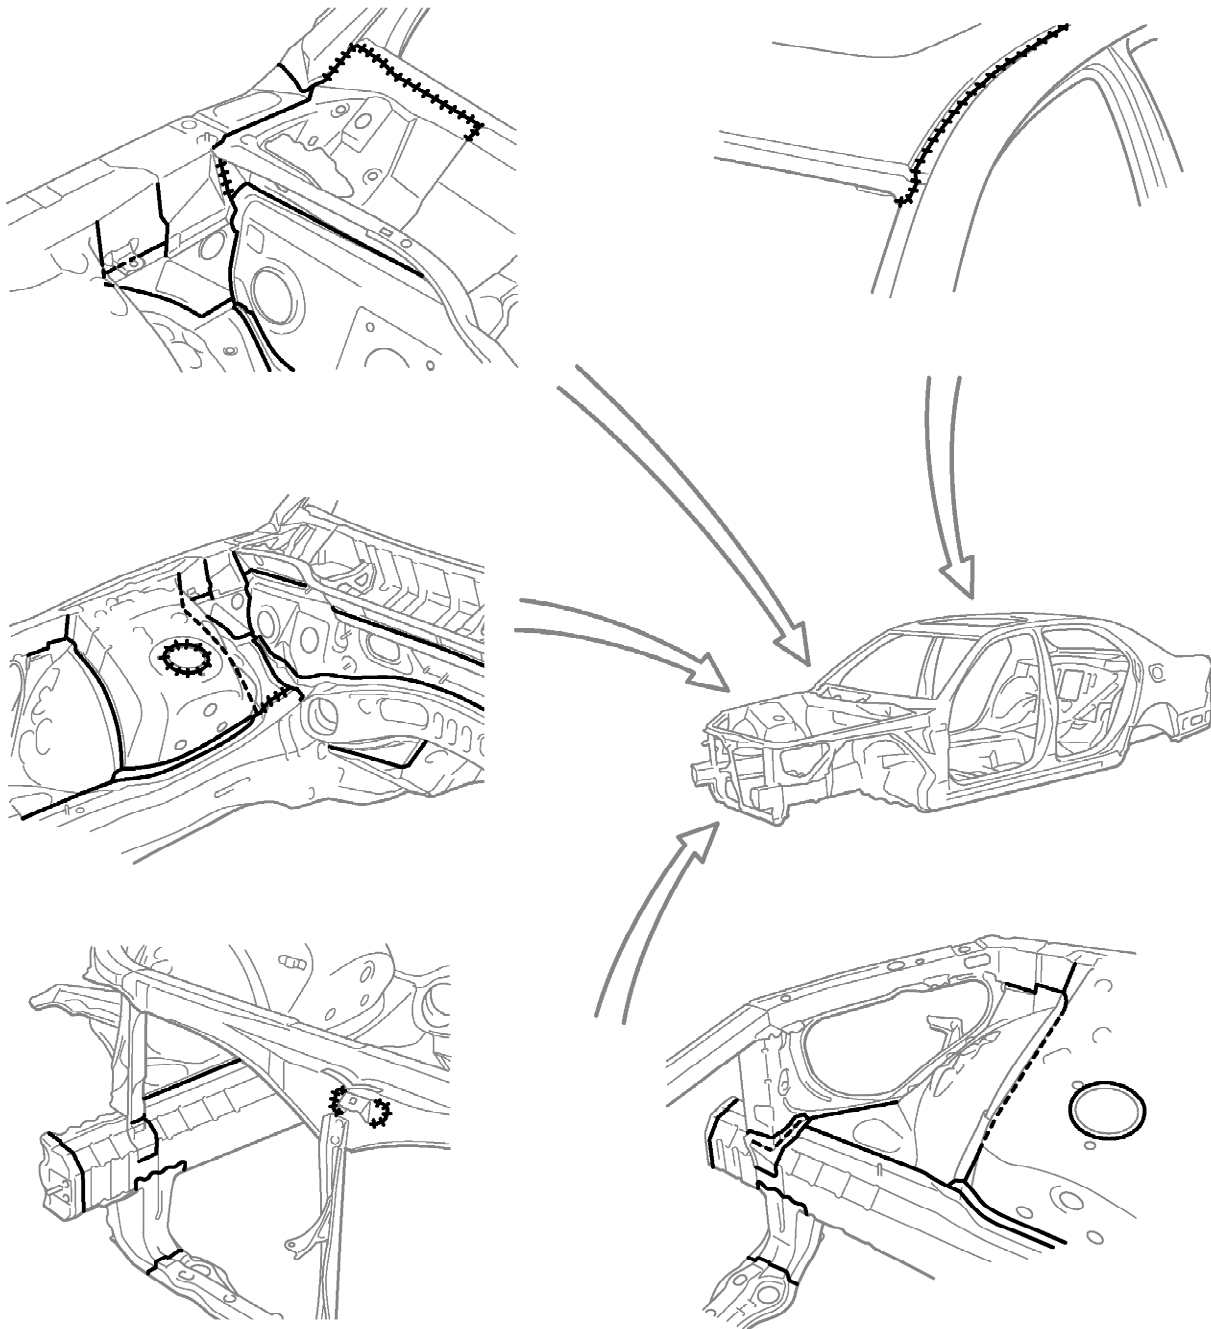

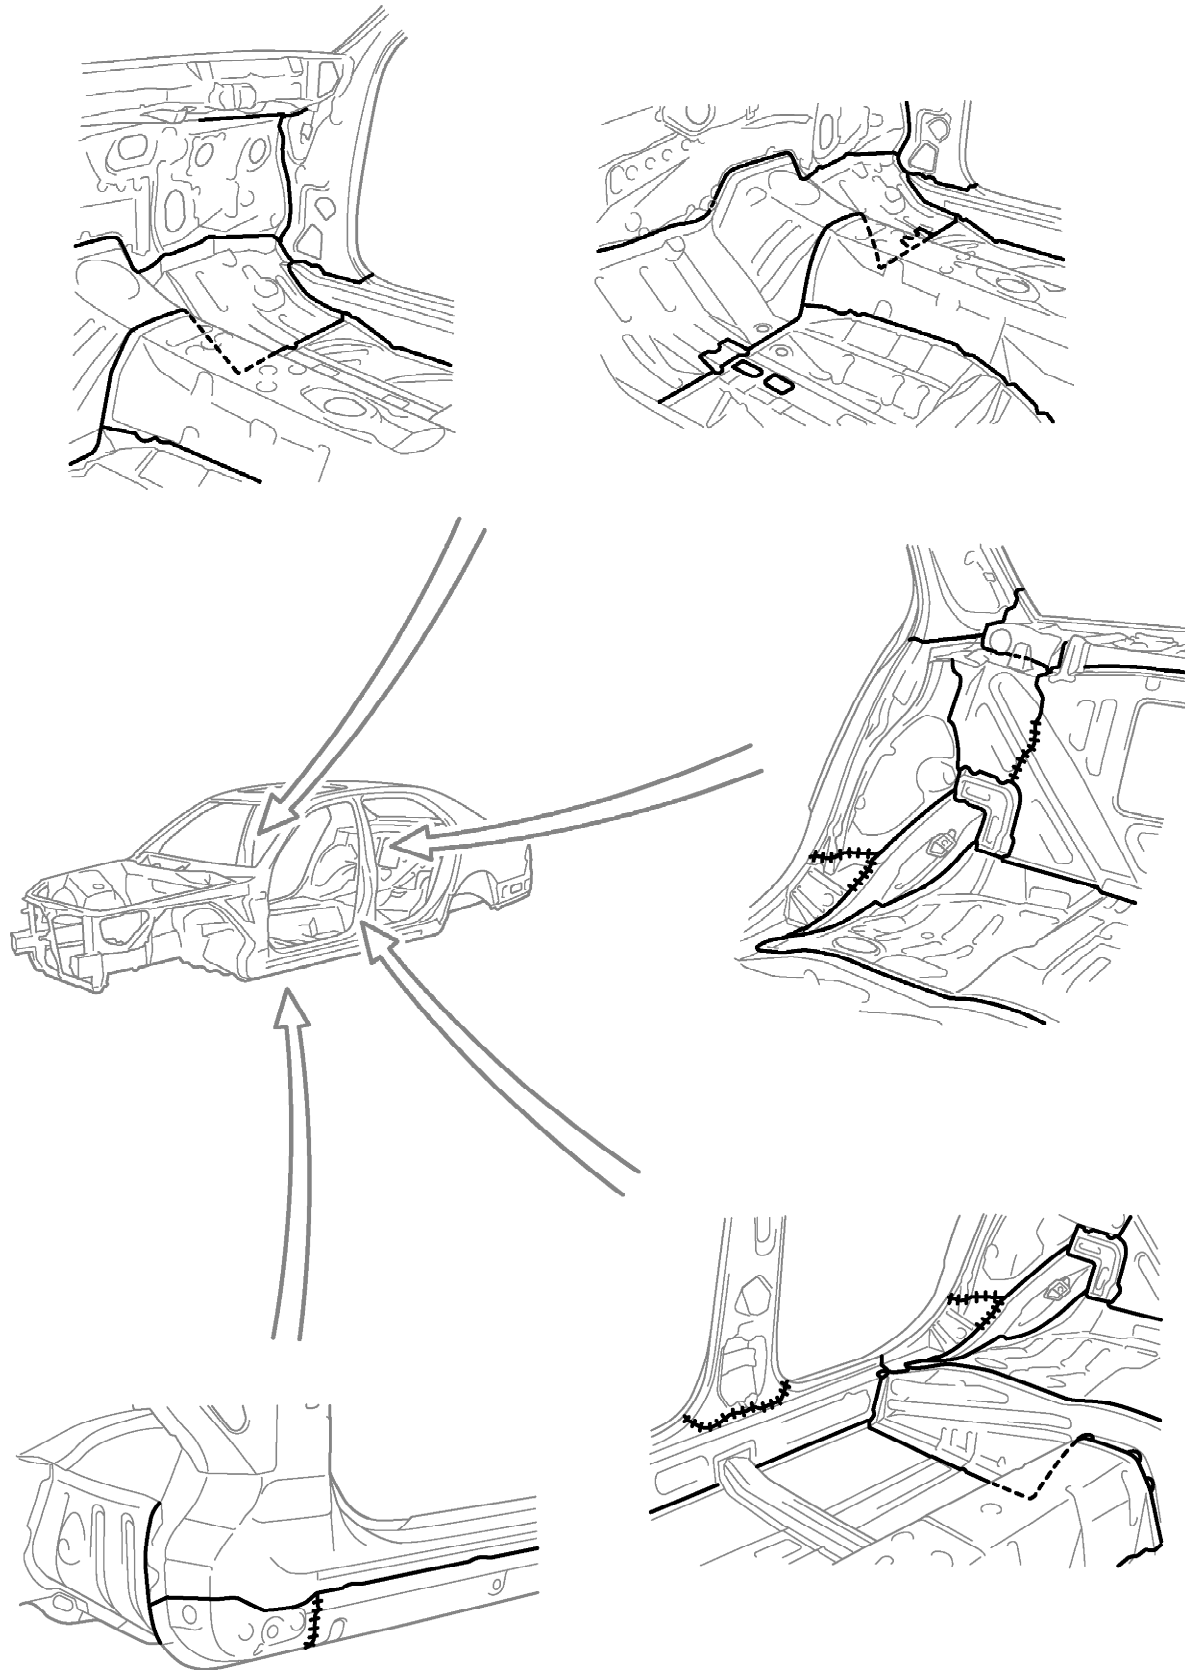**2. INSIDE**

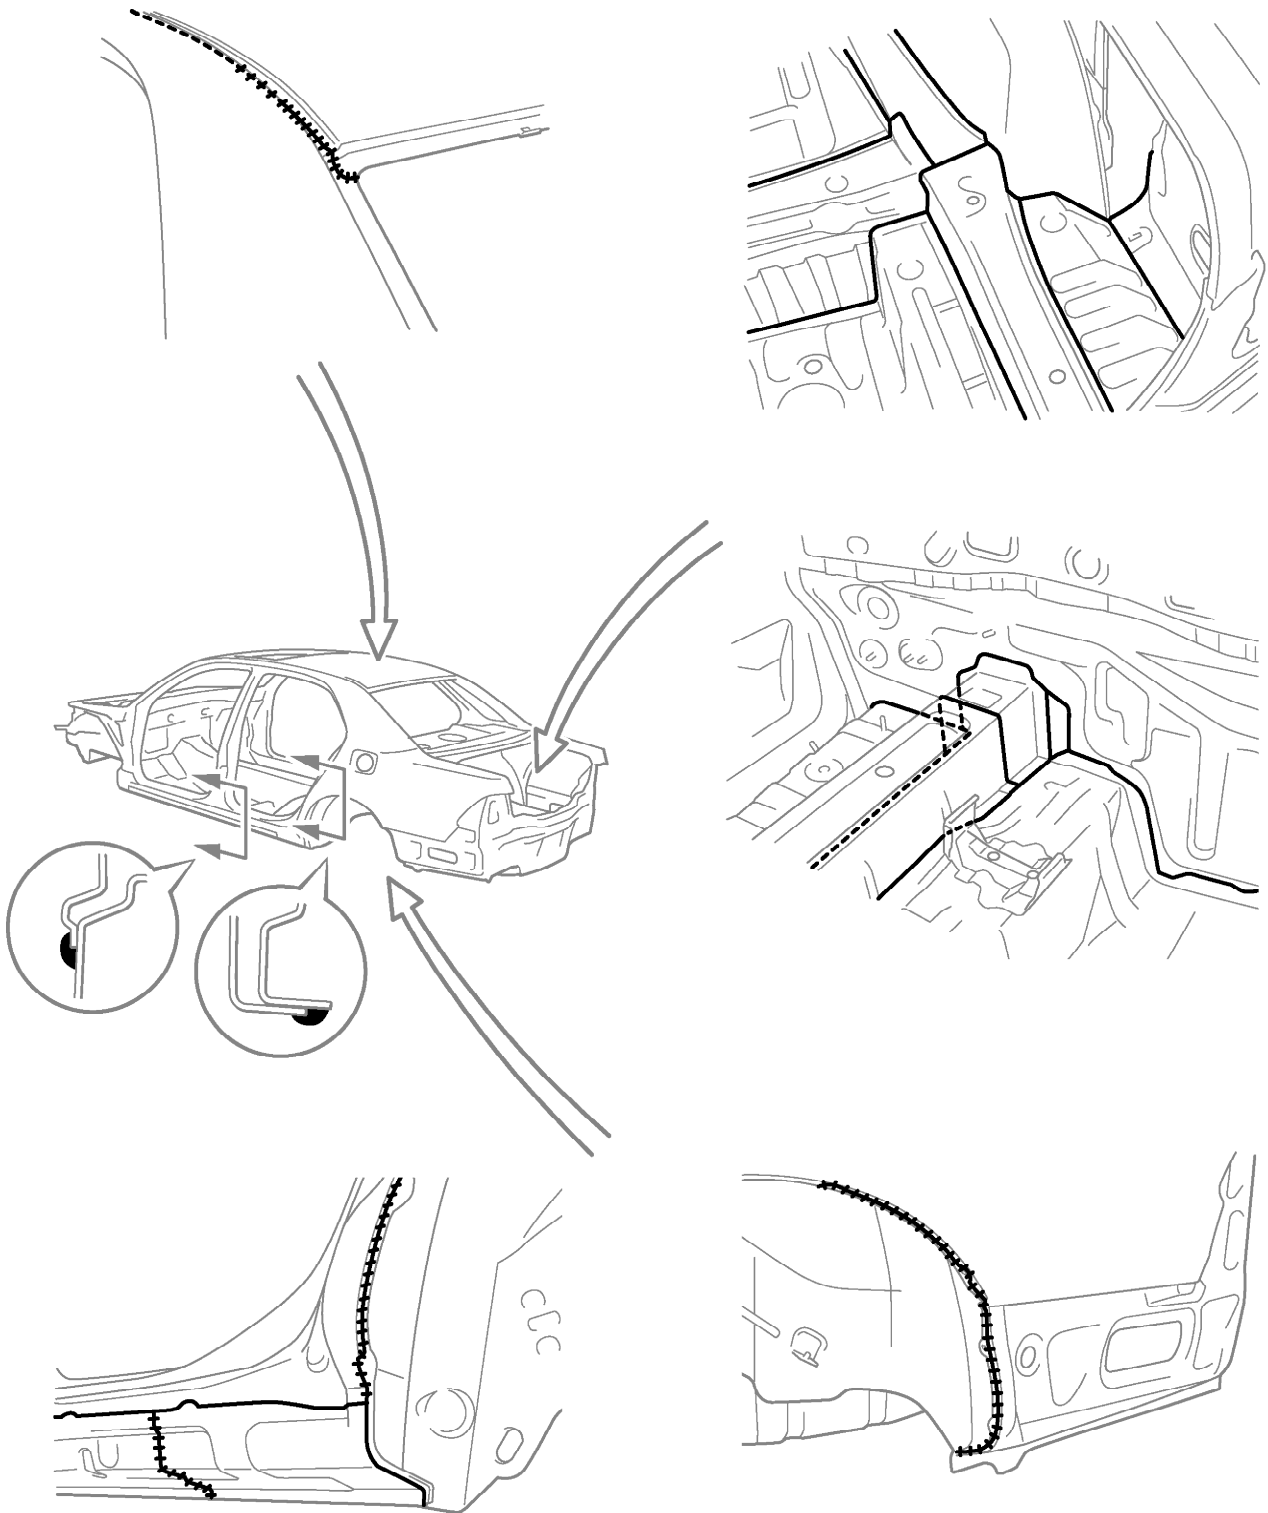**3. REAR LUGGAGE COMPARTMENT**

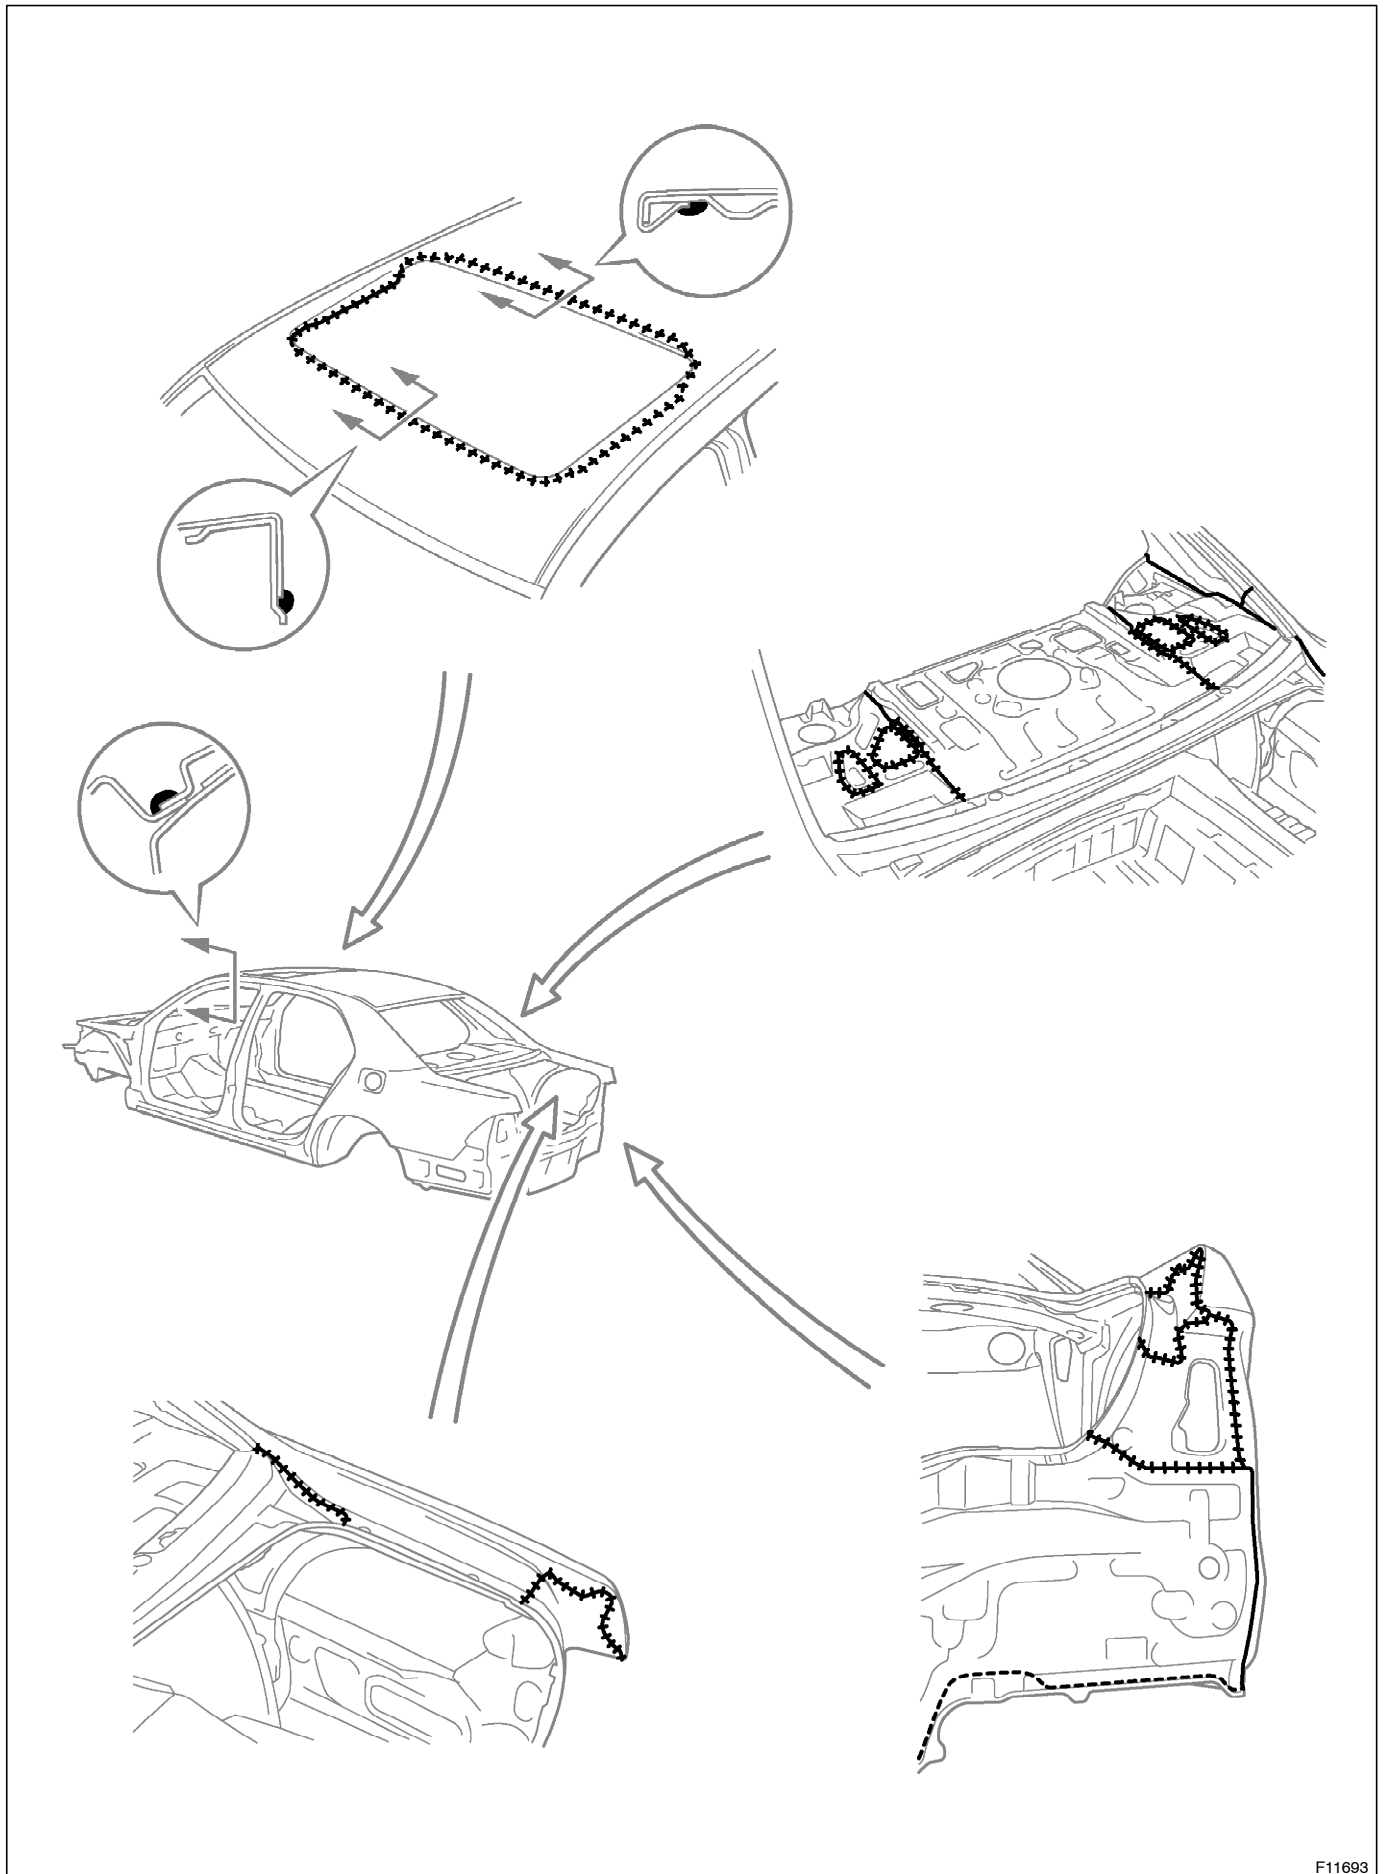

**4. DOOR PARTS**