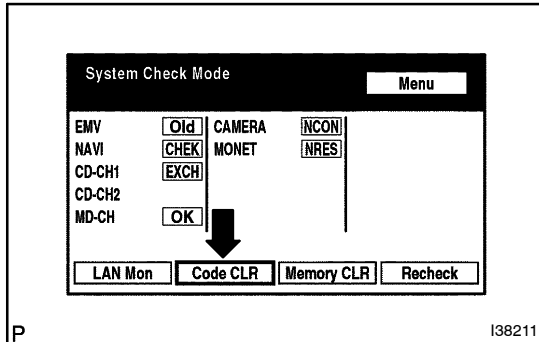# SERVICE CHECK MODE (DTC CLEAR/RECHECK)
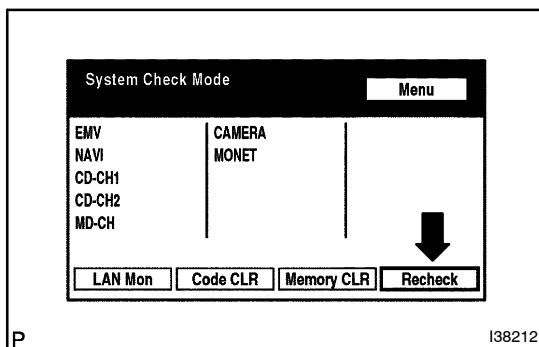
05HZX–01

HINT:

Illustrations may differ from the actual vehicle depending on the device settings and options. Therefore, some detailed areas may not be shown exactly the same as on the actual vehicle.

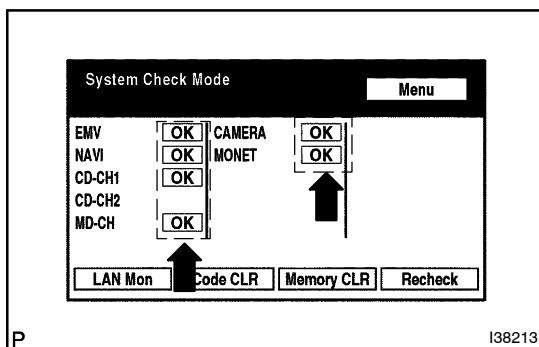1. **Enter the diagnostic mode (see page 05−1954).**

2.   Clear DTC

(a)   Press the "Code CLR" switch for 3 seconds.
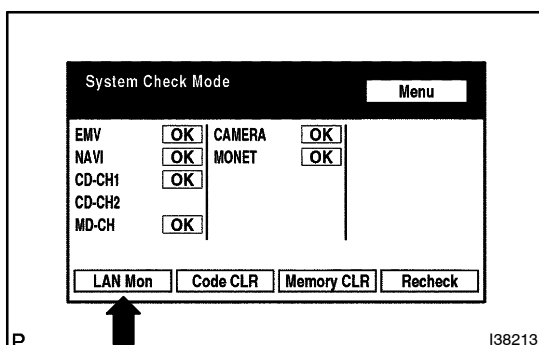
(b)   Check result is cleared.
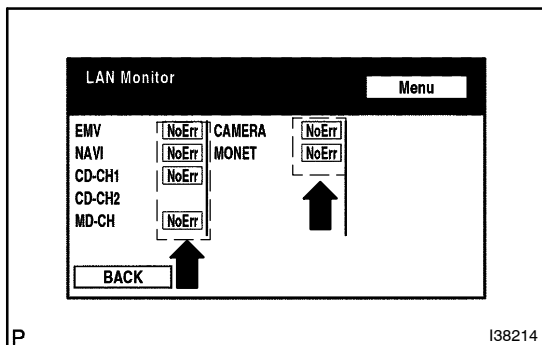
3.   Recheck

(a)   Press the "Recheck" switch.

(b)   Confirm that all diagnostic codes are "OK" when the check results are displayed.

If a code other than "OK" is displayed, troubleshoot again.

(c)   Press the "LAN Mon" switch to change to "LAN Monitor" mode.

LAN Monitor

Menu

EMV   NoErr   CAMERA   NoErr
NAVI   NoErr   MONET   NoErr
CD-CH1 NoErr
CD-CH2
MD-CH   NoErr

BACK

P

I38214

(d)   Confirm that all diagnostic codes are "No Err".

If a code other than "No Err" is displayed, troubleshoot again.